

BOISE

VOLUME ONE

PROJECT MANUAL

For

**DEPARTMENT OF
VETERANS AFFAIRS**

**500 West Fort Street
Boise, ID 83702**

Building 67 Expansion

VA Project No. 531-320
Project No. 11150.000

March 22, 2013

Department of
Veterans Affairs
500 West Fort Street
Boise, Idaho 83702

100% Submittal

THIS PAGE INTENTIONALLY LEFT BLANK

DEPARTMENT OF VETERANS AFFAIRS
BUILDING 67 EXPANSION

VA PROJ. NO. 531-320

PROJECT MANUAL

Boise, Idaho
March 22, 2013

FOR CONSTRUCTION SET

Owner:	Dept of Veterans Affairs Medical Center 500 West Fort Street Boise, Idaho 83702	Joel Holtrop, COTR Tel: (208) 422-1000 x 7889 Cell: (208)941-0977 E-mail: joel.holtrop@va.gov
--------	--	--

Architectural:	CSHQA 250 S. 5 th Street Boise, Idaho 83702	John D. Maulin, AIA Tel: (208) 343-4635 E-mail: john.maulin@cshqa.com
----------------	--	---

Civil:	CSHQA 250 S. 5th Street Boise, Idaho 83702	Jeff Ward, PE, LEED AP Tel: (208) 343-4635 E-mail: jeff.ward@cshqa.com
--------	--	--

Structural:	CSHQA 250 S. 5th Street Boise, Idaho 83702	Gerald Gunny, PE, SE Tel: (208) 343-4635 E-mail: gerald.gunny@cshqa.com
-------------	--	---

Mechanical/
Plumbing

CSHQA
250 S. 5th Street
Boise, Idaho 83702

Steve Hardy, PE
Tel: (208) 343-4635
E-mail: steven.hardy@cshqa.com

Electrical/
Communications:

CSHQA
250 S. 5th Street
Boise, Idaho 83702

Amy Dockter, PE
Tel: (208) 343-4635
E-mail: amy.dockter@cshqa.com

Landscape Arch:

CSHQA
250 S. 5th Street
Boise, Idaho 83702

Kyle Hemly, ASLA, CLARB
Tel: (208) 343-4635
E-mail: kyle.hemly@cshqa.com

Fire Protection: Protection Consultants, Inc.
1199 S. Main Street, Suite 101
Centerville, Utah 84014

Greg T. Jones, FPE
Tel: (801) 295-6070 x 2
E-mail: greg@pciut.com

THIS PAGE INTENTIONALLY LEFT BLANK

**DEPARTMENT OF VETERANS AFFAIRS
VHA MASTER SPECIFICATIONS**

**TABLE OF CONTENTS
Section 00 01 10**

	DIVISION 00 - SPECIAL SECTIONS	DATE
00 00 00	Directory	
00 01 10	Table of Contents	
00 01 15	List of Drawing Sheets	09-11
00 02 00	Geotechnical Engineering Report	
00 02 10	Geotechnical Engineering Report - Addendum #1 Revised	
	DIVISION 01 - GENERAL REQUIREMENTS	
01 00 00	General Requirements	06-11
01 01 50	OSHA Requirements	
01 33 23	Shop Drawings, Product Data, and Samples	11-08
01 42 19	Reference Standards	09-11
01 45 29	Testing Laboratory Services	08-12
01 57 19	Temporary Environmental Controls	01-11
01 74 19	Construction Waste Management	05-12
	DIVISION 02 - EXISTING CONDITIONS	
02 41 00	Demolition	06-10
02 82 11	Traditional Asbestos Abatement for Class I Work	07-11
02 82 13.13	Glovebag Asbestos Abatement	
02 82 13.19	Asbestos Floor Tile and Mastic Abatement	
02 83 33.13	Lead-Based Paint Removal and Disposal	08-11
	DIVISION 03 - CONCRETE	
03 30 00	Cast-in-Place Concrete	03-11
	DIVISION 04 - MASONRY	
04 05 13	Masonry Mortaring	09-11
04 05 16	Masonry Grouting	09-11
04 05 31	Masonry Tuck Pointing	08-11
04 20 00	Unit Masonry	05-12
	DIVISION 05 - METALS	
05 12 00	Structural Steel Framing	07-11
05 21 00	Steel Joist Framing	03-10
05 31 00	Steel Decking	11-08
05 36 00	Composite Metal Decking	07-11
05 40 00	Cold-Formed Metal Framing	07-11
05 50 00	Metal Fabrications	09-11

	DIVISION 06 - WOOD PLASTICS AND COMPOSITES	
06 10 00	Rough Carpentry	09-11
06 20 00	Finish Carpentry	05-10
	DIVISION 07 - THERMAL AND MOISTURE PROTECTION	
07 13 00	Sheet Waterproofing	06-10
07 13 52	Modified Bituminous Sheet Waterproofing	09-11
07 19 00	Water Repellents	
07 21 13	Thermal Insulation	03-09
07 25 00	Weather Barriers	
07 51 00	Built-up Bituminous Roofing	03-09M
07 54 23	Thermoplastic Polyolefin (TPO) Roofing	10-10
07 60 00	Flashing and Sheet Metal	10-10
07 71 00	Roof Specialties	10-11
07 81 00	Applied Fireproofing	11-11
07 84 00	Firestopping Penetrations, Joints and Perimeter Fire Containment	
07 92 00	Joint Sealants	12-11
07 95 13	Expansion Joint Cover Assemblies	10-11
	DIVISION 08 - OPENINGS	
08 11 13	Hollow Metal Doors and Frames	02-09
08 11 61	Detention Door Screens	10-11
08 14 00	Interior Wood Doors	01-10
08 31 13	Access Doors and Frames	10-11
08 41 13	Aluminum-Framed Entrances and Storefronts	10-11
08 51 13	Aluminum Windows	11-12
08 52 00	Wood Windows	05-05M
08 71 00	Door Hardware	09-11
08 80 00	Glazing	12-10
08 90 00	Louvers and Vents	10-11
	DIVISION 09 - FINISHES	
09 22 16	Non-Structural Metal Framing	07-10M
09 24 00	Portland Cement Plastering	10-11
09 29 00	Gypsum Board	02-12
09 30 13	Ceramic/Porcelain Tiling	05-12
09 51 00	Acoustical Ceilings	10-10
09 65 13	Resilient Base and Accessories	10-11
09 65 16	Resilient Sheet Flooring	07-10
09 67 23.20	Resinous (Epoxy Base) with Vinyl Chip Broadcast (RES-2)	05-11
09 68 00	Carpeting	10-11
09 72 16	Vinyl-Coated Fabric Wall Coverings	11-11
09 77 50	Fiberglass Reinforced Panels (FRP)	10-09
09 91 00	Painting	04-09
	DIVISION 10 - SPECIALTIES	
10 11 13	Tackboards and Markerboards	06-10
10 11 23	Glass Door Bulletin Boards	11-11
10 14 00	Signage	06-08M

10 21 13	Toilet Compartments	05-12
10 21 23	Cubicle Curtain Tracks	11-11
10 22 39	Folding Panel Partitions	11-11
10 25 13	Patient Bed Service Walls	11-11
10 26 00	Wall and Door Protection	01-11
10 28 00	Toilet, Bath, and Laundry Accessories	11-11
10 44 13	Fire Extinguisher Cabinets	11-11
10 51 23	Plastic-Laminate-Clad Lockers	02-11
	DIVISION 11 - EQUIPMENT	
11 73 00	Ceiling Mounted Patient Lift System	07-10
	DIVISION 12 - FURNISHINGS	
12 24 00	Window Shades	11-11
	DIVISION 13 - SPECIAL CONSTRUCTION	
13 05 41	Seismic Restraint Requirements for Non-Structural Components	08-11
	DIVISION 14- CONVEYING EQUIPMENT	
14 24 00	Hydraulic Elevators	05-11
14 58 00	Pneumatic Tube System	05-11
	DIVISION 21- FIRE SUPPRESSION	
21 05 11	Common Work Results for Fire Suppression	11-09
21 13 13	Wet-Pipe Sprinkler Systems	05-08
	DIVISION 22 - PLUMBING	
22 05 11	Common Work Results for Plumbing	04-11
22 05 19	Meters and Gages for Plumbing Piping	02-10
22 05 23	General-Duty Valves for Plumbing Piping	12-09
22 05 33	Heat Tracing for Plumbing Piping	12-09
22 07 11	Plumbing Insulation	05-11
22 11 00	Facility Water Distribution	05-11
22 13 00	Facility Sanitary and Vent Piping	12-09
22 40 00	Plumbing Fixtures	03-11
22 62 00	Vacuum Systems for Laboratory and Healthcare Facilities	08-12
22 63 00	Gas Systems for Laboratory and Healthcare Facilities	12-10
	DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)	
23 05 11	Common Work Results for HVAC	11-10
23 05 12	General Motor Requirements for HVAC and Steam Generation Equipment	11-10
23 05 41	Noise and Vibration Control for HVAC Piping and Equipment	11-10
23 05 93	Testing, Adjusting, and Balancing for HVAC	05-11
23 07 11	HVAC and Boiler Plant Insulation	05-11
23 08 00	Commissioning of HVAC Systems	07-10

23 09 23	Direct-Digital Control and Instrumentation (DDC)	09-11
23 21 13	Hydronic Piping	09-12
23 21 23	Hydronic Pumps	02-10
23 25 00	HVAC Water Treatment	02-10
23 31 00	HVAC Ducts and Casings	04-11
23 34 00	HVAC Fans	11-09
23 36 00	Air Terminal Units	03-10
23 37 00	Air Outlets and Inlets	11-09
23 40 00	HVAC Air Cleaning Devices	02-12
23 64 00	Packaged Water Chillers	04-11
23 73 00	Indoor Central-Station Air-Handling Units	04-11
23 82 00	Convection Heating and Cooling Units	04-11
	DIVISION 26 - ELECTRICAL	
26 05 11	Requirements for Electrical Installations	09-10
26 05 21	Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below)	09-10
26 05 26	Grounding and Bonding for Electrical Systems	09-10
26 05 33	Raceway and Boxes for Electrical Systems	09-10
26 24 16	Panelboards	09-10
26 27 26	Wiring Devices	04-09
26 29 11	Motor Starters	09-10
26 29 21	Disconnect Switches	09-10
26 51 00	Interior Lighting	04-09
	DIVISION 27 - COMMUNICATIONS	
27 05 11	Requirements for Communications Installations	11-09
27 05 26	Grounding and Bonding for Communications Systems	10-06
27 05 33	Raceways and Boxes for Communications Systems	12-05
27 10 00	Structured Cabling	12-05
27 11 00	Communications Equipment Room Fittings	10-06
27 15 00	Communications Horizontal Cabling	10-06
27 41 31	Master Antenna Television Equipment and Systems	08-09
27 52 23	Nurse Call and Code Blue Systems	01-10
27 53 19	Distributed Radio Antenna (Within Building) Equipment and System	09-12
	DIVISION 28 - ELECTRONIC SAFETY AND SECURITY	
28 05 00	Common Work Results for Electronic Safety and Security	09-11
28 05 13	Conductors and Cables for Electronic Safety and Security	09-11
28 05 26	Grounding and Bonding for Electronic Safety and Security	09-11
28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	09-11
28 13 00	Physical Access Control Systems	10-11
28 23 00	Video Surveillance	09-11
28 26 00	Electronic Personal Protection System	09-11
28 31 10	Fire Alarm System (Network)	
	DIVISION 31 - EARTHWORK	

31 20 11	Earth Moving (Short Form)	09-08
31 23 19	Dewatering	12-05
31 64 00	Helical Anchors/Piles	
	DIVISION 32 - EXTERIOR IMPROVEMENTS	
32 05 23	Cement and Concrete for Exterior Improvements	04-10
32 84 00	Planting Irrigation	10-11
32 90 00	Planting	10-11
	DIVISION 33 - UTILITIES	
33 40 00	Storm Sewer Utilities	10-11
33 46 13	Foundation Drainage	10-11

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 00 01 15
LIST OF DRAWING SHEETS

The drawings listed below accompanying this specification form a part of the contract.

<u>Drawing No.</u>	<u>Title</u>
	GENERAL
G1.0	TITLE SHEET
G1.1	FIRST FLOOR LIFE SAFETY PLAN
G1.2	SECOND FLOOR LIFE SAFETY PLAN
G1.3	THIRD FLOOR LIFE SAFETY PLAN
G1.4	SECOND FLOOR PHASING PLAN
G1.5	THIRD FLOOR PHASING PLAN
G1.6	SURVEY BY FLSI
	CIVIL
C1.0	SITE DEMOLITION & EROSION CONTROL PLAN
C2.0	GRADING AND DRAINAGE PLAN
	ARCHITECTURAL
A0.1	FIRST FLOOR DEMOLITION PLAN
A0.2	SECOND FLOOR DEMOLITION PLAN
A0.3	THIRD FLOOR DEMOLITION PLAN
A0.4	GROUND FLOOR DEMOLITION AND FLOOR PLAN
A0.5	SECOND FLOOR REFLECTED CEILING DEMOLITION PLAN
A0.6	THIRD FLOOR REFLECTED CEILING DEMOLITION PLAN
A1.1	FIRST FLOOR PLAN
A1.2	SECOND FLOOR PLAN
A1.3	THIRD FLOOR PLAN
A1.3A	THIRD FLOOR PARTIAL PLAN - BASE BID
A1.4	FIRST FLOOR DIMENSION PLAN
A1.5	SECOND FLOOR DIMENSION PLAN
A1.6	THIRD FLOOR DIMENSION PLAN
A1.7	ENLARGED PLANS
A1.8	ENLARGED PLANS
A1.9	ENLARGED PLANS
A2.0	ROOF PLAN
A3.0	EXTERIOR ELEVATION
A4.0	BUILDING SECTIONS
A5.0	WALL SECTIONS
A6.1	FIRST AND SECOND FLOOR ROOM FINISH SCHEDULES
A6.1A	SECOND FLOOR FINISH PLAN
A6.2	THIRD FLOOR ROOM FINISH SCHEDULE
A6.2A	THIRD FLOOR FINISH PLAN
A6.3	FIRST AND SECOND FLOOR DOOR SCHEDULES
A6.4	THIRD FLOOR DOOR SCHEDULE / WINDOW TYPES
A7.0	EXTERIOR DETAILS
A7.1	INTERIOR DETAILS
A7.2	INTERIOR / EXTERIOR DETAILS
A7.3	INTERIOR / EXTERIOR DETAILS
A7.4	INTERIOR DETAILS
A7.5	INTERIOR DETAILS
A8.1	INTERIOR ELEVATIONS
A8.2	INTERIOR ELEVATIONS
A8.3	INTERIOR ELEVATIONS
A8.4	INTERIOR ELEVATIONS
A9.1	FIRST FLOOR REFLECTED CEILING PLAN
A9.2	SECOND FLOOR REFLECTED CEILING PLAN
A9.3	THIRD FLOOR REFLECTED CEILING PLAN
A10.1	FIRST FLOOR FURNITURE & EQUIPMENT PLAN

A10.2	SECOND FLOOR FURNITURE & EQUIPMENT PLAN
A10.3	THIRD FLOOR FURNITURE & EQUIPMENT PLAN
A10.4	FURNITURE & EQUIPMENT SCHEDULES
	STRUCTURAL
S0.1	STRUCTURAL NOTES
S0.2	STRUCTURAL NOTES
S2.1	FOUNDATION PLAN
S2.2	FIRST FLOOR FRAMING PLAN
S2.3	SECOND FLOOR FRAMING PLAN
S2.4	THIRD FLOOR FRAMING PLAN
S2.5	ROOF FRAMING PLAN
S3.1	STRUCTURAL DETAILS
S3.2	STRUCTURAL DETAILS
S3.3	STRUCTURAL DETAILS
S3.4	STRUCTURAL DETAILS
	MECHANICAL/PLUMBING
MO.1	MECHANICAL COVER SHEET AND GENERAL NOTES
M0.2	MECHANICAL SCHEDULES
M0.3	MECHANICAL SCHEDULES
M0.4	MECHANICAL SCHEDULES
M0.5	HVAC DESIGN SCHEDULE
M1.0	BASEMENT FLOOR HVAC DEMOLITION PLAN
M1.1	FIRST FLOOR HVAC DEMOLITION PLAN
M1.2	SECOND FLOOR AIRSIDE HVAC DEMOLITION PLAN
M1.3	SECOND FLOOR HYDRONIC HVAC DEMOLITION PLAN
M1.3A	SECOND FLOOR HYDRONIC HVAC DEMOLITION PLAN - BASE BID
M1.4	THIRD FLOOR AIRSIDE HVAC DEMOLITION PLAN
M1.4A	THIRD FLOOR AIRSIDE HVAC DEMOLITION PLAN - BASE BID
M1.5	THIRD FLOOR HYDRONIC HVAC DEMOLITION PLAN
M1.5A	THIRD FLOOR HYDRONIC HVAC DEMOLITION PLAN - BASE BID
M1.6	PENTHOUSE HVAC DEMOLITION PLAN
M2.0	BASEMENT FLOOR HVAC PLAN
M2.1	FIRST FLOOR AIRSIDE HVAC PLAN
M2.2	FIRST FLOOR HYDRONIC HVAC PLAN
M2.3	SECOND FLOOR AIRSIDE HVAC PLAN
M2.4	SECOND FLOOR HYDRONIC HVAC PLAN
M2.4A	SECOND FLOOR HYDRONIC HVAC PLAN - BASE BID
M2.5	THIRD FLOOR AIRSIDE HVAC PLAN
M2.5A	THIRD FLOOR AIRSIDE HVAC PLAN - BASE BID
M2.6	THIRD FLOOR HYDRONIC HVAC PLAN
M2.6A	THIRD FLOOR HYDRONIC HVAC PLAN - BASE BID
M2.7	PENTHOUSE AIRSIDE HVAC PLAN
M3.1	HVAC DETAILS
M3.2	CHILLED WATER SCHEMATICS
M3.3	CONTROL SCHEMATICS
M3.4	CONTROL SCHEMATICS
P0.1	PLUMBING COVER SHEET
P0.2	PLUMBING SCHEDULES
P1.0MG	BASEMENT DEMOLITION PLAN - MEDICAL GAS
P1.0WA	BASEMENT DEMOLITION PLAN - WATER
P1.0WV	BASEMENT DEMOLITION PLAN - WASTE AND VENT
P1.2MG	SECOND FLOOR DEMOLITION PLAN - MEDICAL GAS
P1.2WA	SECOND FLOOR DEMOLITION PLAN - WATER
P1.2WV	SECOND FLOOR DEMOLITION PLAN - WASTE AND VENT
P1.3AMG	THIRD FLOOR DEMOLITION PLAN - MEDICAL GAS - BASE BID
P1.3AWA	THIRD FLOOR DEMOLITION PLAN - WATER - BASE BID
P1.3AWV	THIRD FLOOR DEMOLITION PLAN - WASTE AND VENT - BASE BID
P1.3MG	THIRD FLOOR DEMOLITION PLAN - MEDICAL GAS
P1.3WA	THIRD FLOOR DEMOLITION PLAN - WATER
P1.3WV	THIRD FLOOR DEMOLITION PLAN - WASTE AND VENT
P2.0MG	BASEMENT PLAN - MEDICAL GAS

P2.0WA	BASEMENT PLAN - WATER
P2.0WV	BASEMENT PLAN - WASTE AND VENT
P2.1MG	FIRST FLOOR PLAN - MEDICAL GAS
P2.1WA	FIRST FLOOR PLAN - WATER
P2.1WV	FIRST FLOOR PLAN - WASTE AND VENT
P2.2MG	SECOND FLOOR PLAN - MEDICAL GAS
P2.2TP	SECOND FLOOR PLAN - TRAP PRIMERS
P2.2WA	SECOND FLOOR PLAN - WATER
P2.2WV	SECOND FLOOR PLAN - WASTE AND VENT
P2.3AMG	THIRD FLOOR PLAN - MEDICAL GAS - BASE BID
P2.3AWA	THIRD FLOOR PLAN - WATER - BASE BID
P2.3AWV	THIRD FLOOR PLAN - WASTE AND VENT - BASE BID
P2.3MG	THIRD FLOOR PLAN - MEDICAL GAS
P2.3TP	THIRD FLOOR PLAN - TRAP PRIMERS
P2.3WA	THIRD FLOOR PLAN - WATER
P2.3WV	THIRD FLOOR PLAN - WASTE AND VENT
	ELECTRICAL
E0.1	ELECTRICAL LEGEND AND SYMBOLS
E0.2	LIGHTING FIXTURE SCHEDULE
E0.3	LIGHTING CONTROLS
E1.0	GROUND FLOOR ELECTRICAL DEMOLITION PLAN
E1.1	FIRST FLOOR ELECTRICAL DEMOLITION PLAN
E1.2	SECOND FLOOR ELECTRICAL DEMOLITION PLAN
E1.3	THIRD FLOOR POWER DEMOLITION PLAN
E1.3A	THIRD FLOOR POWER DEMOLITION PLAN - BASE BID
E1.4	PENTHOUSE ELECTRICAL DEMOLITION PLAN
E1.5	SECOND FLOOR LIGHTING DEMOLITION PLAN
E1.6	THIRD FLOOR LIGHTING DEMOLITION PLAN
E1.6A	THIRD FLOOR LIGHTING DEMOLITION PLAN - BASE BID
E2.0	GROUND FLOOR POWER PLAN
E2.1	FIRST FLOOR POWER PLAN
E2.2	SECOND FLOOR POWER PLAN
E2.3	THIRD FLOOR POWER PLAN
E2.3A	THIRD FLOOR POWER PLAN - BASE BID
E2.4	GROUND FLOOR LIGHTING PLAN
E2.5	FIRST FLOOR LIGHTING PLAN
E2.6	SECOND FLOOR LIGHTING PLAN
E2.7	THIRD FLOOR LIGHTING PLAN
E2.7A	THIRD FLOOR LIGHTING PLAN - BASE BID
E2.8	FIRST FLOOR MECHANICAL POWER PLAN
E2.9	SECOND FLOOR MECHANICAL POWER PLAN
E2.10	THIRD FLOOR MECHANICAL POWER PLAN
E2.10A	THIRD FLOOR MECHANICAL POWER PLAN - BASE BID
E2.11	PENTHOUSE MECHANICAL POWER PLAN
E3.1	SINGLE LINE DIAGRAM
E3.2	PANEL SCHEDULES
E3.3	PANEL SCHEDULES
E3.4	PANEL SCHEDULES
E3.5	PANEL SCHEDULES - BID OPTIONS
E4.1	ELECTRICAL DETAILS
	TELECOMMUNICATION
T0.1	TELECOMMUNICATION LEGEND AND SYMBOLS
T1.0	GROUND FLOOR TELECOMMUNICATIONS DEMOLITION PLAN
T1.1	FIRST FLOOR TELECOMMUNICATIONS DEMOLITION PLAN
T1.2	SECOND FLOOR TELECOMMUNICATIONS DEMOLITION PLAN
T1.3	THIRD FLOOR TELECOMMUNICATIONS DEMOLITION PLAN
T1.3A	THIRD FLOOR TELECOMMUNICATIONS DEMOLITION PLAN - BASE BID
T2.0	GROUND FLOOR TELECOMMUNICATIONS PLAN
T2.1	FIRST FLOOR TELECOMMUNICATIONS PLAN
T2.2	SECOND FLOOR VOICE AND DATA PLAN
T2.3	THIRD FLOOR VOICE AND DATA PLAN

T2.3A	THIRD FLOOR TELECOMMUNICATIONS PLAN - BASE BID
T2.4	SECOND FLOOR NURSE CALL PLAN
T2.5	THIRD FLOOR NURSE CALL PLAN
T2.6	SECOND FLOOR SECURITY PLAN
T2.7	THIRD FLOOR SECURITY PLAN
T3.1	TELECOMMUNICATIONS SCHEMATICS
T3.2	SECURITY SCHEMATICS
T4.1	FIRST FLOOR TELECOMMUNICATION ROOM DETAILS
T4.2	SECOND FLOOR TELECOMMUNICATION ROOM DETAILS
T4.3	THIRD FLOOR TELECOMMUNICATION ROOM DETAILS
	FIRE ALARM
FA0.1	FIRE ALARM LEGEND AND SYMBOLS
FA1.0	GROUND FLOOR FIRE ALARM DEMOLITION PLAN
FA1.1	FIRST FLOOR FIRE ALARM DEMOLITION PLAN
FA1.2	SECOND FLOOR FIRE ALARM DEMOLITION PLAN
FA1.3	THIRD FLOOR FIRE ALARM DEMOLITION PLAN
FA1.3A	THIRD FLOOR FIRE ALARM DEMOLITION PLAN-BASE BID
FA1.4	PENTHOUSE FIRE ALARM DEMOLITION PLAN
FA2.0	GROUND FLOOR FIRE ALARM PLAN
FA2.1	FIRST FLOOR FIRE ALARM PLAN
FA2.2	SECOND FLOOR FIRE ALARM PLAN
FA2.3	THIRD FLOOR FIRE ALARM PLAN
FA2.3A	THIRD FLOOR FIRE ALARM PLAN - BASE BID
FA3.1	FIRE ALARM RISER DIAGRAM AND DETAILS

- - - **END** - - -

Mr. Jim Otradosky
CSHQA Architects
CW Moore Plaza, 250 South 5th Street
Boise, ID 83702
(208) 343-4635

Re: Geotechnical Engineering Report
Veteran's Affairs Medical Center
Building 67 Expansion
500 West Fort Street
Boise, ID


Dear Mr. Otradosky:

In compliance with your instructions, we have conducted a soils exploration and foundation evaluation for the above referenced development. Fieldwork for this investigation was conducted on 21 May 2012. Data have been analyzed to evaluate pertinent geotechnical conditions. Results of this investigation, together with our recommendations, are to be found in the following report. We have provided three copies for your review and distribution.

Often questions arise concerning soil conditions because of design and construction details that occur on a project. MTI would be pleased to continue our role as geotechnical engineers during project implementation. Additionally, MTI would be pleased in providing materials testing and special inspection services during construction of this project. If you will advise us of the appropriate time to discuss these engineering services, we will be pleased to meet with you at your convenience.

MTI appreciates this opportunity to be of service to you and looks forward to working with you in the future. If you have questions, please call (208) 376-4748.

Respectfully Submitted,
Materials Testing & Inspection, Inc.


Kevin L. Schroeder, P.G.
Geotechnical Services Manager

Reviewed by: David O. Cram, P.E.
General Manager



Liz Brown, P.E.
Geotechnical Engineer



TABLE OF CONTENTS

INTRODUCTION.....	3
Project Description	3
Authorization	3
Purpose	3
Scope of Investigation	4
Warranty and Limiting Conditions	4
Exclusive Use	4
Report Recommendation are Limited and Subject to Misinterpretation	4
Environmental Concerns	5
SITE DESCRIPTION	5
Site Access	5
Regional Geology	5
General Site Characteristics.....	6
Regional Site Climatology and Geochemistry.....	6
Geoseismic Setting	6
SOILS EXPLORATION	6
Exploration and Sampling Procedures.....	6
Laboratory Testing Program.....	7
Soil and Sediment Profile	7
Volatile Organic Scan.....	7
SITE HYDROLOGY	8
Groundwater	8
Soil Infiltration Rates	8
LATERAL EARTH PRESSURES	8
Retaining Wall Backfill Materials	9
Retaining Wall Drainage	10
FOUNDATION AND SLAB DISCUSSION AND RECOMMENDATIONS	10
Foundation Design Recommendations	10
Floor Slab-on-Grade.....	11
CONSTRUCTION CONSIDERATIONS	11
Earthwork	12
Dry Weather	12
Wet Weather	12
Frozen Subgrade Soils.....	12
Structural Fill.....	13
Backfill of Walls.....	13
Excavations	14
Groundwater Control.....	14
GENERAL COMMENTS	14
REFERENCES.....	15
APPENDICES	16
Acronym List.....	16
Geotechnical General Notes	17
Geotechnical Investigation Boring Log.....	18
Shear Wave Velocity Test Results	19
Plate 1: Vicinity Map.....	21
Plate 2: Site Map	22



INTRODUCTION

This report presents results of a geotechnical investigation and analysis in support of data utilized in design of structures as defined in the 2009 International Building Code (IBC). Information in support of groundwater and storm water issues pertinent to the practice of Civil Engineering is included. Observations and recommendations relevant to the earthwork phase of the project are also presented. Revisions in plans or drawings for the proposed structure from those enumerated in this report should be brought to the attention of the soils engineer to determine whether changes in foundation recommendations are required. Deviations from noted subsurface conditions, if encountered during construction, should also be brought to the attention of the soils engineer.

Project Description

The proposed development is in the northeastern portion of the City of Boise, Ada County, Idaho, and occupies a portion of the SW $\frac{1}{4}$ SW $\frac{1}{4}$ of Section 2, Township 3 North, Range 2 East, Boise Meridian. This project will consist of construction of a three-story in-fill structure, possibly with a basement level. Total settlements are limited to 1 inch. Preliminary column loads of up to 220,000 pounds were provided by Gerald Gunny of CHSQA and were used for design calculations. The foundation recommendations in this report are to be considered preliminary. Retaining walls are anticipated as basement walls. MTI has not been informed of proposed grading.

Authorization

Authorization to perform this exploration and analysis was given in the form of a written authorization to proceed from Mr. Kent A. Hanway of CSHQA Architects to Kevin L. Schroeder of Materials Testing and Inspection, Inc. (MTI), on 11 May 2012. Said authorization is subject to terms, conditions, and limitations described in the Professional Services Contract entered into between CSHQA Architects and MTI. Our scope of services for the proposed development has been provided in our proposal dated 1 May 2012 and repeated below.

Purpose

The purpose of this Geotechnical Engineering Report is to determine various soil profile components and their engineering characteristics for use by either design engineers or architects in:

- Preparing or verifying suitability of foundation design and placement
- Preparing site drainage designs
- Indicating issues pertaining to earthwork construction

Scope of Investigation

The scope of this investigation included review of geologic literature and existing available geotechnical studies of the area, visual site reconnaissance of the immediate site, subsurface exploration of the site, field and laboratory testing of materials collected, and engineering analysis and evaluation of foundation materials.

Warranty and Limiting Conditions

MTI warrants that findings and conclusions contained herein have been formulated in accordance with generally accepted professional engineering practice in the fields of foundation engineering, soil mechanics, and engineering geology only for the site and project described in this report. These engineering methods have been developed to provide the client with information regarding apparent or potential engineering conditions relating to the site within the scope cited above and are necessarily limited to conditions observed at the time of the site visit and research. Field observations and research reported herein are considered sufficient in detail and scope to form a reasonable basis for the purposes cited above.

Exclusive Use

This report was prepared for exclusive use of the property owner(s), at the time of the report, and their retained design consultants ("Client"). Conclusions and recommendations presented in this report are based on the agreed-upon scope of work outlined in this report together with the Contract for Professional Services between the Client and Materials Testing and Inspection, Inc. ("Consultant"). Use or misuse of this report, or reliance upon findings hereof, by parties other than the Client is at their own risk. Neither Client nor Consultant make representation of warranty to such other parties as to accuracy or completeness of this report or suitability of its use by such other parties for purposes whatsoever, known or unknown, to Client or Consultant. Neither Client nor Consultant shall have liability to indemnify or hold harmless third parties for losses incurred by actual or purported use or misuse of this report. No other warranties are implied or expressed.

Report Recommendation are Limited and Subject to Misinterpretation

There is a distinct possibility that conditions may exist that could not be identified within the scope of the investigation or that were not apparent during our site investigation. Findings of this report are limited to data collected from noted explorations advanced and do not account for unidentified fill zones, unsuitable soil types or conditions, and variability in soil moisture and groundwater conditions. To avoid possible misinterpretations of findings, conclusions, and implications of this report, MTI should be retained to explain the report contents to other design professionals as well as construction professionals.

Since actual subsurface conditions on the site can only be verified by earthwork, note that construction recommendations are based on general assumptions from selective observations and selective field exploratory sampling. Upon commencement of construction, such conditions may be identified that required corrective actions, and these required corrective actions may impact the project budget. Therefore, construction recommendations in this report should be considered preliminary, and MTI should be retained to observe actual subsurface conditions during earthwork construction activities to provide additional construction recommendations as needed.

Since geotechnical reports are subject to misinterpretation, **do not** separate the soil logs from the report. Rather, provide a copy, or authorize for their use, of the complete report to other design professional or contractors.

This report is also limited to information available at the time it was prepared. In the event additional information is provided to MTI following publication of our report, it will be forwarded to the client for evaluation in the form received.

Environmental Concerns

Comments in this report concerning either onsite conditions or observations, including soil appearances and odors, are provided as general information. These comments are not intended to describe, quantify, or evaluate environmental concerns or situations. Since personnel, skills, procedures, standards, and equipment differ, a geotechnical investigation report is not intended to substitute for a geoenvironmental investigation or a Phase II/III Environmental Site Assessment. If the potential for petroleum or hazardous materials contamination or other environmental hazards relating to the site exists, MTI must be informed prior to the commencement of the geotechnical investigation. If environmental services are needed, MTI can provide, via a separate contract, those personnel who are trained to investigate and delineate soil and water contamination.

SITE DESCRIPTION

Site Access

Access to the site may be gained via Interstate 84 to the Broadway Exit. Proceed north on Broadway approximately 3.2 miles to its intersection with Fort Street. From this intersection, proceed west on Fort Street to its intersection with 5th Street. Proceed north on 5th Street to the Veterans Administration Hospital. The site is located just west of the existing emergency facilities. The location is depicted in site map plates included in the **Appendix**.

Regional Geology

The project site is located within the western Snake River Plain of southwestern Idaho and eastern Oregon. The plain is a northwest trending rift basin, about 45 miles wide and 200 miles long, that developed about 14 million years ago (Ma) and has since been occupied sporadically by large inland lakes. Geologic materials found within and along the plain's margins reflect volcanic and fluvial/lacustrine sedimentary processes that have led to an accumulation of approximately 1 to 2 km of interbedded volcanic and sedimentary deposits within the plain. Along the margins of the plain, streams that drained the highlands to the north and south provided coarse to fine-grained sediments eroded from granitic and volcanic rocks, respectively. About 2 million years ago the last of the lakes was drained and since that time fluvial erosion and deposition has dominated the evolution of the landscape. The project site is underlain by "Sandy Alluvium of Side-Stream Valleys and Gulches" as mapped by Othberg and Stanford (1993). Locally, these deposits are composed of medium to coarse sand interbedded with silty fine sand and silt and are mostly derived from weathered granite and reworked Tertiary sediments of the Boise Foothills. The thickness of this unit is variable. Because of the relative youthfulness of these deposits they contain only minor pedogenic clay and calcium carbonate.

General Site Characteristics

This proposed development will be located within an area of relatively flat land. This area has undergone considerable reworking as the Veteran's facility has grown to its current state. Throughout the majority of the site, surficial soils consisted of clayey to silty sand fills, a result of past nearby construction. The first native soils encountered consisted of silty sands.

Regional drainage is south toward the Boise River. Stormwater drainage for the site is achieved by sheet runoff from the paved areas. Storm water drainage facilities are located within the parking areas.

Regional Site Climatology and Geochemistry

According to the Western Regional Climate Center, the average precipitation for Treasure Valley is on the order of 10 to 12 inches per year, with an annual snowfall of approximately 20 inches and a range from 3 to 49 inches. The monthly mean daily temperatures range from 21° F to 95° F with daily extremes ranging from -25° F to 111° F. Winds are generally from the northwest or southeast with an annual average wind speed of approximately 9 miles per hour (mph) with a maximum of 62 mph. Soils and sediments in the area are primarily derived from siliceous materials and exhibit low electro-chemical potential for corrosion of metals or concretes. Local aggregates are generally appropriate for Portland cement and lime cement mixtures. Surface waters, groundwaters, and soils in the region typically have pH levels ranging from 7.2 to 8.2.

Geoseismic Setting

Soils on site are classed as Site Class D in accordance with Chapter 16 of the 2009 edition of the IBC. Shear Wave Velocity Testing conducted west of the main V.A. Hospital building, as shown on plate 2 in the appendix. Considering the percentage of error or bias for the test is 7%, results range from velocities of class D to class C. Therefore, structures constructed on this site should be designed per IBC requirements for the Site Class D seismic classification. Our investigation did not reveal potential hazards resulting from earthquake motions: slope instability, liquefaction, and surface rupture because of faulting or lateral spreading. Incidence and anticipated acceleration of seismic activity in the area is low.

SOILS EXPLORATION

Exploration and Sampling Procedures

Field exploration conducted to determine engineering characteristics of subsurface materials included a reconnaissance of the project site and investigation by soil boring. One borings was located in the field by means of visual approximation from on-site features or known locations and are presumed to be accurate to within a few feet. This boring was advanced by means of a truck-mounted drilling rig equipped with a continuous flight hollow-stem augers. At specified depths, samples were obtained using a standard split-spoon sampler, and Standard Penetration Test (SPT) blow counts were recorded. At completion of exploration, borings were backfilled with loose excavated materials.

Samples have been visually classified in the field by professional staff, identified according to boring number and depth, placed in sealed containers, and transported to our laboratory for additional testing. Subsurface materials have been described in detail on logs provided in the **Appendix**. Results of field and laboratory tests are also presented in the **Appendix**. MTI recommends that these logs **not** be used to estimate fill material quantities.

Laboratory Testing Program

Along with our field investigation, a supplemental laboratory testing program was conducted to determine additional pertinent engineering characteristics of subsurface materials necessary in an analysis of the anticipated behavior of the proposed structures. Laboratory tests were conducted in accordance with current applicable American Society for Testing and Materials (ASTM) specifications, and results of these tests are to be found on the accompanying logs located in the **Appendix**. The laboratory testing program for this report included: Atterberg Limits Tests - ASTM D 4318 and Grain Size Analysis - ASTM C 117/C 136.

Soil and Sediment Profile

The profile below represents one specific profile within the area of the proposed project site. Note that on site soils strata, encountered near this location, may vary from the soil profile presented, which can be found in the **Appendix**.

The materials encountered during exploration were quite typical for the geologic area mapped as Sandy Alluvium of Side-Stream Valleys and Gulches. Surficial materials penetrated to a depth of roughly 10 feet, consisted of clayey and silty sand fills, most likely placed as the existing structure was being completed. These materials were somewhat variable with depth, but were commonly brown to tan in color, slightly moist in moisture content, and very loose to medium dense in relative density. At depth we reached native soils consisting of dark brown to brown, slightly moist, and loose to medium dense silty sands. Silt content decreased with depth, and we noted minor gravel clasts through these sediments beneath 17 feet of depth.

Volatile Organic Scan

No environmental concerns were identified prior to commencement of the investigation. Therefore, soils obtained during on-site activities were not assessed for volatile organic compounds by portable photoionization detector. Samples obtained during our exploration activities exhibited no odors or discoloration typically associated with this type contamination. No groundwater was encountered.



SITE HYDROLOGY

Existing surface drainage conditions are defined in the **General Site Characteristics** section. Information provided in this section is limited to observations made at the time of the investigation. Either regional or local ordinances may require information beyond the scope of this report.

Groundwater

Groundwater was not encountered within the depths explored during this field investigation. Soil moistures in the boring were consistently slightly moist throughout. Groundwater levels in the site vicinity are controlled in large part by commercial and nearby residential irrigation activity. Maximum groundwater elevations likely occur during the later portion of the irrigation season. Estimating seasonal groundwater level fluctuation is problematic without regular monitoring. However, during a previous exploration performed in 2007, which was within a few hundred feet of this location, no groundwater was noted within borings to a depth of 26.5 feet bgs. Therefore, based on evidence of this investigation, primarily the absence of significant moistures within the soils sampled, and background knowledge of the area, MTI anticipates groundwater depths to remain greater than 20 feet bgs throughout the year. This depth is an estimate.

Soil Infiltration Rates

Soil permeability, which was not tested in the field, is a measure of the ability of a soil to transmit a fluid. Given the absence of these measurements, for this report an estimation of fluid transport is presented using generally recognized values for each soil type and gradation. Of the materials comprising the generalized profile for this study, the clayey and silty sand fills may display quite variable rates as a result of placement practices. Silty sand soils usually display rates of 4 to 8 inches per hour. This will increase as the silt content is reduced with depth.

It is recommended that infiltration facilities constructed on the site be extended into native silty sand sediments. Excavation depths of 10 feet minimum, should be anticipated to expose these sediments. If ASTM C 33 filter sand, or equivalent, is incorporated into design of infiltration facilities, an infiltration rate of 8 inches per hour should be used in design.

LATERAL EARTH PRESSURES

Retaining, below-grade, or basement walls will be subject to lateral earth pressures. The magnitude of earth pressure is a function of both type and compaction of backfill behind walls within the "active" zone, and allowable rotation of the top of the wall. The active zone is defined as the wedge of soil between the surface of the wall and a plane inclined 31 degrees from vertical passing through the base of the wall. The following recommendations should be used when dealing with lateral earth pressures on a gravity block: 1) a sliding frictional coefficient of 0.35 is appropriate considering native SM/ML soils, and 2) a sliding frictional coefficient of 0.45 is appropriate considering granular structural fill (SP/GP) under typical conditions.

A state of plastic equilibrium is when the subject material is considered to be 1) homogeneous and unbounded and 2) at the point of incipient instability. This state is evaluated on the basis of unit weight, mechanical properties, and the definition of instability. For the purpose of this report, it is assumed that native relatively

free draining soils and imported granular fill material will be the materials of concern regarding lateral earth pressures. If other materials are considered for use, MTI must be contacted to provide revised lateral pressure information. Furthermore, changes in natural soil moisture, such as can be imposed by site storm water systems, can change the values listed below.

Below-grade restrained walls, such as basement walls, should be designed based on at-rest pressures. Active pressures are appropriate under conditions where the wall moves or rotates away from the soil mass at failure. Passive pressures are used for conditions where the wall moves toward the soil mass at failure. Rotation, or lateral movement, of the top of the wall equal to 0.02 times the height of the wall will be necessary for on-site soil backfill to achieve an “active” loading condition. Lateral movement of the top of the wall equal to 0.001 times the height of the wall will be necessary for the “active” pressure condition for imported SP/GP structural backfill.

Retaining Wall Backfill Materials

For lateral earth pressure analysis, MTI anticipates that the soils of interest will be the native sandy silt (ML) soils encountered between 3 and 10 feet bgs in the test pits. For these soils, the following values are applicable under non-surcharged, drained conditions:

Lateral Earth Pressure Values for Native Soil

Soil Type: Sandy Silt			
Internal Friction Angle:	28 °	Dry Unit Weight:	105 pcf
Cohesion:	200 psf	Buoyant Unit Weight:	68 pcf
Natural Void Ratio:	0.7	Natural Moisture:	16 %
At rest lateral earth pressure:	65 psf		$K_o = 0.5$
Active lateral earth pressure:	44 psf		$K_a = 0.4$
Passive lateral earth pressure:	337 psf		$K_p = 2.8$

Imported, compacted, structural material, which is to be used to backfill the soil side of walls, must demonstrate following characteristics:

Lateral Earth Pressure Values for Fill Materials

Soil Type: Compacted Sandy Gravel			
Internal Friction Angle:	35 °	Dry Unit Weight:	128 pcf
Cohesion:	NA	Buoyant Unit Weight:	83 pcf
Natural Void Ratio:	0.4	Natural Moisture:	5 %
At rest lateral earth pressure:	57 psf		$K_o = 0.4$
Active lateral earth pressure:	36 psf		$K_a = 0.3$
Passive lateral earth pressure:	496 psf		$K_p = 3.7$

In the case that another material is used for backfill, MTI should be consulted for correct lateral earth pressure values. Granular structural fill should consist of 4-inch-minus select, clean, granular soil with no more than

30 percent oversize (greater than ¾-inch) material and no more than 5 percent fines (passing the No. 200 sieve). Retaining wall and basement backfill must be placed in accordance with recommendations in the Structural Fill section of this report and must be properly compacted and tested.

Lateral earth pressure values do not incorporate specific factors of safety, and are only applicable for non-surcharged, drained conditions. Factors of safety, if applicable, should be integrated into the structural design of the wall. The preceding values are presented for idealized conditions relating to simple shallow structures. For complex structures, deep structures, or structures with significant perimeter landscaping, a soils engineer should be retained as part of the design team in developing appropriate project design parameters and construction specifications.

Retaining Wall Drainage

MTI recommends that a drainage system be incorporated into the retained soil mass. This can be accomplished by installing wall and toe drains as a part of each soil-supporting wall system. In areas where there is potential for significantly high soil moistures within the supported soil mass, installation of drains within the soil mass is recommended. Particular consideration of roof drain effluent and irrigation water must be made. Further, these drainage systems must be separate from other retaining wall/foundation systems. If the granular structural fill option to reduce lateral pressures is used, a compacted low permeability soil cap is recommended within the upper 2 feet of the surface to limit surface water infiltration behind the walls.

FOUNDATION AND SLAB DISCUSSION AND RECOMMENDATIONS

Various foundation types have been considered for support of the proposed building structure. Two requirements must be fulfilled in the design of foundations. First, the applied bearing stress must be less than the ultimate bearing capacity of foundation soils to maintain stability. Second, total and differential settlement must not exceed an amount that will produce an adverse behavior of the superstructure. Allowable settlement is usually exceeded before bearing capacity considerations become important; thus, allowable bearing pressure is normally controlled by settlement considerations.

Foundation Design Recommendations

Subsurface soils are subject to excessive settlement under loading without modifications. Therefore, considering subsurface conditions and the proposed construction, MTI recommends that the building be founded upon micropiles. Per Gerald Gunny with CSHQA, preliminary column loads will vary between 100 and 220 kips per column. The following design criteria are to be considered preliminary and will require modification once final loads are determined. No lateral loading or moments were taken in account for the this preliminary design.

Based on our design analysis, micropile construction parameters shall consist of the following:

- Con-tech Systems Ltd. Titan Micropile data was used to evaluate the load capacity of piles.
- A Titan 73/53 grouted pile with a bonded length of 32 feet and a working load of 100 kips (compression) shall be used for construction. The center to center pile spacing should be at least 30 inches or 3 micropile diameters, whichever is greater as required per the Federal Highway Administration: Micropile Design and Construction Manual (FHWA NHI-05-039).

- Grout with a 28-day compressive strength of 4,000 psi shall be used for the piles.
- The geotechnical engineer shall be onsite during pile installation.
- Prior to construction, verification load testing of at least one micropile of each axial capacity must be performed. Load testing of 200% of design load is required per FHWA NHI-05-039. Testing shall be performed in accordance with ASTM D-1143. Settlements shall be documented across the load range, and confirmed to be less than 1 inch.
- During construction, proof load testing of at least 10% of the installed micropiles of each axial capacity must be performed. Load testing of 160% of design load is required per FHWA NHI-05-039. Testing shall be performed in accordance with ASTM D-1143. Settlements shall be documented across the load range, and confirmed to be less than 1 inch.

Pile layout and “load transfer to foundation” details are to be determined by the project structural engineer. Note, alternate pile sizes and load carrying capacity can be analyzed upon request.

Floor Slab-on-Grade

Very loose, questionable fill, was encountered in our boring to just below 10 feet of depth. Fills to this depth are most likely a result of construction of the 2 immediately adjacent wings. MTI recommends that these fill soils be excavated to a sufficient depth to expose competent, native soils or to a minimum depth of 4 feet below finished subgrade. A qualified soils technician should be present during excavation to identify these materials.

Organic, loose, or obviously compressive materials must be removed prior to placement of concrete floors or floor-supporting fill. In addition, the remaining subgrade should be treated in accordance with guidelines presented in the **Earthwork** section. Areas of excessive yielding should be excavated and backfilled with structural fill. Fill used to increase the elevation of the floor slab should meet requirements detailed in the **Structural Fill** section. Fill materials must be compacted to a minimum 95 percent of maximum density as determined by ASTM D 1557.

A free-draining granular mat (drainage fill course) should be provided below slabs-on-grade. This should be a minimum of 4 inches in thickness and properly compacted. The mat should consist of a sand and gravel mixture, complying with Idaho Standards for Public Works Construction (ISPWC) specifications for ¾-inch (Type 1) crushed aggregate. A moisture-retarder should be placed beneath floor slabs to minimize potential ground moisture effects on moisture-sensitive floor coverings. The moisture-retarder should be at least 15-mil in thickness and have a permeance of less than 0.01 US perms as determined by ASTM E 96. Placement of the moisture-retarder will require special consideration with regard to effects on the slab-on-grade. The granular mat should be compacted to no less than 95 percent of maximum density as determined by ASTM D 1557. Upon request, MTI can provide further consultation regarding installation.

CONSTRUCTION CONSIDERATIONS

Recommendations in this report are based upon structural elements of the project being founded on competent native silty sand soils or compacted structural fill. Structural areas should be stripped to an elevation that exposes these soil types.

Earthwork

Excessively organic soils, deleterious materials, or disturbed soils generally undergo high volume changes when subjected to loads, which is detrimental to subgrade behavior in the area of pavements, floor slabs, structural fills, and foundations. Grasses with associated root systems were noted at the time of our investigation. It is recommended that organic or disturbed soils, if encountered, be removed to depths of ½ foot (minimum), and wasted or stockpiled for later use. Stripping depths should be adjusted in the field to assure that the entire root zone or disturbed zone or topsoil are removed prior to placement and compaction of structural fill materials. Exact removal depths should be determined during grading operations by a qualified geotechnical representative, and should be based upon subgrade soil type, composition, and firmness or soil stability. If underground storage tanks (USTs), underground utilities, wells, or septic systems are discovered during construction activities, they must be decommissioned then removed or abandoned in accordance with governing Federal, State, and local agencies. Excavations developed as the result of such removal must be backfilled with structural fill materials as defined in the **Structural Fill** section.

MTI should oversee subgrade conditions (i.e., moisture content) as well as placement and compaction of new fill (if required) after native soils are excavated to design grade. Recommendations for structural fill presented in this report can be used to minimize volume changes and differential settlements that are detrimental to the behavior of footings, pavements, and floor slabs. Sufficient density tests should be performed to properly monitor compaction. For structural fill beneath building structures, one in-place density test per lift for every 5,000 square feet is recommended. In parking and driveway areas, this can be decreased to one test per lift for every 10,000 square feet.

Dry Weather

If construction is to be conducted during dry seasonal conditions, many problems associated with soft soils may be avoided. However, some rutting of subgrade soils may be induced by shallow groundwater conditions related to springtime runoff or irrigation activities during late summer through early fall. Problems may also arise because of lack of moisture in native and fill soils at time of placement. This will require the addition of water to achieve near-optimum moisture levels. Low-cohesion soils exposed in excavations may become friable, increasing chances of sloughing or caving. Measures to control excessive dust should be considered as part of the overall health and safety management plan.

Wet Weather

If construction is to be conducted during wet seasonal conditions (commonly from mid-November through May), problems associated with soft soils must be considered as part of the construction plan. During this time of year, fine-grained soils such as silts and clays will become unstable with increased moisture content, and eventually deform or rut. Additionally, constant low temperatures reduce the possibility of drying soils to near optimum conditions.

Frozen Subgrade Soils

Prior to placement of structural fill materials or foundation elements, frozen subgrade soils must either be allowed to thaw or be stripped to depths that expose non-frozen soils and wasted or stockpiled for later use.

Stockpiled materials must be allowed to thaw and return to near-optimal conditions prior to use as structural fill.

Structural Fill

Soils recommended for use as structural fill are those classified as GW, GP, SW, and SP in accordance with the Unified Soil Classification System (USCS) (ASTM D 2487). Use of silty soils (USCS designation of GM, SM, and ML) as structural fill may be acceptable. However, use of silty soils (GM, SM, and ML) as structural fill below footings is prohibited. These materials require very high moisture contents for compaction and require a long time to dry out if natural moisture contents are too high and may also be susceptible to frost heave under certain conditions. Therefore these materials can be quite difficult to work with as moisture content, lift thickness, and compactive effort becomes difficult to control. If silty soil is used for structural fill, lift thicknesses should not exceed 6 inches (loose), and fill material moisture must be closely monitored at both the working elevation and the elevations of materials already placed. Following placement, silty soils must be protected from degradation resulting from construction traffic or subsequent construction.

Recommended granular structural fill materials, those classified as GW, GP, SW, and SP, should consist of a 6-inch minus select, clean, granular soil with no more than 50 percent oversize (greater than ¾-inch) material and no more than 12 percent fines (passing No. 200 sieve). These fill materials should be placed in layers not to exceed 12 inches in loose thickness. Prior to placement of structural fill materials, surfaces must be prepared as outlined in the **Construction Considerations** section. Structural fill material should be moisture-conditioned to achieve optimum moisture content prior to compaction. For structural fill below footings, areas of compacted backfill must extend outside the perimeter of the footing for a distance equal to the thickness of fill between the bottom of foundation and underlying soils, or 5 feet, whichever is less.

Each layer of structural fill must be compacted, as outlined below:

- Below Structures and Rigid Pavements: A minimum of 95 percent of the maximum dry density as determined by ASTM D 1557.
- Below Flexible Pavements: A minimum of 92 percent of the maximum dry density as determined by ASTM D 1557 or 95 percent of the maximum dry density as determined by ASTM D 698.

The ASTM D 1557 test method must be used for samples containing up to 40 percent oversize (greater than ¾-inch) particles. If material contains more than 40 percent but less than 50 percent oversize particles, compaction of fill must be confirmed by proof rolling each lift with a 10-ton vibratory roller (or equivalent) until the maximum density has been achieved. Density testing must be performed after each proof rolling pass until the in-place density test results indicate a drop (or no increase) in the dry density, defined as the maximum density or "break over" point. The number of required passes should be used as the requirement on the remainder of fill placement. Material should contain sufficient fines to fill void spaces, and must not contain more than 50 percent oversize particles.

Backfill of Walls

Backfill materials must conform to the requirements of structural fill, as defined in this report. For wall heights greater than 2.5 feet, the maximum material size should not exceed 4 inches in diameter. Placing

oversized material against rigid surfaces interferes with proper compaction, and can induce excessive point loads on walls. Backfill shall not commence until the wall has gained sufficient strength to resist placement and compaction forces. Further, retaining walls above 2.5 feet in height shall be backfilled in a manner that will limit the potential for damage from compaction methods and/or equipment. It is recommended that only small hand-operated compaction equipment be used for compaction of backfill within a horizontal distance equal to the height of the wall, measured from the back face of the wall.

Backfill should be compacted in accordance with the specifications for structural fill, except in those areas where it is determined that future settlement is not a concern, such as planter areas. In nonstructural areas, backfill must be compacted to a firm and unyielding condition.

Excavations

Shallow excavations that do not exceed 4 feet in depth may be constructed with side slopes approaching vertical. Below this depth, it is recommended that slopes be constructed in accordance with Occupational Safety and Health Administration (OSHA) regulations, section 1926, subpart P. Based on these regulations, on-site soils are classified as type "C" soil, and as such, excavations within these soils should be constructed at a maximum slope of 1½ foot horizontal to 1 foot vertical (1½H:1V) for excavations up to 20 feet in height. Excavations in excess of 20 feet will require additional analysis. Note that these slope angles are considered stable for short-term conditions only, and will not be stable for long-term conditions.

For deep excavations, native granular sediments cannot be expected to remain in position. These materials are prone to failure and may collapse, thereby, undermining upper soils layers. This is especially true when excavations approach depths near the water table. Care must be taken to ensure that excavations are properly backfilled in accordance with procedures outlined in this report.

Groundwater Control

Groundwater was not encountered during the investigation and is anticipated to be below the depth of construction. Special precautions may be required for control of surface runoff and subsurface seepage. It is recommended that runoff be directed away from open excavations. Silty or clayey soils may become soft and pump if subjected to excessive traffic during time of surface runoff. Ponded water in construction areas should be drained through methods such as trenching, sloping, crowning grades, nightly smooth drum rolling, or installing a French drain system. Additionally, temporary or permanent driveway sections should be constructed if extended wet weather is forecasted.

GENERAL COMMENTS

When plans and specifications are complete, or if significant changes are made in the character or location of the proposed structure, consultation with MTI should be arranged as supplementary recommendations may be required. It is recommended that suitability of subgrade soils and compaction of structural fill materials be verified prior to placement of structural elements. Additionally, monitoring and testing should be performed to verify that suitable materials are used for structural fill and that proper placement and compaction techniques are utilized.

REFERENCES

- American Society for Testing and Materials (ASTM) (2004). Standard Test Method for Materials Finer than 75-um (No. 200) Sieve in Mineral Aggregates by Washing: ASTM C 117 – 04. West Conshohocken, PA: ASTM.
- American Society for Testing and Materials (ASTM) (2006). Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates: ASTM C 136 – 06. West Conshohocken, PA: ASTM.
- American Society for Testing and Materials (ASTM) (2007). Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort D 698-07e1. West Conshohocken, PA: ASTM.
- American Society for Testing and Materials (ASTM) (2011). Standard Practice for Classification of Soils for Engineering Purposes (Unified Soil Classification System) D2487-11. West Conshohocken, PA: ASTM.
- American Society for Testing and Materials (ASTM) (2010). Standard Test Methods for Liquid Limit, Plastic Limit, and Plasticity Index of Soils: ASTM D 4318 – 10. West Conshohocken, PA: ASTM.
- American Society of State Highway and Transportation Officials (AASHTO) (1993). AASHTO Guide for Design of Pavement Structures 1993. Washington, D. C.: AASHTO.
- City of Boise. (2010). Storm Water Management Design Manual (August 2010). [Online] Available: http://www.cityofboise.org/Departments/Public_Works/Services/WaterManagement/DrainageControl/index.aspx (2012).
- Collett, R. A., U. S. Department of Agriculture, Soil Conservation Service. (1980). Soil Survey of Ada County Area, Idaho. Washington, DC: U. S. Government Printing Office.
- Desert Research Institute. Western Regional Climate Center. [Online] Available: <http://www.wrcc.dri.edu/> (2012).
- International Building Code Council (2009). International Building Code, 2009. Country Club Hills, IL: Author.
- Othberg, K. L. and Stanford, L. A., Idaho Geologic Society (1992). Geologic Map of the Boise Valley and Adjoining Area, Western Snake River Plain, Idaho. (scale 1:100,000). Boise, Idaho: Joslyn and Morris.
- State of Idaho, Department of Health and Welfare, Department of Environmental Quality. (July 2011). Technical Guidance Manual For Individual and Subsurface Sewage Disposal Systems. Boise, Idaho: Author.
- U. S. Department of Agriculture, Natural Resource Conservation Service. Web Soil Survey. [Online] Available: <http://websoilsurvey.nrcs.usda.gov/app/> (2012).
- U. S. Dept. of Labor, Occupational Safety and Health Administration. “CFR 29, Part 1926, subpart P: Safety and Health Regulations for Construction, Excavations. (1986)”. [Online] Available: www.osha.gov (2012).
- U. S. Geological Survey. (2011). National Water Information System: Web Interface. [Online] Available: <http://waterdata.usgs.gov/nwis> (2012).



APPENDICES

ACRONYM LIST

AASHTO:	American Association of State Highway and Transportation Officials
ACCP:	Asphalt Cement Concrete Pavement
ACHD:	Ada County Highway District
ASTM:	American Society for Testing and Materials
AU:	Auger sample
bgs:	below ground surface
CB:	Carbide bit
CBR:	California Bearing Ratio
D:	natural dry unit weight, pcf
DB:	diamond bit
DM:	Dames & Moore sampling tube
GS:	grab sample
IBC:	International Building Code
ISPWC:	Idaho Standards for Public Works Construction
ITD:	Idaho Transportation Department
LL:	Liquid Limit
M:	water content
MSL:	mean sea level
N:	Standard "N" penetration: blows per foot, Standard Penetration Test
NP:	nonplastic
PCCP:	Portland Cement Concrete Pavement
PERM:	vapor permeability
PI:	Plasticity Index
PID:	photoionization detector
PVC:	polyvinyl chloride
Qc:	cone penetrometer value, unconfined compressive strength, psi
Qp:	Penetrometer value, unconfined compressive strength, tsf
Qu:	Unconfined compressive strength, tsf
SPT:	Standard Penetration Test (140:pound hammer falling 30 in. on a 2:in. split spoon)
SS:	split spoon (13/8:in. inside diameter, 2:in. outside diameter, except where noted)
ST:	shelby tube (3:in. outside diameter, except where noted)
USCS:	Unified Soil Classification System
USDA:	United States Department of Agriculture
UST:	underground storage tank
V:	vane value, ultimate shearing strength, tsf
WT:	apparent groundwater level



GEOTECHNICAL GENERAL NOTES

RELATIVE DENSITY AND CONSISTENCY CLASSIFICATION			
Coarse-Grained Soils	SPT Blow Counts (N)	Fine-Grained Soils	SPT Blow Counts (N)
Very Loose:	< 4	Very Soft:	< 2
Loose:	4-10	Soft:	2-4
Medium Dense:	10-30	Medium Stiff:	4-8
Dense:	30-50	Stiff:	8-15
Very Dense:	>50	Very Stiff:	15-30
		Hard:	>30

Moisture Content	
Description	Field Test
Dry	Absence of moisture, dusty, dry to touch
Moist	Damp but not visible moisture
Wet	Visible free water, usually soil is below water table

Cementation	
Description	Field Test
Weakly	Crumbles or breaks with handling or slight finger pressure
Moderately	Crumbles or breaks with considerable finger pressure
Strongly	Will not crumble or break with finger pressure

PARTICLE SIZE					
Boulders:	>12 in.	Coarse-Grained Sand:	5 to 0.6 mm	Silts:	0.075 to 0.005 mm
Cobbles:	12 to 3 in.	Medium-Grained Sand:	0.6 to 0.2 mm	Clays:	<0.005 mm
Gravel:	3 in. to 5 mm	Fine-Grained Sand:	0.2 to 0.075 mm		

UNIFIED SOIL CLASSIFICATION SYSTEM			
Major Divisions		Symbol	Soil Descriptions
Coarse-Grained Soils <50% passes No.200 sieve	Gravel & Gravelly Soils <50% coarse fraction passes No.4 sieve	GW	Well-graded gravels; gravel/sand mixtures with little or no fines
		GP	Poorly-graded gravels; gravel/sand mixtures with little or no fines
		GM	Silty gravels; poorly-graded gravel/sand/silt mixtures
		GC	Clayey gravels; poorly-graded gravel/sand/clay mixtures
	Sand & Sandy Soils >50% coarse fraction passes No.4 sieve	SW	Well-graded sands; gravelly sands with little or no fines
		SP	Poorly-graded sands; gravelly sands with little or no fines
		SM	Silty sands; poorly-graded sand/gravel/silt mixtures
		SC	Clayey sands; poorly-graded sand/gravel/clay mixtures
Fine Grained Soils >50% passes No.200 sieve	Silts & Clays LL < 50	ML	Inorganic silts; sandy, gravelly or clayey silts
		CL	Lean clays; inorganic, gravelly, sandy, or silty, low to medium-plasticity clays
		OL	Organic, low-plasticity clays and silts
	Silts & Clays LL > 50	MH	Inorganic, elastic silts; sandy, gravelly or clayey elastic silts
		CH	Fat clays; high-plasticity, inorganic clays
		OH	Organic, medium to high-plasticity clays and silts
Highly Organic Soils		PT	Peat, humus, hydric soils with high organic content



MATERIALS TESTING & INSPECTION

FIELD BOREHOLE LOG

BOREHOLE NO.: **B-1**
TOTAL DEPTH: **21.5**

PROJECT INFORMATION

PROJECT: **Building 67 Expansion**
LOCATION: **500 W Fort Street**
JOB NO.: **B120465g**
LOGGED BY: **Kevin L. Schroeder, P.G.**

DRILLING INFORMATION

DRILLING CO.: **Haztech Drilling, Inc.**
METHOD OF DRILLING: **6" hollow stem auger**
SAMPLING METHODS: **Split Spoon**
DATES DRILLED: **21 May 2012**



Water level during drilling



Standard Split Spoon



Shelby Tube



California Sampler

DEPTH	SOIL TYPE	SAMPLE	SOIL DESCRIPTION	BLOWS	BLOWS PER FOOT (N)
0			CLAYEY SAND FILL (SC-FILL): Dark brown, slightly moist, very loose to medium dense, clayey sand fill		
5				2/1/1	
				4/8/8	
10			SILTY SAND FILL (SM-FILL): Tan, slightly moist, loose to medium dense, silty sand fill	4/5/4	
			SILTY SAND (SM): Dark brown to brown, slightly moist, loose to medium dense, native silty sand	2/2/5	
15			Silt content decreases with depth	4/6/6	
			Minor gravel clasts encountered below 17 feet		
20			Groundwater was not encountered to 21.5 feet of depth	3/7/10	

May 17, 2012

RE: IN-SITU SHEAR WAVE VELOCITY TEST - BOISE, ID

Based on the project objective and site conditions, Sage Earth Science conducted a shear wave velocity test at the Boise, Idaho site. The objective of the test is to determine the average shear wave velocity of the top 100 feet of the subsurface (V_{S100}) for the purpose of seismic site classification.

Seismic Velocity Survey

Seismic Surface Waves methods such as MASW (Multichannel Analysis of Surface Waves) and Refraction Micro Tremor (ReMi™) use the dispersive characteristics of surface waves to determine the variation of the seismic shear wave velocity with depth. Data are acquired by analyzing seismic surface waves generated by random sources or by a controlled impulsive source and received by an array of geophones.

A dispersion curve is calculated from the data that shows the phase velocity of the surface waves as a function of frequency or wavelength. A shear wave velocity profile (a 1-D sounding of velocity as a function of depth) is then modeled from the dispersion curve and the average shear velocity of the top 100 feet is calculated.



Figure 1 seismic source





Figure 1 phase vs. velocity plot


Table 1 Test recording parameters

Test location	See figure
Recording instrument	Bison 9024
S/N	6-93913
geophone natural period	4.5 hz.
geophone/station spacing	16.4 feet (5 meters)
number of channels	24
spread length	378 ft
sample rate	0.5 millisecond
number of samples	4,000 per channel
record length	2.0 seconds
low pass filter	120 hz
low cut filter	4 hz
seismic source	500 lb weight drop
source location	Channel 1

Test Results

Average $V_{S100} = 1,262$ ft/sec.

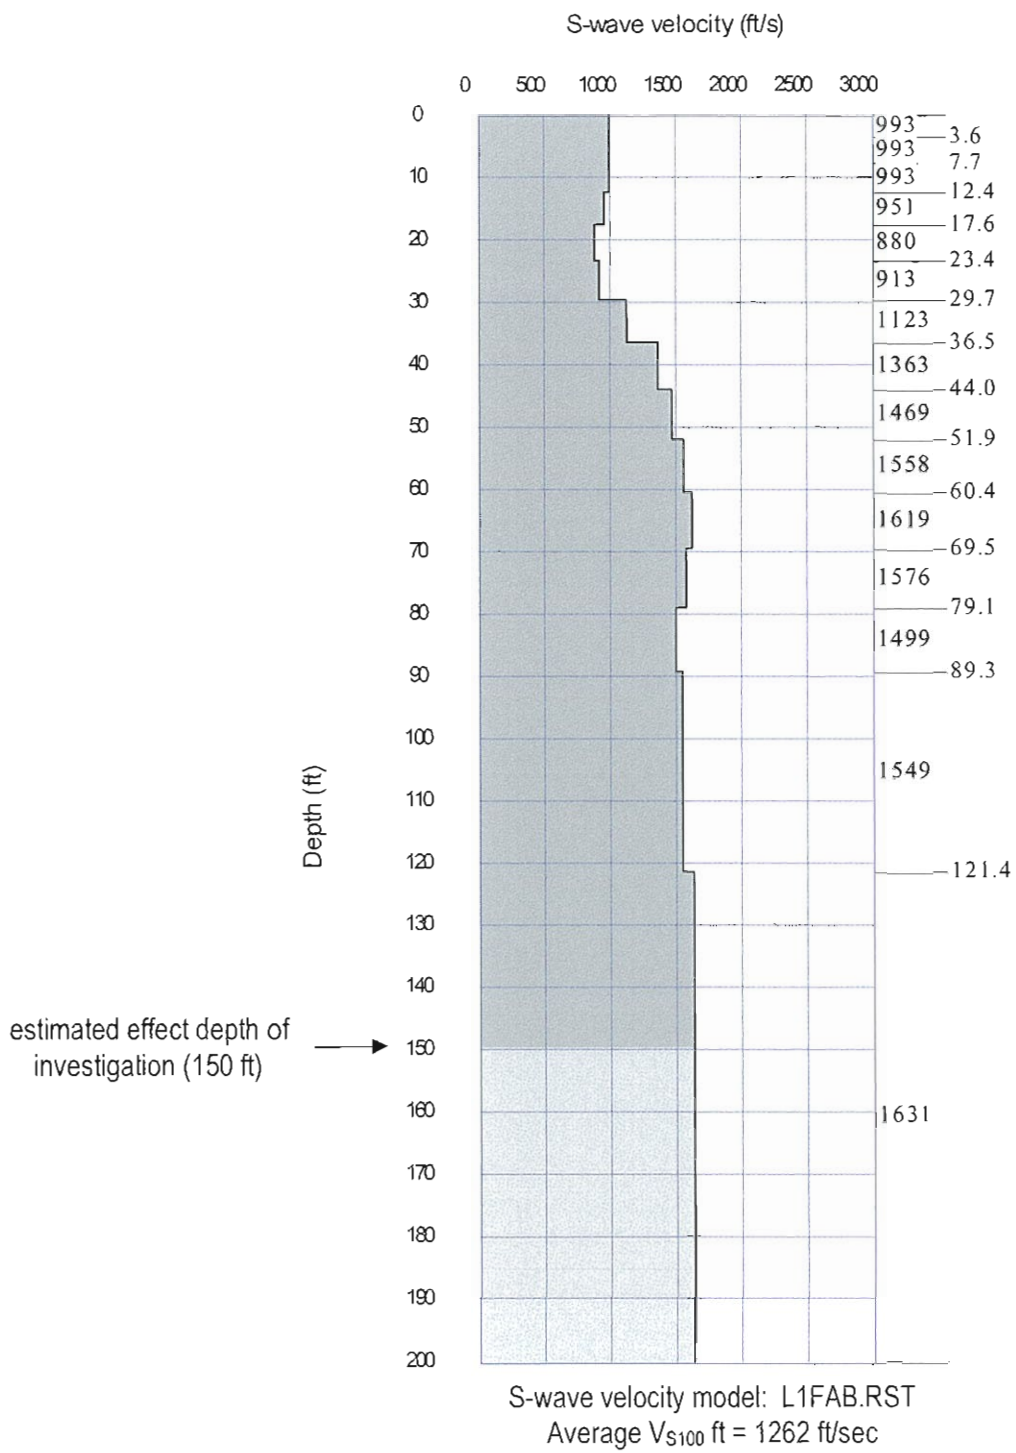

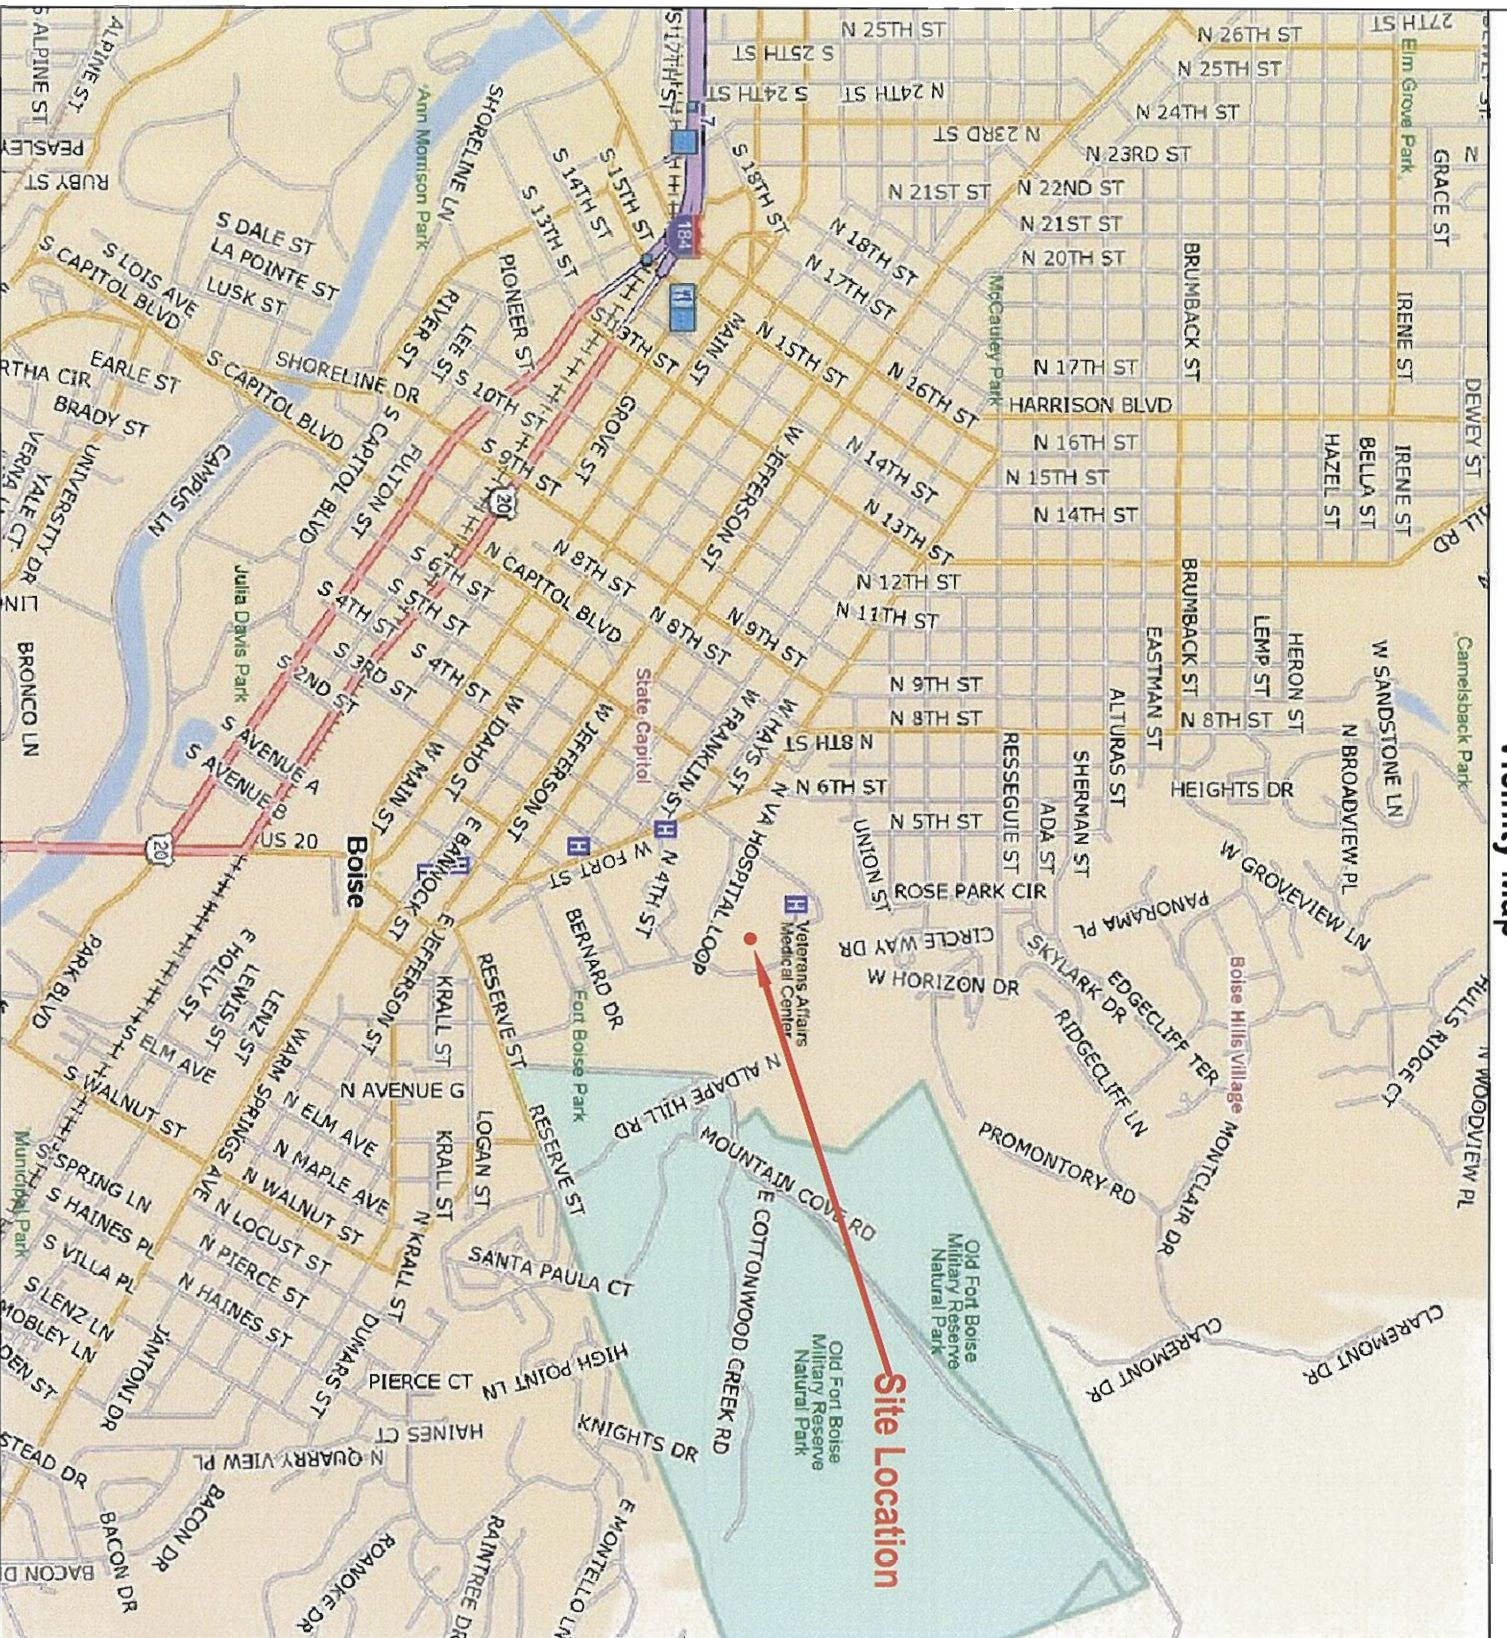

MAP NOTES:

- Delorme Street Atlas
- Not to Scale

LEGEND

Approximate Site Location



VAMC, Building 67 Expansion

500 West Fort Street
Boise, ID

Modified from Delorme by: MHS
30 May 2012
Drawing: B120465g



**MATERIALS
TESTING &
INSPECTION**

2791 S. Victory View Way
Boise, ID 83709-2835

Phone: 208 376-4748
Fax: 208 322-6515
E-mail: mt@mt-id.com



NOTES:

- Not to Scale
- Map Obtained From the Boise VA Website

LEGEND

Approximate Site Boundary

Approximate Shear Wave Velocity Survey Location

Approximate MTI Boring Location



VAMC, Building 67 Expansion

500 West Fort Street
Boise, ID

Modified by: MHS
30 May 2012
Drawing: B120465g



**MATERIALS
TESTING &
INSPECTION**

2791 S. Victory View Way
Boise, ID 83709-2835

Phone: 208 376-4748
Fax: 208 322-8515
E-mail: mt@mti-id.com



GEOTECHNICAL ENGINEERING REPORT
of
Veteran's Affairs Medical Center
Building 67 Expansion
500 West Fort Street
Boise, ID

Prepared for:

CSHQA Architects
CW Moore Plaza, 250 South 5th Street
Boise, ID 83702

MTI File Number B120465g

THIS PAGE INTENTIONALLY LEFT BLANK



☐ Environmental Services

☐ Geotechnical Engineering

☐ Construction Materials Testing

☐ Special Inspections

Mr. Jim Otradosky
CSHQA Architects
CW Moore Plaza, 250 South 5th Street
Boise, ID 83702
(208) 343-4635

**Re: Addendum #1 – Additional Foundation
Recommendations REVISED
Veteran's Affairs Medical Cener, Building 67
Expansion
500 West Fort Street
Boise, ID**

Dear Mr. Otradosky:

This addendum report presents additional foundation design recommendations not included in the previously issued MTI Geotechnical Engineering Report (B120465g). The foundation recommendations provided in the previously issued report were preliminary. Discussions with the design team have revealed that the use of micropiles may be infeasible because of construction constraints. This addendum provides recommendations for use of helical anchors.

Descriptions of general site characteristics and the proposed project are available in the previous report. Unless otherwise noted in this addendum, all initial recommendations, limitations, and warranties expressed in the previous report must be adhered to.

Foundation Design Recommendations

It is MTI's understanding that the new foundation system will bear adjacent to the bottom of the existing foundation. This depth is approximately 7.5 feet below current site grades. Column loads of up to 200,000 pounds were provided by Gerald Gunny of CHSQA and were used for design calculations.

Helical anchors shall be used to distribute the new foundation loads below the existing foundation. Helical anchors must extend at least 10 feet below the bottom of the new and existing foundations and must be designed to support the loads required by the structural engineer. The center to center spacing of the anchors should be at least 36 inches or 3 helix diameters (based on largest helix diameter used), whichever is greater.

Per the 2009 International Building Code, continuous inspection during installation of the helical anchors is required. Prior to construction, verification load testing of at least one helical anchor must be performed. Testing shall be performed in accordance with ASTM D-1143 to at least 2 times the design load. Settlements shall be documented across the load range, and confirmed to be less than 1 inch for the design load.



☐ Environmental Services

☐ Geotechnical Engineering

☐ Construction Materials Testing

☐ Special Inspections

MTI appreciates this opportunity to be of service to you and looks forward to working with you in the future. If you have questions, please call (208) 376-4748.

Respectfully Submitted,

Materials Testing & Inspection, Inc.

Elizabeth Brown

Elizabeth Brown, P.E.
Geotechnical Engineer



Reviewed by: David O. Cram, P.E.
General Manager

SECTION 01 00 00
GENERAL REQUIREMENTS

PART 1 - GENERAL

1.1 INTENTION

- A. Contractor shall completely prepare site for construction, including selective demolition, and furnish labor and materials and perform work for Building 67 Expansion and associated site work, Project #531-320, Boise, Idaho, as required by Drawings and Specifications.
- B. Visits to the site by Bidders may be made only by appointment with the Medical Center Contracting Officer.
- C. Offices of CSHQA, a professional association, Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.
- D. All employees of General Contractor and subcontractors shall comply with Veterans Affairs (VA) security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.
- E. Prior to commencing work, general contractor shall provide proof that a OSHA certified "competent person" (CP) (29 CFR 1926.20(b)(2)) will maintain a presence at the work site whenever the general or subcontractors are present.
- F. Training:
 - 1. Beginning July 31, 2005, all employees of general contractor or subcontractors shall have the 10-hour OSHA certified Construction Safety course and /or other relevant competency training, as determined by the VA Contracting Officer with input from the Infection Control Risk Assessment (ICRA) team.
 - 2. Submit training records of all such employees for approval before the start of work.

G. Terms used in this contract such as Veterans Affairs (VA) and Government; Contracting Officer (CO); Architect-Engineer (AE); Contracting Officer's Technical Representative (COTR) or resident engineer (RE), Engineering Officer (EO) may be used interchangeably, and refer to the same entity.

H. Schedule:

The following is the Government projected Base Bid Construction Schedule:

Notice to Proceed	Day 1
Safety/Environmental/ Schedule Submittals	30 calendar days after Notice to Proceed
Material Submittals	60 Calendar days after Notice to proceed
Phase 1A Completion	73 Calendar days after Notice to Proceed
Phase 1B Completion	410 Calendar days after Notice to Proceed
Phase 2 Completion	531 Calendar days after Notice to Proceed
Phase 3A & 3B Completion	691 Calendar days after Notice to Proceed
Substantial Completion	695 Calendar days after Notice to Proceed
Overall Project Period	695 Calendar days after Notice to Proceed

The provided schedule includes only those construction activities included in the Base Bid. Should any or all of the Bid Options be selected, the impact of each is as follows:

Bid Option 1	ADD 60 Calendar days to Phase 1B
Bid Option 2	ADD 41 Calendar days to the Overall Project Period
Bid Option 3	ADD 114 Calendar days to the Overall Project Period

I. It is strongly suggested that the Contractor submit long lead items for approval early in the project to avoid project delays due to untimely submission of submittals.

- J. One of the submittal items that must be received and approved prior to starting on site work is the project cost schedule. Since it may require significant time to approve the schedule and coordinate any VA moves, this schedule should be submitted early. Refer to General Conditions 852.236-84, Schedule of Work Progress. The schedule is to contain as a minimum a description of each activity, the estimated duration, the trade and crew size, and the planned start and completion dates.
- K. An updated progress schedule is to be provided prior to the submittal of each request for payment. The updated schedule is to show all activities started and/or completed during the reporting period and a projection of the activities that will take place during the following reporting period.
- L. It is strongly suggested that the contractor submit long lead items for approval early in the project to avoid project delays due to untimely submission of submittals.
- M. All contract work, in each phase, including final inspection and punch list items impacting unobstructed use of the area(s), of that phase, shall be completed by the Contractor prior to turning over the area(s) to the VA for their 21 calendar day equipment relocation and occupancy. It will be at the discretion of the VA as to which punch list items prevent unobstructed use of the area(s) of phases. All phase work must be completed, including all punch list items, within the overall project period timeframe.

1.2 STATEMENT OF BID ITEM(S)

- A. BASE BID: Contractor shall provide all materials, equipment, labor and supervision of every kind to complete the Work indicated, excluding any work needed exclusively to complete the bid options, including as necessary temporary construction utilities to maintain uninterrupted use of the existing buildings. The Work shall be complete in all respects to accomplish the intent of the Drawings and Specifications.
- B. BID OPTION NO. 1: Provide construction of tenant improvement on the first floor within the addition area indicated on the construction documents.
- C. BID OPTION NO. 2: Provide demolition and construction of tenant improvement on the second floor within the area indicated on the

construction documents including exterior window replacement indicated within this area.

- D. BID OPTION NO. 3: Provide demolition and construction of tenant improvement on the third floor within the area indicated on the construction documents, including exterior window replacement indicated within this area.

1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

- A. AFTER AWARD OF CONTRACT, 1 Compact Disk (CD) with PDF and AutoCAD format files of Specifications and Drawings will be furnished to the Contractor.
- B. All hard copy sets of Drawings and specifications will be made by the Contractor, at Contractor's expense, from prints and specifications in PDF format on a CD furnished by Issuing Office.

1.4 CONSTRUCTION SECURITY REQUIREMENTS

A. Security Plan:

1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
2. The General Contractor is responsible for assuring that all subcontractors working on the project and their employees also comply with these regulations.

B. Security Procedures:

1. All general contractor's employees, subcontractors, and material suppliers entering the Medical Center consent to search by VA police at any time. The areas of search shall be all encompassing including but not limited to: their person; their personal effects; personal vehicles, as well as any and all contractor vehicles, equipment, trailers, offices, storage shed, tool boxes and any and all containers.
2. For working outside the "regular hours" as defined in the contract, the General Contractor shall give 3 days notice to the Contracting Officer so that security can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.

3. No photography of VA premises outside of construction area is allowed without written permission of the Contracting Officer.
4. VA reserves the right to close down or shut down the project site and order General Contractor's employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Contractor Identification:

1. The Contractor's Project Manager shall be issued a badge identifying him/her as an authorized visitor on the Medical center. The Project Manager shall wear the badge displayed prominently at all times when on site. The Contractor shall return the badge at the conclusion of the project. The Contractor shall within 24 hours notify the Veterans Affairs Police Services and the Contracting Officer if the badge has been lost.
2. The Contractor shall initiate an internal project badge identification program for each of its employees, subcontractors, and subcontractor employees when on the Medical Center property. Each person will be identified with a unique readily visible badge identifying the person and that the person is under the direction of the General Contractor. Every employee or subcontractor shall wear the project badge displayed prominently at all times when on site.

D. Key Control:

1. The General Contractor shall provide duplicate keys and lock combinations to the COTR for the purpose of security inspections of every area of project including tool boxes and parked machines and take any emergency action as necessary.

E. Document Control:

1. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
2. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.

3. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
4. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
 - a. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
 - b. "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.
5. At the completion of the project, the Contractor shall secure all copies of drawings and specifications from its office and all subcontractors and return them to the Government.

F. Motor Vehicle Restrictions:

1. Only properly licensed motor vehicles with valid insurance shall enter the Medical Center. Drivers of such vehicles will possess on their person a valid license for the type of vehicle being driven. Vehicle access to the construction site shall be restricted to active picking up and dropping off materials and supplies.
2. Parking is strictly limited on the Medical Center. Contractor employee/subcontractor employee parking shall be restricted to either Mt. Cove parking lot or Contractor's row at the North end of the facility specifically excluding parking lots 6 and 10. Additional restrictions may be enforced based on patient and staff needs as determined by the Contracting Officer.

G. Personal Conduct:

1. Every person who enters the Medical Center's grounds is expected to conduct themselves in a professional responsible manner without the need to enumerate every expected or prohibited behavior.
2. Weapons, ammunition, explosives, and alcoholic beverages are prohibited on the Medical Center's grounds.

3. There shall be no solicitations or sales of any kind on the Medical Center's grounds.
4. The Government reserves the right to refuse to permit employment on the Work or require dismissal from the Work of any subcontractor who, by reason of previous unsatisfactory work on Department of Veterans Affairs project or for any other reason, is considered by the Contracting Officer to be incompetent or otherwise objectionable.

(Reference VAAR 852.236-80)

1.5 FIRE SAFETY

A. Applicable Publications: Publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

1. American Society for Testing and Materials (ASTM):

E84-2007Surface Burning Characteristics of Building
Materials

2. National Fire Protection Association (NFPA):

10-2010Standard for Portable Fire Extinguishers

30-2008Flammable and Combustible Liquids Code

51B-2009Standard for Fire Prevention During Welding,
Cutting and Other Hot Work

70-2008National Electrical Code

241-2009Standard for Safeguarding Construction,
Alteration, and Demolition Operations

3. Occupational Safety and Health Administration (OSHA):

29 CFR 1926Safety and Health Regulations for Construction

B. Fire Safety Plan: Establish and maintain a fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to COTR and Safety Officer for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. The plan shall include as

a minimum means of egress, egress routes, assembly area, fire extinguishers, fire alarm notification methods, and job specific fire hazards. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the general contractor's competent person per OSHA requirements. This briefing shall include information on the construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, etc. Documentation shall be provided to the COTR that individuals have undergone contractor's safety briefing. Contractor is to perform weekly fire hazard and OSHA safety inspections of the entire construction area from the time constructions starts until the building is turned over to the Government. A copy of these reports, listing all hazards identified and corrective actions taken, is to be provided weekly to the COTR.

- C. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.
- D. Separate temporary facilities, such as trailers, storage sheds and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- E. Temporary Construction Partitions:
 - 1. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. As a minimum at door openings, install Class C, 3/4-hour fire/smoke rated doors with self-closing devices. In all cases, the temporary partition shall meet the minimum fire/smoke barrier requirements for the area affected.
 - 2. Close all openings in smoke barriers and fire-rated construction (walls, floors and ceilings) to maintain fire ratings. This includes any existing holes as well as Contractor caused holes. Holes are to be sealed as soon as possible and as a minimum by the end of each workday with temporary or permanent fire sealant. Seal penetrations

with listed through-penetration fire stop materials in accordance with Section 07270, FIRESTOPPING SYSTEMS.

- F. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70. Open flame heating devices are prohibited on the Medical Center Grounds.
- G. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with COTR.
- H. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly COTR.
- I. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- J. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- K. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 1 hour in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with COTR. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the COTR.
- L. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with COTR.
- M. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. The Contractor shall be responsible for assigning an authorized supervisory representative to issue hot work permits. Before any cutting or welding with open flame is conducted, the subcontractor shall obtain permission from the Contractor's authorized representative by issuance of this permit. Coordinate with

Project Manager prior to issuing any hot work permits. See Attachment A at the end of the section, for sample of hot work permit.

- N. Fire Hazard Prevention and Safety Inspections: Inspect and provide a written report weekly for fire hazards and safety problems for the entire construction areas. These inspections shall begin from the notice to proceed until the acceptance of the entire project by the Contracting Officer. Coordinate with, and report findings and corrective actions weekly to COTR.
- O. Smoking: Smoking is prohibited in and adjacent to all construction areas, inside existing buildings, on building roofs, in crawl spaces, etc. Smoking is prohibited except in designated campus smoking rest areas.
- P. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.
- Q. Perform other construction, alteration and demolition operations in accordance with 29 CFR 1926.

1.6 OPERATIONS AND STORAGE AREAS

- A. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.
- B. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks or roads.

- C. Working space and space available for storing materials shall be as determined by the COTR.
- D. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Keep roads clear of construction materials, debris, standing construction equipment and vehicles at all times. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractor's personnel, except as permitted by COTR where required by limited working space. Additionally, Contractor may be restricted further than OSHA allowable limits in terms of vehicle and construction emissions, odors, noises, core drilling, hammer drilling, jack hammering, etc.
1. Do not store materials and equipment in other than assigned areas.
 2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than two work days. Provide unobstructed access to Medical Center areas required to remain in operation.
 3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.
- E. Phasing: To insure such executions, Contractor shall furnish the COTR with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the COTR two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such phasing dates to insure accomplishment of this work in successive phases mutually agreeable to Medical Center Director, COTR and Contractor. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs

personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.

- F. Construction Fence: Before construction operations begin, Contractor shall provide a substantial construction fence acceptable to the COTR, around the construction area indicated on the Drawings. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 15 inches. Bottom of fences shall extend to one inch above grade. Remove the fence when directed by COTR.
- G. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COTR.
1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of COTR. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without the Medical Center Director's prior knowledge and written approval. Refer to Specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY for additional requirements.
 2. Contractor shall submit a request to interrupt any such services to COTR, in writing, a minimum of 48 hours in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.

3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
4. Major interruptions of any system must be requested, in writing, at least 15 calendar days prior to the desired time and shall be performed as directed by the COTR.
5. In case of a contract construction emergency, service will be interrupted on approval of COTR. Such approval will be confirmed in writing as soon as practical.
6. The VA will shut down existing utility system as necessary for the Contractor to perform required work on the utility. The Contractor shall be responsible for draining existing water systems, such as water, chilled water, heating water etc. as required to accomplish new work. Contractor shall also be responsible for re-filling systems including adding chemicals as required. Contractor shall be further responsible for returning the utility to its proper operating state including but not limited to: removal of air entrainment; re-balancing of throttling valves or dampers; verification of the proper operation of any control system. It is acceptable to salvage existing treated water in clean storage containers approved by the VA, and re-inject it into the system upon completion of the work. Any treated water not re-injected shall be disposed of in accordance with project specifications.

7. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.
- H. All services to be abandoned such as wires, cables, raceways, ducts, pipes and the like, and their hangers or supports, are to be removed entirely back to the point of connection to the active utility (i.e. piping and ductwork back to active mains, electrical wires and cables back to active circuitry, and all empty raceways). If items are noted to be abandoned in place, they are to be sealed, capped or plugged.
- I. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:
1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles. Wherever excavation for new utility lines cross existing roads, at least one lane must be open to traffic at all times unless an alternate route is identified and Contractor provides adequate temporary barriers signage and direction for detours.
 2. Method and scheduling of required cutting, altering and removal of existing roads, walks, and entrances must be approved by the COTR.
 3. The Contractor shall conform to the Manual on Uniform Traffic Control Devices 2009 Edition Part 6 Temporary Traffic Control.
- J. Coordinate the work for this Contract with other construction operations as directed by COTR. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS. (Reference FAR 52.236-10.)
- K. The Contractor shall at all times keep the work area, including storage areas, free from accumulation of waste materials. Before completing the Work, the Contractor shall remove from the Work and premises any rubbish, tools, scaffolding, equipment and materials that are not the property of the Government. Upon completing the Work, the Contractor shall leave the work area in a clean, neat and orderly condition satisfactory to the Contracting Officer.

1.7 ALTERATIONS

- A. Survey: Before any work is started, the Contractor shall make a thorough survey with the COTR and Contracting Officer of areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both, to the Contracting Officer. This report shall list by rooms and spaces:
1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of buildings.
 2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by Drawings to be either reused or relocated, or both.
 3. Shall note any discrepancies between Drawings and existing conditions at site.
 4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and COTR.
- B. Any items required by Drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of COTR and Contracting Officer, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with Specifications. Provided the Contract work is changed by reason of this subparagraph B, the Contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).
- C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and COTR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:
1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and

will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workmen in executing work of this Contract.

D. Protection: Provide the following protective measures:

1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.8 INFECTION PREVENTION MEASURES

- A. Implement the requirements of Veterans Affairs Medical Center's (VAMC's) Infection Control Risk Assessment (ICRA) team. ICRA Group may monitor dust in the vicinity of the construction work and require the Contractor to take corrective action immediately if the safe levels are exceeded.
- B. Establish and maintain a dust control program as part of the contractor's infection preventive measures in accordance with the guidelines provided by ICRA Group. Prior to start of work, prepare a plan detailing project-specific dust protection measures, including periodic status reports, and submit to COTR and Facility ICRA team for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
 1. All personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the Medical Center.
- C. Medical Center Infection Control personnel shall monitor for airborne disease (e.g. aspergillosis) as appropriate during construction. A baseline of conditions may be established by the medical center prior to the start of work and periodically during the construction stage to

determine impact of construction activities on indoor air quality. In addition:

1. The COTR and VAMC Infection Control personnel shall review pressure differential monitoring documentation to verify that pressure differentials in the construction zone and in the patient-care rooms are appropriate for their settings. The requirement for negative air pressure in the construction zone shall depend on the location and type of activity. Upon notification, the Contractor shall implement corrective measures to restore proper pressure differentials as needed.
 2. In case of any problem, the Medical Center, along with assistance from the Contractor, shall conduct an environmental assessment to find and eliminate the source.
- D. In general, following preventive measures shall be adopted during construction to keep down dust and prevent mold.
1. Dampen debris to keep down dust and provide temporary construction partitions in existing structures where directed by COTR. Blank off ducts and diffusers to prevent circulation of dust into occupied areas during construction.
 2. Do not perform dust producing tasks within occupied areas without the approval of the COTR. For construction in any areas that will remain jointly occupied by the medical Center and Contractor's workers, the Contractor shall:
 - a. Provide dust proof two-hour fire-rated temporary drywall construction barriers to completely separate construction from the operational areas of the existing building in order to contain dirt debris and dust. Barriers shall be sealed and made presentable on occupied side. Install a self-closing rated door in a metal frame, commensurate with the partition, to allow worker access. Maintain negative air at all times. A fire retardant polystyrene, 6-mil thick or greater plastic barrier meeting local fire codes may be used where dust control is the only hazard, and with the prior approval of the COTR, the Medical Center Safety Officer, and the Medical Center infection control coordinator.
 - b. HEPA filtration is required where the exhaust dust may reenter the breathing zone. Contractor shall verify that construction exhaust

to exterior is not reintroduced to the Medical Center through intake vents, or building openings. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Exhaust hoses shall be heavy duty, flexible steel reinforced and exhausted so that dust is not reintroduced to the Medical Center.

- c. Adhesive Walk-off/Carpet Walk-off Mats, minimum 600mm x 900mm (24"x48"), shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
- d. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as they are created. Transport these outside the construction area in containers with tightly fitting lids.
- e. The Contractor shall not haul debris through patient-care areas without prior approval of the COTR. When approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
- f. Using a HEPA vacuum, clean inside the barrier and vacuum ceiling tile prior to replacement. Any ceiling access panels opened for investigation beyond sealed areas shall be sealed immediately when unattended.
- g. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.

- h. Seal off all supply and return grilles and diffusers with plastic to prevent any dust or debris from entering the ductwork. Seal any unused doors leading to areas that will not be impacted by the construction.
- i. Any ceiling tiles removed outside the construction containment area are to be replaced as soon as possible, and as a minimum at the end of each work day.
- j. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

E. Final Cleanup:

- 1. Upon completion of Project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
- 2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
- 3. All new air ducts shall be cleaned prior to final inspection.

F. Also reference Specification 01 57 19 TEMPORARY ENVIRONMENTAL CONTROLS.

1.9 DISPOSAL AND RETENTION

A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:

- 1. Reserved items which are to remain property of the Government include fire extinguishers, signs, tables, trash receptacles, cigarette/trash receptacles, bollards and others as well as items noted on Drawings or in other Specifications. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items within Contractor's storage area as further directed by the COTR.
- 2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.

3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this Contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by Drawings and Specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.

B. The Contractor shall be responsible for the removal and disposal of transformer(s) and other miscellaneous equipment. None of the materials contain PCBs.

1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES AND IMPROVEMENTS

A. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this Contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.

B. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.

(Reference FAR 52.236-9 in General Conditions)

1.11 RESTORATION

A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the COTR. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COTR before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.

B. Contractor shall saw cut at lines shown on the Drawings all concrete, asphalt and other materials where demolition or alteration is to occur.

Any damage outside of the cut lines shall be cut out by proper saw cutting creating a neat repair at no additional cost to the Government.

- C. Upon completion of Contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled or replaced with new work, and refinished and left in as good condition as existed before commencing work.
- D. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workmen to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are indicated on Drawings and which are not scheduled for discontinuance or abandonment.
- E. The Drawings show the general location of exiting utilities. The Contractor shall at its own expense verify exact locations and elevations of utilities and make adjustments of the Work to accommodate such utilities. Expense of repairs to such utilities and systems not shown on Drawings will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2) of Section 00 72 00, GENERAL CONDITIONS.

1.12 PHYSICAL DATA

- A. Data and information furnished or referred to below is for the Contractor's information. The Government shall not be responsible for any interpretation of or conclusion drawn from the data or information by the Contractor.
 - 1. Soils Report: The indications of physical conditions on the Drawings and in the Specifications are the result of Geotechnical Engineering Report dated 6-1-2012, prepared by Materials Testing & Inspection, Inc. and Addendum #1 dated 7-20-2012.
 - 2. The soil report is for reference only, but shall not be considered part of the Contract Documents.
 - 3. A copy of the soil report will be made available for inspection by bidders upon request to the COTR at the VA Medical Center.

- B. Government does not guarantee that other materials will not be encountered nor that proportions, conditions or character of several materials will not vary from those indicated by Drawings. Specifically the Department of Veterans Affairs makes no indication of depth of water levels below grade. Bidders are expected to examine site of work and decide for themselves character of materials and make their bids accordingly. Upon proper application to Department of Veterans Affairs, bidders will be permitted to make subsurface explorations of their own at site.

1.13 PROFESSIONAL SURVEYING SERVICES

- A. A registered professional land surveyor or registered civil engineer whose services are retained and paid for by the Contractor shall perform services specified herein and in other Specification Sections. The Contractor shall certify that the land surveyor or civil engineer is not one who is a regular employee of the Contractor, and that the land surveyor or civil engineer has no financial interest in this Contract.

1.14 LAYOUT OF WORK

- A. The Contractor shall lay out the work from Government established base lines and bench marks, indicated on the Drawings, and shall be responsible for all measurements in connection with the layout. The Contractor shall furnish, at Contractor's own expense, all stakes, templates, platforms, equipment, tools, materials, and labor required to lay out any part of the work. The Contractor shall be responsible for executing the work to the lines and grades that may be established or indicated by the Contracting Officer. The Contractor shall also be responsible for maintaining and preserving all stakes and other marks established by the Contracting Officer until authorized to remove them. If such marks are destroyed by the Contractor or through Contractor's negligence before their removal is authorized, the Contracting Officer may replace them and deduct the expense of the replacement from any amounts due or to become due to the Contractor.

(FAR 52.236-17)

- B. Establish and plainly mark such other lines and grades that are reasonably necessary to properly assure that location, orientation, and elevations established for each such structure and/or addition, roads, parking lots, are in accordance with lines and elevations shown on Contract Drawings.

- C. Following completion of general mass excavation and before any other permanent work is performed, establish and plainly mark (through use of appropriate batter boards or other means) sufficient additional survey control points or system of points as may be necessary to assure proper alignment, orientation, and grade of all major features of work. Survey shall include, but not be limited to, location of lines and grades of footings, exterior walls, center lines of columns in both directions, major utilities and elevations of floor slabs:
1. Such additional survey control points or system of points thus established shall be checked and certified by a registered land surveyor or registered civil engineer. Furnish such certification to the COTR before any work (such as footings, floor slabs, columns, walls, utilities and other major controlling features) is placed.
- D. Whenever changes from Contract Drawings are made in line or grading requiring certificates, record such changes on a reproducible drawing bearing the registered land surveyor or registered civil engineer seal, and forward these drawings upon completion of work to COTR.
- E. The Contractor shall perform the surveying and layout work of this and other articles and specifications in accordance with the provisions of Article "Professional Surveying Services".
- F. The Contractor shall keep on the work site a copy of the Drawings and Specifications and shall at all times give the Contracting Officer and COTR access thereto. Anything mentioned in the Specification and not shown on the Drawings, or shown on the Drawings and not mentioned in the Specifications, shall be of like effect as if shown or mentioned in both. In case of difference between Drawings and Specifications, the Contractor shall issue a Request for Information (RFI) requesting confirmation as to which shall govern. In case of discrepancy in the figures, in the Drawings, or in the Specifications, the matter shall be promptly submitted to the Contracting Officer, who shall promptly make a determination in writing. Any adjustment by the Contractor without such a determination shall be at the Contractor's own risk and expense. The Contracting Officer shall furnish from time to time such detailed drawings and other information as considered necessary unless otherwise provided.
- G. Wherever in the Specifications or upon the Drawings the words "directed", "required", "ordered", "designated", "prescribed", or words

of like import are used, it shall be understood that the "direction", "requirement", "order", "designation", or "prescription" of the Contracting Officer is intended and similarly the words "approved", "acceptable", "satisfactory", or words of the like import shall mean "approved by", or "acceptable to", or "satisfactory to" the Contracting Officer, unless otherwise expressly stated.

- H. Where "as shown", "as indicated", "as detailed" or words of similar import are used, it shall be understood that the reference is made to the Drawings accompanying this Contract unless stated otherwise. The word "provided" as used herein shall be understood to mean "provide complete in place" that is "furnished and installed".
- I. Upon completing the work under this Contract, the Contractor shall furnish two complete sets of all shop drawings as finally approved. These drawings shall show all changes and revisions made up to the time the equipment is completed and accepted.
- J. The Contracting Officer's interpretation of the Drawings and Specification will be final, subject to the disputes clause.
- K. Large scale drawings supersede small scale drawings.
- L. Dimensions govern in all cases. Scaling of Drawings may be done only for general location and general size of items.
- M. Dimensions shown of existing work and all dimensions required for work that is to connect with existing work, shall be verified by the Contractor by actual measurement of the existing work. Any work at variance with that specified or shown in the Drawings shall not be performed by the Contractor until approved in writing by the Contracting Officer.

1.15 AS-BUILT DRAWINGS

- A. The Contractor shall maintain one full size set of as-built drawings which will be kept current during construction of the project, to include all Contract changes, modifications and clarifications.
- B. All variations shall be shown in the same general detail as used in the Contract Drawings. To insure compliance, as-built drawings shall be made available for the COTR's review, as often as requested.

- C. Contractor shall deliver one approved completed sets of as-built drawings to the COTR within 7 calendar days after each completed phase and after the acceptance of the project by the COTR.
- D. Paragraphs A, B and C shall also apply to all shop drawings.
- E. Failure to keep as-built drawings up-to-date shall be cause for withholding payments.
- F. Contractor is to submit an updated sequence of operation in digital format indicating all changes made to the original sequence of operation prior to acceptance of each phase.

1.16 USE OF ROADWAYS

- A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the COTR, such temporary roads which are necessary in the performance of Contract work. Temporary roads shall be constructed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by appropriate, traffic-rated steel plates secured in place.

1.17 RESIDENT ENGINEER'S FIELD OFFICE (Not Used)

1.18 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT

- A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to compliance with the following provisions:
 - 1. Permission to use each unit or system must be given by the COTR. If the equipment is not installed and maintained in accordance with the following provisions, the COTR will withdraw permission for use of the equipment.
 - 2. Electrical installations used by the equipment shall be completed in accordance with the Drawings and Specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it

and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.

3. Units shall be properly lubricated, balanced and aligned. Vibrations must be eliminated.
 4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
 5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.
 6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.
- B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.
- C. This paragraph shall not reduce the requirements of the mechanical and electrical Specifications Sections.

1.19 TEMPORARY USE OF EXISTING ELEVATORS

- A. Use of existing elevators for handling building materials and Contractor's personnel will be permitted subject to following provisions:
1. Contractor makes all arrangements with the COTR for use of elevators. The COTR will ascertain that elevators are in proper condition.
 2. Contractor covers and provides maximum protection of following elevator components:
 - a. Entrance jambs, heads soffits and threshold plates.
 - b. Entrance columns, canopy, return panels and inside surfaces of car enclosure walls.

c. Finish flooring.

3. Government will accept hoisting ropes of elevator and rope of each speed governor if they are worn under normal operation. However, if these ropes are damaged by action of foreign matter such as sand, lime, grit, stones, etc., during temporary use, they shall be removed and replaced by new hoisting ropes at Contractor's expense.
4. If brake lining of elevators are excessively worn or damaged during temporary use, they shall be removed and replaced by new brake lining at Contractor's expense.
5. All parts of main controller, starter, relay panel, selector, etc., worn or damaged during temporary use shall be removed and replaced with new parts, if recommended by elevator inspector after elevator is released by Contractor.
6. Place elevator in condition equal, less normal wear, to that existing at time it was placed in service of Contractor as approved by Contracting Officer.

1.20 TEMPORARY USE OF NEW ELEVATORS

- A. The Contractor and his personnel shall be permitted use of new elevator(s) subject to the following provisions:
 1. Contractor shall make arrangements with the COTR for use of elevator(s). Contractor may obtain elevator(s) for exclusive use.
 2. Prior to the use of elevator(s), the Contractor shall have the elevator(s) inspected and accepted by an ASME accredited, certified elevator safety inspector. The acceptance report shall be submitted to the COTR.
 3. Submit to the COTR the schedule and procedures for maintaining equipment. Indicate the day or days of the week and total hours required for maintenance. A report shall be submitted to the COTR monthly indicating the type of maintenance conducted, hours used, and any repairs made to the elevator(s).
 4. The Contractor shall be responsible for enforcing the maintenance procedures.

5. During temporary use of elevator(s) all repairs, equipment replacement and cost of maintenance shall be the responsibility of the Contractor.
6. Personnel for operating elevator(s) shall not be provided by the Department of Veterans Affairs.
7. Contractor shall cover and provide maximum protection of the entire elevator(s) installation.
8. The Contractor shall arrange for the elevator company to perform operation of the elevator(s) so that an ASME accredited, certified elevator safety inspector can evaluate the equipment. The Contractor shall be responsible for any costs of the elevator company.
9. All elevator(s) parts worn or damaged during temporary use shall be removed and replaced with new parts. This shall be determined by an ASME accredited certified elevator safety inspector after temporary use and before acceptance by the Government. Submit report to the COTR for approval.
10. Elevator shall be tested as required by the testing section of the elevator(s) Specifications before acceptance by the Government.

1.21 TEMPORARY TOILETS

- A. Provide where directed, (for use of all Contractor's workmen) ample temporary sanitary toilet accommodations and hand washing accommodations. Keep such places clean and free from flies, and remove prior to completion of Contract, and premises left perfectly clean. Contractor shall further comply with 29 CFR 1926 Subpart D. The Government may direct relocation of temporary facilities as needs of the Medical Center change.

1.22 AVAILABILITY AND USE OF UTILITY SERVICES

- A. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials.
- B. Electricity (for Construction and Testing): Furnish all temporary electric services.

1. Obtain electricity by connecting to the Medical Center electrical distribution system using OSHA and NEC approved GFI equipment for all electrical connections to the Medical Center. Electricity is available at no cost to the Contractor.

C. Water (for Construction and Testing): Furnish temporary water service.

1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection. Water is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at COTR's discretion) of use of water from Medical Center's system.

(Reference FAR 52.236-14 in General Conditions)

1.23 NEW TELEPHONE EQUIPMENT

- A. The Contractor shall coordinate with the work of installation of communications equipment. This work shall be completed prior to final inspection and acceptance the by the Government.

1.24 TESTS

- A. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.
- B. Conduct final tests required in various Sections of Specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments and forms to conduct and record such tests.
- C. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire complex which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a complex which involves several components of different disciplines is a boiler installation. Efficient and

acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.

- D. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably short period of time during which operating and environmental conditions remain reasonably constant.
- E. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

1.25 INSTRUCTIONS

- A. Contractor shall furnish Maintenance and Operating manuals and verbal instructions when required by the systems as further defined in section 1.24 above; various Sections of the Specifications; and as hereinafter specified but no later than 2 weeks prior to final inspection.
- B. Manuals: Maintenance and operating manuals (four copies each) for each separate piece of equipment shall be delivered to the COTR coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style and size than that furnished will not be accepted.
- C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed instructions to assigned Department of Veterans Affairs personnel in the operation and complete

maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the COTR and shall be considered concluded only when COTR is satisfied in regard to complete and thorough coverage. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the COTR, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

1.26 GOVERNMENT-FURNISHED EQUIPMENT (GFE)

- A. The Government shall deliver to the Contractor the GFE indicated on the Drawings.
- B. Equipment furnished by Government to be installed by Contractor will be furnished to Contractor at the Project site.
- C. Contractor shall be prepared to receive this GFE and store or place such equipment not less than 90 days before Completion Date of project.
- D. Notify Contracting Officer in writing, 60 days in advance, of date on which Contractor will be prepared to receive GFE. Arrangements will then be made by the Government for delivery of equipment.
 - 1. Immediately upon delivery of equipment, Contractor shall arrange for a joint inspection thereof with a representative of the Government. At such time the Contractor shall acknowledge receipt of equipment described, make notations, and immediately furnish the Government representative with a written statement as to its condition or shortages.
 - 2. Contractor thereafter is responsible for such equipment until such time as acceptance of Work by the Government.
- E. GFE will be delivered in a partially assembled (knock down) condition in accordance with existing standard commercial practices, complete with all fittings, fastenings and appliances necessary for connections to

respective services installed under Contract. All fittings and appliances (i.e., couplings, ells, tees, nipples, piping, conduits, cables and the like) necessary to make the connection between the GFE item and the utility stub-up shall be furnished and installed by the Contractor at no additional cost to the Government.

- F. Completely assemble and install the GFE in place ready for proper operation in accordance with Specifications and Drawings.
- G. Furnish supervision of installation of equipment at construction site by qualified factory trained technicians regularly employed by the equipment manufacturer.

1.27 RELOCATED EQUIPMENT, ITEMS

- A. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before.
- B. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.
- C. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

1.28 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT (Not Used)

1.29 CONSTRUCTION SIGN

- A. Provide a construction sign where directed by the COTR. All wood members shall be of framing lumber. Cover sign frame with 0.7 mm (24 gage) galvanized sheet steel nailed securely around edges and on all bearings. Provide three 100 by 100 mm (4"x4") posts, or equivalent round posts, set 1200 mm (four feet) into ground. Set bottom of sign level at 900 mm (three feet) above ground and secure to posts with through bolts. Make posts full height of sign. Brace posts with 50 x 100 mm (2"x4") nominal material as directed.

- B. Paint all surfaces of sign and posts two coats of white gloss paint. Border and letters shall be of black gloss paint, except project title which shall be blue gloss paint.
- C. Maintain sign and remove it when directed by the COTR.
- D. Detail drawing of construction sign showing required characteristics of sign is indicated on the Drawings.

1.30 SAFETY SIGNS

- A. Install all signs necessary to comply with OSHA and other applicable regulations.
- B. Provide safeguards, including warning signs, barricades, warning lights and other similar items as required for protection of all personnel during demolition, removal and installation operations.
- C. Maintain signage and remove sign(s) when directed by COTR.

1.31 CONSTRUCTION DIGITAL IMAGES (Not Used)

1.32 FINAL ELEVATION DIGITAL IMAGES (Not Used)

1.33 HISTORIC PRESERVATION

- A. Where the Contractor or any of the Contractor's employees, prior to or during the construction work, are advised of or discover any possible archeological, historical and/or cultural resources, the Contractor shall immediately notify the COTR verbally, and then with a written follow up.

1.34 TOUR OF DUTY

- A. All work shall be performed during normal Medical Center duty hours, Monday through Friday, 8:00AM to 4:30PM, excluding federal holidays, except as follows:
 - 1. Work that requires systems to be shut down may be required to be performed during other than normal working hours, including early mornings, evenings, nights, weekends or holidays. All utility shutdowns shall occur only after approval is given by the COTR .
 - 2. Work that interferes with normal VA functions shall be accomplished during other than normal working hours at a time least inconvenient to the Medical Center's operations. This may include early mornings, evenings, nights, weekends and/or holidays.

3. The Contractor may request to work other than normal duty hours with the approval of the COTR only. Request to work other than normal duty hours must be submitted to the COTR in writing. Approval or rejection of such requests will depend on convenience to the Government.

1.35 LOCKOUT/TAGOUT POLICY

- A. The Contractor shall observe and comply with the station's lockout/tagout policy. As a minimum, every affected person shall apply its own lock(s) on every point of potential energy such that every effected person is protected from all potential sources of energy by its own lock. Each lock shall be permanently identified to each affected person. The key for each affected person's lock shall remain solely with the effected person. No one other than the effected person may remove its lock. All affected persons shall remove their locks prior to leaving the Medical Center. If a person leaves the Medical Center without removing its lock(s), then that person will be required to return to the Medical Center and remove its lock(s) at no cost to the Government. If the affected person is not available, then the lock(s) shall be removed in accordance with the Medical Center's lockout/tagout policy at no cost to the Government. A copy of this policy is available from the COTR upon request.

1.36 COMPLIANCE WITH CODES AND REGULATIONS

- A. All work shall be conducted and all materials handled in accordance with all codes including, but not limited to, the Occupational Safety and Health Act, NFPA Life Safety Code 101, 2009 edition, the NFPA National Electrical Code 70, 2011 edition, the NFPA Electrical Safety Code 70E, 2005 edition, the International Building Code, 2009 edition, the Architectural Barriers Act Accessibility Standards (August 5, 2005) as supplemented by the VA Barrier Free Design Guide (August 2011), and the Environmental Protection Act, latest edition.

1.37 MATERIAL SAFETY AND HEALTH CONSIDERATIONS

- A. The following considerations are applicable to all Specification Sections:

The intent of this Specification is to provide materials, adhesives and solvents, which are safe and environmentally responsible products. All materials, adhesives, solvents and coatings shall be formulated to conform to the most stringent ecological, air quality,

toxicity, flammability and safety regulations in the event of any conflict herein. Provide low "Volatile Organic Compound" (VOC) compliant materials, adhesives and solvents of quality and performance as specified. Out gassing materials, known or suspected carcinogens, and allergenics (i.e. formaldehyde, lead, zinc chromate) or otherwise long-term health threatening materials are to be avoided in enclosed areas whenever possible. Provide material safety data sheets with submittals for review. Inform the COTR of any suspect materials.

1.38 SUPERINTENDENCE BY THE CONTRACTOR

- A. At all times during the performance of this contract and until the work is completed and accepted in writing, the Contractor shall directly superintend the work or assign and have on the work a competent superintendent employed directly by the prime contractor who is satisfactory to the Contracting Officer and has legal authority to act for the Contractor.
- B. The Contractor shall furnish to the COTR each day a consolidated report for the preceding work day in which is shown the weather, number of laborers, mechanics, foremen/forewomen and pieces of heavy equipment used or employed by the Contractor and all subcontractors. The report shall bear the name of the firm, the branch of work which they perform such as concrete, plastering, masonry, plumbing, sheet metal work, and other such work. The report shall give breakdown of employees by crafts, location where employed, and work performed.
- C. At least weekly, the Contractor's Project Manager (a person designated by the Contractor to legally represent the Contractor to the Government), shall attend a meeting with the Contracting Officer and/or the Contracting officer's Technical Representative for direct communications among all parties.
- D. Nothing contained in this contract shall be construed as creating any contractual relationship between and subcontractor and the Government. Divisions or section of specifications are not intended to control the Contractor in dividing work among subcontractors, or to limit work performed by any trade.
- E. The Contractor shall be responsible to the Government for acts and omissions of his/her own employees and subcontractors and their employees. The Contractor shall also be responsible for coordination of

the work of the trades, subcontractors, and material suppliers. The Contractor shall, in advance of the work, prepare coordination drawings showing the location of openings through slabs or walls, the pipe sleeves and hanger inserts, as well as the location and elevation of utility lines, including, but not limited to , conveyor systems, pneumatic tubes, ducts, and conduits and pipes 50 mm (2 inches) and larger in diameter. These drawings including plans, elevations and sections as appropriate shall clearly show the manner in which the utilities fit into the available space and how they relate to each other and to existing building elements. Drawings shall be of appropriate scale to satisfy the previously stated purposes, but not smaller than 9mm (3/8) scale. Drawings may be composite (with distinctive colors for the various trades) or may be separated but fully coordinated drawings (such as sepias or photographic paper reproducible) of the same scale. Separate drawings shall depict identical building areas or sections and shall be capable of being overlaid in any combination. The submitted drawings for a given area of the project shall show the work of all trades which will be involved in that particular area. Six complete composite drawings or six complete sets of separate reproducible drawings shall be received by the Government not less than 20 days prior to the scheduled start of the work in the area illustrated by the drawings, for the purpose of showing the contractor's planned method of installation. The objective of such drawings are to promote carefully planned work sequence and proper trade coordination, in order to assure the expeditious solutions of problems and the installation of lines and equipment as contemplated by the contract documents while avoiding or minimizing additional costs to the contractor and to the Government. In the event the Contractor, in coordinating the various installations and in planning the method of installation, finds a conflict in location or elevation of any of the utilities with themselves, with structural items or with other construction items, the Contractor shall bring this conflict to the attention of the Contracting Officer immediately. In doing so, the Contractor shall explain the proposed method of solving the problem or shall request instruction as to how to proceed if adjustments beyond those of usual trades' coordination are necessary. Utilities installation work will not proceed in any area prior to the submission and completion of the Government review of the coordinated drawings for that area, nor in any area in which conflicts are disclosed by the coordination drawings until the conflicts have been corrected to the satisfaction of the Contracting Officer. It is the responsibility

of the Contractor to submit the required drawings in a timely manner consistent with the requirements to complete the work covered by this Contract within the prescribed contract time.

- F. The Government or its representatives will not undertake to settle any differences between the Contractor and subcontractors or between subcontractors.

1.39 MATERIAL AND WORKMANSHIP

- A. All equipment, material and articles incorporated into the Work covered by this Contract shall be new and of the most suitable grade for the purpose intended, unless otherwise specifically provided in this Contract. References in the Specifications to equipment, material, articles or patented processes by trade name, make or catalog number, shall be regarded as establishing a standard of quality and shall not be construed as limiting competition. The Contractor may, at its option, use any equipment, materials, article or process that, in the judgment of the Contracting Officer, is equivalent to that named in the Specifications, unless otherwise specifically provided in this Contract.
- B. The Contractor shall obtain the Contracting Officer's approval of the machinery and mechanical and other equipment to be incorporated into the Work. When requesting approval, the Contractor shall furnish to the Contracting Officer the name of the manufacturer, the model number, and other information concerning the performance, capacity, nature and rating of the machinery, and mechanical and other equipment. When required by this Contract or by the Contracting Officer, the Contractor shall also obtain the Contracting Officer's approval of the material or articles which the Contractor contemplates incorporating into the work. When requesting approval, the Contractor shall provide full information concerning the material or articles. When directed to do so the Contractor shall submit samples for approval at the Contractor's expense, with all shipping charges prepaid. Machinery, equipment, material and articles that do not have the required approval shall be installed or used at the risk of subsequent rejection.
- C. All work under this Contract shall be performed in a skillful and workman like manner. The Contracting Officer may require, in writing, that the Contractor remove from the work any employee the Contracting Officer deems incompetent, careless or otherwise objectionable.

1.40 UNKNOWN ASBESTOS

- A. The Contractor shall notify all workers that unknown asbestos could be encountered that has not been previously identified in the Contract Documents. In the event a suspect asbestos containing material is encountered during the construction, the Contractor shall immediately vacate the area and contact the COTR before proceeding further for appropriate testing and abatement procedures.

1.41 INSPECTIONS

- A. The Government will perform periodic inspections during the construction. These inspections are for the sole benefit of the Government and in no way relieve the Contractor of the responsibility of maintaining an adequate inspection and quality control system. The Government will conduct a final inspection and may conduct other inspections during which a punch list is generated (i. e. above ceiling inspection, roof inspection, exterior inspection, etc.). The Contractor shall notify the Contracting Officer, in writing, when he will be ready for a Government inspection. The Contractor is required to have all work to be inspected completed prior to a Government inspection. Prior to the final inspection, the Contractor may request a pre-final inspection be conducted by the Government. Provided the Government has adequate time, the project COTR will walk through the Project with the Contractor and point out items that need completion or correction. The Contractor will be responsible for taking notes or marking items during this walk through. The Government will not create a punch list during this walk through. Prior to the final inspection for a given Project or phase, the Contractor is required to have all work required by the Contract for the Project or phase completed. During the final inspection, a punch list of correction items will be generated. It typically requires 2-3 days following the final inspection before a punch list is available. Final payment will not be made until all punch list items are properly corrected.

1.42 MODIFICATIONS DUE TO EQUIPMENT CHANGES

- A. The Project has been designed around specific equipment as listed in the equipment schedules. This is not meant to limit the equipment to be used on the Project. It is a necessity of design. Other equipment is permitted to be used, provided it meets the requirement to be equal to the basis-of-design equipment; however, the Contractor is responsible for determining if using a different piece of equipment will require

changes in the design (i.e. change in electrical requirements, space requirements, etc.). The Contractor is responsible for affecting any necessary changes and for any and all costs related to changes necessitated by using different equipment than the basis-of-design.

1.43 MINIMUM CLEANLINESS FOR TURNOVER OF AREA

A. DESCRIPTION OF SERVICES. The Contractor shall provide all management, tools, equipment, supplies, materials and labor necessary to ensure the following custodial services are performed.

1. Hard Floors. All floors, except carpeted areas, shall be swept, dust mopped, damp mopped, wet mopped, and waxed (floor finish), to ensure they have a uniform, glossy appearance and are free of dirt, debris, dust, scuff marks, heel marks, other stains and discoloration, and other foreign matter. Mondo Floors shall be scuff free and a floor finish called Taski Vision Matte shall be applied to the surface to present a Matte Shine. Vinyl composite tile floors shall be scuff free and a floor finish called Spartan IShine applied to the surface to present a glossy appearance.
2. Vacuum Carpets. Vacuum carpeted areas. After vacuuming, the areas shall be free of all visible dirt, debris, litter and other foreign matter. Any spots shall be removed by carpet manufacturer's approved methods as soon as noticed.
3. Clean Interior Glass/Mirrors. Clean all interior glass, including glass in doors, partitions, walls, display cases, directory boards, windbreaks at entrances, mirrors, etc. After glass cleaning, there shall be no traces of film, dirt, smudges, water or other foreign matter. All adjacent sills, frames, ledges, etc. shall be cleaned.
4. Clean Drinking Fountains. Clean and disinfect all porcelain and polished metal surfaces, including the orifices and drains, as well as exterior surfaces of fountains. Drinking fountains shall be free of streaks, stains, spots, smudges, scale and other obvious soil.
5. General Dusting. All horizontal surfaces from eight (8) feet to twenty (20) feet above the floor level must be dusted or cleaned to eliminate dust collection, to include window blinds. Typewriters, copier machines and equipment of similar nature shall not be dusted. Surfaces eight (8) feet and below are included in "Low Dust".

Surfaces above eight (8) feet to twenty (20) feet are included in "High Dust".

6. Clean and Disinfect. Completely clean and disinfect all surfaces of sinks, toilet bowls, urinals, lavatories, showers, shower mats, dispensers, mirrors, plumbing fixtures, saunas, partitions, doors, walls and other such surfaces, using a germicidal detergent. After cleaning, surfaces will be free of deposits, dirt, streaks, stains, scale, scum and odors. Disinfect all surfaces of partitions, stalls, stall doors, entry doors (including handles, kick plates, ventilation grates, metal guards, etc.), and wall areas adjacent to wall mounted lavatories, urinals and toilets.

- - - E N D - - -

(Attachment A begins on next page)

ATTACHMENT A

PERMIT

FOR CUTTING AND WELDING

WITH PORTABLE GAS OR ARC EQUIPMENT

VA Project Name/Number: Project Name / Project Number

Name of Contractor: _____

Date: _____

Building/Location: _____

Work To Be Done: _____

Special Precautions: As called out in Attachment A, page A2

Fire Watch Required: X Yes No

The location where this work is to be performed has been examined, necessary precautions have been taken, and permission is granted for this work. (See Page A2).

Date Permit Expires: _____

Signed _____

(Contractor's individual responsible
for authorizing hot work)

Time Hot Work Started: _____ Time Hot Work Completed: _____

FINAL CHECK-UP

Work area and all adjacent areas to which sparks and heat might have spread
(including floors above and below and on opposite sides of walls) were
inspected 30 minutes after the work was completed and were found fire safe.

Signed _____

(Contractor's Fire Watch)

A1

ATTENTION

Before approving any cutting and welding permit, the contractor's authorized representative or their appointee shall inspect the work area and confirm that precautions have been taken to prevent fire in accordance with NFPA Standard No. 51B.

PRECAUTIONS

- o Sprinklers are in service where installed
- o Cutting and welding equipment in good repair
- o Within 10.67 meters (35 feet); floors swept clean of combustible, no combustible material or flammable liquids, all wall and floor openings covered, and covers suspended beneath work to collect sparks
- o When working on enclosed equipment and in confined space, equipment and area is free of flammable vapors
- o Fire watch provided during and 30 minutes after operation (60 minutes for torch applied roofing operations)
- o Portable fire extinguisher with adequate rating available in the immediate vicinity
- o Standpipe system in service where installed
- o Protection of any sprinkler heads when hot work is in close proximity
- o Smoking prohibited in immediate area
- o Non-combustible shields provided when hot work is done near combustible walls, partitions, floors, and roofs
- o Prohibition of hot work on pipes contacting combustible walls
- o Personnel trained in use of equipment including portable fire extinguishers and sounding a fire alarm
- o Final check-up conducted after 30 minutes

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 01 50

OSHA REQUIREMENTS - SPECIFIC BOISE VETERANS AFFAIRS MEDICAL CENTER FIRE & SAFETY POLICIES, PROCEDURES & REGULATIONS SUBMITTALS & DEVIATIONS

PART 1 - OSHA REQUIREMENTS

1.1 GENERAL

- A. Contractor shall comply with Occupational Safety and Health Act of 1970. This will include the safety and health standards found in 29 CFR 1910 and 29 CFR 1926. Copies of these standards can be acquired from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20420.
- B. Prior to starting any work on VA property, the Contractor must submit and receive approval from the VA COTR, a fire safety plan in accordance with OSHA 1926.24 and 1926.150. Submit plan in accordance with Specification Section 01320, Submittals.
- C. Weekly the Contractor is to submit to the COTR an OSHA safety and infection control report. The report can be a checklist of OSHA safety and JCAHO infection control requirements. The report is to indicate any problems noted and corrective action taken and is to be signed by the Contractor. A copy of a sample report is available in the Facility Management Office.
- D. In addition, Contractor is required to comply with other applicable Veterans Hospital Administration, Boise Veterans Affairs Medical Center, and Boise Facilities Management Service Regulations, Directives, Memorandums, and Policies. These documents are available in the Facilities Management Services Offices. Each of the Contractor's employees and subcontractor's employees shall be required to read the statement of policies and regulations and sign an acknowledgement that such policies and regulations are understood. Signed acknowledgement will be returned to the COTR prior to any construction activity.
- E. Contractors involved with the removal, alteration, or disturbance of asbestos type insulation or materials will be required to comply strictly with the regulations found in 29 CFR 1010.1001 and the appropriate EPA regulations regarding disposal of asbestos. Assistance in identifying asbestos can be requested from the Medical Center's Industrial Hygienist and the COTR.

- F. Contractors entering locations of known asbestos contamination (i.e. pipe basements) shall be responsible for providing respiratory protection to their employees and ensuring respirators are worn in accordance with 29 CFR 1910.1001 (g). Asbestos contaminated areas shall be defined on the Project Drawings. The minimum equipment requirements shall be not less than minimum requirements by law or a half-mask air-purifying respirator equipped with high efficiency filters and disposable coveralls whichever is more protective.
- G. Contractor, along with other submittals, and at least two weeks prior to bringing any materials on-site, must submit a complete list of chemicals the Contractor will use and MSDS for all hazardous materials as defined in 29 CFR 1910.1200 (d) Hazard Determination. Contracting Officer shall have final approval of all materials brought on site.
- H. The Contractor shall be held solely responsible for the safety and health of its employees, subcontractor employees and any and all persons entering the Medical Center in relation to the Contractor's Work. The Contractor shall also be held responsible to protect the health and safety of the Veterans Affairs Community (including patients, visitors, staff and other persons allowed on the Medical Center facility) from the unwanted efforts of construction. Veterans Affairs staff will monitor the Contractor's performance in complying with all safety and health aspects of the project. Severe, significant, repeat or constant violations may result in than immediate work stoppage or a request for an inspection of a Compliance officer from the Occupational Safety and Health Administration.
- I. During all phases of the project the Contractor is required to comply with and strictly follow NFPA 241 "Standard for Safeguarding Construction, Alteration and Demolition Operations". The Medical Center's Safety Officer, Occupational Health Specialist, Industrial Hygienist, Infection Prevention and Control Nurse, Contracting Officer and COTR will closely monitor the work area for compliance. Appropriate action will be taken for non-compliance up to and including contract termination for cause.

**PART 2 - SPECIFIC BOISE VETERANS AFFAIRS MEDICAL CENTER FIRE & SAFETY
POLICIES, PROCEDURES AND REGULATIONS (SEE ALSO 01 00 00 GENERAL
REQUIREMENTS)**

2.1 INTRODUCTION

- A. The safety and fire protection of patients, employees, members of the public and government is of primary and continuous concern to this Medical Center.
- B. Contractors, their supervisors, subcontractors and their employees are required to comply with Medical Center Directives, Memorandums, and policies ensuring the occupational safety and health of all. Failure to comply with any provisions of any terms, limitations, restrictions or other portions of such policies may result in sanctions up to and including contract termination for cause.
- C. While working at the Boise Veterans Affairs Medical Center, Contractor and its subcontractors are responsible for the occupational safety and health of their employees. Contractor is required to comply with all applicable portions of 29 CFR 1910 and 29 CFR 1926 as appropriate. Failure to comply with any portion of these laws may result in work stoppage and a request to the Area Director of OSHA for a Compliance Officer to inspect the work site.
- D. Contractors are to comply with requirements found in the National Fire Protection Association (NFPA) #241 "Building Construction and Demolition Operation" and NFPA #51B "Fire Prevention in Use of Cutting and Welding Processes".
- E. Questions regarding occupational safety and health issues can be addressed to the Contracting Officer. The Medical Center's Safety Officer, Occupational Health Specialist, Industrial Hygienist, or Infection Prevention and Control Nurse, will advise the Contracting Officer when requested.

2.2 PERSONNEL CONDUCT

- A. The Boise Veterans Affairs Medical Center is Federal Property and any person entering is subject to federal law enforcement.
- B. All personnel shall follow all safety regulations, violation of any of the regulations may result in immediate removal from VA property.

- C. There shall be no smoking by Contractor personnel on VA property; this prohibition includes all vehicles, Contractor trailers, and anywhere else while on VA property.
- D. Personnel on site shall not engage in: gambling, horseplay of any sort, sales or offer to sell any goods or services, or any other action deemed not conducive to the proper operation of the Medical Center as determined by the Contracting Officer.
- E. Contractor personnel shall not bring onto the VA property: weapons, alcohol, animals, other personnel, family members unless employed by the Contractor, or other deleterious materials as determined by the Contracting Officer.
- F. The use of radios, I-Pods and other personal items on site is a privilege, which may be revoked at any time or for any reason by the COTR.
- G. Any form of sexual harassment may result in immediate expulsion from the Medical Center property and denial of re admittance as determined by the Contracting Officer.
- H. Contractor shall not allow any food to be brought into the construction area.

2.3 HAZARD COMMUNICATION

- A. Contractor shall comply with OSHA Standard 29CFR 1926.59 "Hazard Communication".
- B. Contractor shall submit to the Veterans Administration Industrial Hygienist, copies of the Material Safety Data Sheets covering all hazardous materials to which the Contractor and Medical Center employees, patients and visitors may be exposed.
- C. Copies of Material Safety Data Sheets covering all hazardous materials to be use by the Contractor shall be submitted to the COTR prior to bringing the material(s) on to the Medical Center property.
- D. Contractor shall inform the COTR of the hazards to which Medical Center personnel, patients and visitors may be exposed.
- E. Contractor shall have a written Hazard Communication Program available at the construction site at all times, which details how the Contractor shall comply with 29 CFR 1926.59.

2.4 BLOODBORNE PATHOGENS

- A. Since work will take place in a hospital, there is the possibility of the Contractor coming in contact with blood and body fluids whenever working on the sanitary sewer system, dental vacuum system and other utility systems as identified by the VA. The Contractor shall comply with 29 CFR 1910 Subpart Z Toxic and Hazardous Substances section 1910.1030 bloodborne pathogens for work on the affected utilities.

2.5 FIRES AND FIRE NOTIFICATION

- A. All fires must be reported. In the event of a fire in the work area, use the nearest fire alarm pull station, and notify the Medical Center staff in the immediate area. All fire alarms are responded to by the Boise City Fire Department. Emergency notification can also be accomplished through Medical Center telephones by dialing 9-911.
- B. Be sure to give the exact location from where you are calling and the exact nature of the emergency. If the Contractor experiences a fire that was rapidly extinguished by the Contractor's forces, the Contractor must still notify the COTR within one hour of the event. Independent of any Contractor review, the Government shall conduct a detailed fire investigation.

2.6 INTERIM LIFE SAFETY MEASURES (ILSM)

- A. 14 days prior to any work impairing the life safety components or utilities of the Medical Center the Contractor shall notify in writing to the COTR the proposed portion of work and its duration. The life safety components include but are not limited to any portion of the means of egress as further defined in NFPA 101, the fire alarm notification system, the automatic fire sprinkler system, building fire stand pipes, fire hydrants, and emergency access to the structure or construction site.
- B. The Contractor shall work with the Medical Center's safety officer and COTR in completing an ILSM checklist, and shall follow all requirements listed in the ILSM for the impairment. Under no circumstance is a Contractor allowed to deactivate any of the fire protection systems in this Medical Center.
- C. If the nature of the work requires the deactivation of the fire alarm, smoke detection or sprinkler system, you must notify the COTR. Notification must be made well in advance such that ample time can be

allowed to deactivate the system and provide alternative measures for fire protection.

- D. False alarms will not be tolerated. Contractors are required to be familiar with the location of the smoke detectors in your work area. When performing cutting, burning or welding or any other operations that may cause smoke or dust, you must take steps to temporarily cover smoke detectors in order to prevent false alarms. Failure to take the appropriate action will result in the Contracting Officer assessing actual costs for government response for each false alarm that is preventable. Prior to covering the smoke detectors, the Contractor shall request an ILSM as further described above. The Contractor will notify the COTR when the impairment is initiated, and who will also be notified when the covers are removed.

2.7 HOT WORK PERMIT

- A. Hot work is defined as operations including, but not limited to, cutting, welding, thermal welding, brazing, soldering, grinding, thermal spraying, thawing pipes, or any similar situation. If such work is required, the Contractor must notify the COTR no less than one day in advance of such work. The General Contractor will inspect the work area and issue a "Hot Work Permit" authorizing the performance of such work.
- B. All hot work will be performed in compliance with the Medical Center's policy regarding Hot Work Permits and NFPA 241, Safeguarding Construction, Alteration, and Demolition Operations, and NFPA 51B, Fire Prevention in Use of Cutting and Welding Processes, and applicable OSHA standard. A hot work permit will only be issued to individuals familiar with these regulations.
- C. A hot work permit will only be issued when the following conditions are met:
 - 1. Combustible materials are located a minimum of 25 feet from the work site, or protected by flameproof covers or shielded with metal or fire-resistant guards or curtains.
 - 2. Openings or cracks in walls, floors, or ducts within 25 feet of the site are covered to prevent the passage of sparks to adjacent areas.

3. Where cutting or welding is done near walls, partitions, ceiling, or roof of combustible construction, fire resistant guards or shields are provided to prevent ignition.
 4. Cutting or welding on pipes or other metal in contact with combustible walls, ceilings or roofs is not undertaken if the work is close enough to cause ignition by conduction.
 5. Fully charged and operable fire extinguishers, appropriate for the type of possible fire, are available at the work area.
 6. When cutting or welding is done in close proximity to a sprinkler head, a wet rag is laid over the head during operation.
 7. Assure that nearby personnel are protected against heat, sparks, cut off, etc.
 8. Assure that a fire watch is at the site. Make a final check-up 30 minutes after completion of operations to detect and extinguish any smoldering fires.
- D. A fire watch shall be provided by the Contractor whenever cutting, welding, or performing other hot work. Fire watcher(s) shall:
1. Have fire-extinguishing equipment readily available and be trained in its use.
 2. Be familiar with facilities and procedures for sounding an alarm in the event of fire.
 3. Watch for fires in all exposed areas, sound the fire alarm immediately, and try to extinguish only within the capability of the portable extinguishing equipment available. In all cases if a fire is detected the alarm shall be activated even if the fire is extinguished.
 4. Maintain the watch for at least a half-hour after completion of operations to detect and extinguish smoldering fires.
- E. A "Hot Work Permit" will be issued only for the period necessary to perform such work. In the event the time necessary will exceed one day, a "Hot Work Permit" may be issued for the period needed; however, the General Contractor will inspect the area daily. Hot work permit will

apply only to the location identified on the permit. If additional areas involve hot work, then additional permits must be requested.

- F. Contractors will not be allowed to perform hot work processes without the appropriate permit.
- G. Any work involving the Medical Center's fire protection system will require COTR notification. Under no circumstances will the Contractor or employee attempt to alter or tamper with the existing fire protection system.
- H. The General Contractor will be notified within 30 minutes of the completion of all hot work to perform an inspection of the area to confirm that sparks or drops of hot metal are not present.

2.8 TEMPORARY ENCLOSURES

- A. Only non-combustible materials will be used to construct temporary enclosures or barriers at this Medical Center. Plastic barriers are normally prohibited unless specifically allowed by the Contracting Officer in writing. Plastic materials and fabrics used to construct dust barriers must conform to NFPA #701, Standard Methods of Fire Tests for Flame-Resistant Textiles and Films.

2.9 FLAMMABLE LIQUIDS

- A. All flammable liquids will be kept in approved safety containers. Only the amount necessary for your immediate work will be allowed in the building. Flammable liquids must be removed from the building at the end of each day.

2.10 COMPRESSED GAS CYLINDERS

- A. Compressed gas shall be secured in an upright position at all times. A suitable cylinder cart will be used to transport compressed gas cylinders. Only those compressed gas cylinders necessary for immediate work will be allowed in occupied buildings. All other compressed gas cylinders will be stored outside of buildings in a designated area. Contractor will comply with applicable standards compressed gas cylinders found in 29 CFR 1910 and 1926 (OSHA).

2.11 INTERNAL COMBUSTION ENGINE-POWERED EQUIPMENT

- A. Equipment powered by an internal combustion engine such as saws, compressors, generators and etc. will not be used in an occupied building. Special consideration may be given for unoccupied buildings only if the OSHA and NFPA requirements have been met.

2.12 POWDER ACTIVATED TOOLS

- A. The operator of powder activated tools must be trained and certified to use them. Powder activated tools will be kept in a secured manner at all times. When not in use, the tools will be locked up. When in use, the operator will have the tool under his immediate control.

2.13 PROJECT, WORK AREA AND TOOL SECURITY

- A. Under no circumstances are equipment, tools and other items of work to be left unattended for any reason. All tools, equipment and items of work must be under the immediate control of employees or subcontractors.
- B. If for some reason a work area must be left unattended, then it will be required that tools and other equipment be placed in an appropriate box or container and locked. All tool boxes, containers or any other device used for the storage of tool and equipment, will be provided with a latch and padlock. All tool boxes, containers or any other device used for the storage of tools and equipment, will be locked at all times except for putting in and removing tools.
- C. All doors, gates, and other accesses to work areas will be closed and locked when rooms or the work sites are left unattended. Failure to comply with this directive will be considered a violation of VA Regulations 1.218 (b), "Failure to comply with signs of a directive and restrictive nature posted for safety purposes," subject to a \$50.00 fine. Subsequent similar violations may result in both imposition of such a fine as well as the Contracting Officer taking action under the Contract's "Accident Prevention Clause" (FAR 52.236-13) to suspend all contract work until violations such may be satisfactorily resolved or under FAR 52.236-5 "Material and Workmanship Clause" to remove from the work site any personnel deemed by the Contracting Officer to be careless to the point of jeopardizing the welfare of Facility patients or staff.
- D. Contractor shall report to the VA Police Department, Ext. 1122, any tools or equipment that is missing.

- E. Tools and equipment found unattended will be confiscated and removed from the work area.

2.14 EQUIPMENT AND MOTOR VEHICLE SAFETY

- A. Pedestrians have the Right-of-Way at all times whether in a crosswalk, or not.
- B. All vehicles shall strictly follow the posted speed limits. The VA police have the authority to issue citations for driving violations.
- C. All loads shall be properly secured and covered as appropriate prior to operation on the Medical Center grounds.
- D. Seat belts shall be worn by all drivers and passengers in vehicles any time the vehicle is in motion. When operating any motorized equipment equipped with or designed for a seat belt, its use shall be mandatory.
- E. Riders are prohibited from equipment unless specifically designed for their transportation.
- F. Mounting or dismounting a moving vehicle or equipment is strictly prohibited.
- G. Equipment shall only be used by properly trained employees following all manufacturers' instructions including all safety precautions. All equipment shall be maintained in good condition and without modification. Any damaged or altered equipment shall be immediately removed from the VA property.
- H. Fuel for equipment shall be stored on accordance with OSHA and NFPA requirements. Fueling of any piece of equipment shall take place a minimum of 50 feet away from any building or combustible material.
- I. The Contractor shall ensure all motorized equipment or vehicles shall be in proper working order with all required insurance, registrations, maintenance checks, and inspections up to date. All motorized vehicles and equipment shall only be operated by properly trained employees holding current and unrevoked credentials for the equipment or vehicle in question. The operator and any passengers allowed shall follow all manufacturers' instructions including all safety precautions.

- J. The Government may require the cessation of use of motorized equipment due to noise, vibration, or odor and may require the Work to be performed at other than normal duty hours.

2.15 LADDERS

- A. It is required that ladders not be left unattended in an upright position. Ladders must be attended at all times or taken down and chained securely to a stationary object. All non-self-supporting ladders shall be lashed at the top. Fruit picker ladders are prohibited.

2.16 SCAFFOLDS

- A. All scaffolds will be attended at all times. When not in use, an effective barricade (fence) will be erected around the scaffold to prevent use by unauthorized personnel. (Reference 29 CFR 1926. Subpart L)

2.17 EXCAVATIONS

- A. The Contractor shall comply with OSHA 1926 Subpart P. An OSHA "competent person" must be on site during the excavation. The Contractor shall coordinate with the COTR and utility companies prior to the excavation to identify underground utilities tanks etc. All excavations left unattended will be provided with a barricade suitable to prevent entry by unauthorized persons. The barricade shall either be installed at least 6 feet from the edge of the excavation, or be capable of stopping a 200 lb lateral point load at the top of the barricade. Use of equipment as a barricade is not considered a sufficient barricade.

2.18 STORAGE

- A. The Contractor shall make prior arrangements with the COTR for the storage of building materials. Storage will not be allowed to accumulate in the Medical Center buildings.

2.19 TRASH AND DEBRIS

- A. The Contractor shall remove all trash and debris from the work area on a daily basis. Trash and debris will not be allowed to accumulate inside

or outside of the buildings. Trash is specifically prohibited from being piled up on the ground, it must be placed in a suitable trash container. The Contractor is responsible for making arrangements for removal of trash from the Medical Center facility.

2.20 PROTECTION OF FLOORS

- A. It may be necessary at times to take steps to protect floors from dirt, debris, paint, etc. A tarp or other protective covering may be used. However, you must maintain a certain amount of floor space for the safe passage of pedestrian traffic. Common sense must be used in this matter.

2.21 SIGNS

- A. Signs must be placed at the entrance to work areas warning people of the work. Signs must be suitable for the condition of the work. Small pieces of paper with printing or writing are not acceptable. The VAMC Safety Officer can be consulted in this matter.

2.22 INFECTION CONTROL

- A. All proposed work at the Medical Center shall be reviewed by the infection control coordinator to determine the required level of infection control necessary. The type of construction and patient risk group shall determine the level of infection control measures the Contractor shall be required to implement. The Medical Center's infection control coordinator's determination of the level of infection control shall be final. As a minimum, Contractor must control the generation of dust and the contamination of patient care surfaces, supplies and equipment. During demolition phases of the construction:
 - 1. The construction area shall be under negative pressure, ensuring there is an appreciable flow of clean air from the VA occupied portion of the facility into the construction area. The air flow shall be sufficiently strong to draw in the plastic door flaps commonly located at the construction entrance or at the specific site within the construction area.
 - 2. Construction debris being transported through the VA occupied portion of the facility shall be securely covered and whetted as necessary.

3. Construction employees shall remove dust-laden clothing before entering the VA occupied portion of the facility.
 4. Sticky mats shall be placed at all construction entrances and satisfactorily maintained so as to minimize the tracking of dust into the VA occupied portion of the facility.
 5. Dry sweeping of dust and debris is not to be performed.
- B. Additional requirements as determined by the infection control matrix as described in VAMC Directive 138-08-56 may be required of the Contractor. This work is specifically included in the Contractor's scope.

2.23 CONFINED SPACE ENTRY

- A. Contractor will be informed that the workplace contains permit required confined space and that permit space entry is allowed only through compliance with a permit space program meeting the requirements of 29 CFR 1910.146 and 1926.21 (b)(6).
- B. Contractor will be apprised of the elements including the hazards identified and the Medical Center's experience with the space that makes the space in question a permit space.
- C. Contractor will be apprised of any precautions or procedures that the Medical Center has implemented for the protection of employees in or near permit space where Contractor personnel will be working.
- D. Medical Center and Contractor will coordinate entry operations when both Medical Center personnel and Contractor personnel will be working in or near permit spaces as required by 29 CFR 1910.146 (d)(ii) and 1926.21 (b)(6).
- E. Contractor will obtain any available information regarding permit space hazards and entry operation from the Medical Center.
- F. At the conclusion of the entry operations the Medical Center and Contractor will discuss any hazards confronted or created in permit spaces.
- G. The Contractor is responsible for complying with 29 CFR 1910.246 (d) through (g) and 1926.21 (b)(6).

2.24 PERSONAL PROTECTIVE EQUIPMENT

- A. As a minimum, the Contractor shall comply with all OSHA personal protective equipment requirements. Additionally all personnel shall wear hard hats, safety glasses and steel toed shoes whenever they are in the work area. The Contractor shall provide and install signage at all entrances to work areas identifying the minimum required PPE.

2.25 ACCIDENT REPORTING

- A. As a minimum, the Contractor shall report all OSHA recordable or more severe accidents in writing to the Contracting Officer within 72 hours of the incident. The Contractor shall prepare and furnish a copy of its accident investigation report to the Contracting Officer.

PART 3 - SUBMITTALS AND DEVIATIONS

3.1 REVIEW

- A. Contractor shall allow for a minimum of 21 days for submittal review from the time the submittals are received by the A/E until they are returned by the COTR to the Contractor. Submittals on finishes related to textures, patterns, and colors of materials shall be submitted as one complete package so that all finish materials may be coordinated and selected at one time.
- B. VA approval of samples, certificates, manufacturers' literature and data, and shop drawings will be subject to contract requirements and shall not relieve the Contractor from responsibility for errors or any sort in such submittals or from any unauthorized deviations from contract requirements.

3.2 DEVIATION REQUESTS

- A. Any request for deviation from the contract documents shall be submitted separately from other submittals and shall state clearly it is a substitution request so as not to be confused with a submittal review.
- B. The Contractor shall be responsible for the proposed deviation coordination with all utilities and other Specification Sections. The requested substitution shall not relieve the Contractor of any other Contract conditions unless explicitly identified in the deviation request.
- C. Any deviation request will not be accepted until the Contracting Officer issues a Contract Change Order.

- D. Nothing in the Contract shall require the Government to accept a deviation from the Contract Documents.

3.3 ADDITIONAL INFORMATION

- A. The above information shall be used in conjunction with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 33 23
SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

- 1-1. Refer to Articles titled SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in GENERAL CONDITIONS.
- 1-2. For the purposes of this contract, samples, test reports, certificates, and manufacturers' literature and data shall also be subject to the previously referenced requirements. The following text refers to all items collectively as SUBMITTALS.
- 1-3. Submit for approval, all of the items specifically mentioned under the separate sections of the specification, with information sufficient to evidence full compliance with contract requirements. Materials, fabricated articles and the like to be installed in permanent work shall equal those of approved submittals. After an item has been approved, no change in brand or make will be permitted unless:
 - A. Contractor shall submit a project schedule prior to commencing with work, an updated progress schedule shall be submitted prior to each request for payment.
 - B. Satisfactory written evidence is presented to, and approved by Contracting Officer, that manufacturer cannot make scheduled delivery of approved item or;
 - C. Item delivered has been rejected and substitution of a suitable item is an urgent necessity or;
 - D. Other conditions become apparent which indicates approval of such substitute item to be in best interest of the Government.
- 1-4. Forward submittals in sufficient time to permit proper consideration and approval action by Government. Time submission to assure adequate lead time for procurement of contract - required items. Delays attributable to untimely and rejected submittals will not serve as a basis for extending contract time for completion. Allow a minimum of 21 days for submittal review from the time the submittals are received by the Architect until they are returned by the COTR to the Contractor. Submittals on finishes related to textures, patterns, and colors of materials shall be submitted as one complete package so that all finish materials may be coordinated and selected at one time.
- 1-5. Submittals will be reviewed for compliance with contract documents by Architect-Engineer, and action thereon will be taken by COTR on behalf of the Contracting Officer.

- 1-6. Upon receipt of submittals, Architect-Engineer will assign a file number thereto. Contractor, in any subsequent correspondence, shall refer to this file and identification number to expedite replies relative to previously approved or disapproved submittals.
- 1-7. The Government reserves the right to require additional submittals, whether or not particularly mentioned in this contract. If additional submittals beyond those required by the contract are furnished pursuant to request therefor by Contracting Officer, adjustment in contract price and time will be made in accordance with Articles titled CHANGES (FAR 52.243-4) and CHANGES - SUPPLEMENT (VAAR 852.236-88) of the GENERAL CONDITIONS.
- 1-8. Schedules called for in specifications and shown on shop drawings shall be submitted for use and information of Department of Veterans Affairs and Architect-Engineer. However, the Contractor shall assume responsibility for coordinating and verifying schedules. The Contracting Officer and Architect-Engineer assumes no responsibility for checking schedules or layout drawings for exact sizes, exact numbers and detailed positioning of items.
- 1-9. Submittals must be submitted by Contractor only and shipped prepaid where applicable. Contracting Officer assumes no responsibility for checking quantities or exact numbers included in such submittals.
 - A. Submit hard copies of samples in single units unless otherwise specified. Submit shop drawings, calculations, schedules, manufacturers' literature and data, certificates, etc. in electronic PDF format to Architect-Engineer. Hard copies of submittals, except requested samples, will be rejected. Acceptable methods of electronic submittal transfer include email (preferred), thumb drive, CD/DVD, contractor hosted FTP site, or a combination of these. Electronic files shall be in PDF format, and maximum email attachment size is 5 MB. Upon review, the Architect-Engineer shall retain an electronic copy, and email/deliver an electronic copy with disposition stamps, signatures, and notations, electronically marked thereon to the COTR. The COTR will return the final approved/disapproved electronic submittal back to the contractor.
 - B. Submittals will receive consideration only when accompanied by a transmittal letter signed by the Contractor. Letter shall contain the list of items, name of Medical Center, name of Contractor, contract number, applicable specification paragraph numbers, applicable drawing numbers (and other information required for exact identification of location for each item), manufacturer and brand, ASTM or Federal

Specification Number (if any) and such additional information as may be required by specifications for particular item being furnished. In addition, catalog pages shall be noted to indicate specific items submitted for approval.

1. A copy of letter must be enclosed with items, and any items received without identification letter will be considered "unclaimed goods" and held for a limited time only.
 2. Each sample shall be labeled to indicate the name and location of the Medical Center, name of Contractor, manufacturer, brand, contract number and ASTM or Federal Specification Number as applicable and location(s) on project.
 3. Certificates and manufacturers' literature and data shall be labeled to indicate the name and location of the Medical Center, name of Contractor, manufacturer, brand, contract number and ASTM or Federal Specification Number as applicable and location(s) on project.
 4. Required certificates shall be signed by an authorized representative of manufacturer or supplier of material, and by Contractor, and electronically enclosed with submittal.
 5. At project close-out, the contractor will provide the COTR with hard copies of certificates and warranties within the O & M Manuals.
- C. If submittal samples have been disapproved, resubmit new samples as soon as possible after notification of disapproval. Such new samples shall be marked "Resubmitted Sample" in addition to containing other previously specified information required on label and in transmittal letter.
- D. Approved samples will be kept on file by the COTR at the site until completion of contract, at which time such samples will be delivered to Contractor as Contractor's property. Where noted in technical sections of specifications, approved samples in good condition may be used in their proper locations in contract work. At completion of contract, samples that are not approved will be returned to Contractor only upon request and at Contractor's expense. Such request should be made prior to completion of the contract. Disapproved samples that are not requested for return by Contractor will be discarded after completion of contract.
- E. Submittal drawings (shop, erection or setting drawings) and schedules, required for work of various trades, shall be checked before submission by technically qualified employees of Contractor for accuracy, completeness and compliance with contract requirements. These drawings and schedules shall be stamped and signed by Contractor certifying to such check.

1. For each drawing required, submit one electronic PDF file.
 2. PDF shall be full size (760 mm by 1065 mm (30 inches x 42 inches)).
 3. Each drawing shall have marked thereon, proper descriptive title, including Medical Center location, project number, manufacturer's number, reference to contract drawing number, detail Section Number, and Specification Section Number.
 4. A space 120 mm by 125 mm (4-3/4 by 5 inches) shall be reserved on each drawing to accommodate an approval or disapproval stamp.
 5. Submit drawings electronically as noted above.
 7. When work is directly related and involves more than one trade, shop drawings shall be submitted to Architect-Engineer under one cover.
- F. Any deviation from the contract requirements and justification therefore shall be so stated in the letter of transmittal.
- G. No fabrication of work shall be done or any part or parts thereof shipped to the site prior to approval of require shop drawings for such work.
- H. VA approval of samples, certificates, manufacturers' literature and data, and shop drawing will be subject to contract requirements and shall note relieve the contractor from responsibility for errors of any sort in such submittals or from any authorized deviations from contract requirements. An authorized deviation is a deviation that has been identified by the contractor, or Government, and confirmed by an appropriate contract modification.
- 1-10. Samples, shop drawings, test reports, certificates and manufacturers' literature and data, shall be submitted for approval to
- CSHQA, a professional association
-
- (Architect-Engineer)
- 250 South 5th Street
-
- (A/E P.O. Address)
- tim.higley@cshqa.com
-
- (Email Address)
- Boise, Idaho 83702
-
- (City, State and Zip Code)
- 1-11. At the time of transmittal to the Architect-Engineer, the Contractor shall also send/email an electronic copy of the complete submittal directly to the COTR.

- - - E N D - - -

SECTION 01 42 19
REFERENCE STANDARDS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)

- A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.
- B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARTMENT OF VETERANS AFFAIRS
Office of Construction & Facilities Management
Facilities Quality Service (00CFM1A)
425 Eye Street N.W, (sixth floor)
Washington, DC 20001
Telephone Numbers: (202) 632-5249 or (202) 632-5178
Between 9:00 AM - 3:00 PM

1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

AA	Aluminum Association Inc. http://www.aluminum.org
AABC	Associated Air Balance Council http://www.aabchq.com
AAMA	American Architectural Manufacturer's Association http://www.aamanet.org
AAN	American Nursery and Landscape Association http://www.anla.org
AASHTO	American Association of State Highway and Transportation Officials http://www.aashto.org
AATCC	American Association of Textile Chemists and Colorists http://www.aatcc.org
ACGIH	American Conference of Governmental Industrial Hygienists http://www.acgih.org
ACI	American Concrete Institute http://www.aci-int.net
ACPA	American Concrete Pipe Association http://www.concrete-pipe.org
ACPPA	American Concrete Pressure Pipe Association http://www.acppa.org
ADC	Air Diffusion Council http://flexibleduct.org
AGA	American Gas Association http://www.aga.org
AGC	Associated General Contractors of America http://www.agc.org

AGMA	American Gear Manufacturers Association, Inc. http://www.agma.org
AHAM	Association of Home Appliance Manufacturers http://www.aham.org
AISC	American Institute of Steel Construction http://www.aisc.org
AISI	American Iron and Steel Institute http://www.steel.org
AITC	American Institute of Timber Construction http://www.aitc-glulam.org
AMCA	Air Movement and Control Association, Inc. http://www.amca.org
ANLA	American Nursery & Landscape Association http://www.anla.org
ANSI	American National Standards Institute, Inc. http://www.ansi.org
APA	The Engineered Wood Association http://www.apawood.org
ARI	Air-Conditioning and Refrigeration Institute http://www.ari.org
ASAE	American Society of Agricultural Engineers http://www.asae.org
ASCE	American Society of Civil Engineers http://www.asce.org
ASHRAE	American Society of Heating, Refrigerating, and Air-Conditioning Engineers http://www.ashrae.org
ASME	American Society of Mechanical Engineers http://www.asme.org
ASSE	American Society of Sanitary Engineering http://www.asse-plumbing.org

ASTM	American Society for Testing and Materials http://www.astm.org
AWI	Architectural Woodwork Institute http://www.awinet.org
AWS	American Welding Society http://www.aws.org
AWWA	American Water Works Association http://www.awwa.org
BHMA	Builders Hardware Manufacturers Association http://www.buildershardware.com
BIA	Brick Institute of America http://www.bia.org
CAGI	Compressed Air and Gas Institute http://www.cagi.org
CGA	Compressed Gas Association, Inc. http://www.cganet.com
CI	The Chlorine Institute, Inc. http://www.chlorineinstitute.org
CISCA	Ceilings and Interior Systems Construction Association http://www.cisca.org
CISPI	Cast Iron Soil Pipe Institute http://www.cispi.org
CLFMI	Chain Link Fence Manufacturers Institute http://www.chainlinkinfo.org
CPMB	Concrete Plant Manufacturers Bureau http://www.cpmc.org
CRA	California Redwood Association http://www.calredwood.org
CRSI	Concrete Reinforcing Steel Institute http://www.crsi.org

CTI	Cooling Technology Institute http://www.cti.org
DHI	Door and Hardware Institute http://www.dhi.org
EGSA	Electrical Generating Systems Association http://www.egsa.org
EEI	Edison Electric Institute http://www.eei.org
EPA	Environmental Protection Agency http://www.epa.gov
ETL	ETL Testing Laboratories, Inc. http://www.etl.com
FAA	Federal Aviation Administration http://www.faa.gov
FCC	Federal Communications Commission http://www.fcc.gov
FPS	The Forest Products Society http://www.forestprod.org
GANA	Glass Association of North America http://www.cssinfo.com/info/gana.html/
FM	Factory Mutual Insurance http://www.fmglobal.com
GA	Gypsum Association http://www.gypsum.org
GSA	General Services Administration http://www.gsa.gov
HI	Hydraulic Institute http://www.pumps.org
HPVA	Hardwood Plywood & Veneer Association http://www.hpva.org

ICBO	International Conference of Building Officials http://www.icbo.org
ICEA	Insulated Cable Engineers Association Inc. http://www.icea.net
ICAC	Institute of Clean Air Companies http://www.icac.com
IEEE	Institute of Electrical and Electronics Engineers http://www.ieee.org/
IMSA	International Municipal Signal Association http://www.imsasafety.org
IPCEA	Insulated Power Cable Engineers Association
NBMA	Metal Buildings Manufacturers Association http://www.mbma.com
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry Inc. http://www.mss-hq.com
NAAMM	National Association of Architectural Metal Manufacturers http://www.naamm.org
NAPHCC	Plumbing-Heating-Cooling Contractors Association http://www.phccweb.org.org
NBS	National Bureau of Standards See - NIST
NBBPVI	National Board of Boiler and Pressure Vessel Inspectors http://www.nationboard.org
NEC	National Electric Code See - NFPA National Fire Protection Association
NEMA	National Electrical Manufacturers Association http://www.nema.org
NFPA	National Fire Protection Association http://www.nfpa.org

NHLA National Hardwood Lumber Association
<http://www.natlhardwood.org>

NIH National Institute of Health
<http://www.nih.gov>

NIST National Institute of Standards and Technology
<http://www.nist.gov>

NLMA Northeastern Lumber Manufacturers Association, Inc.
<http://www.nelma.org>

NPA National Particleboard Association
18928 Premiere Court
Gaithersburg, MD 20879
(301) 670-0604

NSF National Sanitation Foundation
<http://www.nsf.org>

NWWDA Window and Door Manufacturers Association
<http://www.nwwda.org>

OSHA Occupational Safety and Health Administration
Department of Labor
<http://www.osha.gov>

PCA Portland Cement Association
<http://www.portcement.org>

PCI Precast Prestressed Concrete Institute
<http://www.pci.org>

PPI The Plastic Pipe Institute
<http://www.plasticpipe.org>

PEI Porcelain Enamel Institute, Inc.
<http://www.porcelainenamel.com>

PTI Post-Tensioning Institute
<http://www.post-tensioning.org>

RFCI The Resilient Floor Covering Institute
<http://www.rfci.com>

RIS Redwood Inspection Service
See - CRA

RMA Rubber Manufacturers Association, Inc.
<http://www.rma.org>

SCMA Southern Cypress Manufacturers Association
<http://www.cypressinfo.org>

SDI Steel Door Institute
<http://www.steeldoor.org>

IGMA Insulating Glass Manufacturers Alliance
<http://www.igmaonline.org>

SJI Steel Joist Institute
<http://www.steeljoist.org>

SMACNA Sheet Metal and Air-Conditioning Contractors
National Association, Inc.
<http://www.smacna.org>

SSPC The Society for Protective Coatings
<http://www.sspc.org>

STI Steel Tank Institute
<http://www.steeltank.com>

SWI Steel Window Institute
<http://www.steelwindows.com>

TCA Tile Council of America, Inc.
<http://www.tileusa.com>

TEMA Tubular Exchange Manufacturers Association
<http://www.tema.org>

TPI Truss Plate Institute, Inc.
583 D'Onofrio Drive; Suite 200
Madison, WI 53719
(608) 833-5900

UBC The Uniform Building Code
See ICBO

UL Underwriters' Laboratories Incorporated
<http://www.ul.com>

ULC Underwriters' Laboratories of Canada
<http://www.ulc.ca>

WCLIB West Coast Lumber Inspection Bureau
6980 SW Varns Road, P.O. Box 23145
Portland, OR 97223
(503) 639-0651

WRCLA Western Red Cedar Lumber Association
P.O. Box 120786
New Brighton, MN 55112
(612) 633-4334

WWPA Western Wood Products Association
<http://www.wwpa.org>

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 45 29
TESTING LABORATORY SERVICES

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained by Department of Veterans.

1.2 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.
- B. American Association of State Highway and Transportation Officials (AASHTO):
 - T27-11Standard Method of Test for Sieve Analysis of Fine and Coarse Aggregates
 - T96-02 (R2006)Standard Method of Test for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
 - T99-10Standard Method of Test for Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop
 - T104-99 (R2007)Standard Method of Test for Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
 - T180-10Standard Method of Test for Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop
 - T191-02(R2006)Standard Method of Test for Density of Soil In-Place by the Sand-Cone Method
- C. American Concrete Institute (ACI):
 - 506.4R-94 (R2004)Guide for the Evaluation of Shotcrete
- D. American Society for Testing and Materials (ASTM):
 - A325-10Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength
 - A370-12Standard Test Methods and Definitions for Mechanical Testing of Steel Products
 - A416/A416M-10Standard Specification for Steel Strand, Uncoated Seven-Wire for Prestressed Concrete

A490-12	Standard Specification for Heat Treated Steel Structural Bolts, 150 ksi Minimum Tensile Strength
C31/C31M-10	Standard Practice for Making and Curing Concrete Test Specimens in the Field
C33/C33M-11a	Standard Specification for Concrete Aggregates
C39/C39M-12	Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens
C109/C109M-11b	Standard Test Method for Compressive Strength of Hydraulic Cement Mortars
C136-06	Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates
C138/C138M-10b	Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete
C140-12	Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units
C143/C143M-10a	Standard Test Method for Slump of Hydraulic Cement Concrete
C172/C172M-10	Standard Practice for Sampling Freshly Mixed Concrete
C173/C173M-10b	Standard Test Method for Air Content of freshly Mixed Concrete by the Volumetric Method
C330/C330M-09	Standard Specification for Lightweight Aggregates for Structural Concrete
C567/C567M-11	Standard Test Method for Density Structural Lightweight Concrete
C780-11	Standard Test Method for Pre-construction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry
C1019-11	Standard Test Method for Sampling and Testing Grout
C1064/C1064M-11	Standard Test Method for Temperature of Freshly Mixed Portland Cement Concrete
C1077-11c	Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation
C1314-11a	Standard Test Method for Compressive Strength of Masonry Prisms
D422-63(2007)	Standard Test Method for Particle-Size Analysis of Soils

D698-07e1Standard Test Methods for Laboratory Compaction
 Characteristics of Soil Using Standard Effort
 D1140-00(2006)Standard Test Methods for Amount of Material in
 Soils Finer than No. 200 Sieve
 D1143/D1143M-07e1Standard Test Methods for Deep Foundations Under
 Static Axial Compressive Load
 D1188-07e1Standard Test Method for Bulk Specific Gravity
 and Density of Compacted Bituminous Mixtures
 Using Coated Samples
 D1556-07Standard Test Method for Density and Unit Weight
 of Soil in Place by the Sand-Cone Method
 D1557-09Standard Test Methods for Laboratory Compaction
 Characteristics of Soil Using Modified Effort
 (56,000ft lbf/ft³ (2,700 KNm/m³))
 D2166-06Standard Test Method for Unconfined Compressive
 Strength of Cohesive Soil
 D2167-08)Standard Test Method for Density and Unit Weight
 of Soil in Place by the Rubber Balloon Method
 D2216-10Standard Test Methods for Laboratory
 Determination of Water (Moisture) Content of
 Soil and Rock by Mass
 D2974-07aStandard Test Methods for Moisture, Ash, and
 Organic Matter of Peat and Other Organic Soils
 D3666-11Standard Specification for Minimum Requirements
 for Agencies Testing and Inspecting Road and
 Paving Materials
 D3740-11Standard Practice for Minimum Requirements for
 Agencies Engaged in Testing and/or Inspection
 of Soil and Rock as used in Engineering Design
 and Construction
 D6938-10Standard Test Method for In-Place Density and
 Water Content of Soil and Soil-Aggregate by
 Nuclear Methods (Shallow Depth)
 E94-04(2010)Standard Guide for Radiographic Examination
 E164-08Standard Practice for Contact Ultrasonic Testing
 of Weldments
 E329-11cStandard Specification for Agencies Engaged in
 Construction Inspection, Testing, or Special
 Inspection
 E543-09Standard Specification for Agencies Performing
 Non-Destructive Testing

E605-93(R2011)Standard Test Methods for Thickness and Density
of Sprayed Fire Resistive Material (SFRM)
Applied to Structural Members

E709-08Standard Guide for Magnetic Particle Examination

E1155-96(R2008)Determining FF Floor Flatness and FL Floor
Levelness Numbers

E. American Welding Society (AWS):

D1.D1.1M-10Structural Welding Code-Steel

1.3 REQUIREMENTS:

- A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e.; E329, C1077, D3666, D3740, A880, E543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the "Corporate Office."
- B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by COTR. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of COTR to such failure.
- C. Written Reports: Testing laboratory shall submit test reports to COTR, Contractor, unless other arrangements are agreed to in writing by the COTR. Submit reports of tests that fail to meet construction contract requirements on colored paper.
- D. Verbal Reports: Give verbal notification to COTR immediately of any irregularity.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 EARTHWORK:

- A. General: The Testing Laboratory shall provide qualified personnel, materials, equipment, and transportation as required to perform the services identified/required herein, within the agreed to schedule and/or time frame. The work to be performed shall be as identified herein and shall include but not be limited to the following:

1. Observe fill and subgrades during proof-rolling to evaluate suitability of surface material to receive fill or base course. Provide recommendations to the COTR regarding suitability or unsuitability of areas where proof-rolling was observed. Where unsuitable results are observed, witness excavation of unsuitable material and recommend to COTR extent of removal and replacement of unsuitable materials and observe proof-rolling of replaced areas until satisfactory results are obtained.
2. Provide part time observation of fill placement and compaction and field density testing in building areas and retaining walls for foundation and backfill and pavement areas to verify that earthwork compaction obtained is in accordance with contract documents.
3. Provide supervised geotechnical technician to inspect excavation, subsurface preparation, and backfill for structural fill.

B. Testing Compaction:

1. Determine maximum density and optimum moisture content for each type of fill, backfill and subgrade material used, in compliance with ASTM D698 and/or ASTM D1557.
2. Make field density tests in accordance with the primary testing method following ASTM D6938 wherever possible. Field density tests utilizing ASTM D1556, or ASTM D2167 shall be utilized on a case by case basis only if there are problems with the validity of the results from the primary method due to specific site field conditions. Should the testing laboratory propose these alternative methods, they should provide satisfactory explanation to the COTR before the tests are conducted.
 - a. Building Slab Subgrade: At least one test of subgrade for every 185 m² (2000 square feet) of building slab, but in no case fewer than three tests. In each compacted fill layer, perform one test for every 185 m² (2000 square feet) of overlaying building slab, but in no case fewer than three tests.
 - b. Foundation Wall Backfill: One test per 30 m (100 feet) of each layer of compacted fill but in no case fewer than two tests.
 - c. Pavement Subgrade: One test for each 335 m² (400 square yards), but in no case fewer than two tests.
 - d. Curb, Gutter, and Sidewalk: One test for each 90 m (300 feet), but in no case fewer than two tests.
 - e. Trenches: One test at maximum 30 m (100 foot) intervals per 1200 mm (4 foot) of vertical lift and at changes in required density, but in no case fewer than two tests.

- f. Footing Subgrade: At least one test for each layer of soil on which footings will be placed. Subsequent verification and approval of each footing subgrade may be based on a visual comparison of each subgrade with related tested subgrade when acceptable to COTR. In each compacted fill layer below wall footings, perform one field density test for every 30 m (100 feet) of wall. Verify subgrade is level, all loose or disturbed soils have been removed, and correlate actual soil conditions observed with those indicated by test borings.
- C. Fill and Backfill Material Gradation: One test per 500 cubic yards stockpiled or in-place source material, or one test minimum. Gradation of fill and backfill material shall be determined in accordance with the Geotechnical Report.
- D. Testing for Footing Bearing Capacity: Evaluate if suitable bearing capacity material is encountered in footing subgrade.
- E. Testing Materials: Test suitability of on-site and off-site borrow as directed by COTR.

3.2 LANDSCAPING:

- A. Test topsoil for organic materials, pH, phosphate, potash content, and gradation of particles.
 - 1. Test for organic material by using ASTM D2974.
 - 2. Determine percent of silt, sand, clay, and foreign materials such as rock, roots, and vegetation.
- B. Submit laboratory test report of topsoil to COTR.

3.3 ASPHALT CONCRETE PAVING:

- A. Aggregate Base Course:
 - 1. Determine maximum density and optimum moisture content for aggregate base material in accordance with ASTM D1557, Method D.
 - 2. Make a minimum of three field density tests on each day's final compaction on each aggregate course in accordance with ASTM D1556.
 - 3. Sample and test aggregate as necessary to insure compliance with specification requirements for gradation, wear, and soundness as specified in the applicable state highway standards and specifications.
- B. Asphalt Concrete:
 - 1. Aggregate: Sample and test aggregates in stock pile and hot-bins as necessary to insure compliance with specification requirements for gradation (AASHTO T27), wear (AASHTO T96), and soundness (AASHTO T104).
 - 2. Temperature: Check temperature of each load of asphalt concrete at mixing plant and at site of paving operation.

3. Density: Make a minimum of two field density tests in accordance with ASTM D1188 of asphalt base and surface course for each day's paving operation.

3.4 SITE WORK CONCRETE:

Test site work concrete including materials for concrete as required in Article CONCRETE of this section.

3.5 CONCRETE:

A. Batch Plant Inspection and Materials Testing:

1. Perform continuous batch plant inspection until concrete quality is established to satisfaction of COTR with concurrence of Contracting Officer and perform periodic inspections thereafter as determined by COTR.
2. Periodically inspect and test batch proportioning equipment for accuracy and report deficiencies to COTR.
3. Sample and test mix ingredients as necessary to insure compliance with specifications.
4. Sample and test aggregates daily and as necessary for moisture content. Test the dry rodded weight of the coarse aggregate whenever a sieve analysis is made, and when it appears there has been a change in the aggregate.
5. Certify, in duplicate, ingredients and proportions and amounts of ingredients in concrete conform to approved trial mixes. When concrete is batched or mixed off immediate building site, certify (by signing, initialing or stamping thereon) on delivery slips (duplicate) that ingredients in truck-load mixes conform to proportions of aggregate weight, cement factor, and water-cement ratio of approved trial mixes.

B. Field Inspection and Materials Testing:

1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads are to be removed from the site at the Contractor's expense. Any rejected concrete that is placed will be subject to removal.
3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 m³ (50 cubic yards) or less of each concrete type, and at least three cylinders

- for any one day's pour for each concrete type. After good concrete quality control has been established and maintained as determined by COTR make three cylinders for each 80 m³ (100 cubic yards) or less of each concrete type, and at least three cylinders from any one day's pour for each concrete type. Label each cylinder with an identification number. COTR may require additional cylinders to be molded and cured under job conditions.
4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped concrete at the hopper and at the discharge end of the hose at the beginning of each day's pumping operations to determine change in slump.
 5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 m³ (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 m³ (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.
 6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.
 7. Perform unit weight tests in compliance with ASTM C138 for normal weight concrete and ASTM C567 for lightweight concrete. Test the first truck and each time cylinders are made.
 8. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
 9. Verify that specified mixing has been accomplished.
 10. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
 - a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24 hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.
 - b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24 hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.

11. Inspect the reinforcing steel placement, including bar size, bar spacing, top and bottom concrete cover, proper tie into the chairs, and grade of steel prior to concrete placement. Submit detailed report of observations.
 12. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
 13. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.
 14. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.
 15. Observe preparations for placement of concrete:
 - a. Inspect handling, conveying, and placing equipment, inspect vibrating and compaction equipment.
 - b. Inspect preparation of construction, expansion, and isolation joints.
 16. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
 17. Observe concrete mixing:
 - a. Monitor and record amount of water added at project site.
 - b. Observe minimum and maximum mixing times.
 18. Measure concrete flatwork for levelness and flatness as follows:
 - a. Perform Floor Tolerance Measurements F_F and F_L in accordance with ASTM E1155. Calculate the actual overall F- numbers using the inferior/superior area method.
 - b. Perform all floor tolerance measurements within 48 hours after slab installation and prior to removal of shoring and formwork.
 - c. Provide the Contractor and the COTR with the results of all profile tests, including a running tabulation of the overall F_F and F_L values for all slabs installed to date, within 72 hours after each slab installation.
 19. Other inspections:
 - a. Grouting under base plates.
 - b. Grouting anchor bolts and reinforcing steel in hardened concrete.
- C. Laboratory Tests of Field Samples:
1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by COTR. Compile laboratory test reports as follows: Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling, molding or testing, in which case it shall be discarded and strength of spare cylinder shall be used.

2. Make weight tests of hardened lightweight structural concrete in accordance with ASTM C567.
3. Furnish certified compression test reports (duplicate) to COTR. In test report, indicate the following information:
 - a. Cylinder identification number and date cast.
 - b. Specific location at which test samples were taken.
 - c. Type of concrete, slump, and percent air.
 - d. Compressive strength of concrete in MPa (psi).
 - e. Weight of lightweight structural concrete in kg/m³ (pounds per cubic foot).
 - f. Weather conditions during placing.
 - g. Temperature of concrete in each test cylinder when test cylinder was molded.
 - h. Maximum and minimum ambient temperature during placing.
 - i. Ambient temperature when concrete sample in test cylinder was taken.
 - j. Date delivered to laboratory and date tested.

3.6 MASONRY:

A. Mortar Tests:

1. Laboratory compressive strength test:
 - a. Comply with ASTM C780.
 - b. Obtain samples during or immediately after discharge from batch mixer.
 - c. Furnish molds with 50 mm (2 inch), 3 compartment gang cube.
 - d. Test one sample at 7 days and 2 samples at 28 days.
2. Two tests during first week of operation; one test per week after initial test until masonry completion.

B. Grout Tests:

1. Laboratory compressive strength test:
 - a. Comply with ASTM C1019.
 - b. Test one sample at 7 days and 2 samples at 28 days.
 - c. Perform test for each 230 m² (2500 square feet) of masonry.

C. Masonry Unit Tests:

1. Laboratory Compressive Strength Test:
 - a. Comply with ASTM C140.
 - b. Test 3 samples for each 460 m² (5000 square feet) of wall area.

- D. Prism Tests: For each type of wall construction indicated, test masonry prisms per ASTM C1314 for each 460 m² (5000 square feet) of wall area. Prepare one set of prisms for testing at 7 days and one set for testing at 28 days.

3.7 STRUCTURAL STEEL:

- A. General: Provide shop and field inspection and testing services to certify structural steel work is done in accordance with contract documents. Welding shall conform to AWS D1.1 Structural Welding Code.
- B. Prefabrication Inspection:
 - 1. Review design and shop detail drawings for size, length, type and location of all welds to be made.
 - 2. Approve welding procedure qualifications either by pre-qualification or by witnessing qualifications tests.
 - 3. Approve welder qualifications by certification or retesting.
 - 4. Approve procedure for control of distortion and shrinkage stresses.
 - 5. Approve procedures for welding in accordance with applicable sections of AWS D1.1.
- C. Fabrication and Erection:
 - 1. Weld Inspection:
 - a. Inspect welding equipment for capacity, maintenance and working condition.
 - b. Verify specified electrodes and handling and storage of electrodes in accordance with AWS D1.1.
 - c. Inspect preparation and assembly of materials to be welded for conformance with AWS D1.1.
 - d. Inspect preheating and interpass temperatures for conformance with AWS D1.1.
 - e. Measure 25 percent of fillet welds.
 - f. Welding Magnetic Particle Testing: Test in accordance with ASTM E709 for a minimum of:
 - 1) 20 percent of all shear plate fillet welds at random, final pass only.
 - 2) 20 percent of all continuity plate and bracing gusset plate fillet welds, at random, final pass only.
 - 3) 100 percent of tension member fillet welds (i.e., hanger connection plates and other similar connections) for root and final passes.
 - 4) 20 percent of length of built-up column member partial penetration and fillet welds at random for root and final passes.
 - 5) 100 percent of length of built-up girder member partial penetration and fillet welds for root and final passes.
 - g. Welding Ultrasonic Testing: Test in accordance with ASTM E164 and AWS D1.1 for 100 percent of all full penetration welds, braced and

moment frame column splices, and a minimum of 20 percent of all other partial penetration column splices, at random.

- h. Welding Radiographic Testing: Test in accordance with ASTM E94, and AWS D1.1 for 5 percent of all full penetration welds at random, or per AISC 341 Seismic Provisions, whichever is more stringent.
 - i. Verify that correction of rejected welds are made in accordance with AWS D1.1.
 - j. Testing and inspection do not relieve the Contractor of the responsibility for providing materials and fabrication procedures in compliance with the specified requirements.
2. Bolt Inspection:
- a. Inspect high-strength bolted connections in accordance AISC Specifications for Structural Joints Using ASTM A325 or A490 Bolts.
 - b. Slip-Critical Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in each connection in accordance with AISC Specifications for Structural Joints Using ASTM A325 or A490 Bolts. Inspect all bolts in connection when one or more are rejected.
 - c. Fully Pre-tensioned Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in 25 percent of connections in accordance with AISC Specification for Structural Joints Using ASTM A325 or A490 Bolts. Inspect all bolts in connection when one or more are rejected.
 - d. Bolts installed by turn-of-nut tightening may be inspected with calibrated wrench when visual inspection was not performed during tightening.
 - e. Snug Tight Connections: Inspect 10 percent of connections verifying that plies of connected elements have been brought into snug contact.
 - f. Inspect field erected assemblies; verify locations of structural steel for plumbness, level, and alignment.
- D. Submit inspection reports, record of welders and their certification, and identification, and instances of noncompliance to COTR.

3.8 STEEL DECKING:

- A. Provide field inspection of welds of metal deck to the supporting steel, and testing services to insure steel decking has been installed in accordance with contract documents and manufacturer's requirements.

- B. Qualification of Field Welding: Qualify welding processes and welding operators in accordance with "Welder Qualification" procedures of AWS D1.1. Refer to the "Plug Weld Qualification Procedure" in Part 3 "Field Quality Control."
- C. Submit inspection reports, certification, and instances of noncompliance to COTR.

3.9 SHEAR CONNECTOR STUDS:

- A. Provide field inspection and testing services required by AWS D.1 to insure shear connector studs have been installed in accordance with contract documents.
- B. Tests: Test 20 percent of headed studs for fastening strength in accordance with AWS D1.1.
- C. Submit inspection reports, certification, and instances of noncompliance to COTR.

3.10 SPRAYED-ON FIREPROOFING:

- A. Provide field inspection and testing services to certify sprayed-on fireproofing has been applied in accordance with contract documents.
- B. Obtain a copy of approved submittals from COTR.
- C. Use approved installation in test areas as criteria for inspection of work.
- D. Test sprayed-on fireproofing for thickness and density in accordance with ASTM E605.
 - 1. Thickness gauge specified in ASTM E605 may be modified for pole extension so that overhead sprayed material can be reached from floor.
- E. Location of test areas for field tests as follows:
 - 1. Thickness: Select one bay per floor, or one bay for each 930 m² (10,000 square feet) of floor area, whichever provides for greater number of tests. Take thickness determinations from each of following locations: Metal deck, beam, and column.
 - 2. Density: Take density determinations from each floor, or one test from each 930 m² (10,000 square feet) of floor area, whichever provides for greater number of tests, from each of the following areas: Underside of metal deck, beam flanges, and beam web.
- F. Submit inspection reports, certification, and instances of noncompliance to COTR.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 57 19
TEMPORARY ENVIRONMENTAL CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.
- B. Environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which:
 - 1. Adversely effect human health or welfare,
 - 2. Unfavorably alter ecological balances of importance to human life,
 - 3. Effect other species of importance to humankind, or;
 - 4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.
- C. Definitions of Pollutants:
 - 1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
 - 2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
 - 3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
 - 4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
 - 5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water of the United States" and would require a permit to discharge water from the governing agency.
 - 6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.

7. Sanitary Wastes:

- a. Sewage: Domestic sanitary sewage and human and animal waste.
- b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

1.2 QUALITY CONTROL

- A. Establish and maintain quality control for the environmental protection of all items set forth herein.
- B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

1.3 REFERENCES

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. U.S. National Archives and Records Administration (NARA):
33 CFR 328Definitions
- C. SDC1.0 Demolition and Erosion Control Plan in the design documents shall serve as a base for the preparation of the Environmental Protection Plan. The Contractor shall modify the plan based on his means and methods.

1.4 SUBMITTALS

- A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
 - 1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the COTR to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the COTR for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
 - a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
 - b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.
 - c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.
 - d. Description of the Contractor's environmental protection personnel training program.
 - e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise

control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.

- f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
 - g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
 - h. Permits, licenses, and the location of the solid waste disposal area.
 - i. Drawings showing locations of any proposed temporary excavations or embankments for haul roads, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.
 - j. Environmental Monitoring Plans for the job site including land, water, air, and noise.
 - k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.
- B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

1.5 PROTECTION OF ENVIRONMENTAL RESOURCES

- A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.

- B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, top soil, and land forms without permission from the COTR. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized, or where special emergency use is permitted.
1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
 2. Protection of Landscape: Protect trees, shrubs, vines, grasses, land forms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.
 - a. Box and protect from damage existing trees and shrubs to remain on the construction site.
 - b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
 - c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
 3. Reduction of Exposure of Unprotected Erodible Soils: Plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use. Form earthwork to final grade as shown. Immediately protect side slopes and back slopes upon completion of rough grading.
 4. Temporary Protection of Disturbed Areas: Construct diversion ditches, benches, and berms to retard and divert runoff from the construction site to protected drainage areas approved under paragraph 208 of the Clean Water Act.
 5. Erosion and Sedimentation Control Devices: The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's activities. Construct or install all temporary and permanent erosion and sedimentation control features on the Environmental Protection Plan. Maintain temporary erosion and sediment control measures such as berms, dikes, drains, sedimentation

- basins, grassing, and mulching, until permanent drainage and erosion control facilities are completed and operative.
6. Manage borrow areas on and off Government property to minimize erosion and to prevent sediment from entering nearby water courses or lakes.
 7. Manage and control spoil areas on and off Government property to limit spoil to areas on the Environmental Protection Plan and prevent erosion of soil or sediment from entering nearby water courses or lakes.
 8. Protect adjacent areas from despoilment by temporary excavations and embankments.
 9. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular schedule. Transport all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.
 10. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.
 11. Handle discarded materials other than those included in the solid waste category as directed by the COTR.
- C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.
1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.
 2. Control movement of materials and equipment at stream crossings during construction to prevent violation of water pollution control standards of the Federal, State, or local government.
 3. Monitor water areas affected by construction.
- D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.

- E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of Idaho and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.
1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all times, including weekends, holidays, and hours when work is not in progress.
 2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.
 3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
 4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.
- F. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the COTR. Maintain noise-produced work at or below the decibel levels and within the time periods specified.
1. Perform construction activities involving repetitive, high-level impact noise only between 8:00 a.m. and 4:30 p.m. unless otherwise permitted by local ordinance or the COTR. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70
Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75
 2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:

- a. Maintain maximum permissible construction equipment noise levels at 15 m (50 feet) (dBA):

EARTHMOVING		MATERIALS HANDLING	
FRONT LOADERS	75	CONCRETE MIXERS	75
BACKHOES	75	CONCRETE PUMPS	75
DOZERS	75	CRANES	75
TRACTORS	75	DERRICKS IMPACT	75
SCAPERS	80	PILE DRIVERS	95
GRADERS	75	JACK HAMMERS	75
TRUCKS	75	ROCK DRILLS	80
PAVERS, STATIONARY	80	PNEUMATIC TOOLS	80
PUMPS	75	BLASTING	//--//
GENERATORS	75	SAWS	75
COMPRESSORS	75	VIBRATORS	75

- b. Use shields or other physical barriers to restrict noise transmission.
- c. Provide soundproof housings or enclosures for noise-producing machinery.
- d. Use efficient silencers on equipment air intakes.
- e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.
- f. Line hoppers and storage bins with sound deadening material.
- g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.
3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at 15 m (50 feet) from the noise source. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the COTR noting any problems and the alternatives for mitigating actions.
- G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no

additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.

- H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COTR. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D - - -

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.
- B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.
- C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:
 - 1. Waste Management Plan development and implementation.
 - 2. Techniques to minimize waste generation.
 - 3. Sorting and separating of waste materials.
 - 4. Salvage of existing materials and items for reuse or resale.
 - 5. Recycling of materials that cannot be reused or sold.
- D. At a minimum the following waste categories shall be diverted from landfills:
 - 1. Soil.
 - 2. Inerts (eg, concrete, masonry and asphalt).
 - 3. Clean dimensional wood and palette wood.
 - 4. Green waste (biodegradable landscaping materials).
 - 5. Engineered wood products (plywood, particle board and I-joists, etc).
 - 6. Metal products (eg, steel, wire, beverage containers, copper, etc).
 - 7. Cardboard, paper and packaging.
 - 8. Bitumen roofing materials.
 - 9. Plastics (eg, ABS, PVC).
 - 10. Carpet and/or pad.
 - 11. Gypsum board.
 - 12. Insulation.
 - 13. Paint.
 - 14. Fluorescent lamps.

1.2 RELATED WORK

- A. Section 02 41 00, DEMOLITION.
- B. Section 01 00 00, GENERAL REQUIREMENTS.
- C. Lead Paint: Section 02 83 33.13, LEAD BASED PAINT REMOVAL AND DISPOSAL.

1.3 QUALITY ASSURANCE

- A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:
1. Excess or unusable construction materials.
 2. Packaging used for construction products.
 3. Poor planning and/or layout.
 4. Construction error.
 5. Over ordering.
 6. Weather damage.
 7. Contamination.
 8. Mishandling.
 9. Breakage.
- B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.
- C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 50 percent.
- D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.
- E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations. The Whole Building Design Guide website <http://www.cwm.wbdg.org> provides a Construction Waste Management Database that contains information on companies that haul, collect, and process recyclable debris from construction projects.
- F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.

- G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.
- H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

1.4 TERMINOLOGY

- A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.
- B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.
- C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.
- D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.
- E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).
- F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.
- G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.
- H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.
- I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.
- J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.
- K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.

- L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.
 - 1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
 - 2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.
- M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.
- N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.
- O. Return: To give back reusable items or unused products to vendors for credit.
- P. Salvage: To remove waste materials from the site for resale or re-use by a third party.
- Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.
- R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.
- S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

1.5 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:
- B. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.

1.6 APPLICABLE PUBLICATIONS

- A Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.
- B. U.S. Green Building Council (USGBC):
LEED Green Building Rating System for Remodel Construction

1.7 RECORDS

Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. List of each material and quantity to be salvaged, recycled, reused.
- B. List of each material and quantity proposed to be taken to a landfill.
- C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

PART 3 - EXECUTION

3.1 COLLECTION

- A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.
- B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
- C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

3.2 DISPOSAL

- A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.
- B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

3.3 REPORT

- A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.
- B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.
- C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

**SECTION 02 41 00
DEMOLITION**

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies demolition and removal of portions of buildings, utilities and other structures.

1.2 RELATED WORK:

- A. Demolition and removal of roads, walks, curbs, and on-grade slabs outside buildings to be demolished: Section 31 20 11, EARTH MOVING (SHORT FORM).
- B. Safety Requirements: GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- C. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.
- D. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.
- E. Asbestos Removal: Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.
- F. Asbestos Removal: Section 02 82 13.13 GLOVE BAGS.
- G. Asbestos Removal: Section 02 82 13.19 FLOOR TILE AND MASTIC.
- H. Lead Paint: Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
- I. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- J. Construction Waste Management: Section 017419 CONSTRUCTION WASTE MANAGEMENT.
- K. Infectious Control: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.8, INFECTION PREVENTION MEASURES.

1.3 PROTECTION:

- A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES AND IMPROVEMENTS.
- C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.

- D. Provide enclosed dust chutes with control gates from each floor to carry debris to truck beds and govern flow of material into truck. Provide overhead bridges of tight board or prefabricated metal construction at dust chutes to protect persons and property from falling debris.
- E. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.
- F. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
 - 1. No wall or part of wall shall be permitted to fall outwardly from structures.
 - 2. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
 - 3. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.
- G. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the COTR. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have COTR's approval.
- H. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- I. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7 INFECTION PREVENTION MEASURES.

1.4 UTILITY SERVICES:

- A. Demolish and remove outside utility service lines shown to be removed.
- B. Remove abandoned outside utility lines that would interfere with installation of new utility lines and new construction.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION****3.1 DEMOLITION:**

- A. Completely demolish and remove buildings and structures, including all appurtenances related or connected thereto, as noted below:
 - 1. As required for installation of new utility service lines.
 - 2. To full depth within an area defined by hypothetical lines located 1500 mm (5 feet) outside building lines of new structures.
- B. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center property to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the COTR. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.
- C. In removing buildings and structures of more than two stories, demolish work story by story starting at highest level and progressing down to third floor level. Demolition of first and second stories may proceed simultaneously.
- D. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the COTR. When Utility lines are encountered that are not indicated on the drawings, the COTR shall be notified prior to further work in that area.

3.2 CLEAN-UP:

On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to COTR. Clean-up shall include removal of debris off the Medical Center property, dispose of all items and materials not required to remain property of the Government, as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 02 82 11
TRADITIONAL ASBESTOS ABATEMENT

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

A. Contract documents and related requirements:

1. Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

B. Extent of work

1. Below is a brief description of the estimated quantities of asbestos containing materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.
2. Removal, clean-up and disposal of asbestos containing materials (ACM) and asbestos/waste contaminated elements in an appropriate regulated area for the following approximate quantities;
~11,500 linear feet of 2" - 6" diameter pipe.

~550 fittings 50 - 150 mm (2" - 6") in diameter

C. Related Work

1. Section 07 84 00, FIRESTOPPING.
2. Section 02 41 00, DEMOLITION.
3. Division 09, FINISHES
4. Division 22, PLUMBING.
5. Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION / Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING / Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
6. Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION / Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING / Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION
7. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.
8. Section 22 05 19, METERS AND GAGES FOR PLUMBING PIPING / Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING / Section 22 05 33, HEAT TRACING FOR PLUMBING PIPING / Section 22 11 00, FACILITY WATER DISTRIBUTION / Section 22 13 00, FACILITY SANITARY SEWERAGE / Section 22 13 23, SANITARY WASTE INTERCEPTORS / Section 22 14 00, FACILITY STORM DRAINAGE / Section 22 66 00, CHEMICAL-WASTE SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES / Section 23 11 23, FACILITY NATURAL-GAS PIPING.
9. Section 23 21 13, HYDRONIC PIPING / Section 23 22 13, STEAM AND CONDENSATE HEATING PIPING.
10. Section 23 31 00, HVAC DUCTS AND CASINGS / Section 23 37 00, AIR OUTLETS AND INLETS.

D. Tasks

The work tasks are summarized briefly as follows:

1. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and standard operating procedures for asbestos abatement work.
2. Abatement activities including removal, encapsulation, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.
3. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

E. Contractors Use Of Premises

1. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
2. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design and Construction Procedures. VA Design and Construction Procedures drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action. The following limitations of use shall apply to existing facilities shown on drawings:

1.2 VARIATIONS IN QUANTITY

- A. The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered ACM and those prices shall be used for additional work required under the contractor.

1.3 STOP ASBESTOS REMOVAL

- A. If the Contracting Officer; their field representative; (the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA

shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

1. Airborne PCM analysis results equal to or greater than 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
2. breach or break in regulated area containment barrier(s);
3. less than -0.02" WCG pressure in the regulated area;
4. serious injury/death at the site;
5. fire/safety emergency at the site;
6. respiratory protection system failure;
7. power failure or loss of wetting agent; or
8. any visible emissions observed outside the regulated area.

1.4 DEFINITIONS

A. General

1. Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

B. Glossary

Abatement - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

Aerosol - Solid or liquid particulate suspended in air.

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

Aggressive sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air. For personal samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis. NIOSH Method 7402 can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos Hazard Abatement Plan (AHAP) - Asbestos work procedures required to be submitted by the contractor before work begins.

Asbestos-containing material (ACM) - Any material containing more than one percent of asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-contaminated soil (ACS) - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

Asbestos-containing waste (ACW) material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos Project Monitor - Some states require that any person conducting asbestos abatement clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA).

Barrier - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

Primary Barrier - Plastic barriers placed over critical barriers and exposed directly to abatement work.

Secondary Barrier - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contractor's Professional Industrial Hygienist (CPIH/CIH) - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may be a certified industrial hygienist (CIH).

Count - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

Crawlspace - An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

VA Total - means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

Disposal bag - Typically 6 mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than one (1) percent or asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

High efficiency particulate air (HEPA) filter - An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist (IH) - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician (IH Technician) - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work

assigned. Some states require that an industrial hygienist technician conducting asbestos abatement clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAP) - EPA's rule to control emissions of asbestos to the environment (40 CFR part 61, Subpart M).

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL.

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Organic vapor cartridge - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

Outside air - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone for one or workers within the regulated area using a

filter cassette and a calibrated air sampling pump to determine asbestos exposure.

Permissible exposure limit (PEL) - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the eight (8) hour time weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit is 1.0 fibers per cubic centimeter (1 f/cc).

Personal protective equipment (PPE) - equipment designed to protect user from injury and/or specific job hazard. Such equipment may include protective clothing, hard hats, safety glasses, and respirators.

Pipe tunnel - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, or asbestos-contaminated soil.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, flame retardant per NFPA 241.

Positive/negative fit check - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator respectively.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (b).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of

which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH) or Contractor's PIH (CPIH/CIH).

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B)(5).

Assigned protection factor - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area.

Supplied air respirator (SAR) - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-1989.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Professional Industrial Hygienist (VPIH/CIH) - The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may be a Certified Industrial Hygienist (CIH).

VA Representative - The VA official responsible for on-going project work.

Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

Waste/Equipment decontamination facility (W/EDF) - The area in which equipment is decontaminated before removal from the regulated area.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

C. Referenced Standards Organizations

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

1. VA Department of Veterans Affairs

810 Vermont Avenue, NW
Washington, DC 20420

2. AIHA American Industrial Hygiene Association
2700 Prosperity Avenue, Suite 250
Fairfax, VA 22031
703-849-8888
3. ANSI American National Standards Institute
1430 Broadway
New York, NY 10018
212-354-3300
4. ASTM American Society for Testing and Materials
1916 Race St.
Philadelphia, PA 19103
215-299-5400
5. CFR Code of Federal Regulations
Government Printing Office
Washington, DC 20420
6. CGA Compressed Gas Association
1235 Jefferson Davis Highway
Arlington, VA 22202
703-979-0900
7. CS Commercial Standard of the National Institute of Standards and
Technology (NIST)
U. S. Department of Commerce
Government Printing Office
Washington, DC 20420
8. EPA Environmental Protection Agency
401 M St., SW
Washington, DC 20460
202-382-3949
9. MIL-STD Military Standards/Standardization Division
Office of the Assistant Secretary of Defense
Washington, DC 20420
10. NIST National Institute for Standards and Technology
U. S. Department of Commerce
Gaithersburg, MD 20234
301-921-1000
11. NEC National Electrical Code (by NFPA)

12. NEMA National Electrical Manufacturer's Association
2101 L Street, N.W.
Washington, DC 20037
13. NFPA National Fire Protection Association
1 Batterymarch Park
P.O. Box 9101
Quincy, MA 02269-9101
800-344-3555
14. NIOSH National Institutes for Occupational Safety and Health
4676 Columbia Parkway
Cincinnati, OH 45226
513-533-8236
15. OSHA Occupational Safety and Health Administration
U.S. Department of Labor
Government Printing Office
Washington, DC 20402
16. UL Underwriters Laboratory
333 Pfingsten Rd.
Northbrook, IL 60062
312-272-8800

1.5 APPLICABLE CODES AND REGULATIONS

A. General Applicability Of Codes, Regulations, And Standards

1. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
2. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
3. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

B. Asbestos Abatement Contractor Responsibility

1. The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE) including respiratory protection including respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

C. Federal Requirements

Federal requirements which govern of asbestos abatement include, but are not limited to, the following regulations.

1. Occupational Safety and Health Administration (OSHA)

- a. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
- b. Title 29 CFR 1910 Subpart I - Personal Protective Equipment
- c. Title 29 CFR 1910.134 - Respiratory Protection
- d. Title 29 CFR 1926 - Construction Industry Standards
- e. Title 29 CFR 1910.1020 - Access to Employee Exposure and Medical Records
- f. Title 29 CFR 1910.1200 - Hazard Communication
- g. Title 29 CFR 1910 Subpart K - Medical and First Aid

2. Environmental Protection Agency (EPA):

- a. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
- b. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)

3. Department of Transportation (DOT)

Title 49 CFR 100 - 185 - Transportation

D. Standards

1. Standards which govern asbestos abatement activities include, but are not limited to, the following:

- a) American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems and ANSI Z88.2 - Practices for Respiratory Protection.
- b) Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA Filter Units, 7th Edition.
- 2. Standards which govern encapsulation work include, but are not limited to the following:
 - a) American Society for Testing and Materials (ASTM)
- 3. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
 - a) National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
 - b) NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
 - c) NFPA 101 - Life Safety Code
- E. Epa Guidance Documents
 - 1. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.
 - 2. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
 - 3. Asbestos Waste Management Guidance EPA 530-SW-85-007
 - 4. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
 - 5. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990
- F. Notices
 - 1. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:
 - 2. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, State, and Local authorities.
- G. Permits/Licenses
 - 1. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

H. Posting And Filing Of Regulations

1. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each in the clean room at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

I. VA Responsibilities

Prior to commencement of work:

1. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
2. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized, calibration data and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

J. Emergency Action Plan And Arrangements

1. An Emergency Action Plan shall be developed prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).
2. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
3. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.

4. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
5. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
 - a) For nonlife-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
 - b) For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.
6. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
7. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
8. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

K. Pre-Construction Meeting

Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPCIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine

procedures to be used during the project. At this meeting, the Contractor shall provide:

1. Proof of Contractor licensing.
2. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.
3. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
4. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
5. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
6. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
7. A copy of the Contractor's Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project.
 - a) Regulated area preparation procedures;
 - b) Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
 - c) Decontamination area set-up/layout and decontamination procedures for employees;
 - d) Abatement methods/procedures and equipment to be used;
 - e) Personal protective equipment to be used;
8. At this meeting the Contractor shall provide all submittals as required.
9. Procedures for handling, packaging and disposal of asbestos waste.
10. Emergency Action Plan and Contingency Plan Procedures.

1.6 PROJECT COORDINATION

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

A. Personnel

1. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives

responsible for compliance with these specifications and all other applicable requirements.

2. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.
3. Minimum qualifications for Contractor and assigned personnel are:
 - a) The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of federal (and state as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; has adequate materials, equipment and supplies to perform the work.
 - b) The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
 - c) The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at

least one complete standard operating procedure for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.

- d) The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

- 4. All personnel should be in compliance with OSHA construction safety training as applicable and submit certification.

1.7 RESPIRATORY PROTECTION

A. General - Respiratory Protection Program

- 1. The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.Subpart I;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c)(1)(i - ix) - Respiratory Protection Program.

B. Respiratory Protection Program Coordinator

- 1. The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years' experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

C. Selection And Use Of Respirators

- 1. The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the

clean room of the decontamination unit for reference by employees or authorized visitors.

D. Minimum Respiratory Protection

1. Minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or below 0.5 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

E. Medical Written Opinion

1. No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

F. Respirator Fit Test

1. All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPRs which have been put into a motor/blower failure mode.

G. Respirator Fit Check

1. The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from wearing a respirator inside the regulated area until resolution of the problem.

H. Maintenance And Care Of Respirators

1. The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and Care of Respirators.

I. Supplied Air Systems

1. If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current

requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in accordance with EPA/NIOSH publication EPA-560-OPTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry". The competent person on site will be responsible for the supplied air system to ensure the safety of the worker.

1.8 WORKER PROTECTION

A. Training Of Abatement Personnel

1. Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

B. Medical Examinations

1. Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

C. Regulated Area Entry Procedure

1. The Competent Person shall ensure that each time workers enter the regulated area; they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

D. Decontamination Procedure

1. The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

2. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.
3. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid inhaling asbestos fibers while showering. The following procedure is required as a minimum:
 - a) Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
 - b) With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
 - c) Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.
4. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!)**
5. Shower and wash body completely with soap and water. Rinse thoroughly.
6. Rinse shower room walls and floor to drain prior to exiting.
7. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

E. Regulated Area Requirements

1. The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not

be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES

A. Description

1. Provide each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

B. General Requirements

1. All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j)(1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

C. Temporary Facilities ToThe Pdf And W/Edf

1. The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

D. Personnel Decontamination Facility (Pdf)


1. The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room which is connected to the regulated area. The PDF must be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.

- a) Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.
- b) Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the

equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.

- c) Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.
- d) The PDF shall be as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the

regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 6 mil opaque fire retardant poly.

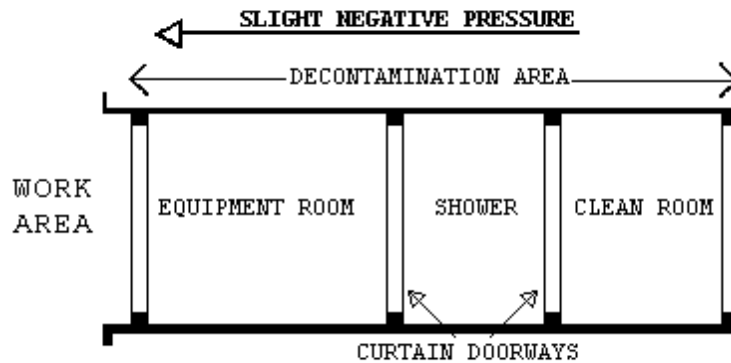


E. Waste/Equipment Decontamination Facility (W/Edf)

The Competent Person shall provide an W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room

unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.

4. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6 mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.
5. The W/EDF shall be as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

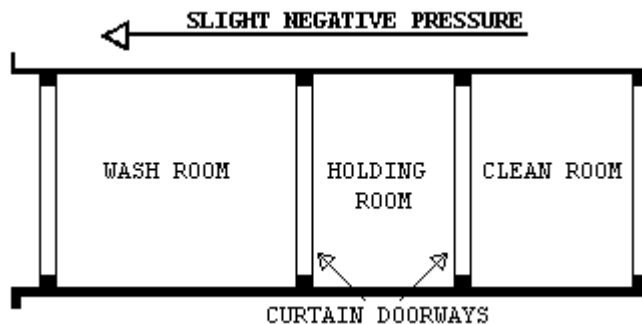

F. Waste/Equipment Decontamination Procedures

1. At the washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

2.1 MATERIALS AND EQUIPMENT

A. General Requirements

1. Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative.
2. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
3. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
4. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
5. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
6. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mil shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
7. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.

8. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.
9. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
10. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
11. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
12. Disposal bags - 2 layers of 6 mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
13. The VA shall be provided an advance copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-start meeting submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.
14. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
15. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

2.2 MONITORING, INSPECTION AND TESTING

A. General

1. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA requires that the employee exposure to asbestos must not exceed 0.1 fiber per cubic

centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.

2. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.
3. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH with review and

approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

B. Scope Of Services Of The VPIH/CIH Consultant

1. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
 - a) Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
 - b) Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
 - c) Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
 - d) Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.
 - e) Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
 - f) Task 6: Issue certificate of decontamination for each regulated area and project report.

2. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
3. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

C. Monitoring, Inspection And Testing By Contractor CPIH/CIH

1. The Contractor's CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor or Abatement Worker and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation on substantially similar projects in size and scope. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for air personal monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA

representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

2.3 ASBESTOS HAZARD ABATEMENT PLAN

- A. The Contractor shall have established an Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of this project and the specifications. The AHAP shall be submitted for review and approval to the VA prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAPs are:
 - 1. Minimum Personnel Qualifications
 - 2. Emergency Action Plan/Contingency Plans and Arrangements
 - 3. Security and Safety Procedures
 - 4. Respiratory Protection/Personal Protective Equipment Program and Training
 - 5. Medical Surveillance Program and Recordkeeping
 - 6. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
 - 7. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
 - 8. Negative Pressure Systems Requirements
 - 9. Monitoring, Inspections, and Testing

10. Removal Procedures for ACM
11. Removal of Contaminated Soil (if applicable)
12. Encapsulation Procedures for ACM
13. Disposal of ACM waste/equipment
14. Regulated Area Decontamination/Clean-up
15. Regulated Area Visual and Air Clearance
16. Project Completion/Closeout

2.4 SUBMITTALS

A. PRE-START MEETING SUBMITTALS

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

1. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
2. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
3. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
4. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
 - a) Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
 - b) Waste water filtration system, shower system, containment barriers.
 - c) Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, and fire extinguishers.
 - d) Respirators, protective clothing, personal protective equipment.
 - e) Fire safety equipment to be used in the regulated area.

5. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
6. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
7. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. Area or clearance air monitoring shall be conducted in accordance with EPA AHERA protocols.
8. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
 - a) Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date
 - b) List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution
 - c) List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including and of the company's officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.
9. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with

the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.

- a) CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of AHAPs developed; medical opinion; and current respirator fit test.
 - b) Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
 - c) Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
- 10. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of AHAPs incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; and copies of monitoring results of the five referenced projects listed and analytical method(s) used.
 - 11. Rented equipment must be decontaminated prior to returning to the rental agency.
 - 12. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all MSDS and application instructions.

B. SUBMITTALS DURING ABATEMENT

1. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; and representative air monitoring and results/TWA's/EL's. Submit this information daily to the VPIH/CIH.
2. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
 - a) Removal of any poly barriers.
 - b) Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
 - c) Packaging and removal of ACM waste from regulated area.
 - d) Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

C. Submittals At Completion Of Abatement

1. The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

2.5 ENCAPSULANTS

A. Types Of Encapsulants

1. The following four types of encapsulants, if used, must comply with performance requirements as stated in paragraph 2.6.2:
 - a) Removal encapsulant - used as a wetting agent to remove ACM.
 - b) Bridging encapsulant - provides a tough, durable coating on ACM.

c) Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2").

d) Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

B. Performance Requirements

1. Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:

2. General Requirements for all Encapsulants:

a) ASTM E84: Flame spread of 25; smoke emission of 50.

b) University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.

c) ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.

d) ASTM E96: Permeability - minimum of 0.4 perms.

3. Bridging/Penetrating Encapsulants:

a) ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft²).

b) ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).

c) ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).

d) ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.

4. Lockdown Encapsulants:

a) ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).

b) ASTM E736: Bond Strength - 48 kPa (100 lbs/ft²) (test compatibility with cementitious and fibrous fireproofing).

c) In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

C. Certificates Of Compliance

1. The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

PART 3 - EXECUTION

3.1 REGULATED AREA PREPARATIONS

A. Site Security

1. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
2. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately require any unauthorized person to leave the regulated area and then notify the VA Contracting Officer or VA Representative using the most expeditious means.
3. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
4. Access to the regulated area shall be through a single decontamination unit. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside; however, they shall be sealed with poly sheeting and taped until needed. In any situation where exposure to high temperatures which may result in a flame hazard, fire retardant poly sheeting must be used.
5. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.

6. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
7. The regulated area shall be locked during non-working hours and secured by VA Representative or Competent Person. The VA Police should be informed of asbestos abatement regulated areas to provide security checks during facility rounds and emergency response.

B. Signage And Power Management

1. Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed the PEL. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.
2. Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.
3. Shut down and lock out/tag out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil polyethylene disposal bags for staging and eventual disposal as asbestos waste.

C. Negative Pressure Filtration System

1. The Contractor shall provide enough HEPA negative air machines to effect $> - 0.02''$ WCG pressure. The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to effect $> - 0.02''$ WCG pressure. Provide a

standby unit in the event of machine failure and/or emergency in an adjacent area.

2. NIOSH has done extensive studies and has determined that negative air machines typically operate at ~50% efficiency. The contractor shall consider this in their determination of number of units needed to provide > - 0.02" WCG pressure. The contractor shall use double the number of machines, based on their calculations, or submit proof their machines operate at stated capacities, at a 2" pressure drop across the filters.

D. Design And Layout

1. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:
 - a) Method of supplying power to the units and designation/location of the panels.
 - b) Description of testing method(s) for correct air volume and pressure differential.
 - c) If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.

E. Negative Air Machines (HEPA Units)

1. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the cabinet shall be less than 30" in order to fit in standard doorways. The cabinet must be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.
2. Negative Air Machine Fan: The rating capacity of the fan must indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.
3. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media must be completely sealed on all edges

within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each HEPA filter shall be certified by the manufacturer to have an efficiency of not less than 99.97%. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.

4. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 μm or larger. A second stage pre-filter shall have a medium efficiency effective for particles down to 5 μm or larger. Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter must be held in place with a special housing or clamps.
5. Negative Air Machine Instrumentation: Each unit must be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit must have an elapsed time meter to show total hours of operation.
6. Negative Air Machine Safety and Warning Devices: An electrical/mechanical lockout must be provided to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.
7. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriters Laboratories (UL). Each unit must be

provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.

8. It is essential that replacement HEPA filters be tested using an "in-line" testing method, to ensure the seal around the periphery was not damaged during replacement. Damage to the outer HEPA filter seal could allow contaminated air to bypass the HEPA filter and be discharged to an inappropriate location. Contractor will provide written documentation of test results for negative air machine units with HEPA filters changed by the contractor or documentation when changed and tested by the contractor filters

F. Pressure Differential

1. The fully operational negative air system within the regulated area shall continuously maintain a pressure differential of -0.02" water column gauge. Before any disturbance of any asbestos material, this shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(e)(5)(i). The Competent Person shall be responsible for providing, maintaining, and documenting the negative pressure and air changes as required by OSHA and this specification.

G. Monitoring

1. The pressure differential shall be continuously monitored and recorded between the regulated area and the area outside the regulated area with a monitoring device that incorporates a strip chart recorder. The strip chart recorder shall become part of the project log and shall indicate at least -0.02" water column gauge for the duration of the project.

H. Auxiliary Generator

1. If the building is occupied during abatement, provide an auxiliary gasoline/diesel generator located outside the building in an area protected from the weather. In the event of a power failure of the general power grid and the VAMC emergency power grid, the generator must automatically start and supply power to a minimum of 50% of the negative air machines in operation.

I. Supplemental Make-Up Air Inlets

1. Provide, as needed for proper air flow in the regulated area, in a location approved by the VA, openings in the plastic sheeting to allow outside air to flow into the regulated area. Auxiliary makeup air inlets must be located as far from the negative air machines as

possible, off the floor near the ceiling, and away from the barriers that separate the regulated area from the occupied clean areas. Cover the inlets with weighted flaps which will seal in the event of failure of the negative pressure system.

J. Testing The System

1. The negative pressure system must be tested before any ACM is disturbed in any way. After the regulated area has been completely prepared, the decontamination units set up, and the negative air machines installed, start the units up one at a time. Demonstrate and document the operation and testing of the negative pressure system to the VA using smoke tubes and a negative pressure gauge. Verification and documentation of adequate negative pressure differential across each barrier must be done at the start of each work shift.

K. Demonstration Of The Negative Pressure Filtration System

1. The demonstration of the operation of the negative pressure system to the VA shall include, but not be limited to, the following:
2. Plastic barriers and sheeting move lightly in toward the regulated area.
3. Curtains of the decontamination units move in toward regulated area.
4. There is a noticeable movement of air through the decontamination units. Use the smoke tube to demonstrate air movement from the clean room to the shower room to the equipment room to the regulated area.
5. Use smoke tubes to demonstrate air is moving across all areas in which work is to be done. Use a differential pressure gauge to indicate a negative pressure of at least -0.02" across every barrier separating the regulated area from the rest of the building. Modify the system as necessary to meet the above requirements.

L. Use Of The Negative Pressure Filtration System During Abatement Operations

1. Start units before beginning any disturbance of ACM occurs. After work begins, the units shall run continuously, maintaining 4 actual air changes per hour at a negative pressure differential of -0.02" water column gauge, for the duration of the work until a final visual clearance and final air clearance has been successfully completed.

No negative air units shall be shut down at any time unless authorized by the VA Contracting Officer, verbally and in writing.

2. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.
3. Abatement work shall begin at a location farthest from the units and proceed towards them. If an electric failure occurs, the Competent Person shall stop all abatement work and immediately begin wetting all exposed asbestos materials for the duration of the power outage. Abatement work shall not resume until power is restored and all units are operating properly again.
4. The negative air machines shall continue to run after all work is completed and until a final visual clearance and a final air clearance has been successfully completed for that regulated area.

M. Dismantling The System

1. After completion of the final visual and final air clearance has been obtained by the VPIH/CIH, the units may be shut down. The unit exterior surfaces shall have been completely decontaminated; pre-filters are not to be removed and the units inlet/outlet sealed with 2 layers of 6 mil poly immediately after shut down. No filter removal shall occur at the VA site following successful completion of site clearance. OSHA/EPA/DOT asbestos shall be attached to the units.

N. Containment Barriers And Coverings In The Regulated Area

1. General

- a) Seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated as a result of the work, shall immediately stop work and clean up the contamination at no additional cost to the VA. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 3.1.4.8; FIRESTOPPING.

O. Preparation Prior To Sealing The Regulated Area

1. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before

commencing work. Any objects remaining in the regulated area shall be completely covered with 2 layers of 6-mil fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area.

P. Controlling Access To The Regulated Area

1. Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

Q. Critical Barriers

1. Completely separate any operations in the regulated area from adjacent areas using 2 layers of 6 mil fire retardant poly and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects/openings in the regulated area. Heat must be shut off any objects covered with poly.

R. Primary Barriers

1. Cover the regulated area with two layers of 6 mil fire retardant poly on the floors and two layers of 4 mil, fire retardant poly on the walls, unless otherwise directed in writing by the VA representative. Floor layers must form a right angle with the wall and turn up the wall at least 300 mm (12"). Seams must overlap at least 1800 mm (6') and must be spray glued and taped. Install sheeting so that layers can be removed independently from each other. Carpeting shall be covered with three layers of 6 mil poly. Corrugated cardboard sheets must be placed between the bottom and middle layers of poly. Mechanically support and seal with duct tape and glue all wa
2. If stairs and ramps are covered with 6 mil plastic, two layers must be used. Provide 19 mm (3/4") exterior grade plywood treads held in place with duct tape/glue on the plastic. Do not cover rungs or rails with any isolation materials.

S. Secondary Barriers

1. A loose layer of 6 mil shall be used as a drop cloth to protect the primary layers from debris generated during the abatement. This layer shall be replaced as needed during the work and at a minimum once per work day.

T. Extension Of The Regulated Area

1. If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. Decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

U. Firestopping

1. Through penetrations caused by cables, cable trays, pipes, sleeves, conduits, etc. must be firestopped with a fire-rated firestop system providing an air tight seal.
2. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.
3. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

V. Sanitary Facilities

1. The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

W. Personal Protective Equipment

1. Provide whole body clothing, head coverings, gloves and foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project.

Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

X. Pre-Cleaning

1. The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.
2. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. All workers performing pre-cleaning activities must don appropriate personal protective equipment (PPE), as specified throughout this document and as approved in the Contractor's work plan. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.
3. The abatement contractor will pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location. Drapes, clothing, upholstered furniture and other fabric items should be disposed of as asbestos contaminated waste. Cleaning these asbestos contaminated items utilizing HEPA vacuum techniques and off-premises steam cleaning is very difficult and cannot guarantee decontamination. Carpeting will be disposed of prior to abatement if in the regulated area. If ACM floor tile is attached to the carpet while the Contractor is removing the carpet that section of the carpet will be disposed of as asbestos waste.
4. The abatement contractor will pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated

here along with specified means of protection. Contact the manufacturer for special protection requirements. Control panels, gauges etc., in the regulated area may require VA access during abatement. These shall be designated and enclosures constructed with access flaps sealed with waterproof tape.

5. The abatement contractor will pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase

Y. Pre-Abatement Activities

1. Pre-Abatement Meeting

- a) The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

2. Pre-Abatement Construction And Operations

- a) Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
- b) Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon

satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP(s), especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.

- c) The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
- d) Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations.

3. Pre-Abatement Inspections And Preparations

- a) Before any work begins on the construction of the regulated area, the Contractor will:
 - 1) Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.
 - 2) The VA Representative, the Contractor, and the VPIH/CIH must be aware of VA A/E Quality Alert 07/09 indicating the failure to identify asbestos in the areas listed as well as common issues when preparing specifications and contract documents. This is especially critical when demolition is planned, because AHERA surveys are non-destructive, and ACM may remain undetected. A NESHAPS (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawlspaces (previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior

insulated wall panels; on underground fuel tanks; and steam line trench coverings.

- 3) The abatement contractor shall ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
- 4) If present and required, remove and dispose of carpeting from floors in the regulated area.
- 5) Inspect existing firestopping in the regulated area. Correct as needed.

3.2 REMOVAL OF ACM

A. Wetting ACM

1. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.
2. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.
3. Removal Encapsulant: When authorized by VA, provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during removal.

B. Secondary Barrier And Walkways

1. Install as a drop cloth a 6 mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely cover floors and any walls within 10 feet (3 meters) of the area where work is to done. Secure the secondary barrier with duct tape to prevent it from moving or debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When

removing, fold inward to prevent spillage and place in a disposal bag.

2. Install walkways using 6 mil black poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the primary layers from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

C. Wet Removal of AMC

1. Adequately and thoroughly wet the ACM to be removed prior to removal with amended water or when authorized by VA, removal encapsulant to reduce/prevent fiber release to the air. Adequate time (at a minimum two hours) must be allowed for the amended water or removal encapsulant to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. **In no event shall dry removal occur except when authorized in writing by the VPIH/CIH and VA when a greater safety hazard (e.g., electricity) is present.**
2. If ACM does not wet well with amended water due to composition, coating or jacketing, remove as follows:
 - a) Mist work area continuously with amended water whenever necessary to reduce airborne fiber levels.
 - b) Remove saturated ACM in small sections. Do not allow material to dry out. As material is removed, bag material, while still wet into disposal bags. Twist the bag neck tightly, bend over (gooseneck) and seal with a minimum of three tight wraps of duct tape. Clean /decontaminate the outside of the bag of any residue and move to washdown station adjacent to W/EDF.
 - c) Fireproofing or Architectural Finish on Scratch Coat: Spray with a fine mist of amended water or removal encapsulant. Allow time for saturation to the substrate. Do not over saturate causing excess dripping. Scrape material from substrate. Remove material

in manageable quantities and control falling to staging or floor. If the falling distance is over 20 feet (6M), use a drop chute to contain material through descent. Remove residue remaining on the scratch coat after scraping is done using a stiff bristle hand brush. If a removal encapsulant is used, remove residue completely before the encapsulant dries. Periodically re-wet the substrate with amended water as needed to prevent drying of the material before the residue is removed from the substrate.

- d) Fireproofing or Architectural Finish on Wire Lath: Spray with a fine mist of amended water or removal encapsulant. Allow time to completely saturate the material. Do not over saturate causing excess dripping. If the surface has been painted or otherwise coated, cut small holes as needed and apply amended water or removal encapsulant from above. Cut saturated wire lath into 2' x 6' (50mm x 150mm) sections and cut hanger wires. Roll up complete with ACM, cover in burlap and hand place in disposal bag. Do not drop to floor. After removal of lath/ACM, remove any overspray on decking and structure using stiff bristle nylon brushes. Depending on hardness of overspray, scrapers may be needed for removal.
- e) Pipe/Tank/Vessel/Boiler Insulation: Remove the outer layer of wrap while spraying with amended water in order to saturate the ACM. Spray ACM with a fine mist of amended water or removal encapsulant. Allow time to saturate the material to the substrate. Cut bands holding pre-formed pipe insulation sections. Slit jacketing at the seams, remove and hand place in a disposal bag. Do not allow dropping to the floor. Remove molded fitting insulation/mud in large pieces and hand place in a disposal bag. Remove any residue on pipe or fitting with a stiff bristle nylon brush. In locations where pipe fitting insulation is removed from fibrous glass or other non-asbestos insulated straight runs of pipe, remove fibrous material at least 6" from the point it contacts the ACM.

D. Removal of ACM/Dirt Floors and Other Special Procedures

1. Major Abatement on Dirt Floors:

When working on dirt floors, remove all visible asbestos debris using wet methods after set-up of PDF, W/EDF, negative air systems as required. Perform work and decontaminate/clean-up; perform

lockdown as needed and complete work as required in these specifications. The asbestos contaminated soil (ACS) shall be removed and/or enclosed.

2. Options for abatement of asbestos contaminated soil include: Removal of top 6 inches of soil; encapsulated the soil using shotcrete or other spray applied concrete materials. Considerations for which option to be used will be made by the VA representative. Factors which may affect which option to be used may include: access to the work area; height of the area (such as is there sufficient height to use concrete materials in the area, etc.) Soils covered with permanent barriers **MUST HAVE PERMANENT SIGNAGE INSTALLED TO WARN AGAINST PENETRATION ASSOCIATED WITH POTENTIAL DISTURBANCE OF ASBESTOS.**

- a) Remove ACS as shown on drawings to a minimum depth of 6 using wet methods. After wetting with amended water to minimize dust, shovel dirt into disposal bags. The CPIH/CIH shall closely monitor work conditions and take appropriate action to protect workers from over exposure to asbestos and heat stress. The minimum number of air changes per hour shall be six using negative air machines. Use special vacuum truck equipped with HEPA filtration to remove soil
- b) Enclosure of ACS using a concrete layer of 4" over the entire surface may also be done. Thoroughly dampen soil first with amended water before pouring concrete. Personnel shall be proficient in concrete finishing as well as asbestos trained.

3. Crawlspace/Pipe Tunnels:

- a) When working in crawlspaces or pipe tunnels, remove all visible asbestos debris using wet methods (if possible) after set-up of PDF, W/EDF, and after establishing negative air systems as required. Perform work and decontaminate/clean-up; perform lockdown as needed and complete work as required in these specifications. The asbestos contaminated soil (ACS) shall be removed and/or enclosed. Clearance requirements include confirmation sampling of affected soil by Polarized Light Microscopy (PLM). Clearance sampling requirements are specified in Sections 3.6.4 and 3.6.5.

- b) Options for abatement of asbestos contaminated soil include: Removal of top 6 inches of soil; encapsulated the soil using shotcrete or other spray applied concrete materials. Considerations for which option to be used will be made by the VA representative. Factors which may affect which option to be used may include: access to the work area; height of the area (such as is there sufficient height to use concrete materials in the area, etc.)

3.3 LOCKDOWN ENCAPSULATION

A. General

1. Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, the contractor shall encapsulate all surfaces with a bridging encapsulant.

B. Delivery and Storage

1. Deliver materials to the job site in original, new and unopened containers bearing the manufacturer's name and label as well as the following information: name of material, manufacturer's stock number, date of manufacture, thinning instructions, application instructions and the MSDS for the material.

C. Worker Protection

1. Before beginning work with any material for which an MSDS has been submitted, provide workers with any required personal protective equipment. The required personal protective equipment shall be used whenever exposure to the material might occur. In addition to OSHA/specification requirements for respiratory protection, a paint pre-filter and an organic vapor cartridge, at a minimum, shall use in addition to the HEPA filter when an organic solvent based encapsulant is used. The CPIH/CIH shall be responsible for provision of adequate respiratory protection. Note: Flammable and combustible encapsulants shall not be used, unless authorized in writing by the VA.

D. Encapsulation of Scratch Coat Plaster or Piping

1. Apply two coats of lockdown encapsulant to the scratch coat plaster or piping after all ACM has been removed. Apply in strict accordance with the manufacturer's instructions. Any deviation from the instructions must be approved by the VA's representative in writing prior to commencing the work.

2. Apply the lockdown encapsulant with an airless sprayer at a pressure and using a nozzle orifice as recommended by the manufacturer. Apply the first coat while the scratch coat is still damp from the asbestos removal process, after passing the visual inspection. If the surface has been allowed to dry, wet wipe or HEPA vacuum prior to spraying with encapsulant. Apply a second coat over the first coat in strict conformance with the manufacturer's instructions. Color the lockdown encapsulant and contrast the color in the second coat so that visual confirmation of completeness and uniform coverage of each coat is possible. Adhere to the manufacturer's instructions for coloring. At the completion of the encapsulation, the surface must be a uniform third color produced by the mixture.

E. Sealing Exposed Edges

1. Seal edges of ACM exposed by removal work which is inaccessible, such as a sleeve, wall penetration, etc., with two coats of bridging encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the bridging encapsulant. Apply in accordance with 3.3.4 (B).

3.4 DISPOSAL OF ACM WASTE MATERIALS

A. General

1. Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

B. Procedures

1. The VA must be notified at least 24 hours in advance of any waste removed from the containment.
2. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures in this specification. Waste shall be double-bagged and wetted with amended water prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall be securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goose necked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to

the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.

3. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Sealed waste bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second waste bag and sealed, which then must also be wet wiped or HEPA vacuumed.
4. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

3.5 PROJECT DECONTAMINATION

A. General

1. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
2. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
3. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

B. Regulated Area Clearance

1. Clearance air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

C. Work Description

1. Decontamination includes the clearance air testing in the regulated area and the decontamination and removal of the

enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

D. Pre-Decontamination Conditions

1. Before decontamination starts, all ACM waste from the regulated area shall be collected and removed, and the loose 6 mil layer of poly removed while being adequately wetted with amended water and disposed of along with any gross debris generated by the work.
2. At the start of decontamination, the following shall be in place:
 - a) Primary barriers consisting of 2 layers of 6 mil poly on the floor and 4 mil poly on the walls.
 - b) Critical barriers consisting of 2 layers of 6 mil poly which is the sole barrier between the regulated area and openings to the rest of the building or outside.
 - c) Decontamination facilities for personnel and equipment in operating condition and the negative pressure system in operation.

E. First Cleaning

1. Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

F. Pre-Clearance Inspection and Testing

1. The CPIH/CIH and VPIH/CIH will perform a thorough and detailed visual inspection at the end of the cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH/CIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the

CPIH/CIH documenting the inspection and sampling results and a statement verifying that the regulated area is ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

2. Lockdown Encapsulation of Abated Surfaces

- a) With the express written permission of the VA's representative, perform lockdown encapsulation of all surfaces from which asbestos was abated in accordance with the procedures in this specification. Negative pressure shall be maintained in the regulated area during the lockdown application.

3.6 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING

A. General

1. Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH starting after the final cleaning.

B. Final Visual Inspection

1. Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

C. Final Air Clearance Testing

1. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. If work is less than 260 lf/160 sf/35 cf, 5 PCM samples shall be collected for clearance and a minimum of one field blank. If work is equal to or more than 260 lf/160 sf/35 cf, AHERA TEM sampling shall be performed for clearance. TEM analysis shall be done in accordance with procedures for EPA AHERA in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved.

All Additional inspection and testing costs will be borne by the Contractor.

2. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

D. Final Air Clearance Procedures

1. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured by the AHERA PCM protocol, or 70 AHERA structures per square millimeter (s/mm²) by AHERA TEM.
2. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:
 - a) Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the AHERA TEM method.
 - b) Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques except where soil is not encapsulated or enclosed. Samples will be collected on 0.8μ MCE filters for PCM analysis and 0.45μ Polycarbonate filters for TEM. A minimum of 1200 Liters of using calibrated pumps shall be collected for clearance samples. Before pumps are started, initiate aggressive air mixing sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.
 - c) Final clearance for soil that is not encapsulated, samples will be collected on 0.8μ MCE filters for PCM analysis and 0.45μ Polycarbonate filters for TEM. A minimum of 1200 Liters of using calibrated pumps shall be collected for clearance samples. Air clearance of work areas where contaminated soil has been removed

is in addition to the requirement for clearance by bulk sample analysis discussed within these specifications. There will be no aggressive air sampling for the clearance of soil due to the fact that aggressive air sampling may overload the cassettes.

- d) Random samples shall be collected from areas of soil which have been abated to ensure that the soil has been properly decontaminated. The total number of samples to be collected from the soil areas shall be; <1000 SF of soil - 3 samples; >1000 to <5000 SF of soil - 5 samples; and >5000 SF of soil - 7 samples. The soil samples shall be collected in a statistically random manner and shall be analyzed by PLM method. The clearance level to determine the soil clean is <1% asbestos by weight as analyzed by PLM method. If this level is achieved, the soil areas shall be considered clear. If the levels are >1% asbestos, the areas shall be re-cleaned until the sample results are <1%.

A. Clearance Sampling Using PCM - Less Than 260lf/160sf:

1. The VPIH/CIH will perform clearance samples as indicated by the specification.
2. The NIOSH 7400 PCM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 5 PCM clearance samples shall be collected. All samples must be equal to or less than 0.01 f/cc to clear the regulated area.
3. Random samples shall be collected from areas of soil which have been abated to ensure that the soil has been properly decontaminated. The total number of samples to be collected from the soil areas shall be; <1000 SF of soil - 3 samples; >1000 to <5000 SF of soil - 5 samples; and >5000 SF of soil - 7 samples. The soil samples shall be collected in a statistically random manner and shall be analyzed by PLM method. The clearance level to determine the soil clean is <1% asbestos by weight as analyzed by PLM method. If this level is achieved, the soil areas shall be considered clear. If the levels are >1% asbestos, the areas shall be re-cleaned until the sample results are <1%.

B. Clearance Sampling Using Tem - Equal To or More Than 260lf/160sf: Tem

1. Clearance requires 13 samples be collected; 5 inside the regulated area; 5 outside the regulated area; and 3 field blanks.
2. The TEM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 13 clearance

samples shall be collected. All samples must be equal to or less than 70 AHERA structures per square millimeter (s/mm²) AHERA TEM.

C. Laboratory Testing of PCM Clearance Samples

1. The services of an AIHA accredited laboratory will be employed by the VA to perform analysis for the PCM air samples. The accredited laboratory shall be successfully participating in the AIHA Proficiency Analytical Testing (PAT) program. Samples will be sent daily by the VPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA's representative and the Contractor.

D. Laboratory Testing of Tem Samples

1. Samples shall be sent by the VPIH/CIH to a NIST accredited laboratory for analysis by TEM. The laboratory shall be successfully participating in the NIST Airborne Asbestos Analysis (TEM) program. Verbal/faxed results from the laboratory shall be available within 24 hours after receipt of the samples. A complete record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor.

E. Laboratory Testing of Bulk Samples

1. Samples shall be sent by the VPIH/CIH or CPIH/CIH to a NIST accredited laboratory for analysis by PLM. The laboratory shall be successfully participating in the NIST Bulk Asbestos Analysis (PLM) program. Verbal/faxed results from the laboratory shall be available within 24 hours after receipt of the samples. A complete record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor.

3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

A. Completion of Abatement Work

1. After thorough decontamination, seal negative air machines with 2 layers of 6 mil poly and duct tape to form a tight seal at the intake/outlet ends before removal from the regulated area. Complete asbestos abatement work upon meeting the regulated area visual and air clearance criteria and fulfilling the following:
2. Remove all equipment and materials from the project area.
3. Dispose of all packaged ACM waste as required.
4. Repair or replace all interior finishes damaged during the abatement work, as required.

5. Fulfill other project closeout requirements as required in this specification.

B. Certificate of Completion by Contractor

1. The CPIH/CIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

C. Work Shifts

1. All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday -Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

D. Re-Insulation

1. If required as part of the contract, replace all asbestos containing insulation/fire-proofing with suitable non-asbestos material. Provide MSDS's for all replacement materials in advance of installation for VA approval. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

ATTACHMENT #1

CERTIFICATE OF COMPLETION

DATE: _____ VA Project #: _____

PROJECT NAME: _____ Abatement Contractor: _____

VAMC/ADDRESS: _____

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):

which took place from _____ / _____ / _____ to _____ / _____ / _____

2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.

3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.

4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.

5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.

6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.

7. That all abatement work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH Signature/Date: _____

CPIH/CIH Print Name: _____

Abatement Contractor Signature/Date: _____

Abatement Contractor Print Name: _____

ATTACHMENT #2

CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

PROJECT NAME: _____ DATE: _____

PROJECT ADDRESS: _____

ABATEMENT CONTRACTOR'S NAME: _____

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards

Medical Monitoring

Air Monitoring

Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards

Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature: _____

Printed Name: _____

Social Security Number: _____

Witness: _____

ATTACHMENT #3

AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION

VA PROJECT NAME AND NUMBER: _____

VA MEDICAL FACILITY: _____

ABATEMENT CONTRACTOR'S NAME AND ADDRESS: _____

1. I verify that the following individual

Name: _____ Social Security Number: _____

who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address: _____

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH: _____ Date: _____

Printed Name of CPIH/CIH: _____

Signature of Contractor: _____ Date: _____

Printed Name of Contractor: _____

ATTACHMENT #4

**ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S
ASBESTOS SPECIFICATIONS**

VA Project Location: _____

VA Project #: _____

VA Project Description: _____

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature _____ Date _____

Abatement Contractor Competent Person(s) _____ Date _____

- - END- - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 02 82 13.13
GLOVEBAG ASBESTOS ABATEMENT

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

A. Contract Documents and Related Requirements

1. Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

B. Extent of Work

1. Below is a brief description of the estimated quantities of asbestos containing materials to be abated by the glovebag method. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.
2. Removal, clean-up and disposal of ACM piping and fittings and asbestos contaminated elements in an appropriate regulated area. This work is expected to be minimal and conducted on an as needed basis. For estimated quantities refer to Section 02 82 11-Traditional Asbestos Abatement.

C. Related Work

1. Section 07 84 00, FIRESTOPPING.
2. Section 02 41 00, DEMOLITION.
3. Division 09, FINISHES.
4. Division 22, PLUMBING.
5. Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION / Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING / Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION
6. Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION / Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING / Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION
7. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.
8. Section 22 05 19, METERS AND GAGES FOR PLUMBING PIPING / Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING / Section 22 05 33, HEAT TRACING FOR PLUMBING PIPING / Section 22 11 00, FACILITY WATER DISTRIBUTION / Section 22 13 00, FACILITY SANITARY SEWERAGE / Section 22 13 23, SANITARY WASTE INTERCEPTORS / Section 22 14 00, FACILITY STORM DRAINAGE / Section 22 66 00, CHEMICAL-WASTE SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES / Section 23 11 23, FACILITY NATURAL-GAS PIPING.
9. Section 23 21 13, HYDRONIC PIPING / Section 23 22 13, STEAM AND CONDENSATE HEATING PIPING.
10. Section 23 31 00, HVAC DUCTS AND CASINGS / Section 23 37 00, AIR OUTLETS AND INLETS.

D. Tasks

The work tasks are summarized briefly as follows:

1. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, work-site preparations, emergency procedures arrangements, and Asbestos Hazard Abatement Plans for glovebag asbestos abatement work.
2. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.
3. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

E. Abatement Contractor Use of Premises

1. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform

the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.

2. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design and Construction Procedures. VA Design and Construction Procedures drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action. The following limitations of use shall apply to existing facilities shown on drawings.

1.2 VARIATIONS IN QUANTITY

- A. The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated, which are limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered ACM and those prices shall be used for additional work required under the contractor.

1.3 STOP ASBESTOS REMOVAL

- A. If the Contracting Officer; their field representative; (the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/ Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal

activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

1. Airborne PCM analysis results equal to or greater than 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
2. breach or break in regulated area containment barrier(s);
3. less than -0.02" WCG pressure in the regulated area;
4. serious injury/death at the site;
5. fire/safety emergency at the site;
6. respiratory protection system failure;
7. power failure or loss of wetting agent; or
8. any visible emissions observed outside the regulated area.

1.4 DEFINITIONS

A. General

1. Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

B. Glossary

Abatement - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

Aerosol - Solid or liquid particulate suspended in air.

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

Aggressive sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air. For personal samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis. NIOSH Method 7402 can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos Hazard Abatement Plan (AHAP) - Asbestos work procedures required to be submitted by the contractor before work begins.

Asbestos-containing material (ACM) - Any material containing more than one percent of asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-contaminated soil (ACS) - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

Asbestos-containing waste (ACW) material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos Project Monitor - Some states require that any person conducting asbestos abatement clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA).

Barrier - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

Primary Barrier - Plastic barriers placed over critical barriers and exposed directly to abatement work.

Secondary Barrier - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contractor's Professional Industrial Hygienist (CPIH/CIH) - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may be a certified industrial hygienist (CIH).

Count - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

Crawlspace - An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

VA Total - means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

Disposal bag - Typically 6 mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag, in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag and shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than one (1) percent or asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

High efficiency particulate air (HEPA) filter - An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist (IH) - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician (IH Technician) - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work

assigned. Some states require that an industrial hygienist technician conducting asbestos abatement clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAP) - EPA's rule to control emissions of asbestos to the environment (40 CFR Part 61, Subpart M).

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL.

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Organic vapor cartridge - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

Outside air - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Personal protective equipment (PPE) - equipment designed to protect user from injury and/or specific job hazard. Such equipment may

include protective clothing, hard hats, safety glasses, and respirators.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone for one or more workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

Permissible exposure limit (PEL) - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the eight (8) hour time weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit is 1.0 fibers per cubic centimeter (1 f/cc).

Pipe tunnel - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, or asbestos-contaminated soil.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, flame retardant per NFPA 241.

Positive/negative fit check - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator respectively.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (b).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of

which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH) of Contractor's PIH (CPIH/CIH).

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B)(5).

Assigned Protection factor - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area.

Supplied air respirator (SAR) - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-1989.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Professional Industrial Hygienist (VPIH/CIH) - The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may be a Certified Industrial Hygienist (CIH).

VA Representative - The VA official responsible for on-going project work.

Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

Waste/Equipment decontamination facility (W/EDF) - The area in which equipment is decontaminated before removal from the regulated area.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

C. Referenced Standards Organizations

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

1. VA Department of Veterans Affairs

810 Vermont Avenue, NW
Washington, DC 20420

2. AIHA American Industrial Hygiene Association
2700 Prosperity Avenue, Suite 250
Fairfax, VA 22031
703-849-8888
3. ANSI American National Standards Institute
1430 Broadway
New York, NY 10018
212-354-3300
4. ASTM American Society for Testing and Materials
1916 Race St.
Philadelphia, PA 19103
215-299-5400
5. CFR Code of Federal Regulations
Government Printing Office
Washington, DC 20420
6. CGA Compressed Gas Association
1235 Jefferson Davis Highway
Arlington, VA 22202
703-979-0900
7. CS Commercial Standard of the National Institute of Standards and Technology(NIST)
U. S. Department of Commerce
Government Printing Office
Washington, DC 20420
8. EPA Environmental Protection Agency
401 M St., SW
Washington, DC 20460
202-382-3949
9. MIL-STD Military Standards/Standardization Division
Office of the Assistant Secretary of Defense
Washington, DC 20420
10. NIST National Institute for Standards and Technology
U. S. Department of Commerce
Gaithersburg, MD 20234
301-921-1000
11. NEC National Electrical Code (by NFPA)

12. NEMA National Electrical Manufacturer's Association
2101 L Street, NW
Washington, DC 20037
13. NFPA National Fire Protection Association
1 Batterymarch Park
P.O. Box 9101
Quincy, MA 02269-9101
800-344-3555
14. NIOSH National Institutes for Occupational Safety and Health
4676 Columbia Parkway
Cincinnati, OH 45226
513-533-8236
15. OSHA Occupational Safety and Health Administration
U.S. Department of Labor
Government Printing Office
Washington, DC 20402
16. UL Underwriters Laboratory
333 Pfingsten Rd.
Northbrook, IL 60062
312-272-8800

1.5 APPLICABLE CODES AND REGULATIONS

A. General Applicability of Codes, Regulations, and Standards

1. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
2. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specification exists, the most stringent requirement(s) shall be utilized.
3. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

B. Asbestos Abatement Contractor Responsibility

1. The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE) including respiratory protection including respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

C. Federal Requirements

Federal requirements which govern some aspect of asbestos abatement include, but are not limited to, the following regulations.

1. Occupational Safety and Health Administration (**OSHA**)
 - a) Title 29 CFR 1926.1101 - Construction Standard for Asbestos
 - b) Title 29 CFR 1910 Subpart I - Personal Protective Equipment
 - c) Title 29 CFR 1910.134 - Respiratory Protection
 - d) Title 29 CFR 1926 - Construction Industry Standards
 - e) Title 29 CFR 1910.1020 - Access to Employee Exposure and Medical Records
 - f) Title 29 CFR 1910.1200 - Hazard Communication
 - g) Title 29 CFR 1910 Subpart K - Medical and First Aid
2. Environmental Protection Agency (**EPA**)
 - a) 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
 - b) 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
3. Department of Transportation (**DOT**)
 - Title 49 CFR 100 - 185 - Transportation

D. Standards

1. Standards which govern asbestos abatement activities include, but are not limited to, the following:

- a) American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems and ANSI Z88.2 - Practices for Respiratory Protection.
- b) Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA filter Units, 7th Edition.
- 2. Standards which govern encapsulation work include, but are not limited to, the following:
 - a) American Society for Testing and Materials (ASTM)
- 3. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
 - a) National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
 - b) NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
 - c) NFPA 101 - Life Safety Code
- E. Epa Guidance Documents
 - 1. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.
 - 2. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
 - 3. Asbestos Waste Management Guidance EPA 530-SW-85-007.
 - 4. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
 - 5. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990
- F. Notices
 - 1. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:
 - 2. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, State, and Local authorities.
- G. Permits/Licenses
 - 1. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

H. Posting and Filing of Regulations

1. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

I. VA Responsibilities

Prior to commencement of work:

1. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment, and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
2. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized, calibration data and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

J. Emergency Action Plan and Arrangements

1. An Emergency Action Plan shall be developed by prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a); (b).
2. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
3. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
4. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls,

confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.

5. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
 - a) For nonlife-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
 - b) For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.
6. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
7. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
8. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the Asbestos Hazard Abatement Plans during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

K. Pre-Construction Meeting

1. Prior to commencing the work, the Contractor shall meet with the VPCIH to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

2. Proof of Contractor licensing.
3. Proof the Competent Person is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person shall also be presented.
4. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
5. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
6. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
7. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
8. A copy of the Contractor's Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project. A copy of the Contractor's Asbestos Hazard Abatement Plan (AHAP) for Class I Glovebag Asbestos Abatement. In these procedures, the following information must be detailed, specific for this project.
 - a) Regulated area preparation procedures;
 - b) Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
 - c) If required, decontamination area set-up/layout and decontamination procedures for employees;
 - d) Glovebag abatement methods/procedures and equipment to be used; and
 - e) Personal protective equipment to be used.
9. At this meeting the Contractor shall provide all submittals as required.
10. Procedures for handling, packaging and disposal of asbestos waste.
11. Emergency Action Plan and Contingency Plan Procedures.

1.6 PROJECT COORDINATION

- A. The following are the minimum administrative and supervisory personnel necessary for coordination of the work.
- B. Personnel
 1. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor

Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.

2. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.
3. Minimum qualifications for Contractor and assigned personnel are:
 - a) The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of federal (and state as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive Asbestos Hazard Abatement Plans (AHAPs) for asbestos work; and has adequate materials, equipment and supplies to perform the work.
 - b) The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
 - c) The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as

senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete Asbestos Hazard Abatement Plan for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.

d) The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the Asbestos Hazard Abatement Plans of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

4. All personnel should be in compliance with OSHA construction safety training as applicable and submit certification.

1.7 RESPIRATORY PROTECTION

A. General - Respiratory Protection Program

1. The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910 Subpart I;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c)(1)(i - ix) - Respiratory Protection Program.

B. Respiratory Protection Program Coordinator

1. The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

C. Selection and Use of Respirators

1. The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The

procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

D. Minimum Respiratory Protection

1. Minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or below 0.5 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

E. Medical Written Opinion

1. No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

F. Respirator Fit Test

1. All personnel wearing respirators shall have a current quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Fit tests shall be done for PAPR's which have been put into a failure mode.

G. Respirator Fit Check

1. The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from wearing a respirator inside the regulated area until resolution of the problem.

H. Maintenance and Care of Respirators

1. The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) maintenance and care of respirators.

1.8 WORKER PROTECTION

A. Training of Abatement Personnel

1. Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

B. Medical Examinations

1. Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

C. Personal Protective Equipment

1. Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

D. Regulated Area Entry Procedure

1. The Competent Person shall ensure that each time workers enter the regulated area; they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

E. Decontamination Procedure

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

1. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.
2. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid inhaling asbestos fibers while showering. The following procedure is required as a minimum:
 - a) Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
 - b) With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
 - c) Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.
3. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!)**
4. Shower and wash body completely with soap and water. Rinse thoroughly.
5. Rinse shower room walls and floor to drain prior to exiting.
6. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

F. Regulated Area Requirements

1. The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for Class I glovebag regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew

tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES

A. Description

1. Provide each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

B. General Requirements

1. All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j)(1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

C. Temporary Facilities to the PDF and W/EDF

1. The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.


D. Personnel Decontamination Facility (Pdf)

1. The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room. The PDF must be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.
 - a) Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.
 - b) Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be

constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of once per day or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.

- c) Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.
- d) The PDF shall be as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the

regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 6 mil opaque fire retardant poly.

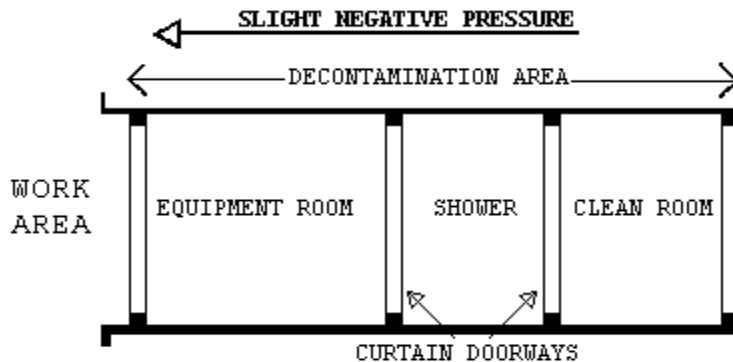


E. Waste/Equipment Decontamination Facility (W/EDF)

1. The Competent Person shall provide a W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:
 - a) Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
 - b) Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
 - c) Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the

clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.

- d) Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6 mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.
- e) The W/EDF shall be as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

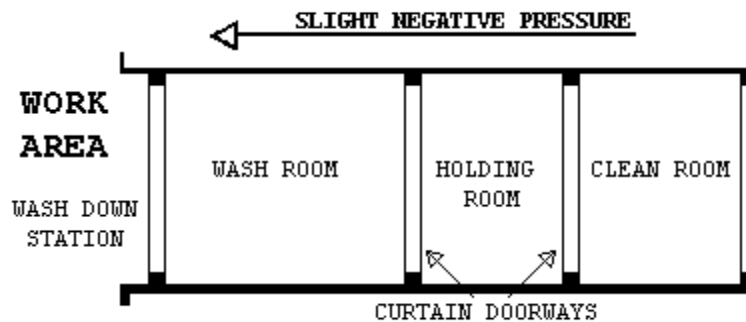

F. Waste/Equipment Decontamination Procedures

1. At the washdown station in the regulated area, thoroughly wet wipe/clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and

disposal. These personnel will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

2.1 MATERIALS AND EQUIPMENT

A. General Requirements (All Abatement Projects)

1. Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative.
1. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
2. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
3. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
4. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
5. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mils shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
6. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing

- polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
7. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.
 8. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
 9. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
 10. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
 11. Disposal bags - 2 layers of 6 mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
 12. The VA shall be provided an advance copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-project submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.
 13. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
 14. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA

A. General

1. Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces.

All horizontal surfaces in the regulated area must be covered with 2 layers of 6 mil fire retardant poly to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated, immediately stop work and clean up the contamination at no additional cost to the Government. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 2.2.8; FIRESTOPPING.

B. Preparation Prior To Sealing The Regulated Area

1. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with 2 layers of 6-mil fire retardant poly sheeting and secure with duct tape. Lock out and tag out any HVAC systems in the regulated area.

C. Controlling Access to the Regulated Area

1. Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid.

D. Critical Barriers

1. Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Heat must be shut off any objects covered with poly.

E. Secondary Barriers

1. A loose layer of 6 mil fire retardant poly shall be used as a drop cloth to protect the floor/horizontal surfaces from debris generated during the glovebag abatement. This layer shall be replaced as needed during the work.

F. Extension Of The Regulated Area

1. If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. If the affected area cannot be added to the regulated area, decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

G. Firestopping

1. Through penetrations caused by cables, cable trays, pipes, sleeves must be firestopped with a fire-rated firestop system providing an air tight seal.
2. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The Contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA Representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.
3. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

2.3 MONITORING, INSPECTION AND TESTING

A. General

1. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA requires that the Employee exposure to asbestos must not exceed 0.1 fibers per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and

testing requirements are also indicated in other parts of this specification.

2. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.
3. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH/CIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

B. Scope of Services of the VPIH/CIH Consultant

1. The purpose of the work of the VPIH/CIH is to: Assure quality; resolve problems; and prevent the spread of contamination beyond the regulated area. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
 - a) Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.//
 - b) Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.//
 - c) Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
 - d) Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of unforeseen developments, etc.
 - e) Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area or building at the conclusion of the abatement and clean-up work to certify compliance with all regulations and the VA requirements/specifications.
 - f) Task 6: Issue certificate of decontamination for each regulated area or building and project report.
2. All data, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
3. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during

abatement work and to accept or reject a regulated area or building as decontaminated.

C. Monitoring, Inspection And Testing By Abatement Contractor CPIH/CIH

1. The Contractor's CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor (or Abatement Worker) and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation on substantially similar projects in size and scope. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for air personal monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e.,

removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

2.4 ASBESTOS HAZARD ABATEMENT PLAN

- A. The Contractor shall have established Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the ways and procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of the project. The AHAP shall be submitted for review and approval prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAP(s) are:

1. Minimum Personnel Qualifications
2. Contingency Plans and Arrangements
3. Security and Safety Procedures
4. Respiratory Protection/Personal Protective Equipment Program and Training
5. Medical Surveillance Program and Recordkeeping
6. Regulated Area Requirements for Glovebag Abatement
7. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
8. Monitoring, Inspections, and Testing
9. Removal Procedures for Piping ACM Using the Glovebag Method
10. Disposal of ACM waste
11. Regulated Area Decontamination/Clean-up
12. Regulated Area Visual and Air Clearance
13. Project Completion/Closeout

2.5 SUBMITTALS

- A. Pre-Start Meeting Submittals

1. Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this

requirement is a prerequisite for the pre-start meeting for this project:

- a) Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
- b) Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
- c) Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
- d) Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
 - 1) Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
 - 2) Waste water filtration system, shower system, containment barriers.
 - 3) Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, and fire extinguishers.
 - 4) Respirators, protective clothing, personal protective equipment.
 - 5) Fire safety equipment to be used in the regulated area.
- e) Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
- f) Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local

health, fire, ambulance, hospital authorities and any other notifications/arrangements.

- g) Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. And area or clearance air monitoring in accordance with EPA AHERA protocols.
- h) Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
 - 1) Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; and Completion Date
 - 2) List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; and Resolution.
 - 3) List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including and of the company's officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.
- i) Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.
 - 1) CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials;

samples of AHAP(s) developed; medical opinion; and current respirator fit test.

- 2) Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
- 3) Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
- j) Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of AHAP(s) incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and Asbestos Hazard Abatement Plans; copies of monitoring results of the five referenced projects listed and analytical method(s) used.
- k) Rented equipment must be decontaminated prior to returning to the rental agency.
- l) Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all MSDS, and application instructions.

B. Submittals During Abatement

1. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment

failures, emergencies, and any cause for stopping work; representative air monitoring and results/TWAs/ELs. Submit this information daily to the VPIH/CIH.

2. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.

- a) Removal of any poly barriers.
- b) Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
- c) Packaging and removal of ACM waste from regulated area.
- d) Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

C. Submittals at Completion of Abatement

1. The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

2.6 ENCAPSULANTS

A. Types of Encapsulants

1. The following four types of encapsulants must comply with performance requirements as stated in paragraph 2.6.2:
 - a) Removal encapsulant - used as a wetting agent to remove ACM.
 - b) Bridging encapsulant - provides a tough, durable coating on ACM.
 - c) Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2").
 - d) Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

B. Performance Requirements

1. Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:
 - a) General Requirements for all Encapsulants:
 - 1) ASTM E84: Flame spread of 25; smoke emission of 50.
 - 2) University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.
 - 3) ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.
 - 4) ASTM E96: Permeability - minimum of 0.4 perms.
2. Bridging/Penetrating Encapsulants:
 - a) ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft²).
 - b) ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
 - c) ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).
 - d) ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.
3. Lockdown Encapsulants:
 - a) ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
 - b) ASTM E736: Bond Strength - 48 kPa (100 lbs/ft²) (test compatibility with cementitious and fibrous fireproofing).
 - c) In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

2.7 CERTIFICATES OF COMPLIANCE

- A. The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

2.8 RECYCLABLE PROTECTIVE CLOTHING

- A. If recyclable clothing is provided, all requirements of EPA, DOT and OSHA shall be met.

PART 3 - EXECUTION

3.1 REGULATED AREA PREPARATIONS

A. Site Security

1. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
2. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately require any unauthorized person to leave the regulated area and then notify the VA Contracting Officer or VA Representative using the most expeditious means.
3. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
4. Access to the regulated area shall be through a single decontamination unit. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside; however, they shall be sealed with poly sheeting and taped until needed. In any situation where exposure to high temperatures which may result in a flame hazard, fire retardant poly sheeting must be used.
5. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.

6. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
7. The regulated area shall be locked during non-working hours and secured by VA Representative or Competent Person. The VA Police should be informed of asbestos abatement regulated areas to provide security checks during facility rounds and emergency response.

B. OSHA Danger Signs

1. Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed ambient background levels. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

C. Shut Down - Lock Out Electrical

1. Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

D. Shut Down - Lock Out HVAC

1. Shut down and lock out/tag out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil poly disposal bags for disposal as asbestos waste.

E. Containment Barriers And Coverings For The Regulated Area

1. General

- a) Seal off any openings at the perimeter of the regulated area with critical barriers to completely isolate the regulated area and to contain all airborne asbestos contamination created by the abatement activities. Should the adjacent area past the regulated area become contaminated due to improper work activities, the Contractor shall suspend work inside the regulated area, continue wetting, and clean the adjacent areas in accordance with procedures described in these specifications. Any and all costs associated with the adjacent area cleanup shall not be borne by the VA.

2. Preparation Prior to Sealing Off

- a) Place all materials, equipment and supplies necessary to isolate the regulated area inside the regulated area. Remove all movable material/equipment as described above and secure all unmovable material/equipment as described above. Properly secured material/equipment shall be considered to be outside the regulated area.

3. Controlling Access to the Regulated Area

- a) Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

4. Critical Barriers

- a) The regulated area must be completely separated from the adjacent area(s) and the outside by at least 2 layers of 6 mil fire retardant poly and duct tape/spray adhesive. Individually seal all supply and exhaust ventilation openings, lighting fixtures, clocks, doorways, windows, convectors, speakers, and other openings into the regulated area with 2 layers of 6 mil fire retardant poly, and taped securely in place with duct tape/spray adhesive. Critical barriers must remain in place until all work and clearances have been completed. Light fixtures shall not be

operational during abatement. Auxiliary lighting shall be provided. If needed, provide plywood squares 6" x 6" x 3/8" (150mm x 150mm x 18mm) held in place with one 6d smooth masonry/galvanized nail driven through the center of the plywood square and duct tape on the poly so as to clamp the poly to the wall/surface. Locate plywood squares at each end, corner, and 4' (1200mm) maximum on centers.

5. Extension of the Regulated Area

- a) If the regulated area barrier is breached in any manner that could allow the passage of asbestos fibers or debris, the Competent Person shall immediately stop work, continue wetting, and proceed to extend the regulated area to enclose the affected area as per procedures described in this specification. If the affected area cannot be enclosed, decontamination measures and cleanup shall start immediately. All personnel shall be isolated from the affected area until decontamination/cleanup is completed as verified by visual inspection and air monitoring. Air monitoring at completion must indicate background levels.

6. Floor Barriers:

- a) All floors within 10' of glovebag work shall be covered with 2 layers of 6 mil fire retardant poly.

F. Sanitary Facilities

1. The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

G. Pre-Cleaning

1. Pre-Cleaning Movable Objects

- a) The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.
- b) Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. PPE must be donned by all workers performing pre-cleaning activities. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.

- c) Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location.

2. Pre-Cleaning Fixed Objects

- a) Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area.
- b) Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements. Control panels, gauges etc., in the regulated area may require VA access during abatement. These shall be designated and enclosures constructed with access flaps sealed with waterproof tape.

3. Pre-Cleaning Surfaces in the Regulated Area

- a) Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area.
- b) Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

H. Pre-Abatement Activities

1. Pre-Abatement Meeting

- a) The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

2. Pre-Abatement Inspections and Preparations

- a) Before any work begins on the construction of the regulated area, the Contractor will:
 - 1) Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.
 - 2) The VA Representative, the Contractor, and the VPIH/CIH must be aware of VA A/E Quality Alert 07/09 indicating the failure to identify asbestos in the areas listed as well as common issues when preparing specifications and contract documents. This is especially critical when demolition is planned, because AHERA surveys are non-destructive, and ACM may remain undetected. A NESHAPS (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite

piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawl spaces(previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; and steam line trench coverings.

- 3) The asbestos abatement contractor will ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
- 4) If present and required, remove and dispose of carpeting from floors in the regulated area.
- 5) Inspect existing firestopping in the regulated area. Correct as needed.

3. Pre-Abatement Construction and Operations

- a) Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
- b) Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP(s), especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation.
- c) The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
- d) Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification.

3.2 REMOVAL OF PIPING ACM

A. Wetting Materials

1. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP's regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.
2. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.
3. Removal Encapsulant: Provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during disturbance equal to or greater than the amended water described above in B.

B. Secondary Barrier and Walkways

1. Install as a drop cloth a 6 mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely cover floors and any walls within 10 feet (3 meters) of the area where work is to done. Secure the secondary barrier with duct tape to prevent it from moving or debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.
2. Install walkways using 6 mil black poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the primary layers from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

C. Wet Removal of ACM

1. Using acceptable glovebag procedures, adequately and thoroughly wet the ACM to be removed prior to removal with amended water or when authorized by VA, removal encapsulant to reduce/prevent fiber release to the air. Adequate time (at a minimum two hours) must be

allowed for the amended water or removal encapsulant to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. **In no event shall dry removal occur except when authorized in writing by the VPIH/CIH and VA when a greater safety hazard (e.g., electricity) is present.**

3.3 GLOVEBAG REMOVAL PROCEDURES

A. General

1. All applicable OSHA requirements and glovebag manufacturer's recommendations shall be met during glove bagging operations. In cases where live steam lines are present, the lines must be shut down prior to any work being performed on the system. **No abatement work shall be conducted on live, pressurized steam lines.** The Contractor may choose to use a High Temperature Glovebag in which a temperature rating ranges from 300°F to 700°F on steam lines that have recently been shut down and remain at high temperature for some time. In the case where a glovebag is not feasible, the Contractor will need to build a full negative pressure containment of sufficient size and follow all regulations as it pertains to removal.
 - a) Mix the surfactant with water in the garden sprayer, following the manufacturer's directions.
 - b) Have each employee put on a HEPA filtered respirator approved for asbestos and check the fit using the positive/negative fit check.
 - c) Have each employee put on a disposable full-body suit. Remember, the hood goes over the respirator straps.
 - d) Check closely the integrity of the glove bag to be used. Check all seams, gloves, sleeves, and glove openings. OSHA requires the bottom of the bag to be seamless.

- e) Check the pipe where the work will be performed. If it is damaged (broken lagging, hanging, etc.), wrap the entire length of the pipe in poly sheeting and "candy stripe" it with duct tape.
- f) Attach glovebag with required tools per manufacturer's instructions.
- g) Using the smoke tube and aspirator bulb, test 10% of glovebags by placing the tube into the water porthole (two-inch opening to glove bag), and fill the bag with smoke and squeeze it. If leaks are found, they should be taped closed using duct tape and the bag should be retested with smoke.
- h) Insert the wand from the water sprayer through the water porthole.
- i) Insert the hose end from a HEPA vacuum into the upper portion of the glove bag.
- j) Wet and remove the pipe insulation.
- k) If the section of pipe is covered with an aluminum jacket, remove it first using the wire cutters to cut any bands and the tin snips to remove the aluminum. It is important to fold the sharp edges in to prevent cutting the bag when placing it in the bottom.
- l) When the work is complete, spray the upper portion of the bag and clean-push all residue into the bottom of the bag with the other waste material. Be very thorough. Use adequate water.
- m) Put all tools, after washing them off in the bag, in one of the sleeves of glove bag and turn it inside out, drawing it outside of the bag. Twist the sleeve tightly several times to seal it and tape it several tight turns with duct tape. Cut through the middle of the duct tape and remove the sleeve. Put the sleeve in the next glove bag or put it in a bucket of water to decontaminate the tools after cutting the sleeve open.
- n) Turn on the HEPA vacuum and collapse the bag completely. Remove the vacuum nozzle, seal the hole with duct tape, twist the bag tightly several times in the middle, and tape it to keep the material in the bottom during removal of the glove bag from the pipe.
- o) Slip a disposal bag over the glove bag (still attached to the pipe). Remove the tape securing the ends, and slit open the top

of the glove bag and carefully fold it down into the disposal bag. Double bag and gooseneck waste materials.

B. Negative Pressure Glovebag Procedure

1. In addition to the above requirements, the HEPA vacuum shall be run continuously during the glovebag procedure until completion at which time the glovebag will be collapsed by the HEPA vacuum prior to removal from the pipe/component.
2. The HEPA vacuum shall be attached and operated as needed to prevent collapse of the glovebag during the removal process.

3.4 LOCKDOWN ENCAPSULATION

A. General

1. Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, all piping surfaces shall be encapsulated with a bridging encapsulant.

B. Sealing Exposed Edges

1. Seal edges of ACM exposed by removal work with two coats of encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the encapsulant.

3.5 DISPOSAL OF ACM WASTE MATERIALS

A. General

1. Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

B. Procedures

1. The VA must be notified at least 24 hours in advance of any waste removed from the containment
2. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures in this specification. Waste shall be double-bagged and wetted with amended water prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall be securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goose necked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to

- the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP's signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.
3. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Sealed waste bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second waste bag and sealed, which then must also be wet wiped or HEPA vacuumed..
 4. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

3.6 PROJECT DECONTAMINATION

A. General

1. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
2. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
3. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

B. Regulated Area Clearance

1. Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

C. Work Description

1. Decontamination includes the clearance air testing in the regulated area and the decontamination and removal of the

enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

D. Pre-Decontamination Conditions

1. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removed and disposed of along with any gross debris generated by the work.
2. At the start of decontamination, the following shall be in place:
 - a) Critical barriers over all openings consisting of two layers of 6 mil poly which is the sole barrier between the regulated area and the rest of the building or outside.
 - b) Decontamination facilities, if required for personnel and equipment in operating condition.

E. First Cleaning

1. Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

F. Pre-Clearance Inspection and Testing

1. The CPIH/CIH and VPIH/CIH will perform a thorough and detailed visual inspection at the end of the cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH/CIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH/CIH documenting the inspection and sampling results and a statement verifying that the regulated area is ready for lockdown encapsulation. The VA reserves the right to utilize their own

VPIH/CIH to perform a pre-clearance inspection and testing for verification.

G. Lockdown Encapsulation of Abated Surfaces

1. With the express written permission of the VA's representative, perform lockdown encapsulation of all surfaces from which asbestos was abated in accordance with the procedures in this specification.

3.7 FINAL VISUAL INSPECTIONS AND AIR CLEARANCE TESTING

A. General

1. Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the final cleaning.

B. Final Visual Inspection

1. Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

C. Final Air Clearance Testing

1. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. If work is less than 260 lf/160 sf/35 cf, 5 PCM samples shall be collected for clearance and a minimum of one field blank. If work is equal to or more than 260 lf/160 sf/35 cf, AHERA TEM sampling shall be performed for clearance. TEM analysis shall be done in accordance with procedures for EPA AHERA in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. All additional inspection and testing costs will be borne by the Contractor.
2. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

D. Final Air Clearance Procedures

1. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured by the AHERA PCM protocol, or 70 AHERA structures per square millimeter (s/mm²) by AHERA TEM.
2. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:
 - a) Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the AHERA TEM method.
 - b) Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques except where soil is not encapsulated or enclosed. Samples will be collected on 0.8µ MCE filters for PCM analysis and 0.45µ Polycarbonate filters for TEM. A minimum of 1200 Liters of using calibrated pumps shall be collected for clearance samples. Before pumps are started, initiate aggressive air mixing sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.

E. Clearance Sampling Using PCM

1. The VPIH/CIH will perform clearance samples as indicated by the specification.
2. The NIOSH 7400 PCM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 5 PCM clearance samples shall be collected. All samples must be equal to or less than 0.01 f/cc to clear the regulated area.

F. Clearance Sampling Using TEM

1. Clearance requires 13 samples be collected; 5 inside the regulated area; 5 outside the regulated area; and 3 field blanks.

2. The TEM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 13 clearance samples shall be collected. All samples must be equal to or less than 70 AHERA structures per square millimeter (s/mm²) AHERA TEM.

G. Laboratory Testing Of PCM Samples

1. The services of an AIHA accredited laboratory will be employed by the VA to perform analysis for the PCM air samples. The accredited laboratory shall be successfully participating in the AIHA Proficiency Analytical Testing (PAT) program. Samples will be sent daily by the VPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA's representative and the Contractor.

H. Laboratory Testing Of TEM Samples

1. Samples shall be sent by the VPIH/CIH to a NIST accredited laboratory for analysis by TEM. The laboratory shall be successfully participating in the NIST Airborne Asbestos Analysis (TEM) program. Verbal/faxed results from the laboratory shall be available within 24 hours after receipt of the samples. A complete record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor

3.8 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

A. Completion of Abatement Work

1. After thorough decontamination, seal negative air machines with 2 layers of 6 mil poly and duct tape to form a tight seal at the intake/outlet ends before removal from the regulated area. Complete asbestos abatement work upon meeting the regulated area visual and air clearance criteria and fulfilling the following:
 - a) Remove all equipment, materials, and debris from the project area.
 - b) Package and dispose of all asbestos waste as required. Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations.
 - c) Repair or replace all interior finishes damaged during the abatement work.

d) The VA will be notified of any waste removed from the containment prior to 24 hours.

e) Fulfill other project closeout requirements as specified elsewhere in this specification.

B. Certificate of Completion by Contractor

1. The CPIH/CIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

C. Work Shifts

1. All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

D. Re-Insulation

1. If required as part of the contract, replace all asbestos containing insulation with suitable non-asbestos material. Provide MSDS for all replacement materials. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

ATTACHMENT #1

CERTIFICATE OF COMPLETION

DATE: _____ VA Project #: _____

PROJECT NAME: _____ Abatement Contractor: _____

VAMC/ADDRESS: _____

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):

which took place from / / to / /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all glovebag work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH Signature/Date: _____

CPIH/CIH Print Name: _____

Abatement Contractor Signature/Date: _____

Abatement Contractor Print Name: _____

ATTACHMENT #2

CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

PROJECT NAME: _____ DATE: _____

PROJECT ADDRESS: _____

ABATEMENT CONTRACTOR'S NAME: _____

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards

Medical Monitoring

Air Monitoring

Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards

Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature: _____

Printed Name: _____

Social Security Number: _____

Witness: _____

ATTACHMENT #3

AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION

VA PROJECT NAME AND NUMBER: _____

VA MEDICAL FACILITY: _____

ABATEMENT CONTRACTOR'S NAME AND ADDRESS: _____

1. I verify that the following individual

Name: _____ Social Security Number: _____

who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address: _____

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH: _____ Date: _____

Printed Name of CPIH/CIH: _____

Signature of Contractor: _____ Date: _____

Printed Name of Contractor: _____

ATTACHMENT #4

**ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S
ASBESTOS SPECIFICATIONS**

VA Project Location: _____

VA Project #: _____

VA Project Description: _____

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature _____ Date _____

Abatement Contractor Competent Person(s) _____ Date _____

- - - END - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 02 82 13.19

ASBESTOS FLOOR TILE AND MASTIC ABATEMENT

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

A. Contract Documents and Related Requirements

1. Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

B. Extent of Work

1. Below is a brief description of the estimated quantities of asbestos flooring materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.
2. Removal, clean-up and disposal of ACM flooring in an appropriate regulated area in the following approximate quantities:
3. ~750 square feet of flooring and mastic in areas indicated on the architect's demolition plans.

C. Related Work

1. Section 07 84 00, FIRESTOPPING.
2. Section 02 41 00, DEMOLITION.
3. Division 09, FINISHES.

D. Tasks

The work tasks are summarized briefly as follows:

1. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and Asbestos Hazard Abatement Plans for asbestos abatement work.
2. Abatement activities including removal, encapsulation, enclosure, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.
3. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

E. Abatement Contractor Use of Premises

1. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
2. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design Construction Procedure. VA Design Construction Procedure drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action.

1.2 VARIATIONS IN QUANTITY

- A. The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as

having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered ACM and those prices shall be used for additional work required under the contractor.

1.3 STOP ASBESTOS REMOVAL

- A. If the Contracting Officer; their field representative; (the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:
1. Airborne PCM analysis results equal to or greater than 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
 2. breach or break in regulated area containment barrier(s);
 3. less than -0.02" WCG pressure in the regulated area;
 4. serious injury/death at the site;
 5. fire/safety emergency at the site;
 6. respiratory protection system failure;
 7. power failure or loss of wetting agent; or
 8. any visible emissions observed outside the regulated area.

1.4 DEFINITIONS

A. General

1. Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

B. Glossary

Abatement - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

Aerosol - Solid or liquid particulate suspended in air.

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

Aggressive sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air. For personal samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis. NIOSH Method 7402 can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos Hazard Abatement Plan (AHAP) - Asbestos work procedures required to be submitted by the contractor before work begins.

Asbestos-containing material (ACM) - Any material containing more than one percent of asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-contaminated soil (ACS) - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

Asbestos-containing waste (ACW) material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos Project Monitor - Some states require that any person conducting asbestos abatement clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA0..

Barrier - Any surface the isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

Primary Barrier - Plastic barriers placed over critical barriers and exposed directly to abatement work.

Secondary Barrier - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contractor's Professional Industrial Hygienist (CPIH/CIH) - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may be a certified industrial hygienist (CIH).

Count - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

Crawlspace - An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

VA Total - means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

Disposal bag - Typically 6 mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or

PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than one (1) percent or asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

High efficiency particulate air (HEPA) filter - An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist (IH) - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician (IH Technician) - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician conducting asbestos abatement clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAP) - EPA's rule to control emissions of asbestos to the environment (40 CFR Part 61, Subpart M).

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PELs.

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Organic vapor cartridge - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

Outside air - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Personal protective equipment (PPE) - equipment designed to protect user from injury and/or specific job hazard. Such equipment may include protective clothing, hard hats, safety glasses, and respirators.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone for one or workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

Permissible exposure limit (PEL) - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the eight (8) hour time weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit is 1.0 fibers per cubic centimeter (1 f/cc).

Pipe Tunnel - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, or asbestos-contaminated soil.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, flame retardant per NFPA 241.

Positive/negative fit check - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing

in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator respectively.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (b).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH) or Contractor's PIH (CPIH/CIH).

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B)(5).

Assigned Protection factor - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, and III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II

non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area.

Supplied air respirator (SAR) - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-1989.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Professional Industrial Hygienist (VPIH/CIH) - The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may be a Certified Industrial Hygienist (CIH).

VA Representative - The VA official responsible for on-going project work.

Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

Waste/Equipment decontamination facility (W/EDF) - The area in which equipment is decontaminated before removal from the regulated area.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

C. Referenced Standards Organizations

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

1. VA Department of Veterans Affairs

810 Vermont Avenue, NW
Washington, DC 20420

2. AIHA American Industrial Hygiene Association

2700 Prosperity Avenue, Suite 250
Fairfax, VA 22031
703-849-8888

3. ANSI American National Standards Institute

1430 Broadway
New York, NY 10018
212-354-3300

4. ASTM American Society for Testing and Materials

1916 Race St.
Philadelphia, PA 19103
215-299-5400

5. CFR Code of Federal Regulations

Government Printing Office
Washington, DC 20420

6. CGA Compressed Gas Association

1235 Jefferson Davis Highway
Arlington, VA 22202
703-979-0900

7. CS Commercial Standard of the National Institute of Standards and Technology (NIST)

U. S. Department of Commerce

- Government Printing Office
Washington, DC 20420
8. EPA Environmental Protection Agency
401 M St., SW
Washington, DC 20460
202-382-3949
 9. MIL-STD Military Standards/Standardization Division
Office of the Assistant Secretary of Defense
Washington, DC 20420
 10. NEC National Electrical Code (by NFPA)
 11. NEMA National Electrical Manufacturer's Association
2101 L Street, NW
Washington, DC 20037
 12. NFPA National Fire Protection Association
1 Batterymarch Park
P.O. Box 9101
Quincy, MA 02269-9101
800-344-3555
 13. NIOSH National Institutes for Occupational Safety and Health
4676 Columbia Parkway
Cincinnati, OH 45226
513-533-8236
 14. OSHA Occupational Safety and Health Administration
U.S. Department of Labor
Government Printing Office
Washington, DC 20402
 15. UL Underwriters Laboratory
333 Pfingsten Rd.
Northbrook, IL 60062
312-272-8800

1.5 APPLICABLE CODES AND REGULATIONS

A. General Applicability Of Codes, Regulations, and Standards

1. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.

2. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
3. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

B. Contractor Responsibility

1. The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE) including respiratory protection including respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

C. Federal Requirements

Federal requirements which govern some aspect of asbestos abatement include, but are not limited to, the following regulations.

1. Occupational Safety and Health Administration (**OSHA**)
 - a) Title 29 CFR 1926.1101 - Construction Standard for Asbestos
 - b) Title 29 CFR 1910.132 - Personal Protective Equipment
 - c) Title 29 CFR 1910.134 - Respiratory Protection
 - d) Title 29 CFR 1926 - Construction Industry Standards
 - e) Title 29 CFR 1910.20 - Access to Employee Exposure and Medical Records
 - f) Title 29 CFR 1910.1200 - Hazard Communication
 - g) Title 29 CFR 1910.151 - Medical and First Aid
2. Environmental Protection Agency (EPA)

- a) 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
- b) 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
- 3. Department of Transportation (DOT)
 - Title 49 CFR 100 - 185 - Transportation

D. Standards

- 1. Standards which govern asbestos abatement activities include, but are not limited to, the following:
 - a) American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems Z88.2 - Practices for Respiratory Protection.
 - b) Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA filter Units, 7th Edition.
- 2. Standards which govern encapsulation work include, but are not limited to, the following:
 - a) American Society for Testing and Materials (ASTM)
- 3. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
 - a) National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
 - b) NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
 - c) NFPA 101 - Life Safety Code

E. EPA Guidance Documents

- 1. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.
- 2. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
- 3. Asbestos Waste Management Guidance EPA 530-SW-85-007
- 4. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
- 5. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

F. Notices

1. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:
2. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, State, and Local authorities.

G. Permits/Licenses

1. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

H. Posting and Filing of Regulations

1. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

I. VA Responsibilities

Prior to commencement of work:

1. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipments and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
2. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized, calibration data and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

J. Site Security

1. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be

established prior to commencing the project and be posted in the clean room of the decontamination unit.

2. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent person shall immediately notify the VA.
3. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
4. Access to the regulated area shall be through of a critical barrier doorway. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside; however, they shall be sealed with poly sheeting and taped until needed.
5. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.
6. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
7. The regulated area shall be locked during non-working hours and secured by VA security guards.

K. Emergency Action Plan and Arrangements

1. An Emergency Action Plan shall be developed prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).
2. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign

these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.

3. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
4. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
5. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
 - a) For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
 - b) For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.
6. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
7. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
8. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the Asbestos Hazard Abatement Plans during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event

of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

L. Pre-Construction Meeting

1. Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPCIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:
 - a) Proof of Contractor licensing.
 - b) Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.
 - c) A list of all workers who will participate in the project, including experience and verification of training and accreditation.
 - d) A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
 - e) Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
 - f) Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
 - g) A copy of the Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project.
 - 1) Regulated area preparation procedures;
 - 2) Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
 - 3) Decontamination area set-up/layout and decontamination procedures for employees;
 - 4) Abatement methods/procedures and equipment to be used;
 - 5) Personal protective equipment to be used;
 - h) At this meeting the Contractor shall provide all submittals as required.
 - i) Procedures for handling, packaging and disposal of asbestos waste.

j) Emergency Action Plan and Contingency Plan Procedures.

1.6 PROJECT COORDINATION

A. The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

B. Personnel

1. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.
2. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.
3. Minimum qualifications for Contractor and assigned personnel are:
 - a) The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of federal (and state as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive Asbestos Hazard Abatement Plans for asbestos work; and has adequate materials, equipment and supplies to perform the work.
 - b) The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and

complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.

c) The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete Asbestos Hazard Abatement Plan for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.

d) The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the Asbestos Hazard Abatement Plans of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; and has certificate of training/current refresher and State accreditation/license.

4. All personnel should be in compliance with OSHA construction safety training as applicable and submit certification.

1.7 RESPIRATORY PROTECTION

A. General - Respiratory Protection Program

1. The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.Subpart I;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c)(1)(i - ix) - Respiratory Protection Program.

B. Respiratory Protection Program Coordinator

1. The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

C. Selection and Use of Respirators

1. The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

D. Minimum Respiratory Protection

1. Minimum respiratory protection shall be a half face, HEPA filtered, air purifying respirator when fiber levels are maintained consistently at or below 0.1 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

E. Medical Written Opinion

1. No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

F. Respirator Fit Test

1. All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPRs which have been put into a motor/blower failure mode.

G. Respirator Fit Check

1. The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as

evidenced by failure of a user seal check shall preclude that person from wearing a respirator inside the regulated area until resolution of the problem.

H. Maintenance and Care of Respirators

1. The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and Care of Respirators.

I. Supplied Air Systems

1. If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in accordance with EPA/NIOSH publication EPA-560-PTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry". The competent person on site will be responsible for the supplied air system to ensure the safety of the worker.

1.8 WORKER PROTECTION

A. Training of Abatement Personnel

1. Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

B. Medical Examinations

1. Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

C. Personal Protective Equipment

1. Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle. Worker protection shall meet the most stringent requirements.

D. Regulated Area Entry Procedure

1. The Competent Person shall ensure that each time workers enter the regulated area they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

E. Decontamination Procedure

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

1. When exiting the regulated area, remove all disposable PPE and dispose of in a disposal bag provided in the regulated area.
2. Carefully decontaminate and clean the respirator. Put in a clean container/bag.

F. Regulated Area Requirements

1. The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for Class I regulated areas at 29 CFR 1926.1101 (e) are met applicable to Class II work. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES:

A. Description:

1. Provide each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

B. General Requirements

1. All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j)(1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

C. Temporary Facilities To The Pdf And W/Edf

1. The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141 (d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

D. Personnel Decontamination Facility (Pdf)


1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room

of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.

2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work

equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.


4. The PDF shall be as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 6 mil opaque fire retardant poly.

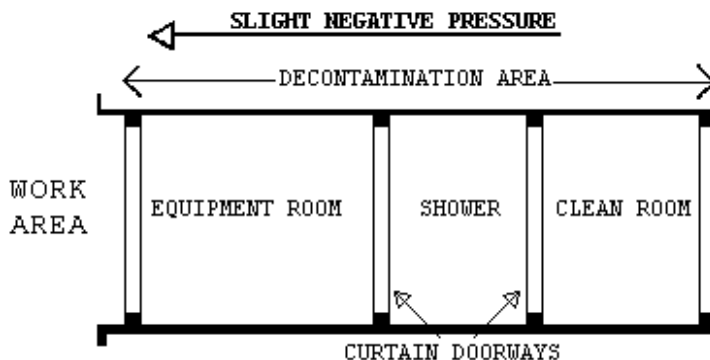

E. Waste/Equipment Decontamination Facility (W/Edf)

1. The Competent Person shall provide an W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

- a) Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
- b) Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
- c) Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.
- d) Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6 mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.
- e) The W/EDF shall be as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

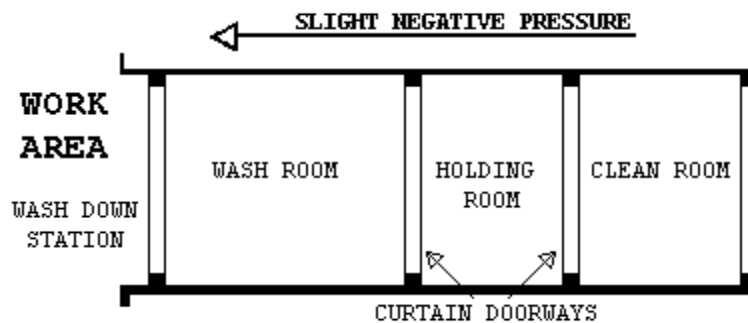

F. Waste/Equipment Decontamination Procedures:

1. At the washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

2.1 MATERIALS AND EQUIPMENT

A. General Requirements (All Abatement Projects)

Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative.

1. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
2. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be

stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.

3. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
4. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
5. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mil shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
6. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
7. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.
8. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
9. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
10. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).

11. Disposal bags - 2 layers of 6 mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
12. The VA shall be provided an advance copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-project submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.
13. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
14. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

B. Negative Pressure Filtration System

1. The Contractor shall provide enough HEPA negative air machines to continuously maintain a pressure differential of -0.02" water column gauge (WCG). The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to continuously maintain a pressure differential of -0.02" WCG. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area.
2. NIOSH has done extensive studies and has determined that negative air machines typically operate at ~50% efficiency. The contractor shall consider this in their determination of number of units needed to continuously maintain a pressure differential of -0.02" WCG. The contractor shall use 8 air changes per hour or double the number of machines, based on their calculations, or submit proof their machines operate at stated capacities, at a 2" pressure drop across the filters.

C. Design and Layout

1. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The

point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:

- a) Method of supplying power to the units and designation/location of the panels.
- b) Description of testing method(s) for correct air volume and pressure differential.
- c) If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.

D. Negative Air Machines (Hepa Units)

1. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the cabinet shall be less than 30" in order to fit in standard doorways. The cabinet must be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.
2. Negative Air Machine Fan: The rating capacity of the fan must indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.
3. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media must be completely sealed on all edges within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each HEPA filter shall be certified by the manufacturer to have an efficiency of not less than 99.97%. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.
4. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-

filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 micron or larger. A second stage pre-filter shall have a medium efficiency effective for particles down to 5 micron or larger. Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter must be held in place with a special housing or clamps.

5. Negative Air Machine Instrumentation: Each unit must be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit must have an elapsed time meter to show total hours of operation.
6. Negative Air Machine Safety and Warning Devices: An electrical/mechanical lockout must be provided to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.
7. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriters Laboratories (UL). Each unit must be provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.
8. It is essential that replacement HEPA filters be tested using an "in-line" testing method, to ensure the seal around the periphery was not damaged during replacement. Damage to the outer HEPA filter seal could allow contaminated air to bypass the HEPA filter and be discharged to an inappropriate location. Contractor will provide written documentation of test results for negative air machine units with HEPA filters changed by the contractor or documentation when changed and tested by the contractor filters.

E. Pressure Differential

1. The fully operational negative air system within the regulated area shall continuously maintain a pressure differential of -0.02" water column gauge. Before any disturbance of any asbestos material, this shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(e)(5)(i). The Competent Person shall be responsible for providing, maintaining, and documenting the negative pressure and air changes as required by OSHA and this specification.

2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA

A. General

1. Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated as a result of the work, shall immediately stop work and clean up the contamination at no additional cost to the VA. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 3.1.4.8; FIRESTOPPING.
2. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before commencing work. Any objects remaining in the regulated area shall be completely covered with 2 layers of 6-mil fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area.

B. Controlling Access to the Regulated Area

1. Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

C. Critical Barriers

1. Completely separate any operations in the regulated area from adjacent areas using 2 layers of 6 mil fire retardant poly and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects/openings in the regulated area. Heat must be shut off any objects covered with poly.

D. Secondary Barriers:

1. A loose layer of 6 mil poly shall be used as a drop cloth to protect the primary layers from debris generated during the abatement. This layer shall be replaced as needed during the work and at a minimum once per work day.

E. Extension of the Regulated Area

1. If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. Decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

F. Firestopping

1. Through penetrations caused by cables, cable trays, pipes, sleeves, conduits, etc. must be firestopped with a fire-rated firestop system providing an air tight seal.
2. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.
3. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

2.3 MONITORING, INSPECTION AND TESTING

A. General

1. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA requires that the Employee exposure to asbestos must not exceed 0.1 fibers per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.
2. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.
3. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation

of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH/CIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

B. Scope of Services of the VPIH/CIH Consultant

1. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
 - a) Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
 - b) Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
 - c) Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
 - d) Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.

- e) Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
 - f) Task 6: Issue certificate of decontamination for each regulated area and project report.
- 2. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
 - 3. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

C. Monitoring, Inspection and Testing By Contractor CPIH/CIH

- 1. The Contractor's CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor (or Abatement Worker) and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation on substantially similar projects in size and scope. The analytic laboratory used by the Contractor to analyze the

samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for air personal monitoring for asbestos in 29 CFR 1926.1101 (f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

2.4 ASBESTOS HAZARD ABATEMENT PLAN

- A. The Contractor shall have established Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of this project and the specifications. The AHAP(s) shall be submitted for review and approval to the VA prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAP(s) are:
1. Minimum Personnel Qualifications
 2. Emergency Action Plan/Contingency Plans and Arrangements
 3. Security and Safety Procedures
 4. Respiratory Protection/Personal Protective Equipment Program and Training
 5. Medical Surveillance Program and Recordkeeping

6. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
7. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
8. Negative Pressure Systems Requirements
9. Monitoring, Inspections, and Testing
10. Removal Procedures for ACM
11. Removal of Contaminated Soil (if applicable)
12. Encapsulation Procedures for ACM
13. Disposal of ACM waste/equipment
14. Regulated Area Decontamination/Clean-up
15. Regulated Area Visual and Air Clearance
16. Project Completion/Closeout

2.5 SUBMITTALS

A. Pre-Start Meeting Submittals

1. Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:
 - a) Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
 - b) Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
 - c) Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
 - d) Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
 - 1) Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.

- 2) Waste water filtration system, shower system, containment barriers.
 - 3) Encapsulants, surfactants, hand held sprayers, airless sprayers, and fire extinguishers.
 - 4) Respirators, protective clothing, personal protective equipment.
 - 5) Fire safety equipment to be used in the regulated area.
- e) Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
 - f) Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
 - g) Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. And area or clearance air monitoring in accordance with EPA AHERA protocols.
 - h) Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
 - 1) Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; and Completion Date
 - 2) List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution
 - 3) List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including and of the company's officers (including damages paid) in the last 3

years. Provide copies and all information needed for verification.

- i) Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.
- 1) CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of AHAP(s) developed; medical opinion; and current respirator fit test.
- 2) Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
- 3) Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
- j) Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of the AHAP incorporating the requirements of this specification; information on who provides your training, how often; who

provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and Asbestos Hazard Abatement Plans; copies of monitoring results of the five referenced projects listed and analytical method(s) used.

k) Rented equipment must be decontaminated prior to returning to the rental agency.

l) Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all MSDS, and application instructions.

B. Submittals During Abatement

1. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; representative air monitoring and results/TWAs/ELs. Submit this information daily to the VPIH/CIH.

2. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.

a) Removal of any poly barriers.

b) Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.

c) Packaging and removal of ACM waste from regulated area.

d) Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

C. Submittals at Completion of Abatement

1. The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in

accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

PART 3 - EXECUTION

3.1 PRE-ABATEMENT ACTIVITIES

A. Pre-Abatement Meeting

1. The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

B. Pre-Abatement Inspections and Preparations

Before any work begins on the construction of the regulated area, the Contractor will:

1. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.
2. The VA Representative, the Contractor, and the VPIH/CIH must be aware of VA A/E Quality Alert 07/09 indicating the failure to identify asbestos in the areas listed as well as common issues when preparing specifications and contract documents. This is especially critical when demolition is planned, because AHERA surveys are non-

- destructive, and ACM may remain undetected. A NESHAPS (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawl spaces(previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; and steam line trench coverings.
3. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
 4. If present and required, remove and dispose of carpeting from floors in the regulated area. If ACM floor tile is attached to the carpet while the Contractor is removing the carpet that section of the carpet will be disposed of as asbestos waste.
 5. Inspect existing firestopping in the regulated area. Correct as needed.

C. Pre-Abatement Construction and Operations

1. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
2. Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP, especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.
3. The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.

4. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations.

3.2 REGULATED AREA PREPARATIONS

A. OSHA Danger Signs

1. Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed the PEL. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

B. Controlling Access to the Regulated Area

1. Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid

C. Shut Down - Lock Out Electrical

1. Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

D. Shut Down - Lock Out HVAC

1. Shut down and lock out/tag out heating, cooling, and air conditioning system (**HVAC**) components that are in, supply or pass through the regulated area.
2. Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated

area. Remove all contaminated HVAC system filters and place in labeled 6-mil poly disposal bags for disposal as asbestos waste.

E. Sanitary Facilities

1. The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

F. Water for Abatement

1. The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

G. Preparation Prior to Sealing Off

1. Place all tools, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with 2 layers of 6-mil fire retardant poly sheeting and secure with duct tape. Lock out and tag out any HVAC systems in the regulated area.

H. Critical Barriers

1. Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Heat must be shut off any objects covered with poly

I. Floor Barriers

1. If floor removal is not being done, all floors in the regulated area shall be covered with 2 layers of 6 mil fire retardant poly and brought up the wall 12 inches

J. Pre-Cleaning Movable Objects

1. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.
2. Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After

cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location.

K. Pre-Cleaning Fixed Objects

1. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area
2. Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements. Control panels, gauges etc., in the regulated area may require VA access during abatement. These shall be designated and enclosures constructed with access flaps sealed with waterproof tape.

L. Pre-Cleaning Surfaces in the Regulated Area

1. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area
2. Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

M. Extension of the Regulated Area

1. If the regulated area barrier is breached in any manner that could allow the passage of asbestos fibers or debris, the Competent Person shall immediately stop work, continue wetting, and proceed to extend the regulated area to enclose the affected area as per procedures described in this specification. If the affected area cannot be

enclosed, decontamination measures and cleanup shall start immediately. All personnel shall be isolated from the affected area until decontamination/cleanup is completed as verified by visual inspection and air monitoring. Air monitoring at completion must indicate background levels.

3.3 REMOVAL OF CLASS II FLOORING, ROOFING, AND TRANSITE MATERIALS:

A. General

1. All applicable requirements of OSHA, EPA, and DOT shall be followed during Class II work. Keep materials intact; do not disturb; wet while working with it; wrap as soon as possible with 2 layers of 6 mil plastic for disposal.

B. Removal of Flooring Materials:

1. All requirements of OSHA Flooring agreement provisions shall be followed:
 - a) The Contractor shall provide enough HEPA negative air machines to effect > - 0.02" WCG pressure. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area. The contractor shall use double the number of machines, based on their calculations, or submit proof their machines operate at stated capacities, at a 2" pressure drop across the filters.
 - b) Flooring shall be removed intact, as much as possible. Do not rip or tear flooring.
 - c) Mechanical chipping or sanding is not allowed.
 - d) Wet clean and HEPA vacuum the floor before and after removal of flooring.
 - e) Place a 6 mil poly layer 4' by 10' adjacent to the regulated area for use as a decontaminated area. All waste must be contained in the regulated area.
 - f) Package all waste in 6 mil poly lined fiberboard drums.

C. Removal of Mastic

1. All chemical mastic removers must be low in volatile organic compound (VOC) content, have a flash point greater than 200° Fahrenheit, contain no chlorinated solvents, and comply with California Air Resources Board (CARB) thresholds for VOCs (effective January 1, 2010).
2. A negative air machine as required under flooring removal shall be provided.

3. Follow all manufacturers' instructions in the use of the mastic removal material.
4. Package all waste in 6 mil poly lined fiberboard drums.
5. Prior to application of any liquid material, check the floor for penetrations and seal before removing mastic.

3.4 DISPOSAL OF CLASS II WASTE MATERIAL:

A. General

1. Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

3.5 PROJECT DECONTAMINATION

A. General

1. The VA must be notified at least 24 hours in advance of any waste removed from the containment,
2. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
3. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
4. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

B. Regulated Area Clearance

1. Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

C. Work Description

1. Decontamination includes the clearance air testing in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work

including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

D. Pre-Decontamination Conditions

1. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removed and disposed of along with any gross debris generated by the work.
2. At the start of decontamination, the following shall be in place:
 - a) Critical barriers over all openings consisting of two layers of 6 mil poly which is the sole barrier between the regulated area and the rest of the building or outside.
 - b) Decontamination facilities, if required for personnel and equipment in operating condition.

E. Cleaning:

1. Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

3.6 VISUAL INSPECTION AND AIR CLEARANCE TESTING

A. General

1. Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the final cleaning.

B. Visual Inspection

1. Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to

confirm visual findings. When the regulated area is visually clean the final testing can be done.

C. Air Clearance Testing

1. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. If work is less than 260 lf/160 sf/35 cf, 5 PCM samples shall be collected for clearance and a minimum of one field blank. If work is equal to or more than 260 lf/160 sf/35 cf, AHERA TEM sampling shall be performed for clearance. TEM analysis shall be done in accordance with procedures for EPA AHERA in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. **All Additional inspection and testing costs will be borne by the Contractor.**
2. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

D. Final Air Clearance Procedures

1. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured by the AHERA PCM protocol, or 70 AHERA structures per square millimeter (s/mm²) by AHERA TEM.
2. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:
 - a) Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the AHERA TEM method.
 - b) Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques except where soil is not encapsulated or enclosed. Samples will be collected on 0.8μ MCE filters for PCM analysis and 0.45μ Polycarbonate filters for

TEM. A minimum of 1200 Liters of using calibrated pumps shall be collected for clearance samples. Before pumps are started, initiate aggressive air mixing sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.

3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

A. Completion of Abatement Work

1. After thorough decontamination, complete asbestos abatement work upon meeting the regulated area clearance criteria and fulfilling the following:
 - a) Remove all equipment, materials, and debris from the project area.
 - b) Package and dispose of all asbestos waste as required.
 - c) Repair or replace all interior finishes damaged during the abatement work.
 - d) Fulfill other project closeout requirements as specified elsewhere in this specification.

B. Certificate of Completion by Contractor

1. The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

C. Work Shifts

1. All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative

- - END- -

ATTACHMENT #1

CERTIFICATE OF COMPLETION

DATE: _____ VA Project #: _____

PROJECT NAME: _____ Abatement Contractor: _____

VAMC/ADDRESS: _____

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):

which took place from / / to / /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all abatement work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH Signature/Date: _____

CPIH/CIH Print Name: _____

Abatement Contractor Signature/Date: _____

Abatement Contractor Print Name: _____

ATTACHMENT #2

CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

PROJECT NAME: _____ DATE: _____

PROJECT ADDRESS: _____

ABATEMENT CONTRACTOR'S NAME: _____

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards

Medical Monitoring

Air Monitoring

Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards

Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature: _____

Printed Name: _____

Social Security Number: _____

Witness: _____

ATTACHMENT #3

AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION

VA PROJECT NAME AND NUMBER: _____

VA MEDICAL FACILITY: _____

ABATEMENT CONTRACTOR'S NAME AND ADDRESS: _____

1. I verify that the following individual

Name: _____ Social Security Number: _____

who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address: _____

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH: _____ Date: _____

Printed Name of CPIH/CIH: _____

Signature of Contractor: _____ Date: _____

Printed Name of Contractor: _____

ATTACHMENT #4

**ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S
ASBESTOS SPECIFICATIONS**

VA Project Location: _____

VA Project #: _____

VA Project Description: _____


This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature _____ Date _____

Abatement Contractor Competent Person(s) _____ Date _____

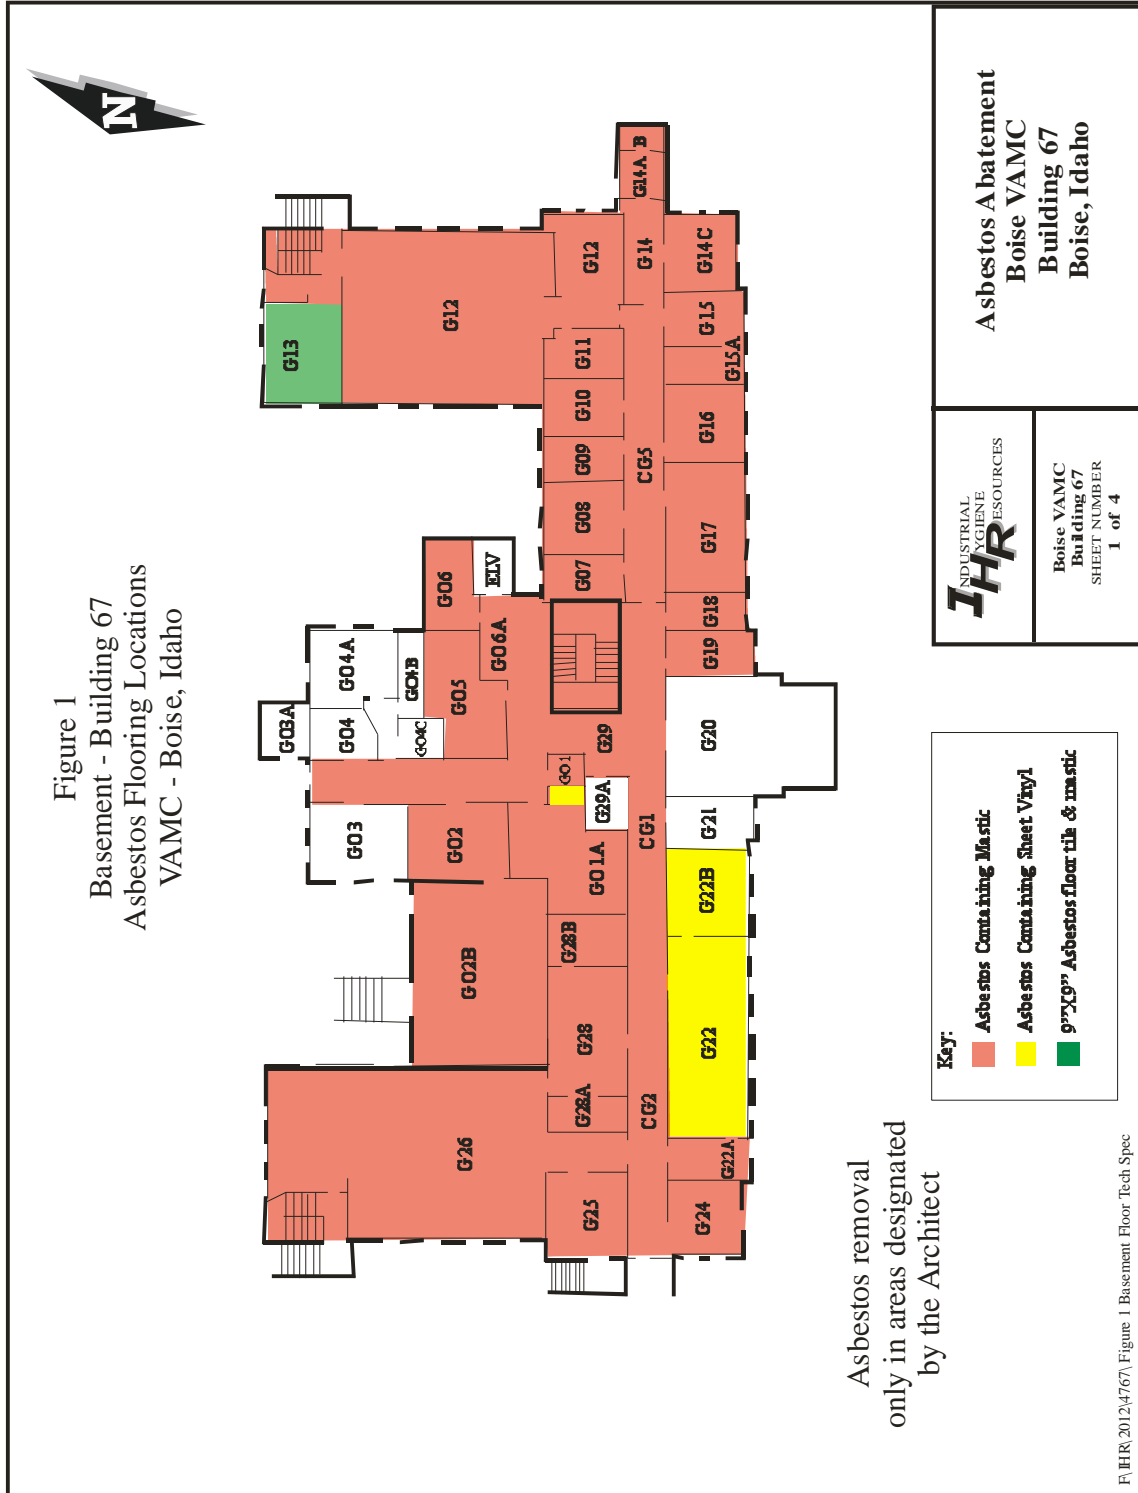


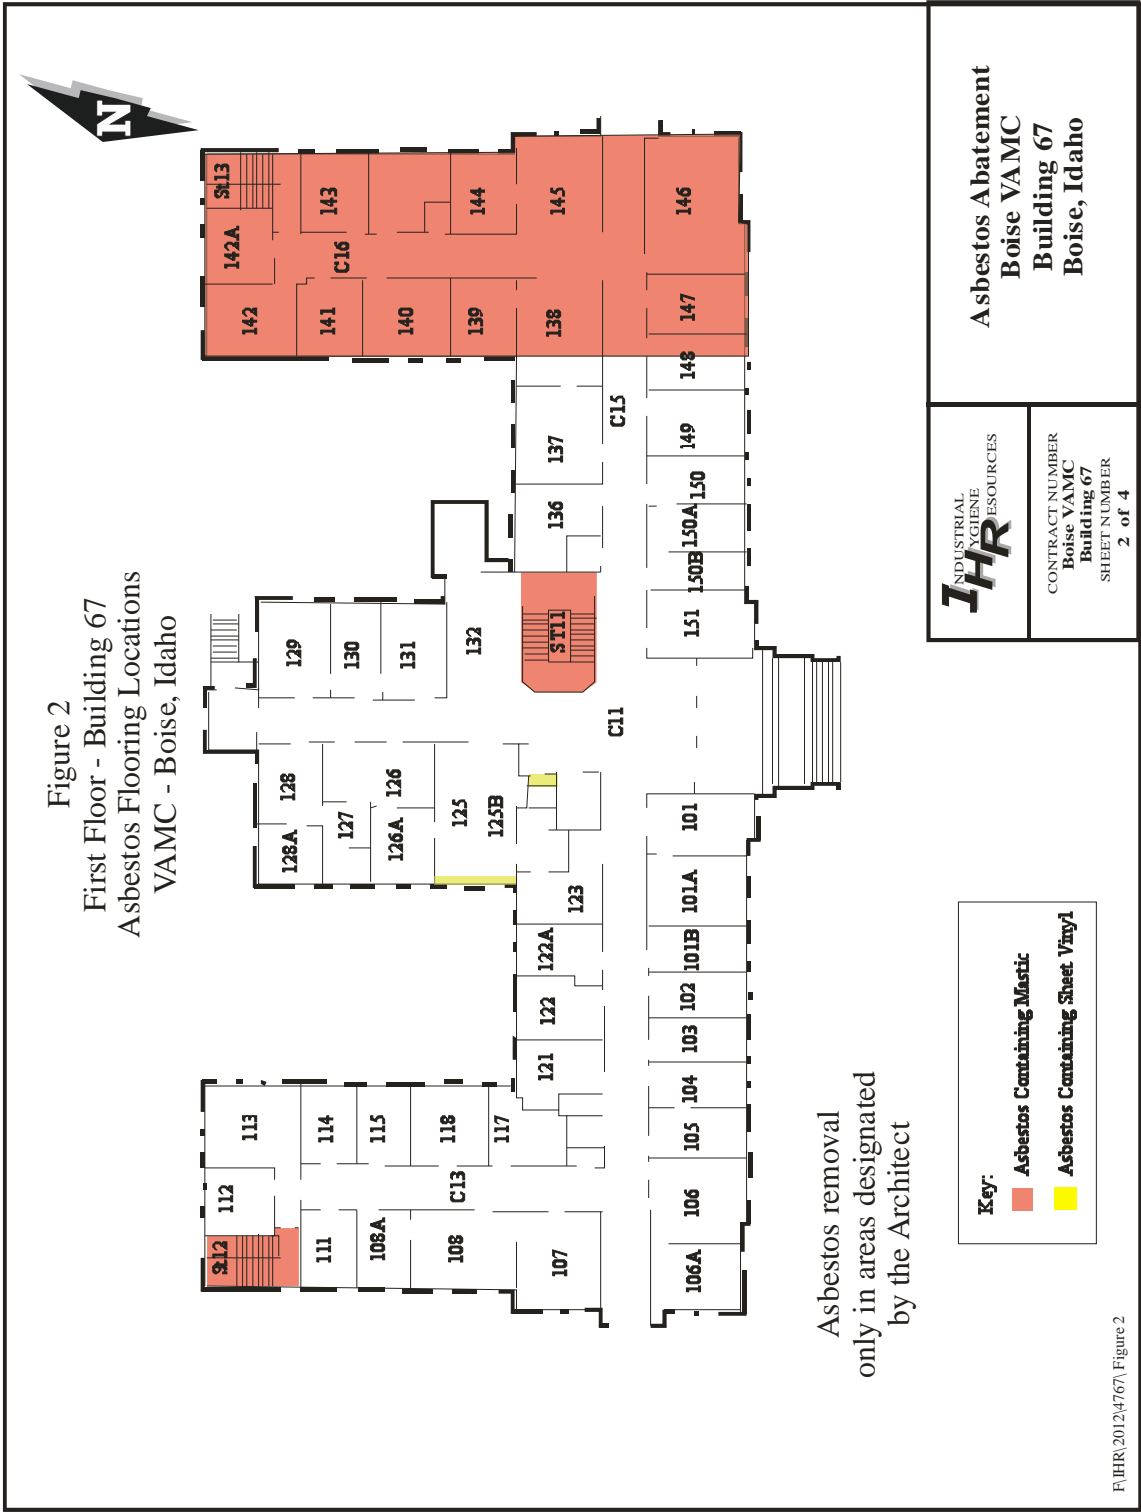


Figure 3
Second Floor - Building 67
Asbestos Flooring Locations
VAMC - Boise, Idaho

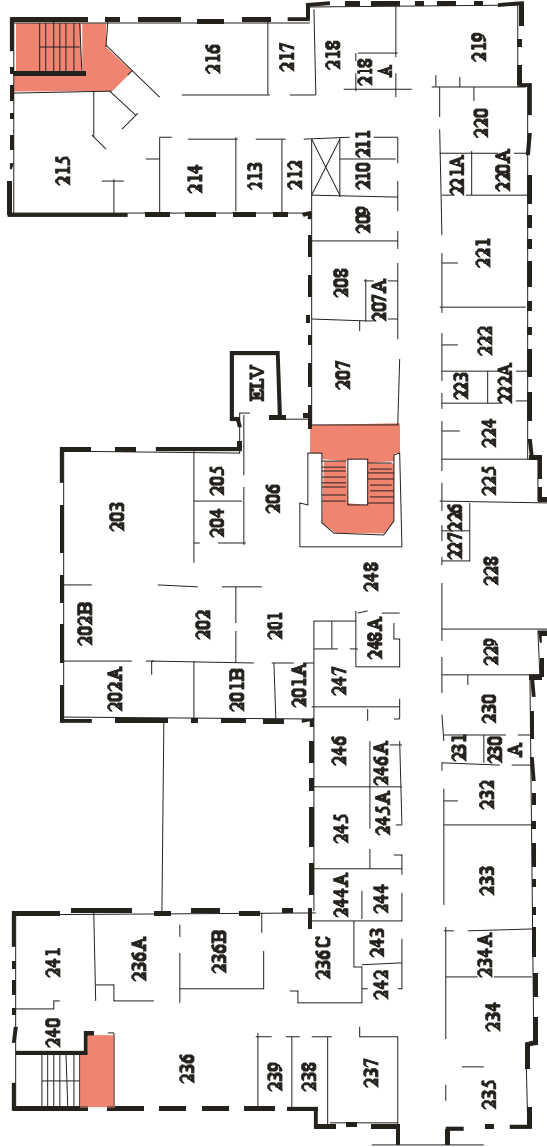

Asbestos removal
only in areas designated
by the Architect

Key:


Asbestos Containing Mastic



CONTRACT NUMBER
Boise VAMC
Building 67
SHEET NUMBER
3 of 4

Asbestos Abatement
Boise VAMC
Building 67
Boise, Idaho

F:\IHR\2012\4767\ Figure 3 Second Floor Tech Spec

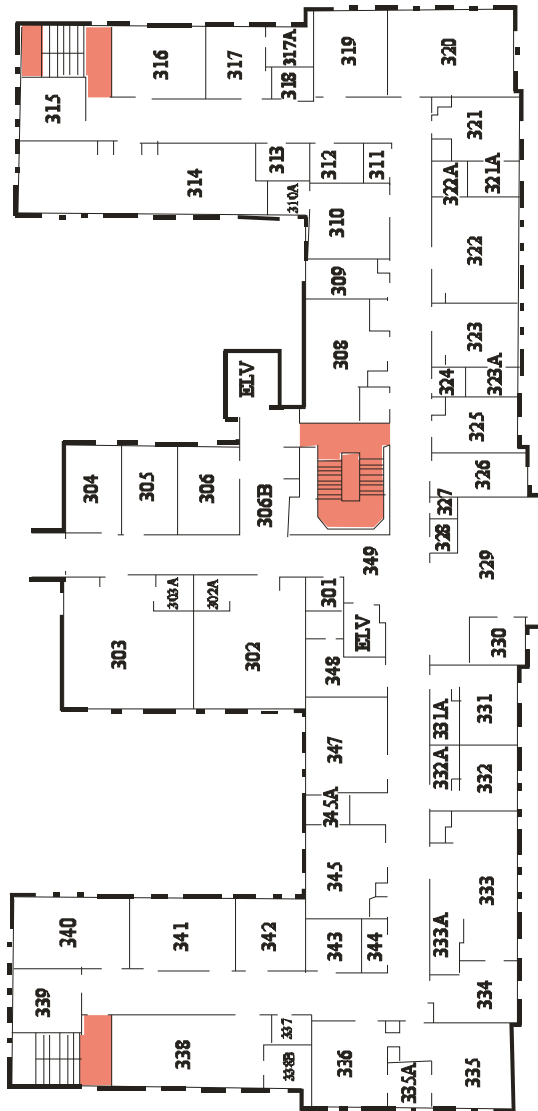

Asbestos removal
only in areas designated
by the Architect

Asbestos Containing Mastic



CONTRACT NUMBER
Boise VAMC
Building 67
SHEET NUMBER
4 of 4

**Asbestos Abatement
Boise VAMC
Building 67
Boise, Idaho**

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 02 83 33.13
LEAD-BASED PAINT REMOVAL AND DISPOSAL

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies abatement and disposal of lead-based paint (LBP) and controls needed to limit occupational and environmental exposure to lead hazards.

B. Extent of Work

1. Below is a brief description of the estimated quantities of lead containing materials to be impacted by this project. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be impacted. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.

2. Removal, clean-up and disposal of lead containing materials and lead/waste contaminated elements in an appropriate regulated area for the following approximate quantities;

Removal of ~135 windows impacted by the renovation.

The exterior metal stairs (black) located at the exit to hallway C-14

~200 liner feet of exterior crown molding impacted by the expansion

1.2 RELATED WORK

A. Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.

B. Section 02 41 00, DEMOLITION.

C. Section 09 91 00, PAINTING.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

B. Code of Federal Regulations (CFR):

CFR 29 Part 1910Occupational Safety and Health Standards

CFR 29 Part 1926Safety and Health Regulations for Construction

CFR 40 Part 148Hazardous Waste Injection Restrictions

CFR 40 Part 260Hazardous Waste Management System: General

CFR 40 Part 261Identification and Listing of Hazardous Waste

CFR 40 Part 262Standards Applicable to Generators of Hazardous Waste

- CRF 40 Part 263Standards Applicable to Transporters of Hazardous Waste
- CFR 40 Part 264Standards for Owners and Operations of Hazardous Waste Treatment, Storage, and Disposal Facilities
- CFR 40 Part 265Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
- CFR 40 Part 268Land Disposal Restrictions
- CFR 49 Part 172Hazardous Material Table, Special Provisions, Hazardous Material Communications, Emergency Response Information, and Training Requirements
- CFR 49 Part 178Specifications for Packaging
- C. National Fire Protection Association (NFPA):
 - NFPA 701-2004Methods of Fire Test for Flame-Resistant Textiles and Films
- D. National Institute for Occupational Safety and Health (NIOSH)
 - NIOSH OSHA Booklet 3142 Lead in Construction
- E. Underwriters Laboratories (UL)
 - UL 586-1996 (Rev 2009) . High-Efficiency, Particulate, Air Filter Units
- F. American National Standards Institute
 - Z9.2-2006Fundamentals Governing the Design and Operation of Local Exhaust Systems
 - Z88.6-2006Respiratory Protection

1.4 DEFINITIONS

- A. Action Level: Employee exposure, without regard to use of respirations, to an airborne concentration of lead of 30 micrograms per cubic meter of air averaged over an 8-hour period. As used in this section, "30 micrograms per cubic meter of air" refers to the action level.
- B. Area Monitoring: Sampling of lead concentrations within the lead control area and inside the physical boundaries which is representative of the airborne lead concentrations which may reach the breathing zone of personnel potentially exposed to lead.
- C. Physical Boundary: Area physically roped or partitioned off around an enclosed lead control area to limit unauthorized entry of personnel. As used in this section, "inside boundary" shall mean the same as "outside lead control area."
- D. Certified Industrial Hygienist (CIH): As used in this section, refers to an Industrial Hygienist employed by the Contractor and is certified by the American Board of Industrial Hygiene in comprehensive practice.

- E. Change Rooms and Shower Facilities: Rooms within the designated physical boundary around the lead control area equipped with separate storage facilities for clean protective work clothing and equipment and for street clothes which prevent cross- contamination.
- F. Competent Person: A person capable of identifying lead hazards in the work area and is authorized by the contractor to take corrective action.
- G. Decontamination Room: Room for removal of contaminated personal protective equipment (PPE).
- H. Eight-Hour Time Weighted Average (TWA): Airborne concentration of lead averaged over an 8-hour workday to which an employee is exposed.
- I. High Efficiency Particulate Air (HEPA) Filter Equipment: HEPA filtered vacuuming equipment with a UL 586 filter system capable of collecting and retaining lead-contaminated paint dust. A high efficiency particulate filter means 99.97 percent efficient against 0.3 micron size particles.
- J. Lead: Metallic lead, inorganic lead compounds, and organic lead soaps. Excluded from this definition are other organic lead compounds.
- K. Lead Control Area: An enclosed area or structure with full containment to prevent the spread of lead dust, paint chips, or debris of lead-containing paint removal operations. The lead control area is isolated by physical boundaries to prevent unauthorized entry of personnel.
- L. Lead Permissible Exposure Limit (PEL): Fifty micrograms per cubic meter of air as an 8-hour time weighted average as determined by 29 CFR 1910.1025. If an employee is exposed for more than 8 hours in a work day, the PEL shall be determined by the following formula. $PEL (\text{micrograms/cubic meter of air}) = 400/\text{No. of hrs worked per day}$
- M. Personnel Monitoring: Sampling of lead concentrations within the breathing zone of an employee to determine the 8-hour time weighted average concentration in accordance with 29 CFR 1910.1025. Samples shall be representative of the employee's work tasks. Breathing zone shall be considered an area within a hemisphere, forward of the shoulders, with a radius of 150 mm to 225 mm (6 to 9 inches) and the center at the nose or mouth of an employee.

1.5 QUALITY ASSURANCE

- A. Before exposure to lead-contaminated dust, provide workers with a comprehensive medical examination as required by 29 CFR 1926.62 (I) (1) (i) & (ii). The examination shall not be required if adequate records show that employees have been examined as required by 29 CFR 1926.62(I) without the last year.
- B. Medical Records: Maintain complete and accurate medical records of employees in accordance with 29 CFR 1910.20.

- C. CIH Responsibilities: The Contractor shall employ a certified Industrial Hygienist who will be responsible for the following:
1. Certify Training.
 2. Review and approve lead-containing paint removal plan for conformance to the applicable referenced standards.
 3. Inspect lead-containing paint removal work for conformance with the approved plan.
 4. Direct monitoring.
 5. Ensure work is performed in strict accordance with specifications at all times.
 6. Ensure hazardous exposure to personnel and to the environment are adequately controlled at all times.
- D. Training: Train each employee performing paint removal, disposal, and air sampling operations prior to the time of initial job assignment, in accordance with 29 CFR 1926.62.
- E. Training Certification: Submit certificates signed and dated by the CIH and by each employee stating that the employee has received training.
- F. Respiratory Protection Program:
1. Furnish each employee required to wear a negative pressure respirator or other appropriate type with a respirator fit test at the time of initial fitting and at least every 6 months thereafter as required by 29 CFR 1926.62.
 2. Establish and implement a respiratory protection program as required by 29 CFR 1910.134, 29 CFR 1910.1025, and 29 CFR 1926.62.
- G. Hazard Communication Program: Establish and implement a Hazard Communication Program as required by 29 CFR 1910.1200.
- H. Hazardous Waste Management: The Hazardous Waste Management plan shall comply with applicable requirements of Federal, State, and local hazardous waste regulations and address:
1. Identification of hazardous wastes associated with the work.
 2. Estimated quantities of wastes to be generated and disposed of.
 3. Names and qualifications of each contractor that will be transporting, storing, treating, and disposing of the wastes. Include the facility location and a 24-hour point of contact. Furnish two copies of EPA, state and local hazardous waste permit applications, permits and EPA Identification numbers.
 4. Names and qualifications (experience and training) of personnel who will be working on-site with hazardous wastes.
 5. List of waste handling equipment to be used in performing the work, to include cleaning, volume reduction, and transport equipment.

6. Spill prevention, containment, and cleanup contingency measures to be implemented.
7. Work plan and schedule for waste containment, removal and disposal. Wastes shall be cleaned up and containerized daily.
8. Cost for hazardous waste disposal according to this plan.

I. Safety and Health Compliance:

1. In addition to the detailed requirements of this specification, comply with laws, ordinances, rules, and regulations of federal, state, and local authorities regarding removing, handling, storing, transporting, and disposing of lead waste materials. Comply with the applicable requirements of the current issue of 29 CFR 1910.1025. Submit matters regarding interpretation of standards to the Contracting Officer for resolution before starting work.
2. Where specification requirements and the referenced documents vary, the most stringent requirements shall apply.

- J. Pre-Construction Conference: Along with the CIH, meet with the Contracting Officer to discuss in detail the lead-containing paint removal work plan, including work procedures and precautions for the work plan.

1.6 SUBMITTALS

- A. Submit the following in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Catalog Data:
 - Vacuum filters
 - Respirators
- C. Instructions: Paint removal materials. Include applicable material safety data sheets.
- D. Statements Certifications and Statements:
 1. Qualifications of CIH: Submit name, address, and telephone number of the CIH selected to perform responsibilities in paragraph entitled "CIH Responsibilities." Provide previous experience of the CIH. Submit proper documentation that the Industrial Hygienist is certified by the American Board of Industrial Hygiene in comprehensive practice, including certification number and date of certification/recertification.
 2. Testing Laboratory: Submit the name, address, and telephone number of the testing laboratory selected to perform the monitoring, testing, and reporting of airborne concentrations of lead. Provide proper documentation that persons performing the analysis have been judged proficient by successful participation within the last year in the National Institute for Occupational Safety and Health (NIOSH)

Proficiency Analytical Testing (PAT) Program. The laboratory shall be accredited by the American Industrial Hygiene Association (AIHA). Provide AIHA documentation along with date of accreditation/reaccreditation.

3. Lead-Containing Paint Removal Plan:

- a. Submit a detailed job-specific plan of the work procedures to be used in the removal of lead-containing paint. The plan shall include a sketch showing the location, size, and details of lead control areas, location and details of decontamination rooms, change rooms, shower facilities, and mechanical ventilation system.
- b. Include in the plan, eating, drinking, smoking and restroom procedures, interface of trades, sequencing of lead related work, collected wastewater and paint debris disposal plan, air sampling plan, respirators, protective equipment, and a detailed description of the method of containment of the operation to ensure that airborne lead concentrations of 30 micrograms per cubic meter of air are not exceeded outside of the lead control area.
- c. Include air sampling, training and strategy, sampling methodology, frequency, duration of sampling, and qualifications of air monitoring personnel in the air sampling portion on the plan.

4. Field Test Reports: Monitoring Results: Submit monitoring results to the Contracting Officer within 3 working days, signed by the testing laboratory employee performing the air monitoring, the employee that analyzed the sample, and the CIH.

5. Records:

- a. Completed and signed hazardous waste manifest from treatment or disposal facility.
- b. Certification of Medical Examinations.
- c. Employee training certification.

PART 2 - PRODUCTS

2.1 PAINT REMOVAL PRODUCTS

- A. Submit applicable Material Safety Data Sheets for paint removal products used in paint removal work. Use the least toxic product, suitable for the job and acceptable to the Industrial Hygienist.

PART 3 - EXECUTION

3.1 PROTECTION

- A. Notification: Notify the Contracting Officer 10 days prior to the start of any paint removal work.
- B. Lead Control Area Requirements.

1. Contain removal operations by the use of a negative pressure full containment system with at least one change room and with HEPA filtered exhaust.
- C. Protection of Existing Work to Remain: Perform paint removal work without damage or contamination of adjacent areas. Where existing work is damaged or contaminated, restore work to its original condition.
- D. Boundary Requirements: Provide physical boundaries around the lead control area by roping off the area [designated on the drawings] or providing curtains, portable partitions or other enclosures to ensure that airborne concentrations of lead will not reach 30 micrograms per cubic meter of air outside of the lead control area.
- E. Heating, Ventilating and Air Conditioning (HVAC) Systems: Shut down, lock out, and isolate HVAC systems that supply, exhaust, or pass through the lead control areas. Seal intake and exhaust vents in the lead control area with 6-mil plastic sheet and tape. Seal seams in HVAC components that pass through the lead control area.
- F. Change Room and Shower Facilities: Provide clean change rooms and shower facilities within the physical boundary around the designated lead control area in accordance with requirements of 29 CFR 1926.62.
- G. Mechanical Ventilation System:
1. Use adequate ventilation to control personnel exposure to lead in accordance with 29 CFR 1926.57.
 2. To the extent feasible, use fixed local exhaust ventilation connected to HEPA filters or other collection systems, approved by the industrial hygienist. Local exhaust ventilation systems shall be designed, constructed, installed, and maintained in accordance with ANSI Z9.2.
 3. If air from exhaust ventilation is recirculated into the work place, the system shall have a high efficiency filter with reliable back-up filter and controls to monitor the concentration of lead in the return air and to bypass the recirculation system automatically if it fails. Air may be recirculated only where exhaust to the outside is not feasible.
- H. Personnel Protection: Personnel shall wear and use protective clothing and equipment as specified herein. Eating, smoking, or drinking is not permitted in the lead control area. No one will be permitted in the lead control area unless they have been given appropriate training and protective equipment.
- I. Warning Signs: Provide warning signs at approaches to lead control areas. Locate signs at such a distance that personnel may read the sign

and take the necessary precautions before entering the area. Signs shall comply with the requirements of 29 CFR 1926.62.

3.2 WORK PROCEDURES

- A. Perform removal of lead-containing paint in accordance with approved lead-containing paint removal plan. Use procedures and equipment required to limit occupational and environmental exposure to lead when lead-containing paint is removed in accordance with 29 CFR 1926.62, except as specified herein. Dispose of removed paint chips and associated waste in compliance with Environmental Protection Agency (EPA), federal, state, and local requirements.
- B. Personnel Exiting Procedures:
 - 1. Whenever personnel exit the lead-controlled area, they shall perform the following procedures and shall not leave the work place wearing any clothing or equipment worn during the work day:
 - a. Vacuum themselves off.
 - b. Remove protective clothing in the decontamination room, and place them in an approved impermeable disposal bag.
 - c. Shower.
 - d. Change to clean clothes prior to leaving the physical boundary designated around the lead-contaminated job site.
- C. Monitoring: Monitoring of airborne concentrations of lead shall be in accordance with 29 CFR 1910.1025 and as specified herein. Air monitoring, testing, and reporting shall be performed by a CIH or an Industrial Hygiene (IH) Technician who is under the direction of the CIH:
 - 1. The CIH or the IH Technician under the direction of the CIH shall be on the job site directing the monitoring, and inspecting the lead-containing paint removal work to ensure that the requirements of the Contract have been satisfied during the entire lead-containing paint removal operation.
 - 2. Take personal air monitoring samples on employees who are anticipated to have the greatest risk of exposure as determined by the CIH. In addition, take air monitoring samples on at least 25 percent of the work crew or a minimum of two employees, whichever is greater, during each work shift.
 - 3. Submit results of air monitoring samples, signed by the CIH, within 24 hours after the air samples are taken. Notify the Contracting Officer immediately of exposure to lead at or in excess of the action level of 30 micrograms per cubic meter of air outside of the lead control area.
- D. Monitoring During Paint Removal Work:

1. Perform personal and area monitoring during the entire paint removal operation. Sufficient area monitoring shall be conducted at the physical boundary to ensure unprotected personnel are not exposed above 30 micrograms per cubic meter of air at all times. If the outside boundary lead levels are at or exceed 30 micrograms per cubic meter of air, work shall be stopped and the CIH shall immediately correct the condition(s) causing the increased levels and notify the Contracting Officer immediately.
2. The CIH shall review the sampling data collected on that day to determine if condition(s) requires any further change in work methods. Removal work shall resume when approval is given by the CIH. The Contractor shall control the lead level outside of the work boundary to less than 30 micrograms per cubic meter of air at all times. As a minimum, conduct area monitoring daily on each shift in which lead paint removal operations are performed in areas immediately adjacent to the lead control area.
3. For outdoor operations, at least one sample on each shift shall be taken on the downwind side of the lead control area. If adjacent areas are contaminated, clean and visually inspect contaminated areas. The CIH shall certify that the area has been cleaned of lead contamination.

3.3 LEAD-CONTAINING PAINT REMOVAL

- A. Remove paint within the areas designated on the drawings in order to completely expose the substrate. Take whatever precautions are necessary to minimize damage to the underlying substrate.
- B. Indoor Lead Paint Removal: Select paint removal processes to minimize contamination of work areas with lead-contaminated dust or other lead-contaminated debris/waste. This paint removal process should be described in the lead-containing paint removal plan. Perform manual sanding and scraping to the maximum extent feasible.
- C. Mechanical Paint Removal and Blast Cleaning: Perform mechanical paint removal and blast cleaning in lead control areas using negative pressure full containments with HEPA filtered exhaust. Collect paint residue and spent grit (used abrasive) from blasting operations for disposal in accordance with EPA, state and local requirements.
- D. Outside Lead Paint Removal: Select removal processes to minimize contamination of work areas with lead-contaminated dust or other lead-contaminated debris/waste. This paint removal process should be described in the lead-containing paint removal plan. Perform manual sanding and scraping to the maximum extent feasible.

3.4 SURFACE PREPARATIONS

- A. Avoid flash rusting or other deterioration of the substrate. Provide surface preparations for painting in accordance with Section 09 91 00, PAINTING.

3.5 CLEANUP AND DISPOSAL

- A. Cleanup: Maintain surfaces of the lead control area free of accumulations of paint chips and dust. Restrict the spread of dust and debris; keep waste from being distributed over the work area. Do not dry sweep or use compressed air to clean up the area. At the end of each shift and when the paint removal operation has been completed, clean the area of visible lead paint contamination by vacuuming with a HEPA filtered vacuum cleaner and wet mopping the area.
- B. Certification: The CIH shall certify in writing that the inside and outside the lead control area air monitoring samples are less than 30 micrograms per cubic meter of air, the respiratory protection for the employees was adequate, the work procedures were performed in accordance with 29 CFR 1926.62, and that there were no visible accumulations of lead-contaminated paint and dust on the worksite. Do not remove the lead control area or roped-off boundary and warning signs prior to the Contracting Officer's receipt of the CIH's certification. Reclean areas showing dust or residual paint chips.
- C. Testing of Lead-Containing Paint Residue and Used Abrasive Where indicated or when directed by the Contracting Officer, test lead containing paint residue and used abrasive in accordance with 40 CFR 261 for hazardous waste.
- D. Disposal:
 - 1. Collect lead-contaminated waste, scrap, debris, bags, containers, equipment, and lead-contaminated clothing, which may produce airborne concentrations of lead particles.
 - 2. Store removed paint, lead-contaminated clothing and equipment, and lead-contaminated dust and cleaning debris into U.S. Department of Transportation (49 CFR 178) approved 55-gallon drums. Properly label each drum to identify the type of waste (49 CFR 172) and the date lead-contaminated wastes were first put into the drum. Obtain and complete the Uniform Hazardous Waste Manifest forms. Comply with land disposal restriction notification requirements as required by 40 CFR 268:
 - a. At least 14 days prior to delivery, notify the Contracting Officer who will arrange for job site inspection of the drums and manifests.

- b. As necessary, make lot deliveries of hazardous wastes to the PWC Hazardous Waste Storage Facility to ensure that drums do not remain on the jobsite longer than 90 calendar days from the date affixed to each drum.
 - c. Collect lead-contaminated waste, scrap, debris, bags, containers, equipment, and lead-contaminated clothing which may produce airborne concentrations of lead particles. Label the containers in accordance with 29 CFR 1926.62. Dispose of lead-contaminated waste material at a EPA and state approved hazardous waste treatment, storage, or disposal facility off Government property.
 - d. Store waste materials in U.S. Department of Transportation (49 CFR 178) approved 55-gallon drums. Properly label each drum to identify the type of waste (49 CFR 172) and the date the drum was filled. The Contracting Officer or an authorized representative will assign an area for interim storage of waste-containing drums.
Do not store hazardous waste drums in interim storage longer than 90 calendar days from the date affixed to each drum.
 - e. Handle, store, transport, and dispose lead or lead-contaminated waste in accordance with 40 CFR 260, 40 CFR 261, 40 CFR 262, 40 CFR 263, 40 CFR 264, and 40 CFR 265. Comply with land disposal restriction notification requirements as required by 40 CFR 268.
- E. Disposal Documentation Submit written evidence that the hazardous waste treatment, storage, or disposal facility (TSD) is approved for lead disposal by the EPA and state or local regulatory agencies. Submit one copy of the completed manifest, signed and dated by the initial transporter in accordance with 40 CFR 262.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 03 30 00
CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies cast-in-place structural concrete and materials and mixes for other concrete.

1.2 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Concrete roads, walks, and similar exterior site work: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.

1.3 TESTING AGENCY FOR CONCRETE MIX DESIGN:

- A. Testing agency retained and reimbursed by the Contractor and approved by Resident Engineer.
- B. Testing agency maintaining active participation in Program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology. Accompany request for approval of testing agency with a copy of Report of Latest Inspection of Laboratory Facilities by CCRL.
- C. Testing agency shall furnish equipment and qualified technicians to establish proportions of ingredients for concrete mixes.

1.4 TOLERANCES:

- A. Formwork: ACI 117, except the elevation tolerance of formed surfaces before removal of shores is +0 mm (+0 inch) and -20 mm (-3/4 inch).
- B. Reinforcement Fabricating and Placing: ACI 117, except that fabrication tolerance for bar sizes Nos. 10, 13, and 16 (Nos. 3, 4, and 5) (Tolerance Symbol 1 in Fig. 2.1(a), ACI, 117) used as column ties or stirrups is +0 mm (+0 inch) and -13 mm (-1/2 inch) where gross bar length is less than 3600 mm (12 feet), or +0 mm (+0 inch) and -20 mm (-3/4 inch) where gross bar length is 3600 mm (12 feet) or more.
- C. Cross-Sectional Dimension: ACI 117, except tolerance for thickness of slabs 12 inches or less is +20 mm (+3/4 inch) and - 6 mm (-1/4 inch). Tolerance of thickness of beams more than 300 mm (12 inch) but less than 900 mm (3 feet) is +20 mm (+3/4 inch) and -10 mm (-3/8 inch).
- D. Slab Finishes: ACI 117, Section 4.5.6, F-number method in accordance with ASTM E1155, except as follows:
 - 1. Test entire slab surface, including those areas within 600 mm (2 feet) of construction joints and vertical elements that project through slab surface.
 - 2. Maximum elevation change which may occur within 600 mm (2 feet) of any column or wall element is 6 mm (0.25 inches).

3. Allow sample measurement lines that are perpendicular to construction joints to extend past joint into previous placement no further than 1500 mm (5 feet).

1.5 REGULATORY REQUIREMENTS:

- A. ACI SP-66 - ACI Detailing Manual.
- B. ACI 318 - Building Code Requirements for Reinforced Concrete.
- C. ACI 301 - Standard Specifications for Structural Concrete.

1.6 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Shop Drawings: Reinforcing steel: Complete shop drawings
- C. Mill Test Reports:
 1. Reinforcing Steel.
 2. Cement.
- D. Manufacturer's Certificates:
 1. Abrasive aggregate.
 2. Lightweight aggregate for structural concrete.
 3. Air-entraining admixture.
 4. Chemical admixtures, including chloride ion content.
 5. Waterproof paper for curing concrete.
 6. Liquid membrane-forming compounds for curing concrete.
 7. Non-shrinking grout.
 8. Liquid hardener.
 9. Waterstops.
 10. Expansion joint filler.
 11. Adhesive binder.
- E. Testing Agency for Concrete Mix Design: Approval request including qualifications of principals and technicians and evidence of active participation in program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology and copy of report of latest CCRL, Inspection of Laboratory.
- F. Test Report for Concrete Mix Designs: Trial mixes including water-cement fly ash ratio curves, concrete mix ingredients, and admixtures.
- G. Shoring and Reshoring Sequence: Submit for approval a shoring and reshoring sequence for flat slab/flat plate portions, prepared by a registered Professional Engineer. As a minimum, include timing of form stripping, reshoring, number of floors to be re-shored and timing of re-shore removal to serve as an initial outline of procedures subject to modification as construction progresses. Submit revisions to sequence, whether initiated by Resident Engineer (see FORMWORK) or Contractor.

- H. Test reports on splitting tensile strength (Fct) of lightweight concrete.

1.7 DELIVERY, STORAGE, AND HANDLING:

- A. Conform to ACI 304. Store aggregate separately for each kind or grade, to prevent segregation of sizes and avoid inclusion of dirt and other materials.
- B. Deliver cement in original sealed containers bearing name of brand and manufacturer, and marked with net weight of contents. Store in suitable watertight building in which floor is raised at least 300 mm (1 foot) above ground. Store bulk cement and fly ash in separate suitable bins.
- C. Deliver other packaged materials for use in concrete in original sealed containers, plainly marked with manufacturer's name and brand, and protect from damage until used.

1.8 PRE-CONCRETE CONFERENCE:

- A. General: At least 15 days prior to submittal of design mixes, conduct a meeting to review proposed methods of concrete construction to achieve the required results.
- B. Agenda: Includes but is not limited to:
 - 1. Submittals.
 - 2. Coordination of work.
 - 3. Availability of material.
 - 4. Concrete mix design including admixtures.
 - 5. Methods of placing, finishing, and curing.
 - 6. Finish criteria required to obtain required flatness and levelness.
 - 7. Timing of floor finish measurements.
 - 8. Material inspection and testing.
- C. Attendees: Include but not limited to representatives of Contractor; subcontractors involved in supplying, conveying, placing, finishing, and curing concrete; lightweight aggregate manufacturer; admixture manufacturers; Resident Engineer; Consulting Engineer; Department of Veterans Affairs retained testing laboratories for concrete testing and finish (F-number) verification.
- D. Minutes of the meeting: Contractor shall take minutes and type and distribute the minutes to attendees within five days of the meeting.

1.9 MOCK-UP:

- A. In addition to the other specified samples and tests, construct a mock-up using the materials, reinforcing, forming system and construction methods proposed for use in exposed architectural concrete.
- B. Construct the mock-up with at least a 2.5 m by 2.5 m (8 feet by 8 feet) exposed surface and suitable foundations. Include the following where

applicable: Control joints, reglets, recesses or other typical architectural details.

- C. Before casting the mock-up, submit full detailed Shop Drawings of the mock-up formwork for review by the Architect. Perform all necessary preliminary tests to ensure that concrete used for the mock-up will exactly match the approved sample in color and texture.
- D. Perform the surface treatment proposed for use on one or more areas not less than 300 mm by 300 mm (1 foot by 1 foot) on the back side of the mock-up to establish the texture of finish required by the Architect. Repeat as required until a sample satisfactory to the Architect has been obtained.
- E. Treat the finished front surface of the mock-up to produce a uniform appearance similar in every respect to the approved sample area.
- F. The completed mock-up shall be inspected by the Architect. Failure of the mock-up to match the approved sample will require the construction of further mock-ups until approval is obtained. Remove rejected mock-ups immediately.
- G. Maintain the approved mock-ups in good condition at the job site until all architectural concrete surfaces have been completed and approved by the Architect. Remove the mock-up from the site after completion of the above.

1.10 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Concrete Institute (ACI):
 - 117-10Tolerances for Concrete Construction and
Materials
 - 211.1-91(R2009)Selecting Proportions for Normal, Heavyweight,
and Mass Concrete
 - 211.2-98(R2004)Selecting Proportions for Structural Lightweight
Concrete
 - 214R-02Evaluation of Strength Test Results of Concrete
 - 301-10Structural Concrete
 - 304R-00(R2009)Guide for Measuring, Mixing, Transporting, and
Placing Concrete
 - 305R-10Hot Weather Concreting
 - 306R-10Cold Weather Concreting
 - 308R-01(R2008)Standard Practice for Curing Concrete
 - 309R-05Guide for Consolidation of Concrete

- 318-08Building Code Requirements for Reinforced
Concrete and Commentary
- 347-04Guide to Formwork for Concrete
- SP-66-04ACI Detailing Manual
- C. American National Standards Institute and American Hardboard Association
(ANSI/AHA):
- A135.4-2004Basic Hardboard
- D. American Society for Testing and Materials (ASTM):
- A82/A82M-07Steel Wire, Plain, for Concrete Reinforcement
- A185/185M-07Steel Welded Wire Fabric, Plain, for Concrete
Reinforcement
- A615/A615M-09Deformed and Plain Billet-Steel Bars for
Concrete Reinforcement
- A653/A653M-09Steel Sheet, Zinc-Coated (Galvanized) or Zinc-
Iron Alloy-Coated (Galvannealed) by the Hot-Dip
Process
- A706/A706M-09Low-Alloy Steel Deformed and Plain Bars for
Concrete Reinforcement
- A767/A767M-09Zinc-Coated (Galvanized) Steel Bars for Concrete
Reinforcement
- A775/A775M-07Epoxy-Coated Reinforcing Steel Bars
- A820-06Steel Fibers for Fiber-Reinforced Concrete
- A996/A996M-09Rail-Steel and Axle-Steel Deformed Bars for
Concrete Reinforcement
- C31/C31M-09Making and Curing Concrete Test Specimens in the
field
- C33-08Concrete Aggregates
- C39/C39M-09Compressive Strength of Cylindrical Concrete
Specimens
- C94/C94M-09Ready-Mixed Concrete
- C143/C143M-10Slump of Hydraulic Cement Concrete
- C150-09Portland Cement
- C171-07Sheet Materials for Curing Concrete
- C172-08Sampling Freshly Mixed Concrete
- C173-10...Air Content of Freshly Mixed Concrete by the
Volumetric Method
- C192/C192M-07Making and Curing Concrete Test Specimens in the
Laboratory
- C231-09Air Content of Freshly Mixed Concrete by the
Pressure Method
- C260-06Air-Entraining Admixtures for Concrete

- C309-07Liquid Membrane-Forming Compounds for Curing
Concrete
- C330-09Lightweight Aggregates for Structural Concrete
- C494/C494M-10Chemical Admixtures for Concrete
- C618-08Coal Fly Ash and Raw or Calcined Natural
Pozzolan for Use as a Mineral Admixture in
Concrete
- C666/C666M-03Resistance of Concrete to Rapid Freezing and
Thawing
- C881/C881M-02Epoxy-Resin-Base Bonding Systems for Concrete
- C1107/1107M-08Packaged Dry, Hydraulic-Cement Grout (Non-
shrink)
- C1315-08Liquid Membrane-Forming Compounds Having Special
Properties for Curing and Sealing Concrete
- D6-95(R2006)Loss on Heating of Oil and Asphaltic Compounds
- D297-93(R2006)Rubber Products-Chemical Analysis
- D1751-04(R2008)Preformed Expansion Joint Filler for Concrete
Paving and Structural Construction (Non-
extruding and Resilient Bituminous Types)
- D4397-09Polyethylene Sheeting for Construction,
Industrial and Agricultural Applications
- E1155-96(R2008)Determining F_F Floor Flatness and F_L Floor
Levelness Numbers
- E. American Welding Society (AWS):
- D1.4/D1.4M-11Structural Welding Code - Reinforcing Steel
- F. Concrete Reinforcing Steel Institute (CRSI):
- Handbook 2008
- G. National Cooperative Highway Research Program (NCHRP):
- Report OnConcrete Sealers for the Protection of Bridge
Structures
- H. U. S. Department of Commerce Product Standard (PS):
- PS 1Construction and Industrial Plywood
- PS 20American Softwood Lumber
- I. U. S. Army Corps of Engineers Handbook for Concrete and Cement:
- CRD C513Rubber Waterstops
- CRD C572Polyvinyl Chloride Waterstops

PART 2 - PRODUCTS:

2.1 FORMS:

- A. Wood: PS 20 free from loose knots and suitable to facilitate finishing
concrete surface specified; tongue and grooved.

- B. Plywood: PS-1 Exterior Grade B-B (concrete-form) 16 mm (5/8 inch), or 20 mm (3/4 inch) thick for unlined contact form. B-B High Density Concrete Form Overlay optional.
- C. Metal for Concrete Rib-Type Construction: Steel (removal type) of suitable weight and form to provide required rigidity.
- D. Permanent Steel Form for Concrete Slabs: Corrugated, ASTM A653, Grade E, and Galvanized, ASTM A653, G90. Provide venting where insulating concrete fill is used.
- E. Corrugated Fiberboard Void Boxes: Double faced, completely impregnated with paraffin and laminated with moisture resistant adhesive, size as shown. Design forms to support not less than 48 KPa (1000 psf) and not lose more than 15 percent of their original strength after being completely submerged in water for 24 hours and then air dried.
- F. Form Lining:
 - 1. Hardboard: ANSI/AHA A135.4, Class 2 with one (S1S) smooth side)
 - 2. Plywood: Grade B-B Exterior (concrete-form) not less than 6 mm (1/4 inch) thick.
 - 3. Plastic, fiberglass, or elastomeric capable of reproducing the desired pattern or texture.
- G. Form Ties: Develop a minimum working strength of 13.35 kN (3000 pounds) when fully assembled. Ties shall be adjustable in length to permit tightening of forms and not have any lugs, cones, washers to act as spreader within form, nor leave a hole larger than 20 mm (3/4 inch) diameter, or a depression in exposed concrete surface, or leave metal closer than 40 mm (1 1/2 inches) to concrete surface. Wire ties not permitted. Cutting ties back from concrete face not permitted.

2.2 MATERIALS:

- A. Portland Cement: ASTM C150 Type I or II; Type V for concrete in contact with soil.
- B. Fly Ash: ASTM C618, Class C or F including supplementary optional requirements relating to reactive aggregates and alkalies, and loss on ignition (LOI) not to exceed 5 percent.
- C. Coarse Aggregate: ASTM C33.
 - 1. Size 67 or Size 467 may be used for footings and walls over 300 mm (12 inches) thick.
 - 2. Coarse aggregate for applied topping, encasement of steel columns, and metal pan stair fill shall be Size 7.
 - 3. Maximum size of coarse aggregates not more than one-fifth of narrowest dimension between sides of forms, one-third of depth of slabs, nor three-fourth of minimum clear spacing between reinforcing bars.

- D. Lightweight Aggregates for Structural Concrete: ASTM C330, Table 1. Maximum size of aggregate not larger than one-fifth of narrowest dimension between forms, nor three-fourth of minimum clear distance between reinforcing bars. Contractor to furnish certified report to verify that aggregate is sound and durable, and has a durability factor of not less than 80 based on 300 cycles of freezing and thawing when tested in accordance with ASTM C666.
- E. Fine Aggregate: ASTM C33. Fine aggregate for applied concrete floor topping shall pass a 4.75 mm (No. 4) sieve, 10 percent maximum shall pass a 150 μ m (No. 100) sieve.
- F. Mixing Water: Fresh, clean, and potable.
- G. Admixtures:
1. Water Reducing Admixture: ASTM C494, Type A and not contain more chloride ions than are present in municipal drinking water.
 2. Water Reducing, Retarding Admixture: ASTM C494, Type D and not contain more chloride ions than are present in municipal drinking water.
 3. High-Range Water-Reducing Admixture (Superplasticizer): ASTM C494, Type F or G, and not contain more chloride ions than are present in municipal drinking water.
 4. Non-Corrosive, Non-Chloride Accelerator: ASTM C494, Type C or E, and not contain more chloride ions than are present in municipal drinking water. Admixture manufacturer must have long-term non-corrosive test data from an independent testing laboratory of at least one year duration using an acceptable accelerated corrosion test method such as that using electrical potential measures.
 5. Air Entraining Admixture: ASTM C260.
 6. Microsilica: Use only with prior review and acceptance of the Resident Engineer. Use only in conjunction with high range water reducer.
 7. Calcium Nitrite corrosion inhibitor: ASTM C494 Type C.
 8. Prohibited Admixtures: Calcium chloride, thiocyanate or admixtures containing more than 0.05 percent chloride ions are not permitted.
 9. Certification: Written conformance to the requirements above and the chloride ion content of the admixture prior to mix design review.
- H. Vapor Barrier: ASTM E 1745, Class A. Include manufacturer's recommended adhesive or pressure-sensitive tape.
1. Sheet Vapor Barrier: Polyolefin sheet, not less than 15 mils (0.375 mm) thick.

2. Basis-of-Design Product: Stego-Wrap Vapor Barrier. Subject to compliance with the criteria indicated, provide the basis-of-design product or an approved equivalent product by a different manufacturer.
 - a. Water Vapor Tran Rate (WVTR): 0.008 gr./ft²/hr. maximum.
 - b. Permeance Rating (PERMS): 0.01 gr./ft²/hr. maximum.
 - c. Puncture Resistance: 204.0 lbs./sq.ft. minimum.
 - d. Tensile Strength: 54.2 lbs. at 1139% strain/MD and 55.5 lbs. at 1009% strain/CMD.
 - e. Tear Resistant: 7.40 lbs./ft. MD and 8.22 lbs./ft. CMD.
3. Provide manufacturer's recommended accessories for sealing perimeter of vapor barrier.
- I. Reinforcing Steel: ASTM A615, or ASTM A996, deformed, grade as shown.
- J. Welded Wire Fabric: ASTM A185.
- K. Reinforcing Bars to be Welded: ASTM A706.
- L. Galvanized Reinforcing Bars: ASTM A767.
- M. Epoxy Coated Reinforcing Bars: ASTM A775.
- N. Cold Drawn Steel Wire: ASTM A82.
- O. Reinforcement for Concrete Fireproofing: 100 mm x 100 mm x 3.4 mm diameter (4 x 4-W1.4 x W1.4) welded wire fabric, secured in place to hold mesh 20 mm (3/4 inch) away from steel. Mesh at steel columns shall be wired to No. 10 (No. 3) vertical corner steel bars.
- P. Reinforcement for Metal Pan Stair Fill: 50 mm (2 inch) wire mesh, either hexagonal mesh at .8Kg/m² (1.5 pounds per square yard), or square mesh at .6Kg/m² (1.17 pounds per square yard).
- Q. Supports, Spacers, and Chairs: Types which will hold reinforcement in position shown in accordance with requirements of ACI 318 except as specified.
- R. Expansion Joint Filler: ASTM D1751.
- S. Sheet Materials for Curing Concrete: ASTM C171.
- T. Liquid Membrane-forming Compounds for Curing Concrete: ASTM C309, Type I, with fugitive dye. Compound shall be compatible with scheduled surface treatment, such as paint and resilient tile, and shall not discolor concrete surface.
- U. Abrasive Aggregate: Aluminum oxide grains or emery grits.
- V. Liquid Hardener and Dustproofer: Fluosilicate solution of magnesium fluosilicate or zinc fluosilicate. Magnesium and zinc may be used separately or in combination as recommended by manufacturer.
- W. Moisture Vapor Emissions & Alkalinity Control Sealer: 100% active colorless aqueous siliconate solution concrete surface treatment applied the day of the concrete pour in lieu of other curing methods for all concrete slabs receiving resilient flooring, such as, sheet vinyl, vinyl

composition tile, rubber, wood flooring, carpet, epoxy coatings and overlays .

1. ASTM C1315 Type 1 Class A, and ASTM C309 Type 1 Class A, penetrating product to have no less than 34% solid content, leaving no sheen, volatile organic compound (VOC) content rating as required to suite regulatory requirements. The product shall have at least a five (5) year documented history in controlling moisture vapor emission from damaging floor covering, compatible with all finish materials.

2. MVE 15-Year Warranty:

- a. When a floor covering is installed on a below grade, on grade, or above grade concrete slab treated with Moisture Vapor Emissions & Alkalinity Control Sealer according to manufacturer's instruction, sealer manufacturer shall warrant the floor covering system against failure due to moisture vapor migration or moisture-born contaminates for a period of fifteen (15) years from the date of original installation. The warranty shall cover all labor and materials needed to replace all floor covering that fails due to moisture vapor emission & moisture born contaminates.

X. Penetrating Sealer: For use on parking garage ramps and decks. High penetration silane sealer providing minimum 95 percent screening per National Cooperative Highway Research Program (NCHRP) No. 244 standards for chloride ion penetration resistance. Requires moist (non-membrane) curing of slab.

Y. Non-Shrink Grout:

1. ASTM C1107, pre-mixed, produce a compressive strength of at least 18 MPa at three days and 35 MPa (5000 psi) at 28 days. Furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent bearing under a 1200 mm x 1200 mm (4 foot by 4 foot) base plate.
2. Where high fluidity or increased placing time is required, furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent under an 450 mm x 900 mm (18 inch by 36 inch) base plate.

Z. Adhesive Binder: ASTM C881.

1. Polyvinyl Chloride Waterstop: CRD C572.
2. Rubber Waterstops: CRD C513.
3. Bentonite Water Stop: Flexible strip of bentonite 25 mm x 20 mm (1 inch by 3/4 inch), weighing 8.7 kg/m (5.85 lbs. per foot) composed of Butyl Rubber Hydrocarbon (ASTM D297), Bentonite (SS-S-210-A) and Volatile Matter (ASTM D6).

4. Porous Backfill: Crushed stone or gravel graded from 25 mm to 20 mm (1 inch to 3/4 inch).
5. Synthetic Fibers: Monofilament or fibrillated polypropylene fibers for secondary reinforcing of concrete members. Use appropriate length and 0.9 kg/m^3 (1.5 lb. per cubic yard). Product shall have a UL rating.
6. Steel Fibers: ASTM A820, Type I cold drawn, high tensile steel wire for use as primary reinforcing in slab-on-grade. Minimum dosage rate 18 kg/m^3 (30 lb. per cubic yard).
7. Epoxy Joint Filler: Two component, 100 percent solids compound, with a minimum shore D hardness of 50.
8. Bonding Admixture: Non-rewettable, polymer modified, bonding compound.
9. Architectural Concrete: For areas designated as architectural concrete on the Contract Documents, use colored cements and specially selected aggregates as necessary to produce a concrete of a color and finish which exactly matches the designated sample panel.

2.3 CONCRETE MIXES:

- A. Mix Designs: Proportioned in accordance with Section 5.3, "Proportioning on the Basis of Field Experience and/or Trial Mixtures" of ACI 318.
 1. If trial mixes are used, make a set of at least 6 cylinders in accordance with ASTM C192 for test purposes from each trial mix; test three for compressive strength at 7 days and three at 28 days.
 2. Submit a report of results of each test series, include a detailed listing of the proportions of trial mix or mixes, including cement, fly ash, admixtures, weight of fine and coarse aggregate per m^3 (cubic yard) measured dry rodded and damp loose, specific gravity, fineness modulus, percentage of moisture, air content, water-cement-fly ash ratio, and consistency of each cylinder in terms of slump. Include dry unit weight of lightweight structural concrete.
 3. Prepare a curve showing relationship between water-cement-fly ash ratio at 7-day and 28-day compressive strengths. Plot each curve using at least three specimens.
 4. If the field experience method is used, submit complete standard deviation analysis.
- B. Fly Ash Testing: Submit certificate verifying conformance with specifications initially with mix design and for each truck load of fly ash delivered from source. Notify Resident Engineer immediately when change in source is anticipated. Prior to beginning trial mixes submit to the Resident Engineer the following representative samples of material to be used, properly identified source and project description

and number, type of testing (complete chemical and physical), suitably packaged for shipment, and addressed as specified. Allow 60 calendar days for test results after submittal of sample.

1. Fly ash - 2.25 kg (five pounds).

2. Portland cement - 3.5 kg (8 pounds):

a. Address -Waterways Experiment Station (WES)

b. 3909 Halls Ferry Road

c. Vicksburg, MS 39180-6199

d. ATTN: Engineering Materials Group

- C. After approval of mixes no substitution in material or change in proportions of approval mixes may be made without additional tests and approval of Resident Engineer or as specified. Making and testing of preliminary test cylinders may be carried on pending approval of cement and fly ash, providing Contractor and manufacturer certify that ingredients used in making test cylinders are the same. Resident Engineer may allow Contractor to proceed with depositing concrete for certain portions of work, pending final approval of cement and fly ash and approval of design mix.
- D. Cement Factor: Maintain minimum cement factors in Table I regardless of compressive strength developed above minimums. Use Fly Ash as an admixture with 20% replacement by weight in all structural work. Increase this replacement to 40% for mass concrete, and reduce it to 10% for drilled piers and caissons.

TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE

Concrete Strength		Non-Air- Entrained	Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/m ³ (lbs/c. yd)	Max. Water Cement Ratio	Min. Cement kg/m ³ (lbs/c. yd)	Max. Water Cement Ratio
35 (5000) ^{1,3}	375 (630)	0.45	385 (650)	0.40
30 (4000) ^{1,3}	325 (550)	0.50	340 (570)	0.45
25 (3000) ^{1,3}	280 (470)	0.55	290 (490)	0.50
25 (3000) ^{1,2}	300 (500)	*	310 (520)	*

1. If trial mixes are used, the proposed mix design shall achieve a compressive strength 8.3 MPa (1200 psi) in excess of f'c. For concrete strengths above 35 Mpa (5000 psi), the proposed mix design shall achieve a compressive strength 9.7 MPa (1400 psi) in excess of f'c.

2. Lightweight Structural Concrete. Pump mixes may require higher cement values.
 3. For concrete exposed to high sulfate content soils maximum water cement ratio is 0.44.
 4. Determined by Laboratory in accordance with ACI 211.1 for normal concrete or ACI 211.2 for lightweight structural concrete.
- E. Maximum Slump: Maximum slump, as determined by ASTM C143 with tolerances as established by ASTM C94, for concrete to be vibrated shall be as shown in Table II.

TABLE II - MAXIMUM SLUMP, MM (INCHES)*

Type of Construction	Normal Weight Concrete	Lightweight Structural Concrete
Reinforced Footings and Substructure Walls	75mm (3 inches)	75 mm (3 inches)
Slabs, Beams, Reinforced Walls, and Building Columns	100 mm (4 inches)	100 mm (4 inches)

- F. Slump may be increased by the use of the approved high-range water-reducing admixture (superplasticizer). Tolerances as established by ASTM C94. Concrete containing the high-range-water-reducing admixture may have a maximum slump of 225 mm (9 inches). The concrete shall arrive at the job site at a slump of 50 mm to 75 mm (2 inches to 3 inches), and 75 mm to 100 mm (3 inches to 4 inches) for lightweight concrete. This should be verified, and then the high-range-water-reducing admixture added to increase the slump to the approved level.
- G. Air-Entrainment: Air-entrainment of normal weight concrete shall conform with Table III. Air-entrainment of lightweight structural concrete shall conform with Table IV. Determine air content by either ASTM C173 or ASTM C231.

**TABLE III - TOTAL AIR CONTENT
FOR VARIOUS SIZES OF COARSE AGGREGATES (NORMAL CONCRETE)**

Nominal Maximum Size of Total Air Content	Coarse Aggregate, mm (Inches) Percentage by Volume
10 mm (3/8 in).6 to 10	13 mm (1/2 in).5 to 9
20 mm (3/4 in).4 to 8	25 mm (1 in).3-1/2 to 6-1/2
40 mm (1 1/2 in).3 to 6	

TABLE IV
AIR CONTENT OF LIGHTWEIGHT STRUCTURAL CONCRETE

Nominal Maximum size of Total Air Content	Coarse Aggregate, mm's (Inches) Percentage by Volume
Greater than 10 mm (3/8 in) 4 to 8	10 mm (3/8 in) or less 5 to 9

- H. High early strength concrete, made with Type III cement or Type I cement plus non-corrosive accelerator, shall have a 7-day compressive strength equal to specified minimum 28-day compressive strength for concrete type specified made with standard Portland cement.
- I. Lightweight structural concrete shall not weigh more than air-dry unit weight shown. Air-dry unit weight determined on 150 mm by 300 mm (6 inch by 12 inch) test cylinders after seven days standard moist curing followed by 21 days drying at $23 \text{ degrees C} \pm 1.7 \text{ degrees C}$ (73.4 ± 3 degrees Fahrenheit), and 50 (plus or minus 7) percent relative humidity. Use wet unit weight of fresh concrete as basis of control in field.
- J. Concrete slabs placed at air temperatures below 10 degrees C (50 degrees Fahrenheit) use non-corrosive, non-chloride accelerator. Concrete required to be air entrained use approved air entraining admixture. Pumped concrete, synthetic fiber concrete, architectural concrete, concrete required to be watertight, and concrete with a water/cement ratio below 0.50 use high-range water-reducing admixture (superplasticizer).
- K. Durability: Use air entrainment for exterior exposed concrete subjected to freezing and thawing and other concrete shown or specified. Air content as shown in Table III or Table IV.
- L. Enforcing Strength Requirements: Test as specified in Section 01 45 29, TESTING LABORATORY SERVICES, during the progress of the work. Seven-day tests may be used as indicators of 28-day strength. Average of any three 28-day consecutive strength tests of laboratory-cured specimens representing each type of concrete shall be equal to or greater than specified strength. No single test shall be more than 3.5 MPa (500 psi) below specified strength. Interpret field test results in accordance with ACI 214. Should strengths shown by test specimens fall below required values, Resident Engineer may require any one or any combination of the following corrective actions, at no additional cost to the Government:
1. Require changes in mix proportions by selecting one of the other appropriate trial mixes or changing proportions, including cement content, of approved trial mix.

2. Require additional curing and protection.
3. If five consecutive tests fall below 95 percent of minimum values given in Table I or if test results are so low as to raise a question as to the safety of the structure, Resident Engineer may direct Contractor to take cores from portions of the structure. Use results from cores tested by the Contractor retained testing agency to analyze structure.
4. If strength of core drilled specimens falls below 85 percent of minimum value given in Table I, Resident Engineer may order load tests, made by Contractor retained testing agency, on portions of building so affected. Load tests in accordance with ACI 318 and criteria of acceptability of concrete under test as given therein.
5. Concrete work, judged inadequate by structural analysis, by results of load test, or for any reason, shall be reinforced with additional construction or replaced, if directed by the Resident Engineer.

2.4 BATCHING AND MIXING:

- A. General: Concrete shall be "Ready-Mixed" and comply with ACI 318 and ASTM C94, except as specified. Batch mixing at the site is permitted. Mixing process and equipment must be approved by Resident Engineer. With each batch of concrete, furnish certified delivery tickets listing information in Paragraph 16.1 and 16.2 of ASTM C94. Maximum delivery temperature of concrete is 38°C (100 degrees Fahrenheit). Minimum delivery temperature as follows:

Atmospheric Temperature	Minimum Concrete Temperature
-1. degrees to 4.4 degrees C (30 degrees to 40 degrees F)	15.6 degrees C (60 degrees F.)
-17 degrees C to -1.1 degrees C (0 degrees to 30 degrees F.)	21 degrees C (70 degrees F.)

1. Services of aggregate manufacturer's representative shall be furnished during the design of trial mixes and as requested by the Resident Engineer for consultation during batching, mixing, and placing operations of lightweight structural concrete. Services will be required until field controls indicate that concrete of required quality is being furnished. Representative shall be thoroughly familiar with the structural lightweight aggregate, adjustment and control of mixes to produce concrete of required quality. Representative shall assist and advise Resident Engineer.

PART 3 - EXECUTION**3.1 FORMWORK:**

- A. General: Design in accordance with ACI 347 is the responsibility of the Contractor. The Contractor shall retain a registered Professional Engineer to design the formwork, shores, and reshores.
 - 1. Form boards and plywood forms may be reused for contact surfaces of exposed concrete only if thoroughly cleaned, patched, and repaired and Resident Engineer approves their reuse.
 - 2. Provide forms for concrete footings unless Resident Engineer determines forms are not necessary.
 - 3. Corrugated fiberboard forms: Place forms on a smooth firm bed, set tight, with no buckled cartons to prevent horizontal displacement, and in a dry condition when concrete is placed.
- B. Treating and Wetting: Treat or wet contact forms as follows:
 - 1. Coat plywood and board forms with non-staining form sealer. In hot weather, cool forms by wetting with cool water just before concrete is placed.
 - 2. Clean and coat removable metal forms with light form oil before reinforcement is placed. In hot weather, cool metal forms by thoroughly wetting with water just before placing concrete.
 - 3. Use sealer on reused plywood forms as specified for new material.
- C. Size and Spacing of Studs: Size and space studs, wales and other framing members for wall forms so as not to exceed safe working stress of kind of lumber used nor to develop deflection greater than $1/270$ of free span of member.
- D. Unlined Forms: Use plywood forms to obtain a smooth finish for concrete surfaces. Tightly butt edges of sheets to prevent leakage. Back up all vertical joints solidly and nail edges of adjacent sheets to same stud with 6d box nails spaced not over 150 mm (6 inches) apart.
- E. Lined Forms: May be used in lieu of unlined plywood forms. Back up form lining solidly with square edge board lumber securely nailed to studs with all edges in close contact to prevent bulging of lining. No joints in lining and backing may coincide. Nail abutted edges of sheets to same backing board. Nail lining at not over 200 mm (8 inches) on center along edges and with at least one nail to each square foot of surface area; nails to be 3d blued shingle or similar nails with thin flatheads.
- F. Architectural Liner: Attach liner as recommended by the manufacturer with tight joints to prevent leakage.
- G. Wall Form Ties: Locate wall form ties in symmetrically level horizontal rows at each line of wales and in plumb vertical tiers. Space ties to maintain true, plumb surfaces. Provide one row of ties within 150 mm (6

inches) above each construction joint. Space through-ties adjacent to horizontal and vertical construction joints not over 450 mm (18 inches) on center.

1. Tighten row of ties at bottom of form just before placing concrete and, if necessary, during placing of concrete to prevent seepage of concrete and to obtain a clean line. Ties to be entirely removed shall be loosened 24 hours after concrete is placed and shall be pulled from least important face when removed.
 2. Coat surfaces of all metal that is to be removed with paraffin, cup grease or a suitable compound to facilitate removal.
- H. Inserts, Sleeves, and Similar Items: Flashing reglets, steel strips, masonry ties, anchors, wood blocks, nailing strips, grounds, inserts, wire hangers, sleeves, drains, guard angles, forms for floor hinge boxes, inserts or bond blocks for elevator guide rails and supports, and other items specified as furnished under this and other sections of specifications and required to be in their final position at time concrete is placed shall be properly located, accurately positioned, and built into construction, and maintained securely in place.
1. Locate inserts or hanger wires for furred and suspended ceilings only in bottom of concrete joists, or similar concrete member of overhead concrete joist construction.
 2. Install sleeves, inserts and similar items for mechanical services in accordance with drawings prepared specially for mechanical services. Contractor is responsible for accuracy and completeness of drawings and shall coordinate requirements for mechanical services and equipment.
 3. Do not install sleeves in beams, joists or columns except where shown or permitted by Resident Engineer. Install sleeves in beams, joists, or columns that are not shown, but are permitted by the Resident Engineer, and require no structural changes, at no additional cost to the Government.
 4. Minimum clear distance of embedded items such as conduit and pipe is at least three times diameter of conduit or pipe, except at stub-ups and other similar locations.
 5. Provide recesses and blockouts in floor slabs for door closers and other hardware as necessary in accordance with manufacturer's instructions.
- I. Construction Tolerances:
1. Set and maintain concrete formwork to assure erection of completed work within tolerances specified and to accommodate installation of other rough and finish materials. Accomplish remedial work necessary

for correcting excessive tolerances. Erected work that exceeds specified tolerance limits shall be remedied or removed and replaced, at no additional cost to the Government.

2. Permissible surface irregularities for various classes of materials are defined as "finishes" in specification sections covering individual materials. They are to be distinguished from tolerances specified which are applicable to surface irregularities of structural elements.

3.2 PLACING REINFORCEMENT:

- A. General: Details of concrete reinforcement in accordance with ACI 318 unless otherwise shown.
- B. Placing: Place reinforcement conforming to CRSI DA4, unless otherwise shown.
 1. Place reinforcing bars accurately and tie securely at intersections and splices with 1.6 mm (16 gauge) black annealed wire. Use epoxy-coated tie wire with epoxy-coated reinforcing. Secure reinforcing bars against displacement during the placing of concrete by spacers, chairs, or other similar supports. Portions of supports, spacers, and chairs in contact with formwork shall be made of plastic in areas that will be exposed when building is occupied. Type, number, and spacing of supports conform to ACI 318. Where concrete slabs are placed on ground, use concrete blocks or other non-corrodible material of proper height, for support of reinforcement. Use of brick or stone supports will not be permitted.
 2. Lap welded wire fabric at least 1 1/2 mesh panels plus end extension of wires not less than 300 mm (12 inches) in structural slabs. Lap welded wire fabric at least 1/2 mesh panels plus end extension of wires not less than 150 mm (6 inches) in slabs on grade.
 3. Splice column steel at no points other than at footings and floor levels unless otherwise shown.
- C. Spacing: Minimum clear distances between parallel bars, except in columns and multiple layers of bars in beams shall be equal to nominal diameter of bars. Minimum clear spacing is 25 mm (1 inch) or 1-1/3 times maximum size of coarse aggregate.
- D. Splicing: Splices of reinforcement made only as required or shown or specified. Accomplish splicing as follows:
 1. Lap splices: Do not use lap splices for bars larger than Number 36 (Number 11). Minimum lengths of lap as shown.
 2. Welded splices: Splicing by butt-welding of reinforcement permitted providing the weld develops in tension at least 125 percent of the yield strength (fy) for the bars. Welding conform to the requirements

of AWS D1.4. Welded reinforcing steel conform to the chemical analysis requirements of AWS D1.4.

- a. Submit test reports indicating the chemical analysis to establish weldability of reinforcing steel.
 - b. Submit a field quality control procedure to insure proper inspection, materials and welding procedure for welded splices.
 - c. Department of Veterans Affairs retained testing agency shall test a minimum of three splices, for compliance, locations selected by Resident Engineer.
3. Mechanical Splices: Develop in tension and compression at least 125 percent of the yield strength (f_y) of the bars. Stresses of transition splices between two reinforcing bar sizes based on area of smaller bar. Provide mechanical splices at locations indicated. Use approved exothermic, tapered threaded coupling, or swaged and threaded sleeve. Exposed threads and swaging in the field not permitted.
- a. Initial qualification: In the presence of Resident Engineer, make three test mechanical splices of each bar size proposed to be spliced. Department of Veterans Affairs retained testing laboratory will perform load test.
 - b. During installation: Furnish, at no additional cost to the Government, one companion (sister) splice for every 50 splices for load testing. Department of Veterans Affairs retained testing laboratory will perform the load test.
- E. Bending: Bend bars cold, unless otherwise approved. Do not field bend bars partially embedded in concrete, except when approved by Resident Engineer.
- F. Cleaning: Metal reinforcement, at time concrete is placed, shall be free from loose flaky rust, mud, oil, or similar coatings that will reduce bond.
- G. Future Bonding: Protect exposed reinforcement bars intended for bonding with future work by wrapping with felt and coating felt with a bituminous compound unless otherwise shown.

3.3 VAPOR BARRIER:

- A. Sheet Vapor Barriers: Place, protect, and repair sheet vapor barrier according to ASTM E 1643, The American concrete Institute's 302.2R-06, and manufacturer's written instructions.
1. Lap joints 6 inches (150 mm) and seal with manufacturer's recommended tape.
 2. Seal around penetrations per manufacturer's written instructions.

3. Seal to slab at perimeter per manufacturer's written instructions using manufacturer's recommended accessories.
4. Patch punctures and tears.

3.4 CONSTRUCTION JOINTS:

- A. Unless otherwise shown, location of construction joints to limit individual placement shall not exceed 24,000 mm (80 feet) in any horizontal direction, except slabs on grade which shall have construction joints shown. Allow 48 hours to elapse between pouring adjacent sections unless this requirement is waived by Resident Engineer.
- B. Locate construction joints in suspended floors near the quarter-point of spans for slabs, beams or girders, unless a beam intersects a girder at center, in which case joint in girder shall be offset a distance equal to twice width of beam. Provide keys and inclined dowels as shown. Provide longitudinal keys as shown.
- C. Place concrete for columns slowly and in one operation between joints. Install joints in concrete columns at underside of deepest beam or girder framing into column.
- D. Allow 2 hours to elapse after column is cast before concrete of supported beam, girder or slab is placed. Place girders, beams, grade beams, column capitals, brackets, and haunches at the same time as slab unless otherwise shown.
- E. Install polyvinyl chloride or rubber water seals, as shown in accordance with manufacturer's instructions, to form continuous watertight seal.

3.6 EXPANSION JOINTS:

- A. Clean expansion joint surfaces before installing premolded filler and placing adjacent concrete.
- B. Install polyvinyl chloride or rubber water seals, as shown in accordance with manufacturer's instructions, to form continuous watertight seal.

3.7 PLACING CONCRETE:

- A. Preparation:
 1. Remove hardened concrete, wood chips, shavings and other debris from forms.
 2. Remove hardened concrete and foreign materials from interior surfaces of mixing and conveying equipment.
 3. Have forms and reinforcement inspected and approved by Resident Engineer before depositing concrete.
 4. Provide runways for wheeling equipment to convey concrete to point of deposit. Keep equipment on runways which are not supported by or bear on reinforcement. Provide similar runways for protection of vapor barrier on coarse fill.

- B. Bonding: Before depositing new concrete on or against concrete which has been set, thoroughly roughen and clean existing surfaces of laitance, foreign matter, and loose particles.
1. Preparing surface for applied topping:
 - a. Remove laitance, mortar, oil, grease, paint, or other foreign material by sand blasting. Clean with vacuum type equipment to remove sand and other loose material.
 - b. Broom clean and keep base slab wet for at least four hours before topping is applied.
 - c. Use a thin coat of one part Portland cement, 1.5 parts fine sand, bonding admixture; and water at a 50: 50 ratio and mix to achieve the consistency of thick paint. Apply to a damp base slab by scrubbing with a stiff fiber brush. New concrete shall be placed while the bonding grout is still tacky.
- C. Conveying Concrete: Convey concrete from mixer to final place of deposit by a method which will prevent segregation. Method of conveying concrete subject to approval of Resident Engineer.
- D. Placing: For special requirements see Paragraphs, HOT WEATHER and COLD WEATHER.
1. Do not place concrete when weather conditions prevent proper placement and consolidation, or when concrete has attained its initial set, or has contained its water or cement content more than 1 1/2 hours.
 2. Deposit concrete in forms as near as practicable in its final position. Prevent splashing of forms or reinforcement with concrete in advance of placing concrete.
 3. Do not drop concrete freely more than 3000 mm (10 feet) for concrete containing the high-range water-reducing admixture (superplasticizer) or 1500 mm (5 feet) for conventional concrete. Where greater drops are required, use a tremie or flexible spout (canvas elephant trunk), attached to a suitable hopper.
 4. Discharge contents of tremies or flexible spouts in horizontal layers not exceeding 500 mm (20 inches) in thickness, and space tremies such as to provide a minimum of lateral movement of concrete.
 5. Continuously place concrete until an entire unit between construction joints is placed. Rate and method of placing concrete shall be such that no concrete between construction joints will be deposited upon or against partly set concrete, after it's initial set has taken place, or after 45 minutes of elapsed time during concrete placement.
 6. On bottom of members with severe congestion of reinforcement, deposit 25 mm (1 inch) layer of flowing concrete containing the specified

high-range water-reducing admixture (superplasticizer). Successive concrete lifts may be a continuation of this concrete or concrete with a conventional slump.

7. Concrete on metal deck:

a. Concrete on metal deck shall be minimum thickness shown. Allow for deflection of steel beams and metal deck under the weight of wet concrete in calculating concrete quantities for slab.

- 1) The Contractor shall become familiar with deflection characteristics of structural frame to include proper amount of additional concrete due to beam/deck deflection.

E. Consolidation: Conform to ACI 309. Immediately after depositing, spade concrete next to forms, work around reinforcement and into angles of forms, tamp lightly by hand, and compact with mechanical vibrator applied directly into concrete at approximately 450 mm (18 inch) intervals. Mechanical vibrator shall be power driven, hand operated type with minimum frequency of 5000 cycles per minute having an intensity sufficient to cause flow or settlement of concrete into place. Vibrate concrete to produce thorough compaction, complete embedment of reinforcement and concrete of uniform and maximum density without segregation of mix. Do not transport concrete in forms by vibration.

1. Use of form vibration shall be approved only when concrete sections are too thin or too inaccessible for use of internal vibration.
2. Carry on vibration continuously with placing of concrete. Do not insert vibrator into concrete that has begun to set.

3.8 HOT WEATHER:

Follow the recommendations of ACI 305 or as specified to prevent problems in the manufacturing, placing, and curing of concrete that can adversely affect the properties and serviceability of the hardened concrete. Methods proposed for cooling materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by Resident Engineer.

3.9 COLD WEATHER:

Follow the recommendations of ACI 306 or as specified to prevent freezing of concrete and to permit concrete to gain strength properly. Use only the specified non-corrosive, non-chloride accelerator. Do not use calcium chloride, thiocyanates or admixtures containing more than 0.05 percent chloride ions. Methods proposed for heating materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by Resident Engineer.

3.10 PROTECTION AND CURING:

- A. Conform to ACI 308: Initial curing shall immediately follow the finishing operation. Protect exposed surfaces of concrete from premature drying, wash by rain and running water, wind, mechanical injury, and excessively hot or cold temperatures. Keep concrete not covered with membrane or other curing material continuously wet for at least 7 days after placing, except wet curing period for high-early-strength concrete shall be not less than 3 days. Keep wood forms continuously wet to prevent moisture loss until forms are removed. Cure exposed concrete surfaces as described below. Other curing methods may be used if approved by Resident Engineer.
1. Liquid curing and sealing compounds: Apply by power-driven spray or roller in accordance with the manufacturer's instructions. Apply immediately after finishing. Maximum coverage 10m²/L (400 square feet per gallon) on steel troweled surfaces and 7.5m²/L (300 square feet per gallon) on floated or broomed surfaces for the curing/sealing compound.
 2. Plastic sheets: Apply as soon as concrete has hardened sufficiently to prevent surface damage. Utilize widest practical width sheet and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with tape.
 3. Paper: Utilize widest practical width paper and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with sand, wood planks, pressure-sensitive tape, mastic or glue.

3.11 REMOVAL OF FORMS:

- A. Remove in a manner to assure complete safety of structure after the following conditions have been met.
1. Where structure as a whole is supported on shores, forms for beams and girder sides, columns, and similar vertical structural members may be removed after 24 hours, provided concrete has hardened sufficiently to prevent surface damage and curing is continued without any lapse in time as specified for exposed surfaces.
 2. Take particular care in removing forms of architectural exposed concrete to insure surfaces are not marred or gouged, and that corners and arises are true, sharp and unbroken.
- B. Control Test: Use to determine if the concrete has attained sufficient strength and curing to permit removal of supporting forms. Cylinders required for control tests taken in accordance with ASTM C172, molded in accordance with ASTM C31, and tested in accordance with ASTM C39. Control cylinders cured and protected in the same manner as the structure they represent. Supporting forms or shoring not removed until

strength of control test cylinders have attained at least 70 percent of minimum 28-day compressive strength specified. For post-tensioned systems supporting forms and shoring not removed until stressing is completed. Exercise care to assure that newly unsupported portions of structure are not subjected to heavy construction or material loading.

- C. Reshoring: Reshoring is required if superimposed load plus dead load of the floor exceeds the capacity of the floor at the time of loading. In addition, for flat slab/plate, reshoring is required immediately after stripping operations are complete and not later than the end of the same day. Reshoring accomplished in accordance with ACI 347 at no additional cost to the Government.

3.12 CONCRETE SURFACE PREPARATION:

- A. Metal Removal: Unnecessary metal items cut back flush with face of concrete members.
- B. Patching: Maintain curing and start patching as soon as forms are removed. Do not apply curing compounds to concrete surfaces requiring patching until patching is completed. Use cement mortar for patching of same composition as that used in concrete. Use white or gray Portland cement as necessary to obtain finish color matching surrounding concrete. Thoroughly clean areas to be patched. Cut out honeycombed or otherwise defective areas to solid concrete to a depth of not less than 25 mm (1 inch). Cut edge perpendicular to surface of concrete. Saturate with water area to be patched, and at least 150 mm (6 inches) surrounding before placing patching mortar. Give area to be patched a brush coat of cement grout followed immediately by patching mortar. Cement grout composed of one part Portland cement, 1.5 parts fine sand, bonding admixture, and water at a 50:50 ratio, mix to achieve consistency of thick paint. Mix patching mortar approximately 1 hour before placing and remix occasionally during this period without addition of water. Compact mortar into place and screed slightly higher than surrounding surface. After initial shrinkage has occurred, finish to match color and texture of adjoining surfaces. Cure patches as specified for other concrete. Fill form tie holes which extend entirely through walls from unexposed face by means of a pressure gun or other suitable device to force mortar through wall. Wipe excess mortar off exposed face with a cloth.
- C. Upon removal of forms, clean vertical concrete surface that is to receive bonded applied cementitious application with wire brushes or by sand blasting to remove unset material, laitance, and loose particles to expose aggregates to provide a clean, firm, granular surface for bond of applied finish.

3.13 CONCRETE FINISHES:

A. Vertical and Overhead Surface Finishes:

1. Unfinished areas: Vertical and overhead concrete surfaces exposed in pipe basements, elevator and dumbwaiter shafts, pipe spaces, pipe trenches, above suspended ceilings, manholes, and other unfinished areas will not require additional finishing.
2. Interior and exterior exposed areas finished: Give a grout finish of uniform color and smooth finish treated as follows:
 - a. After concrete has hardened and laitance, fins and burrs removed, scrub concrete with wire brushes. Clean stained concrete surfaces by use of a hone stone.
 - b. Apply grout composed of one part of Portland cement, one part fine sand, smaller than a 600 μm (No. 30) sieve. Work grout into surface of concrete with cork floats or fiber brushes until all pits, and honeycombs are filled.
 - c. After grout has hardened slightly, but while still plastic, scrape grout off with a sponge rubber float and, about 1 hour later, rub concrete vigorously with burlap to remove any excess grout remaining on surfaces.
 - d. In hot, dry weather use a fog spray to keep grout wet during setting period. Complete finish of area in same day. Make limits of finished areas at natural breaks in wall surface. Leave no grout on concrete surface overnight.

B. Slab Finishes:

1. Monitoring and Adjustment: Provide continuous cycle of placement, measurement, evaluation and adjustment of procedures to produce slabs within specified tolerances. Monitor elevations of structural steel in key locations before and after concrete placement to establish typical deflection patterns for the structural steel. Determine elevations of cast-in-place slab soffits prior to removal of shores. Provide information to COTR and floor consultant for evaluation and recommendations for subsequent placements.
2. Set perimeter forms to serve as screed using either optical or laser instruments. For slabs on grade, wet screeds may be used to establish initial grade during strike-off, unless Resident Engineer determines that the method is proving insufficient to meet required finish tolerances and directs use of rigid screed guides. Where wet screeds are allowed, they shall be placed using grade stakes set by optical or laser instruments. Use rigid screed guides, as opposed to wet screeds, to control strike-off elevation for all types of elevated (non slab-on-grade) slabs. Divide bays into halves or thirds by hard

- screeds. Adjust as necessary where monitoring of previous placements indicates unshored structural steel deflections to other than a level profile.
3. Place slabs monolithically. Once slab placement commences, complete finishing operations within same day. Slope finished slab to floor drains where they occur, whether shown or not.
 4. Use straightedges specifically made for screeding, such as hollow magnesium straightedges or power strike-offs. Do not use pieces of dimensioned lumber. Strike off and screed slab to a true surface at required elevations. Use optical or laser instruments to check concrete finished surface grade after strike-off. Repeat strike-off as necessary. Complete screeding before any excess moisture or bleeding water is present on surface. Do not sprinkle dry cement on the surface.
 5. Immediately following screeding, and before any bleed water appears, use a 3000 mm (10 foot) wide highway straightedge in a cutting and filling operation to achieve surface flatness. Do not use bull floats or darbys, except that darbying may be allowed for narrow slabs and restricted spaces.
 6. Wait until water sheen disappears and surface stiffens before proceeding further. Do not perform subsequent operations until concrete will sustain foot pressure with maximum of 6 mm (1/4 inch) indentation.
 7. Scratch Finish: Finish base slab to receive a bonded applied cementitious application as indicated above, except that bull floats and darbys may be used. Thoroughly coarse wire broom within two hours after placing to roughen slab surface to insure a permanent bond between base slab and applied materials.
 8. Float Finish: Slabs to receive unbonded toppings, steel trowel finish, fill, or mortar setting beds, and ramps, stair treads, platforms (interior and exterior), and equipment pads shall be floated to a smooth, dense uniform, sandy textured finish. During floating, while surface is still soft, check surface for flatness using a 3000 mm (10 foot) highway straightedge. Correct high spots by cutting down and correct low spots by filling in with material of same composition as floor finish. Remove any surface projections and re-float to a uniform texture.
 9. Steel Trowel Finish: Concrete surfaces to receive resilient floor covering or carpet, monolithic floor slabs to be exposed to view in finished work, applied toppings, and other interior surfaces for which no other finish is indicated. Steel trowel immediately

following floating. During final troweling, tilt steel trowel at a slight angle and exert heavy pressure to compact cement paste and form a dense, smooth surface. Finished surface shall be smooth, free of trowel marks, and uniform in texture and appearance.

10. Broom Finish: Finish exterior slabs and ramps with a bristle brush moistened with clear water after surfaces have been floated. Brush in a direction transverse to main traffic. Match texture approved by COTR from sample panel.
11. Finished slab flatness (FF) and levelness (FL) values comply with the following minimum requirements:
 - a. Areas covered with carpeting, or not specified otherwise in b. below:
 - 1) Slab on Grade:

a) Specified overall value	FF 25/FL 20
b) Minimum local value	FF 17/FL 15
 - 2) Level suspended slabs (shored until after testing) and topping slabs:

a) Specified overall value	FF 25/FL 20
b) Minimum local value	FF 17/FL 15
 - 3) Unshored suspended slabs:

a) Specified overall value	FF 25
b) Minimum local value	FF 17
 - 4) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.
 - b. Areas that will be exposed, receive thin-set tile or resilient flooring, or roof areas designed as future floors:
 - 1) Slab on grade:

a) Specified overall value	FF 36/FL 20
b) Minimum local value	FF 24/FL 15
 - 2) Level suspended slabs (shored until after testing) and topping slabs

a) Specified overall value	FF 30/FL 20
b) Minimum local value	FF 24/FL 15
 - 3) Unshored suspended slabs:

a) Specified overall value	FF 30
b) Minimum local value	FF 24
 - 4) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.

- c. "Specified overall value" is based on the composite of all measured values in a placement derived in accordance with ASTM E1155.
 - d. "Minimum local value" (MLV) describes the flatness or levelness below which repair or replacement is required. MLV is based on the results of an individual placement and applies to a minimum local area. Minimum local area boundaries may not cross a construction joint or expansion joint. A minimum local area will be bounded by construction and/or control joints, or by column lines and/or half-column lines, whichever is smaller.
12. Measurements
- a. Department of Veterans Affairs may retain testing laboratory to take measurements as directed by COTR, to verify compliance with FF, FL, and other finish requirements. Measurements will occur within 72 hours after completion of concrete placement (weekends and holidays excluded). Make measurements before shores or forms are removed to insure the "as-built" levelness is accurately assessed. Profile data for above characteristics may be collected using a laser level or any Type II apparatus (ASTM E1155, "profileograph" or "dipstick"). Contractor's surveyor shall establish reference elevations to be used by Department of Veterans Affairs retained testing laboratory.
 - b. Contractor not experienced in using FF and FL criteria is encouraged to retain the services of a floor consultant to assist with recommendations concerning adjustments to slab thicknesses, finishing techniques, and procedures on measurements of the finish as it progresses in order to achieve the specific flatness and levelness numbers.
13. Acceptance/ Rejection:
- a. If individual slab section measures less than either of specified minimum local F_F/F_L numbers, that section shall be rejected and remedial measures shall be required. Sectional boundaries may be set at construction and contraction (control) joints, and not smaller than one-half bay.
 - b. If composite value of entire slab installation, combination of all local results, measures less than either of specified overall F_F/F_L numbers, then whole slab shall be rejected and remedial measures shall be required.
14. Remedial Measures for Rejected Slabs: Correct rejected slab areas by grinding, planning, surface repair with underlayment compound or repair topping, retopping, or removal and replacement of entire

rejected slab areas, as directed by Resident Engineer, until a slab finish constructed within specified tolerances is accepted.

3.14 SURFACE TREATMENTS:

- A. Use on exposed concrete floors and concrete floors to receive carpeting except those specified to receive non-slip finish.
- B. Liquid Densifier/Sealer: Apply in accordance with manufacturer's directions just prior to completion of construction.
- C. Non-Slip Finish: Except where safety nosing and tread coverings are shown, apply non-slip abrasive aggregate to treads and platforms of concrete steps and stairs, and to surfaces of exterior concrete ramps and platforms. Broadcast aggregate uniformly over concrete surface at rate of application of 8% per 1/10th m² (7.5 percent per square foot) of area. Trowel concrete surface to smooth dense finish. After curing, rub treated surface with abrasive brick and water to slightly expose abrasive aggregate.

3.15 APPLIED TOPPING:

- A. Separate concrete topping on floor base slab of thickness and strength shown. Topping mix shall have a maximum slump of 200 mm (8 inches) for concrete containing a high-range water-reducing admixture (superplasticizer) and 100 mm (4 inches) for conventional mix. Neatly bevel or slope at door openings and at slabs adjoining spaces not receiving an applied finish.
- B. Placing: Place continuously until entire section is complete, struck off with straightedge, leveled with a highway straightedge or highway bull float, floated and troweled by machine to a hard dense finish. Slope to floor drains as required. Do not start floating until free water has disappeared and no water sheen is visible. Allow drying of surface moisture naturally. Do not hasten by "dusting" with cement or sand.

3.16 RESURFACING FLOORS:

Remove existing flooring areas to receive resurfacing to expose existing structural slab and extend not less than 25 mm (1 inch) below new finished floor level. Prepare exposed structural slab surface by roughening, broom cleaning, and dampening. Apply specified bonding grout. Place topping while the bonding grout is still tacky.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 04 05 13
MASONRY MORTARING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. Section specifies mortar materials and mixes.

1.2 RELATED WORK:

A. Mortar used in Section:

1. Section 04 20 00, UNIT MASONRY.

1.3 TESTING LABORATORY-CONTRACTOR RETAINED

A. Engage a commercial testing laboratory approved by COTR to perform tests specified below.

1.4 TESTS

- A. Test mortar and materials specified.
- B. Certified test reports.
- C. Identify materials by type, brand name and manufacturer or by origin.
- D. Do not use materials until laboratory test reports are approved by COTR.
- E. After tests have been made and materials approved, do not change without additional test and approval of COTR.
- F. Testing:
 - 1. Test materials proposed for use for compliance with specifications in accordance with test methods contained in referenced specifications and as follows:
 - 2. Mortar:
 - a. Test for compressive strength and water retention; ASTM C270.
 - b. Mortar compressive strengths 28 days as follows:
Type S: Minimum 12400 kPa (1800 psi) at 28 days.
- G. During progress of work, testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES, takes and tests samples as specified in that section. Testing procedures and test methods in ASTM C780.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Certificates:
 - 1. Indicating that following items meet specifications:
 - a. Portland cement.
 - b. Masonry cement.
 - c. Mortar cement.
 - d. Hydrated lime.
 - e. Fine aggregate (sand).
 - f. Color admixture.

C. Laboratory Test Reports:

1. Mortar, each type.
2. Admixtures.

D. Manufacturer's Literature and Data:

1. Cement, each kind.
2. Hydrated lime.
3. Admixtures.
4. Liquid acrylic resin.

1.6 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Deliver masonry materials in original sealed containers marked with name of manufacturer and identification of contents.
- B. Store masonry materials under waterproof covers on planking clear of ground, and protect damage from handling, dirt, stain, water and wind.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C40-04Organic Impurities in Fine Aggregates for
Concrete
 - C91-05Masonry Cement
 - C109-08Compressive Strength of Hydraulic Cement Mortars
(Using 2-in. or 50-MM Cube Specimens)
 - C144-04Aggregate for Masonry Mortar
 - C150-09Portland Cement
 - C207-06Hydrated Lime for Masonry Purposes
 - C270-10Mortar for Unit Masonry
 - C307-03(R2008)Tensile Strength of Chemical - Resistant Mortar,
Grouts, and Monolithic Surfacing
 - C321-00(R2005)Bond Strength of Chemical-Resistant Mortars
 - C348-08Flexural Strength of Hydraulic Cement Mortars
 - C595-10Blended Hydraulic Cement
 - C780-10Preconstruction and Construction Evaluation of
Mortars for Plain and Reinforced Unit Masonry
 - C979-10Pigments for Integrally Colored Concrete
 - C1329-05Mortar Cement

PART 2 - PRODUCTS**2.1 HYDRATED LIME**

- A. ASTM C207, Type S.

2.2 AGGREGATE FOR MASONRY MORTAR

- A. ASTM C144 and as follows:
 - 1. Light colored sand for mortar for laying face brick.
- B. Test sand for color value in accordance with ASTM C40. Sand producing color darker than specified standard is unacceptable.

2.3 BLENDED HYDRAULIC CEMENT

- A. ASTM C595, Type IS, IP.

2.4 MASONRY CEMENT

- A. ASTM C91. Type N, S, or M.

2.5 MORTAR CEMENT

- A. ASTM C1329, Type N, S or M.

2.6 PORTLAND CEMENT

- A. ASTM C150, Type I.

2.7 LIQUID ACRYLIC RESIN

- A. A formulation of acrylic polymers and modifiers in liquid form designed for use as an additive for mortar to improve physical properties.

2.8 WATER

- A. Potable, free of substances that are detrimental to mortar, masonry, and metal.

2.9 MASONRY MORTAR

- A. Conform to ASTM C270.
- B. Admixtures:
 - 1. Do not use mortar admixtures and color admixtures unless approved by COTR.
 - 2. Submit laboratory test report showing effect of proposed admixture on strength, water retention, and water repellency of mortar.
 - 3. Do not use antifreeze compounds.
- C. Colored Mortar:
 - 1. Maintain uniform mortar color for exposed work throughout.
 - 2. Color of mortar for exposed work to match color of existing mortar unless specified otherwise on the Drawings.
- D. Color Admixtures:
 - 1. Proportion as specified by manufacturer.

2.10 COLOR ADMIXTURE

- A. Pigments: ASTM C979.
- B. Use mineral pigments only. Organic pigments are not acceptable.
- C. Pigments inert, stable to atmospheric conditions, nonfading, alkali resistant and water insoluble.

PART 3 - EXECUTION**3.1 MIXING**

- A. Mix in a mechanically operated mortar mixer.
 - 1. Mix mortar for at least three minutes but not more than five minutes.
- B. Measure ingredients by volume. Measure by the use of a container of known capacity.
- C. Mix water with dry ingredients in sufficient amount to provide a workable mixture which will adhere to vertical surfaces of masonry units.
- D. Mortar that has stiffened because of loss of water through evaporations:
 - 1. Re-tempered by adding water to restore to proper consistency and workability.
 - 2. Discard mortar that has reached its initial set or has not been used within two hours.
- E. Pointing Mortar:
 - 1. Mix dry ingredients with enough water to produce a damp mixture of workable consistency which will retain its shape when formed into a ball.
 - 2. Allow mortar to stand in dampened condition for one to 1-1/2 hours.
 - 3. Add water to bring mortar to a workable consistency prior to application.

3.2 MORTAR USE LOCATION

- A. For brick veneer over frame back up walls, use Type N portland cement-lime mortar or Type S masonry cement or mortar cement mortar.

- - - E N D - - -

**SECTION 04 05 16
MASONRY GROUTING**

PART 1 - GENERAL

1.1 DESCRIPTION:

Section specifies grout materials and mixes.

1.2 RELATED WORK:

A. Grout used in Section:

1. Section 03 45 00, PRECAST ARCHITECTURAL CONCRETE.
2. Section 04 20 00, UNIT MASONRY.
3. Section 04 72 00, CAST STONE MASONRY.

B. Grout Color: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 TESTS:

A. Test grout and materials specified.

B. Certified test reports.

C. Identify materials by type, brand name and manufacturer or by origin.

D. Do not use materials until laboratory test reports are approved by Resident Engineer.

E. After tests have been made and materials approved, do not change without additional test and approval of Resident Engineer.

F. Testing:

1. Test materials proposed for use for compliance with specifications in accordance with test methods contained in referenced specifications and as follows:

2. Grout:

- a. Test for compressive strength; ASTM C1019.
- b. Grout compressive strength of 13790 kPa (2000 psi) at 28 days.

3. Cement:

- a. Test for water soluble alkali (nonstaining) when nonstaining cement is specified.
- b. Nonstaining cement shall contain not more than 0.03 percent water soluble alkali.

4. Sand: Test for deleterious substances, organic impurities, soundness and grading.

1.4 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Certificates:

1. Indicating that following items meet specifications:
 - a. Portland cement.
 - b. Masonry cement.

- c. Grout.
- d. Hydrated lime.
- e. Fine aggregate (sand).
- f. Coarse aggregate for grout.
- g. Color admixture.
- C. Laboratory Test Reports:
 - 1. Grout, each type.
 - 2. Admixtures.
- D. Manufacturer's Literature and Data:
 - 1. Cement, each kind.
 - 2. Hydrated lime.
 - 3. Admixtures.
 - 4. Liquid acrylic resin.

1.5 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Deliver masonry materials in original sealed containers marked with name of manufacturer and identification of contents.
- B. Store masonry materials under waterproof covers on planking clear of ground, and protect damage from handling, dirt, stain, water and wind.

1.6 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C40-04Organic Impurities in Fine Aggregates for
Concrete
 - C91-05Masonry Cement
 - C150-09Portland Cement
 - C207-06Hydrated Lime for Masonry Purposes
 - C404-07Aggregate for Masonry Grout
 - C476-10Grout for Masonry
 - C595-10Blended Hydraulic Cement
 - C979-10Pigments for Integrally Colored Concrete
 - C1019-11Sampling and Testing Grout

PART 2 - PRODUCTS

2.1 HYDRATED LIME:

ASTM C207, Type S.

2.2 AGGREGATE FOR MASONRY GROUT:

ASTM C404, Size 8.

2.3 BLENDED HYDRAULIC CEMENT:

ASTM C595, Type IS, IP.

2.4 MASONRY CEMENT:

- A. ASTM C91. Type N, S, or M.
- B. Use white masonry cement whenever white mortar is specified.

2.5 PORTLAND CEMENT:

- A. ASTM C150, Type I.
- B. Use white Portland cement wherever white mortar is specified.

2.6 LIQUID ACRYLIC RESIN:

A formulation of acrylic polymers and modifiers in liquid form designed for use as an additive for mortar to improve physical properties.

2.7 WATER:

Potable, free of substances that are detrimental to grout, masonry, and metal.

2.8 GROUT:

- A. Conform to ASTM C476 except as specified.
- B. Grout type proportioned by volume as follows:
 - 1. Fine Grout:
 - a. Portland cement or blended hydraulic cement: one part.
 - b. Hydrated lime: 0 to 1/10 part.
 - c. Fine aggregate: 2-1/4 to three times sum of volumes of cement and lime used.
 - 2. Coarse Grout:
 - a. Portland cement or blended hydraulic cement: one part.
 - b. Hydrated lime: 0 to 1/10 part.
 - c. Fine aggregate: 2-1/4 to three times sum of volumes of cement and lime used.
 - d. Coarse aggregate: one to two times sum of volumes of cement and lime used.
 - 3. Sum of volumes of fine and coarse aggregates: Do not exceed four times sum of volumes of cement and lime used.

2.9 COLOR ADMIXTURE:

- A. Pigments: ASTM C979.
- B. Use mineral pigments only. Organic pigments are not acceptable.
- C. Pigments inert, stable to atmospheric conditions, nonfading, alkali resistant and water insoluble.

PART 3 - EXECUTION**3.1 MIXING:**

- A. Mix in a mechanically operated grout mixer.
 - 1. Mix grout for at least five minutes.
- B. Measure ingredients by volume. Measure by the use of a container of known capacity.

- C. Mix water with grout dry ingredients in sufficient amount to bring grout mixture to a pouring consistency.

3.2 GROUT USE LOCATIONS:

- A. Use fine grout for filling wall cavities and cells of concrete masonry units where the smallest dimension is 50 mm (2 inches) or less.
- B. Use either fine grout or coarse grout for filling wall cavities and cells of concrete masonry units where the smallest dimension is greater than 50 mm (2 inches).
- C. Do not use grout for filling bond beam or lintel units.

- - - E N D - - -

**SECTION 04 05 31
MASONRY TUCK POINTING**

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies requirements for tuck pointing of existing masonry and stone work.

1.2 RELATED WORK

Mortars: Section 04 05 13, MASONRY MORTARING.

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C67-07Brick and Structural Clay Tile, Sampling and Testing
 - C216-07Facing Brick (Solid Masonry Units Made From Clay or Shale)
 - C270-07Mortar for Unit Masonry
- C. International Masonry Institute: Recommended Practices and Guide Specifications for Cold Weather Masonry Construction.

PART 2 - PRODUCTS

2.1 TUCK POINTING MORTAR

As per appendix X3 of ASTM C270.

2.2 REPLACEMENT MASONRY UNITS

- A. Face Brick:
 - 1. ASTM C216, Grade SW, Type FBS. Brick shall be classified slightly efflorescent or better when tested in accordance with ASTM C67.
 - 2. Face brick shall be Robinson Brick Colonial Satin to match facing brick of the existing building(s) that is being tuck pointed.
- B. Other Units to match existing.

PART 3 - EXECUTION

3.1 CUT OUT OF EXISTING MORTAR JOINTS

- A. Cut out existing mortar joints (both bed and head joints) and remove by means of a toothing chisel or a special pointer's grinder, to a uniform depth of to 19 mm (3/4-inch), or until sound mortar is reached. Take care to not damage edges of existing masonry units to remain.
- B. Remove dust and debris from the joints by brushing, blowing with air or rinsing with water. Do not rinse when temperature is below freezing.

3.2 JOB CONDITIONS

- A. Protection: Protect newly pointed joints from rain, until pointed joints are sufficiently hard enough to prevent damage.
- B. Cold Weather Protection:
 - 1. Tuck pointing may be performed in freezing weather when methods of protection are utilized.
 - 2. Comply with applicable sections of "Recommended Practices for Cold Weather Construction" as published by International Masonry Industry All Weather Council.
 - 3. Existing surfaces at temperatures to prevent mortar from freezing or causing other damage to mortar.

3.3 INSTALLATION OF TUCK POINTING MORTAR

- A. Immediately prior to application of mortar, dampen joints to be tuck pointed. Prior to application of pointing mortar, allow masonry units to absorb surface water.
- B. Tightly pack mortar into joints in thin layers, approximately 6 mm (1/4-inch) thick maximum.
- C. Allow layer to become "thumbprint hard" before applying next layer.
- D. Pack final layer flush with surfaces of masonry units. When mortar becomes "thumbprint hard", tool joints.

3.4 TOOLING OF JOINTS

- A. Tool joints with a jointing tool to produce a smooth, compacted, concaved joint.
- B. Tool joints in patch work with a jointing tool to match the existing surrounding joints.

3.5 REPLACEMENT OF MASONRY UNITS

- A. Cut out mortar joints surrounding masonry units that are to be removed and replaced.
 - 1. Units removed may be broken and removed, providing surrounding units to remain are not damaged.
 - 2. Once the units are removed, carefully chisel out the old mortar and remove dust and debris.
 - 3. If units are located in exterior wythe of a cavity or veneer wall, exercise care to prevent debris falling into cavity.
- B. Dampen surfaces of the surrounding units before new units are placed.
 - 1. Allow existing masonry to absorb surface moisture prior to starting installation of the new replacement units.
 - 2. Butter contact surfaces of existing masonry and new replacement masonry units with mortar.
 - 3. Center replacement masonry units in opening and press into position.

4. Remove excess mortar with a trowel.
5. Point around replacement masonry units to ensure full head and bed joints.
6. When mortar becomes "thumbprint hard", tool joints.

3.6 CLEANING

- A. Clean exposed masonry surfaces on completion.
- B. Remove mortar droppings and other foreign substances from wall surfaces.
- C. First wet surfaces with clean water, then wash down with a solution of soapless detergent specially prepared for cleaning brick.
- D. Brush with stiff fiber brushes while washing, and immediately thereafter hose down with clean water.
- E. Free clean surfaces from traces of detergent, foreign streaks or stains. Protect materials during cleaning operations including adjoining construction.
- F. Use of muratic acid for cleaning is prohibited.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 04 20 00
UNIT MASONRY**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies requirements for construction of masonry unit walls.

1.2 RELATED WORK

- A. Mortars: Section 04 05 13, MASONRY MORTARING.
- B. Steel lintels and shelf angles: Section 05 50 00, METAL FABRICATIONS.
- C. Water Repellents: Sections 07 19 00, WATER REPELLENTS.
- D. Cavity insulation: Section 07 21 13, THERMAL INSULATION.
- E. Flashing: Section 07 60 00, FLASHING AND SHEET METAL.
- F. Sealants and sealant installation: Section 07 92 00, JOINT SEALANTS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Samples:
 - 1. Face brick, sample panel, 200 mm by 400 mm (8 inches by 16 inches,) showing full color range and texture of bricks, bond, and proposed mortar joints.
 - 2. Anchors, and ties, one each and joint reinforcing 1200 mm (48 inches) long.
- C. Shop Drawings:
 - 1. Drawings, showing reinforcement, applicable dimensions and methods of brick installation at a typical wall installation, window head, sill and jamb, at ornamental brick band, at concrete stem wall, and at top of brick.
- D. Manufacturer's Literature and Data:
 - 1. Anchors, ties, and reinforcement.

1.4 SAMPLE PANEL

- A. Before starting masonry, lay up a minimum 16 sq. ft. (1.5 sq. m.) mock-up panel in accordance with Masonry Standards Joint Committee (MSJC) and Brick Industry Association (BIA). Locate as directed by the COTR and where it can be protected during masonry work.
 - 1. Use masonry units from random cubes of units delivered on site.
 - 2. Include reinforcing, ties, and anchors.
 - 3. Include the ornamental brick band as shown on the design documents below the first floor level.
- B. Notify COTR in advance of date and time that mock-up will be constructed.

- C. Use mock-up panel approved by COTR for standard of workmanship of new masonry work.
- D. Use mock-up panel to demonstrate cleaning methods.
- E. Remove mock-up when directed.

1.5 WARRANTY

- A. Warrant exterior masonry walls against moisture leaks and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be five years.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A951-06Steel Wire for Masonry Joint Reinforcement.
 - A615/A615M-09Deformed and Plain Billet-Steel Bars for Concrete Reinforcement.
 - A675/A675M-03(R2009) ...Standard Specification for Steel Bars, Carbon, Hot-Wrought, Special Quality, Mechanical Properties
 - C34-03 Structural Clay Load-Bearing Wall Tile
 - C55-09Concrete Building Brick
 - C56-10Structural Clay Non-Load-Bearing Tile
 - C62-10Building Brick (Solid Masonry Units Made From Clay or Shale)
 - C67-09Sampling and Testing Brick and Structural Clay Tile
 - C90-11Load-Bearing Concrete Masonry Units
 - C126-10Ceramic Glazed Structural Clay Facing Tile, Facing Brick, and Solid Masonry Units
 - C216-10Facing Brick (Solid Masonry Units Made From Clay or Shale)
 - C476-10Standard Specification for Grout for Masonry
 - C612-10Mineral Fiber Block and Board Thermal Insulation
 - C744-11Prefaced Concrete and Calcium Silicate Masonry Units.
 - D1056-07Flexible Cellular Materials - Sponge or Expanded Rubber
 - D2000-08Rubber Products in Automotive Applications
 - D2240-05(R2010)Rubber Property - Durometer Hardness
 - D3574-08Flexible Cellular Materials-Slab, Bonded, and Molded Urethane Foams
 - F1667-11Fasteners: Nails, Spikes and Staples

C. Masonry Industry Council:

Hot and Cold Weather Masonry Construction Manual-98 (R2000).

D. American Welding Society (AWS):

D1.4-11 Structural Welding Code - Reinforcing Steel.

E. Federal Specifications (FS):

FF-S-107C-00Screws, Tapping and Drive

F. Brick Industry Association - Technical Notes on Brick Construction (BIA):

11-2001Guide Specifications for Brick Masonry, Part I

11A-1988Guide Specifications for Brick Masonry, Part II

11B-1988Guide Specifications for Brick Masonry, Part III
Execution

11C-1998Guide Specification for Brick Masonry Engineered
Brick Masonry, Part IV

11D-1988Guide Specifications for Brick Masonry
Engineered Brick Masonry, Part IV continued

G. Masonry Standards Joint Committee; Specifications for Masonry Structures

TMS 602-08/ACI 530.1-08/ASCE 6-08 (2008 MSJC Book Version TMS-0402-08).

PART 2 - PRODUCTS**2.1 BRICK**

A. Face Brick:

1. ASTM C216, Grade SW, Type FBS.

2. Brick when tested in accordance with ASTM C67: Classified slightly efflorescent or better.

3. Size:

a. Modular: 7 5/8" (194 mm) x 3 5/8" (92 mm) x 2 1/4" (57 mm).

4. Manufacturer: Provide Robinson Brick Colonial Satin.

B. If a different brick is to be submitted as a substitution, it must meet the Idaho State Historic Preservation Office (SHPO) requirements and approvals.

2.2 ANCHORS, TIES, AND REINFORCEMENT

A. Adjustable Veneer Anchor for Frame Walls:

1. Anchor shall be compatible with continuous insulation installed on the exterior of the frame walls. Coordinate with details for insulation thickness.

2. Two piece, adjustable anchor and tie.

3. Anchor and tie may be either type; use only one type throughout.

4. Loop Type:

- a. Anchor: Screw-on galvanized steel anchor strap 2.75 mm (0.11 inch) by 19 mm (3/4 inch) wide by 225 mm (9 inches) long, with 9 mm (0.35 inch) offset and 100 mm (4 inch) adjustment. Provide 5 mm (0.20 inch) hole at each end for fasteners.
- b. Ties: Triangular tie, fabricated of 5 mm (0.20 inch) diameter galvanized cold drawn steel wire. Ties long enough to engage the anchor and be embedded not less than 50 mm (2 inches) into the bed joint of the masonry veneer.

5. Angle Type:

- a. Anchor: Minimum 2 mm (16 gage) thick galvanized steel angle shaped anchor strap. Provide hole in vertical leg for fastener. Provide hole near end of outstanding leg to suit upstanding portion of tie.
- b. Tie: Fabricate from 5 mm (0.20 inch) diameter galvanized cold drawn steel wire. Form "L" shape to be embedded not less than 50 mm (2 inches) into the bed joint of the masonry veneer and provide upstanding leg to fit through hole in anchor and be long enough to allow 50 mm (2 inches) of vertical adjustment.

B. Dovetail Anchors:

- 1. Corrugated steel dovetail anchors formed of 1.5 mm (0.0598 inch) thick by 25 mm (1 inch) wide galvanized steel, 90 mm (3-1/2 inches) long where used to anchor 100 mm (4 inch) nominal thick masonry units, 140 mm (5-1/2 inches) long for masonry units more than 100 mm (4 inches) thick.
- 2. Triangular wire dovetail anchor 100 mm (4 inch) wide formed of 4 mm (9 gage) steel wire with galvanized steel dovetail insert. Anchor length to extend at least 75 mm (3 inches) into masonry, 25 mm (1 inch) into 40 mm (1-1/2 inch) thick units.
- 3. Form dovetail anchor slots from 0.6 mm (0.0239 inch) thick galvanized steel (with felt or fiber filler).

C. Wall Ties, (Mesh or Wire):

- 1. Mesh wall ties formed of ASTM A82, W0.5, 2 mm, (16 gage) galvanized steel wire 13 mm by 13 mm (1/2 inch by 1/2 inch) mesh, 75 mm (3 inches) wide by 200 mm (8 inches) long.
- 2. Rectangular wire wall ties formed of W1.4, 3 mm, (9 gage) galvanized steel wire 50 mm (2 inches) wide by 200 mm (8 inches) long.

D. Corrugated Wall Tie:

- 1. Form from 1.5 mm (0.0598 inch) thick corrugated, galvanized steel 30 mm (1-1/4 inches) wide by lengths so as to extend at least 100 mm (4 inches) into joints of new masonry plus 38 mm (1-1/2 inch) turn-up.
- 2. Provide 5 mm (3/16 inch) hole in turn-up for fastener attachment.

2.3 PREFORMED COMPRESSIBLE JOINT FILLER

- A. Thickness and depth to fill the joint as specified.
- B. Closed Cell Neoprene: ASTM D1056, Type 2, Class A, Grade 1, B2F1.
- C. Non-Combustible Type: ASTM C612, Class 5, 1800 degrees F.

2.4 ACCESSORIES

- A. Weep Hole Wicks: Glass fiber ropes, 10 mm (3/8 inch) minimum diameter, 300 mm (12 inches) long.
- B. Masonry Cleaner:
 - 1. Detergent type cleaner selected for each type masonry used.
 - 2. Acid cleaners are not acceptable.
 - 3. Use soapless type specially prepared for cleaning brick as appropriate.
- C. Fasteners:
 - 1. Concrete Nails: ASTM F1667, Type I, Style 11, 19 mm (3/4 inch) minimum length.
 - 2. Masonry Nails: ASTM F1667, Type I, Style 17, 19 mm (3/4 inch) minimum length.
 - 3. Screws: FS-FF-S-107, Type A, AB, SF thread forming or cutting.
- D. Loose lintels:
 - 1. Loose lintels are to be provided by the Metal Fabrication subcontractor per specification 05 50 00 but are to be installed by the Unit Masonry subcontractor 04 20 00.

PART 3 - EXECUTION**3.1 JOB CONDITIONS**

- A. Protection:
 - 1. Cover tops of walls with nonstaining waterproof covering, when work is not in progress. Secure to prevent wind blow off.
 - 2. On new work protect base of wall from mud, dirt, mortar droppings, and other materials that will stain face, until final landscaping or other site work is completed.
- B. Cold Weather Protection:
 - 1. Masonry may be laid in freezing weather when methods of protection are utilized.
 - 2. Comply with MSJC and "Hot and Cold Weather Masonry Construction Manual".

3.2 CONSTRUCTION TOLERANCES

- A. Lay masonry units plumb, level and true to line within the tolerances as per MSJC requirements and as follows:
- B. Maximum variation from plumb:
 - 1. In 3000 mm (10 feet) - 6 mm (1/4 inch).

- 2. In 6000 mm (20 feet) - 10 mm (3/8 inch).
- 3. In 12 000 mm (40 feet) or more - 13 mm (1/2 inch).
- C. Maximum variation from level:
 - 1. In any bay or up to 6000 mm (20 feet) - 6 mm (1/4 inch).
 - 2. In 12 000 mm (40 feet) or more - 13 mm (1/2 inch).
- D. Maximum variation from linear building lines:
 - 1. In any bay or up to 6000 mm (20 feet) - 13 mm (1/2 inch).
 - 2. In 12 000 mm (40 feet) or more - 19 mm (3/4 inch).
- E. Maximum variation in cross-sectional dimensions of columns and thickness of walls from dimensions shown:
 - 1. Minus 6 mm (1/4 inch).
 - 2. Plus 13 mm (1/2 inch).
- F. Maximum variation in prepared opening dimensions:
 - 1. Accurate to minus 0 mm (0 inch).
 - 2. Plus 6 mm (1/4 inch).

3.3 INSTALLATION GENERAL

- A. Keep finish work free from mortar smears or spatters, and leave neat and clean.
- B. Anchor masonry as specified in Paragraph, ANCHORAGE.
- C. Wall Openings:
 - 1. Fill hollow metal frames built into masonry walls and partitions solid with mortar as laying of masonry progresses.
 - 2. If items are not available when walls are built, prepare openings for subsequent installation.
- D. Tooling Joints:
 - 1. Do not tool until mortar has stiffened enough to retain thumb print when thumb is pressed against mortar.
 - 2. Tool while mortar is soft enough to be compressed into joints and not raked out.
 - 3. Finish joints in exterior face masonry work with a jointing tool, and provide smooth, water-tight concave joint unless specified otherwise.
- E. Lintels:
 - 1. Coordinate with structural drawings for locations and criteria.
 - 2. Loose lintels are to be provided by the Metal Fabrications subcontractor and installed by the Unit Masonry subcontractor.
- F. Before connecting new masonry with previously laid, remove loosened masonry or mortar, and clean and wet work in place as specified under wetting.
- G. Wetting and Wetting Test:
 - 1. Test and wet brick or clay tile in accordance with BIA 11B.

3.4 ANCHORAGE**A. Veneer to Frame Walls:**

1. Use adjustable veneer anchors approved for use through continuous insulation and sheathing.
2. Fasten anchor to stud through insulation and sheathing with self drilling and tapping screw, one at each end of loop type anchor.
3. Space anchors not more than 400 mm (16 inches) on center vertically at each stud and as per manufacturer's written instructions.

B. Veneer to Concrete Walls:

1. Install dovetail slots in concrete vertically at 600 mm (2 feet) on centers.
2. Locate dovetail anchors at 400 mm (16 inch) maximum vertical intervals.
3. Anchor new masonry facing to existing concrete with corrugated wall ties spaced at 400 mm, (16 inch) maximum vertical intervals, and at 600 mm (2 feet) maximum horizontal intervals. Fasten ties to concrete with power actuated fasteners or concrete nails.

3.5 BRICK EXPANSION JOINTS.**A. Provide brick expansion (BEJ) joints where shown on drawings.****B. Keep joint free of mortar and other debris.****C. Where joints occur in masonry walls.**

1. Install preformed compressible joint filler in brick wythe.
2. Install filler, backer rod, and sealant on exposed faces.

D. Interrupt steel joint reinforcement at expansion joints unless otherwise shown.**E. Fill opening in exposed face of expansion and control joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.****3.6 BRICKWORK****A. Lay clay brick in accordance with BIA Technical Note 11 series.****B. Laying:**

1. Lay brick in running bond with course of masonry bonded at corners unless shown otherwise. Match bond of existing building on alterations and additions.
2. Maintain bond pattern throughout.
3. Do not use brick smaller than half-brick at any angle, corner, break or jamb.
4. Where length of cut brick is greater than one half but less than a whole brick, maintain the vertical joint location of such units.
5. Lay exposed brickwork joints symmetrical about center lines of openings.

6. Before starting work, lay facing brick on foundation wall and adjust bond to openings, angles, and corners.
7. Lay brick for sills with wash and drip.
8. Build solid brickwork as required for anchorage of items.

C. Joints:

1. Exterior and interior joint widths: Lay for three equal joints in 200 mm (eight inches) vertically, unless shown otherwise.
2. Rake joints for pointing with colored mortar when colored mortar is not full depth.

D. Weep Holes:

1. Install weep holes at 600 mm (24 inches) on center in bottom of vertical joints of exterior masonry veneer or cavity wall facing over foundations, bond beams, and other water stops in the wall.
2. Form weep holes using wicks made of mineral fiber insulation strips turned up 200 mm (8 inches) in cavity. Anchor top of strip to backup to securely hold in place.
3. Install sand or pea gravel in cavity approximately 75 mm (3 inches) high between weep holes.

E. Cavity Type Exterior Walls:

1. Veneer Framed Walls:
 - a. Build with 100 mm (4 inches) of face brick over sheathed stud wall with air space.
 - b. Keep air space clean of mortar accumulations and debris.

3.7 POINTING

- A. Fill joints with pointing mortar using rubber float trowel to rub mortar solidly into raked joints.
- B. Wipe off excess mortar from joints with dry cloth.
- C. Finish exposed joints in finish work with a jointing tool to provide a smooth concave joint unless specified otherwise.
- D. At joints with existing work match existing joint.

3.8 CLEANING AND REPAIR

A. General:

1. Clean exposed masonry surfaces on completion.
2. Protect adjoining construction materials and landscaping during cleaning operations.
3. Cut out defective exposed new joints to depth of approximately 19 mm (3/4 inch) and repoint.
4. Remove mortar droppings and other foreign substances from wall surfaces.

B. Brickwork:

1. First wet surfaces with clean water, then wash down with a solution of soapless detergent. Do not use muriatic acid.
2. Brush with stiff fiber brushes while washing, and immediately thereafter hose down with clean water.
3. Free clean surfaces of traces of detergent, foreign streaks, or stains of any nature.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 05 12 00
STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies structural steel shown and classified by Section 2, Code of Standard Practice for Steel Buildings and Bridges.

1.2 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Painting: Section 09 91 00, PAINTING.
- C. Steel Joist: Section 05 21 00, STEEL JOIST FRAMING.
- D. Steel Decking: Section 05 31 00, STEEL DECKING.
- E. Composite Steel Deck: Section 05 36 00, COMPOSITE METAL DECKING.
- F. Fireproofing: Section 07 81 00, APPLIED FIREPROOFING.

1.3 QUALITY ASSURANCE:

- A. Fabricator and erector shall maintain a program of quality assurance in conformance with Section 8, Code of Standard Practice for Steel Buildings and Bridges. Work shall be fabricated in an AISC certified Category Conventional Steel Structures fabrication plant.
- B. Before authorizing the commencement of steel erection, the controlling contractor shall ensure that the steel erector is provided with the written notification required by 29 CFR 1926.752. Provide copy of this notification to the Resident Engineer.

1.4 TOLERANCES:

Fabrication tolerances for structural steel shall be held within limits established by ASTM A6, by Section 6, Code of Standard Practice for Buildings and Bridges, and by Standard Mill Practice - General Information (AISC, Thirteenth Edition, except as follows:

- A. Elevation tolerance for column splice points at time member is erected is 10 mm (3/8 inch).
- B. Elevation tolerance for top surface of steel beams and girders at connections to columns at time floor is erected is 13 mm (1/2 inch).
- C. Elevation tolerance for closure plates at the building perimeter and at slab openings prior to concrete placement is 6 mm (1/4 inch).

1.5 REGULATORY REQUIREMENTS:

- A. AISC: Specification for Structural Steel Buildings - Allowable Stress Design. or LRFD Specification for Structural Steel Buildings.
- B. AISC: Code of Standard Practice for Steel Buildings and Bridges.

1.7 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop and Erection Drawings: Complete
- C. Certificates:
 - 1. Structural steel.
 - 2. Steel for all connections.
 - 3. Welding materials.
 - 4. Shop coat primer paint.
- D. Test Reports:
 - 1. Welders' qualifying tests.
- E. Design Calculations and Drawings.
- F. Record Surveys.

1.8 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Institute of Steel Construction (AISC):
 - 1. Specification for Structural Steel Buildings - March 9, 2005.
 - 2. Specification for Structural Joints using ASTM A325 or A490 Bolts (June 30, 2004).
 - 3. Code of Standard Practice for Steel Buildings and Bridges, March 18, 2005.
- C. American National Standards Institute (ANSI):
 - B18.22.1-65(R2008)Plain Washers
 - B18.22M-81(R2000)Metric Plain Washers
- D. American Society for Testing and Materials (ASTM):
 - A6/A6M-09Standard Specification for General Requirements
for Rolled Structural Steel Bars, Plates,
Shapes, and Sheet Piling
 - A36/A36M-08Standard Specification for Carbon Structural
Steel
 - A53/A53M-10Standard Specification for Pipe, Steel, Black
and Hot-Dipped, Zinc-Coated Welded and Seamless
 - A123/A123M-09Standard Specification for Zinc (Hot-Dip
Galvanized) Coatings on Iron and Steel Products
 - A242/A242M-04(R2009) ...Standard Specification for High-Strength Low-
Alloy Structural Steel
 - A283/A283M-03(R2007) ...Standard Specification for Low and Intermediate
Tensile Strength Carbon Steel Plates

- A307-10Standard Specification for Carbon Steel Bolts
and Studs, 60,000 psi Tensile Strength
- A325-10Standard Specification for Structural Bolts,
Steel, Heat Treated, 120/105 ksi Minimum Tensile
Strength
- A490-10Standard Specification for Heat-Treated Steel
Structural Bolts 150 ksi Minimum Tensile
Strength
- A500/A500M-10Standard Specification for Cold Formed Welded
and Seamless Carbon Steel Structural Tubing in
Rounds and Shapes
- A501-07Standard Specification for Hot-Formed Welded and
Seamless Carbon Steel Structural Tubing
- A572/A572M-07Standard Specification for High-Strength
Low-Alloy Columbium-Vanadium Structural Steel
- A992/A992M-06Standard Specification for Structural Steel
Shapes
- E. American Welding Society (AWS):
D1.1/D1.1M-10Structural Welding Code-Steel
- F. Research Council on Structural Connections (RCSC) of The Engineering
Foundation:
Specification for Structural Joints Using ASTM A325 or A490 Bolts
- G. Military Specifications (Mil. Spec.):
MIL-P-21035Paint, High Zinc Dust Content, Galvanizing,
Repair
- H. Occupational Safety and Health Administration (OSHA):
29 CFR Part 1926-2001 ..Safety Standards for Steel Erection

PART 2 - PRODUCTS

2.1 MATERIALS:

- A. Structural Steel: ASTM A36, A572, Grade 50, A992.
- B. Hollow Structural Section: ASTM A500, Grade B.
- C. Steel Pipe: ASTM A53, Grade B.
- D. Bolts, Nuts and Washers:
 - 1. High-strength bolts, including nuts and washers: ASTM A325.
 - 2. Bolts and nuts, other than high-strength: ASTM A307, Grade A.
 - 3. Plain washers, other than those in contact with high-strength bolt
heads and nuts: ANSI Standard B18.22.1.
- E. Zinc Coating: ASTM A123.
- F. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035.

PART 3 - EXECUTION**3.1 CONNECTIONS (SHOP AND FIELD):**

- A. Welding: Welding in accordance with AWS D1.1. Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.1 to perform type of work required.
- B. High-Strength Bolts: High-strength bolts tightened to a bolt tension not less than proof load given in Specification for Structural Joints Using ASTM A325 or A490 Bolts. Tightening done with properly calibrated wrenches, by turn-of-nut method or by use of direct tension indicators (bolts or washers). Tighten bolts in connections identified as slip-critical using Direct Tension Indicators or the turn-of-the-nut method. Twist-off torque bolts are not an acceptable alternate fastener for slip critical connections.

3.2 FABRICATION:

Fabrication in accordance with Chapter M, Specification for Steel Buildings - Allowable Stress Design and Plastic Design or Load and Resistance Factor Design.

3.3 SHOP PAINTING:

- A. General: Shop paint steel with primer in accordance with Section 6, Code of Standard Practice for Steel Buildings and Bridges.
- B. Shop paint for steel surfaces is specified in Section 09 91 00, PAINTING.
- C. Do not apply paint to following:
 - 1. Surfaces within 50 mm (2 inches) of joints to be welded in field.
 - 2. Surfaces which will be encased in concrete.
 - 3. Surfaces which will receive sprayed on fireproofing.
 - 4. Top flange of members which will have shear connector studs applied.
- D. Structural steel in the interstitial space that does not receive sprayed on fireproofing shall be painted with primer in accordance with general requirement of shop painting.
- E. Zinc Coated (Hot Dip Galvanized) per ASTM A123 (after fabrication):
Touch-up after erection: Clean and wire brush any abraded and other spots worn through zinc coating, including threaded portions of bolts and welds and touch-up with galvanizing repair paint.

3.4 ERECTION:

- A. General: Erection in accordance with Section 7, Code of Standard Practice for Steel Buildings and Bridges.
- B. Temporary Supports: Temporary support of structural steel frames during erection in accordance with Section 7, Code of Standard Practice for Steel Buildings and Bridges.

3.5 FIELD PAINTING:

- A. After erection, touch-up steel surfaces specified to be shop painted. After welding is completed, clean and prime areas not painted due to field welding.
- B. Finish painting of steel surfaces is specified in Section 09 91 00, PAINTING.

3.6 SURVEY:

Upon completion of finish bolting or welding on any part of the work, and prior to start of work by other trades that may be supported, attached, or applied to the structural steel work, submit a certified report of survey to Resident Engineer for approval. Reports shall be prepared by Registered Land Surveyor or Registered Civil Engineer as specified in Section 01 00 00, GENERAL REQUIREMENTS. Report shall specify that location of structural steel is acceptable for plumbness, level and alignment within specified tolerances specified in the AISC Manual.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 05 21 00
STEEL JOIST FRAMING**

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies open web, longspan, and deep longspan steel joists and joist girders.

1.2 RELATED WORK:

- A. Structural Steel: Section 05 12 00, STRUCTURAL STEEL FRAMING.
- B. Finish Painting: Section 09 91 00, PAINTING.

1.3 DESIGN REQUIREMENTS:

Design all elements with the latest published version of applicable Codes.

1.4 TOLERANCES:

Deviation from a straight line between ends of any installed joist shall not exceed 10 mm in 3 m (3/8 inch in 10 feet).

1.5 REGULATORY REQUIREMENTS:

STEEL JOIST INSTITUTE: Standard Specifications, Load Tables and Weight Tables for Steel Joists and Joist Girders, (Latest Edition).

1.6 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop and Erection Drawings: Complete.
 - 1. Fabrication drawings including details and schedules for the fabrication and assembly of each joist.
 - 2. Erection drawings showing the size and location of each joist, bridging, cross bracing, bearing details, connections, welds, bolts and bearing plates.
- C. Certificates: STEEL JOIST INSTITUTE compliance.
- D. Design Calculations: Submit complete calculations covering the design of all members and connections. Calculations must be specifically applicable to the joists supplied.
 - 1. See steel joist general notes on sheet S0.1 for design loads.

1.7 QUALITY ASSURANCE:

Provide documentation that the joist manufacturer is a member of the Steel Joist Institute and has satisfactorily completed work of a similar scope and nature.

1.8 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Institute of Steel Construction (AISC):

1. Specification for Structural Steel Buildings - Allowable Stress Design and Plastic Design (Latest Edition).
 2. Load and Resistance Factor Design Specification for Structural Steel Buildings (Latest Edition).
- C. American Society for Testing and Materials (ASTM):
- A307-07Carbon Steel Bolts and Studs, 400 MPa (60,000 psi) Tensile Strength
 - A325-09Structural Bolts, Steel, Heat Treated, 800/700 MPa (120/105 ksi) Minimum Tensile Strength
 - A490-08Heat-Treated Steel Structural Bolts, 1000 MPa (150 ksi) Minimum Tensile Strengths
- D. American Welding Society (AWS):
- D1.1-08Structural Welding Code - Steel
- E. SSPC: The Society for Protective Coatings:
- Steel Structures Painting Manual, Volumes 1 and 2
- F. Steel Joist Institute (STEEL JOIST INSTITUTE):
- Standard Specifications, Load Tables and Weight Tables for Steel Joists and Joist Girders (Latest Edition).
- G. U.S. Army Corps of Engineers:
- CRD-C-621Specification for Non-Shrink Grout

PART 2 - PRODUCTS

2.1 OPEN WEB STEEL JOISTS:

K-Series conforming to STEEL JOIST INSTITUTE standard specifications.

2.2 LONGSPAN STEEL JOISTS AND DEEP LONGSPAN STEEL JOISTS:

LH-Series and DLH-Series conforming to STEEL JOIST INSTITUTE standard specifications.

2.3 ACCESSORIES - FITTINGS:

- A. Accessories and fittings, including end supports and bridging, in accordance with standard STEEL JOIST INSTITUTE specification under which joists were designed.
- B. Unfinished Threaded Fasteners: ASTM A307, Grade A, regular hexagon type, low carbon steel.
- C. High-strength bolts, including nuts and washers: ASTM A325 or A490 heavy hexagon structural bolts.

2.4 BEDDING MORTAR:

- A. For joist ends bearing on concrete or masonry, provide bedding mortar as follows:
 1. Portland cement and sand, mixed at a ratio of 1 part cement to 3 parts sand, by volume, with enough water for placement and hydration.
 2. Non-metallic, shrinkage-resistant mortar; premixed, non-corrosive, non-staining product containing selected silica sands, portland

cement, shrinkage compensating agents, plasticizing and water reducing agents, complying with CRD-C-621.

PART 3 - EXECUTION

3.1 FABRICATION:

- A. Fabrication and assembly in accordance with applicable standard STEEL JOIST INSTITUTE specification:
 1. Make chord splices with full penetration welds capable of developing the ultimate strength in tension of the parent material. Make no allowance for the strength of back-up bars or other material incidental to welding.
 2. Provide shop-welded connection plates at panel points to receive supplemental framing.
 3. Holes in Chord Members: Provide holes in chord members where shown for securing other work to steel joists; however, deduct area of holes from the area of chord when calculating strength of member.
 4. Extended Ends: Provide extended ends on joists where shown, complying with manufacturer's standards and requirements of applicable STEEL JOIST INSTITUTE specifications.
 5. Ceiling Extensions: Provide ceiling extension in areas having ceilings attached directly to joist bottom chord. Provide either an extended bottom chord element or a separate unit, to suit manufacturer's standards, of sufficient strength to support ceiling construction. Extend ends to within 12 mm (1/2 inch) of finished wall surface unless otherwise indicated.
 6. Bridging: Provide horizontal or diagonal type bridging for joists and joist girders, complying with STEEL JOIST INSTITUTE specifications. Provide bridging anchors for ends of bridging lines terminating at walls or beams. Provide bridging adequate to resist the loads indicated on the Contract Documents.
 7. End Anchorage: Provide end anchorages, including bearing plates, to secure joists to adjacent construction, complying with STEEL JOIST INSTITUTE specifications, unless otherwise indicated. Design all end anchorages to resist a minimum net uplift of 1.6 kPa (35 pounds per square foot) of supported area.
 8. Header Units: Provide header units to support all joists at openings in floor or roof system not framed with steel shapes.
 9. Provide supplemental steel support framing for metal deck where normal deck bearing is precluded by other framing members and minor openings.

3.2 SHOP PAINTING:

- A. Shop painting in accordance with applicable STEEL JOIST INSTITUTE standard specification.

- B. Shop paint joists and accessories with a rust-inhibiting primer paint. For joists which will be finish painted, limit paint to a primer which is compatible with specified finish paint. In high humidity areas, shop paint joists with a zinc-rich primer to receive top coats per the paint system manufacturer's recommendations.

3.3 ERECTION:

- A. Installation of joists in accordance with applicable STEEL JOIST INSTITUTE standard specification.
- B. Handle joists in a manner to avoid damaging of joists. Remove damaged joists from site, except when field repair is approved and such repairs are satisfactorily made in accordance with manufacturer's recommendations.
- C. Accurately set joists and end anchorage in accordance with the applicable STEEL JOIST INSTITUTE standard specification. Secure joists resting on masonry or concrete bearing surfaces by welding or bolting to the steel bearing plates as indicated on the Contract Documents. Secure bridging and anchoring in place prior to application of any construction loads. Distribute any temporary loads so that carrying capacity of any joist is not exceeded. Loads shall not be applied to bridging where joist lengths are 12 m (40 feet) and longer. Where joist lengths are 12 m (40 feet) and longer, install a center row of bolted diagonal bridging to provide lateral stability before slackening of hoisting lines.

3.4 FIELD PAINTING:

- A. Clean abraded, corroded, and field welded areas and touch up with same type of paint used in shop painting.
- B. Finish painting of steel surfaces is specified in Section 09 91 00, PAINTING.

- - - E N D - - -

**SECTION 05 31 00
STEEL DECKING**

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies material and services required for installation of steel decking as shown and specified.

1.2 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Finish Painting: Section 09 91 00, PAINTING.

1.3 DESIGN REQUIREMENTS:

- A. Design steel decking in accordance with AISI publication, "Specification for the Design of Cold-formed Steel Structural Members" except as otherwise shown or specified.
- B. Design all elements with the latest published version of applicable codes.

1.4 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Shop and erection drawings showing decking unit layout, connections to supporting members, and similar information necessary for completing installation as shown and specified, including supplementary framing, sump pans, ridge and valley plates, cant strips, cut openings, special jointing or other accessories. Show welding, side lap, closure, deck reinforcing and closure reinforcing details. Show openings required for work of other trades, including openings not shown on structural drawings. Indicate where temporary shoring is required to satisfy design criteria.
- C. Manufacturer's Literature and Data: Showing steel decking section properties and specifying structural characteristics.
- D. Certification: For each type and gauge of metal deck supporting concrete slab or fill, furnish certification of the specified fire ratings. Certify that the units supplied are U.L. listed as a "Steel Floor and Form Unit".
- E. Insurance Certification: Assist the Government in preparation and submittal of roof installation acceptance certification as may be necessary in connection with fire and extended coverage insurance.

1.5 QUALITY ASSURANCE:

- A. Underwriters' Label: Provide metal floor deck units listed in Underwriters' Laboratories "Fire Resistance Directory", with each deck unit bearing the UL label and marking for specific system detailed.

1.6 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A36/A36M-08Standard Specification for Carbon Structural Steel
 - A611-97Standard Specification for Structural Steel (SS), Sheet, Carbon, Cold-Rolled
 - A653/A653M-08Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvanized) by the Hot-Dip Process
 - C423-08Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
- C. American Institute of Steel Construction (AISC):
 - 1. Specification for Structural Steel Buildings - Allowable Stress Design and Plastic Design (Latest Edition)
 - 2. Load and Resistance Factor Design Specification for Structural Steel Buildings (Latest Edition)
- D. American Iron and Steel Institute (AISI):
 - 1. Specification and Commentary for the Design of Cold-Formed Steel Structural Members
- E. American Welding Society (AWS):
 - D1.3-08Structural Welding Code - Sheet Steel
- F. Factory Mutual (FM Global):
 - 1. Loss Prevention Data Sheet 1-28: Wind Loads to Roof Systems and Roof Deck Securement
 - 2. Factory Mutual Research Approval Guide (2002)
- G. Military Specifications (Mil. Spec.)
 - MIL-P-21035BPaint, High Zinc Dust Content, Galvanizing Repair

PART 2 - PRODUCTS**2.1 MATERIALS:**

- A. Steel Decking: ASTM A611, Grade C.
- B. Galvanizing: ASTM A653, G60.

- C. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035B.
- D. Miscellaneous Steel Shapes: ASTM A36.
- E. Welding Electrode: E60XX minimum.
- F. Sheet Metal Accessories: ASTM A653, galvanized, unless noted otherwise.
Provide accessories of every kind required to complete the installation of metal decking in the system shown. Finish sheet metal items to match deck including, but not limited to, the following items:
 - 1. Metal Cover Plates: For end-abutting deck units, to close gaps at changes in deck direction, columns, walls and openings. Same quality as deck units but not less than 1.3 mm (18 gauge) sheet steel.
 - 2. Continuous Sheet Metal Edging: At openings, concrete slab edges and roof deck edges. Same quality as deck units but not less than 1.3 mm (18 gauge) steel. Side and end closures supporting concrete and their attachment to supporting steel shall be designed by the manufacturer to safely support the wet weight of concrete and construction loads. The deflection of cantilever closures shall be limited to 3 mm (1/8 inch) maximum.
 - 3. Metal Closure Strips: For openings between decking and other construction, of not less than 1.3 mm (18 gauge) sheet steel of the same quality as the deck units. Form to the configuration required to provide tight-fitting closures at open ends of flutes and sides of decking.
 - 4. Ridge and Valley Plates: Provide 1.3 mm (18 gauge), minimum 100 mm (4 inch) wide ridge and valley plates where roof slope exceeds 40 mm per meter (1/2 inch per foot).
 - 5. Cant Strips: Provide bent metal 45 degree leg cant strips where indicated on the Drawings. Fabricate cant strips from 1 mm (20 gauge) metal with a minimum 125 mm (5 inch) face width.
 - 6. Seat Angles for Deck: Provide where a beam does not frame into a column.
 - 7. Sump Pans for Roof Drains: Fabricated from single piece of minimum 1.9 mm (14 gauge) galvanized sheet steel with level bottoms and sloping sides to direct water flow to drain, unless otherwise shown. Provide sump pans of adequate size to receive roof drains and with bearing flanges not less than 75 mm (3 inches) wide. Recess pans not less than 38 mm (1 1/2 inches) below roof deck surface, unless otherwise shown or required by deck configuration. Holes for drains will be cut in the field.
 - 8. Acoustic Sound Barrier Closures: Manufacturer's standard mineral fiber closures.

2.2 REQUIREMENTS:

- A. Provide steel decking of the type, depth, gauge, and section properties as indicated on drawings.
 - 1. Finish: Galvanized G-60.
- B. Do not use steel deck for hanging supports for any type or kind of building components including suspended ceilings, electrical light fixtures, plumbing, heating, or air conditioning pipes or ducts or electrical conduits.
- C. Steel decking units used for interstitial levels shall include an integral system.
 - 1. System to provide a simple point of attachment for light duty hanger devices.
 - 2. System to allow for flexibility for attaching hangers for support of suspended ceilings, electrical, plumbing, heating, or air conditioning items, weight not to exceed 50 kg/m² (10 psf).
 - 3. System shall provide for a minimum spacing pattern of 300 mm (12 inches) on centers longitudinally and 600 mm (24 inches) on centers transversely.
 - 4. Maximum load suspended from any hanger is 23 kg (50 pounds).
 - 5. System consisting of fold-down type hanger tabs or lip hanger is acceptable.

PART 3 - EXECUTION**3.1 ERECTION:**

- A. Do not start installation of metal decking until corresponding steel framework has been plumbed, aligned and completed and until temporary shoring, where required, has been installed. Remove any oil, dirt, paint, ice, water and rust from steel surfaces to which metal decking will be welded.
- B. Coordinate and cooperate with structural steel erector in locating decking bundles to prevent overloading of structural members.
- C. Do not use floor deck units for storage or working platforms until permanently secured. Do not overload deck units once placed. Replace any deck units that become damaged after erection and prior to casting concrete at no cost to the Government.
- D. Provide steel decking in sufficient lengths to extend over 3 or more spans, except for interstitial levels.
- E. Place steel decking units at right angles to supporting members. End laps of sheets of roof deck shall be a minimum of 50 mm (2 inches) and shall occur over supports.

F. Fastening Deck Units: As indicated in Drawings.

1. Provide any additional fastening necessary to comply with the requirements of Underwriters Laboratories and/or Factory Mutual to achieve the required ratings.
2. Uplift Loading: Install and anchor roof deck units to resist gross uplift loading of 2.1 kPa (45 psf) at eave overhang and 1.4 kPa (30 psf) for other roof areas.
3. Weld end laps of corrugated form deck units in valley of side lap and at middle of sheet (maximum spacing of welds is 380 mm (15 inches)).
4. Weld corrugated deck to intermediate supports in an X pattern. Weld in valley of side laps on every other support and in the valley of the center corrugation on the remaining supports (maximum spacing of welds is 760 mm (30 inches)).

G. Cutting and Fitting:

1. Cut all metal deck units to proper length in the shop prior to shipping.
2. Field cutting by the metal deck erector is restricted to bevel cuts, notching to fit around columns and similar items, and cutting openings that are located and dimensioned on the Structural Drawings.
3. Other penetrations shown on the approved metal deck shop drawings but not shown on the Structural Drawings are to be located, cut and reinforced by the trade requiring the opening.
4. Make all cuts neat and trim using a metal saw, drill or punchout device; cutting with torches is expressly prohibited.
5. Do not make any cuts in the metal deck that are not shown on the approved metal deck drawings. If an additional opening not shown on the approved shop drawings is required, submit a sketch, to scale, locating the required new opening and any other openings and supports in the immediate area. Do not cut the opening until the sketch has been reviewed and accepted by the Resident Engineer. Provide any additional reinforcing or framing required for the opening at no cost to the Government. Failure to comply with these requirements is cause for rejection of the work and removal and replacement of the affected metal deck.
6. Reinforcement at Openings: Provide additional metal reinforcement and closure pieces as required for strength, continuity of decking, and support of other work shown.

3.2 WELDING:

Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.3.

3.3 FIELD REPAIR:

1. Areas scarred during erection.
2. Welds to be thoroughly cleaned and touched-up. Touch-up paint for zinc-coated units shall be zinc rich galvanizing repair paint.

- - - E N D - - -

**SECTION 05 36 00
COMPOSITE METAL DECKING**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies material and services required for installation of composite steel decking including shear connector studs and miscellaneous closures required to prepare deck for concrete placement as shown and specified.

1.2 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

1.3 DESIGN REQUIREMENTS:

- A. Design steel decking in accordance with American Iron And Steel Institute publication "Specifications for the Design of Cold Formed Steel Structural Members", except as otherwise shown or specified.
- B. Design all elements with the latest published version of applicable codes.

1.4 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Shop and erection drawings showing decking unit layout, connections to supporting members, and information necessary to complete the installation as shown and specified, including supplementary framing, cant strips, cut openings, special jointing or other accessories. Show welding, side lap, closure, deck reinforcing and closure reinforcing details. Show openings required for work of other trades, including openings not shown on structural drawings. Indicate where temporary shoring is required to satisfy design criteria.
- C. Manufacturer's Literature and Data: Showing steel decking section properties and specifying structural characteristics as specified herein.
- D. Manufacturer's written recommendations for:
 - 1. Shape of decking section to be used.
 - 2. Cleaning of steel decking prior to concrete placement.
- E. Test Report - Establishing structural characteristics of composite concrete and steel decking system.
- F. Test Report - Stud base qualification.
- G. Welding power setting recommendation by shear stud manufacturer.
- H. Shear Stud Layouts: Submit drawings showing the number, pattern, spacing and configuration of the shear studs for each beam and girder.

- I. Certification: For each type and gauge of metal deck supporting concrete slab or fill, furnish certification of the specified fire ratings. Certify that the units supplied are U.L. listed as a "Steel Floor and Form Unit".

1.5 QUALITY ASSURANCE:

- A. Underwriters' Label: Provide metal floor deck units listed in Underwriters' Laboratories "Fire Resistance Directory", with each deck unit bearing the UL label and marking for specific system detailed.

1.6 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only. Refer to the latest edition of all referenced Standards and codes.
- B. American Iron and Steel Institute (AISI):
Specification and Commentary for the Design of Cold-Formed Steel Structural Members (Latest Edition).
- C. American Society of Testing and Materials (ASTM):
A36/A36M-08Standard Specification for Carbon Structural Steel
A108-07Standard Specification for Steel Bars, Carbon, Cold Finished, Standard Quality
A653/A653M-10Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvanized) by the Hot-Dip Process
- D. American Institute of Steel Construction (AISC):
1. Specification for Structural Steel Buildings - Allowable Stress Design and Plastic Design (Latest Edition)
2. Load and Resistance Factor Design Specification for Structural Steel Buildings (Latest Edition)
- E. American Welding Society (AWS):
D1.1/D1.1M-10Structural Welding Code - Steel
D1.3/D1.3M-08Structural Welding Code - Sheet Steel
- F. Military Specifications (Mil. Spec.):
MIL-P-21035BPaint, High Zinc Dust Content, Galvanizing Repair

PART 2 - PRODUCTS

2.1 MATERIALS:

- A. Steel Decking and all Flashings: ASTM A653, Structural Quality suitable for shear stud weld-through techniques.
- B. Galvanizing: ASTM A653, G60.

- C. Shear connector studs: ASTM A108, Grades 1015-1020, yield 350 Mpa (50,000 psi) minimum, tensile strength - 400 Mpa (60,000 psi) minimum, reduction of area 50 percent minimum. Studs of uniform diameter; heads shall be concentric and normal to shaft; stud, after welding free from any substance or defect which would interfere with its function as a shear connector. Studs shall not be painted or galvanized. Size of studs shall be as shown on drawings. Studs manufactured by a company normally engaged in the manufacture of shear studs and can furnish equipment suitable for weld-through installation of shear studs.
- D. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035B.
- E. Miscellaneous Steel Shapes: ASTM A36.
- F. Welding Electrode: E60XX minimum.
- G. Sheet Metal Accessories: ASTM A653, galvanized, unless noted otherwise. Provide accessories of every kind required to complete the installation of metal decking in the system shown. Finish sheet metal items to match deck including, but not limited to, the following items:
 - 1. Metal Cover Plates: For end-abutting deck units, to close gaps at changes in deck direction, columns, walls and openings. Same quality as deck units but not less than 1.3 mm (18 gauge) sheet steel.
 - 2. Continuous sheet metal edging: at openings and concrete slab edges. Same quality as deck units but not less than 1.3 mm (18 gauge) steel. Side and end closures supporting concrete and their attachment to supporting steel shall be designed by the manufacturer to safely support the wet weight of concrete and construction loads. The deflection of cantilever closures shall be limited to 3 mm (1/8 inch) maximum.
 - 3. Metal Closure Strips: For openings between decking and other construction, of not less than 1.3 mm (18 gauge) sheet steel of the same quality as the deck units. Form to the configuration required to provide tight-fitting closures at open ends of flutes and sides of decking.
 - 4. Seat angles for deck: Where a beam does not frame into a column.

2.2 REQUIREMENTS:

- A. Steel decking depth, gage, and section properties to be as shown. Provide edges of deck with vertical interlocking male and female lip providing for a positive mechanical connection.
- B. Fabricate deck units with integral embossments to provide mechanical bond with concrete slab. In combination with concrete slab, capable of supporting total design loads on spans shown.
- C. Steel decking capable of safely supporting total, normal construction service loads without damage to decking unit.

- D. Steel decking units shall include an integral system which provides a simple point of attachment for light duty hanger devices for flexibility for attaching hangers for support of acoustical, lathing, plumbing, heating, air conditioning and electrical items. System shall provide for minimum spacing pattern of 300 mm (12 inches) on centers longitudinally and 600 mm or 900 mm (24 or 36 inches) on centers transversely. Suspension system shall be capable of safely supporting a maximum allowable load of 45 kg (100 pounds) concentrated at any one hanger attachment point. System may consist of fold-down type hanger tabs or a lip hanger.

PART 3 - EXECUTION

3.1 ERECTION:

- A. Do not start installation of metal decking until corresponding steel framework has been plumbed, aligned and completed and until temporary shoring, where required, has been installed. Remove any oil, dirt, paint, ice, water and rust from steel surfaces to which metal decking will be welded.
- B. Coordinate and cooperate with structural steel erector in locating decking bundles to prevent overloading of structural members.
- C. Do not use floor deck units for storage or working platforms until permanently secured. Do not overload deck units once placed. Replace any deck units that become damaged after erection and prior to casting concrete at no cost to the Government.
- D. Erect steel deck in accordance with manufacturer's printed instructions.
- E. Ship steel deck units to project in standard widths and cut to proper length.
- F. Provide steel decking in sufficient lengths to extend over 3 or more spans, except where structural steel layout does not permit.
- G. Place steel decking units on supporting steel framework and adjust to final position before being permanently fastening. Bring each unit to proper bearing on supporting beams. Place deck units in straight alignment for entire length of run of flutes and with close registration of flutes of one unit with those of abutting unit. Maximum space between ends of abutting units is 13 mm (1/2 inch). If space exceeds 13 mm (1/2 inch), install closure plates at no additional cost to Government.
- H. Ceiling hanger loops, if used, must be flattened or removed to obtain bearing of units on structural steel.
- I. Fastening Deck Units: As indicated on Drawings.
- J. Welding to conform to AWS D1.3 and done by competent experienced welding mechanics.

- K. Areas scarred during erection and welds shall be thoroughly cleaned and touched-up with zinc rich galvanizing repair paint. Paint touch-up is not required for welds or scars that are to be in direct contact with concrete.
- L. Provide metal concrete stops at edges of deck as required.
- M. Cutting and Fitting:
 - 1. Cut all metal deck units to proper length in the shop prior to shipping.
 - 2. Field cutting by the metal deck erector is restricted to bevel cuts, notching to fit around columns and similar items, and cutting openings that are located and dimensioned on the structural drawings.
 - 3. Other penetrations shown on the approved metal deck shop drawings but not shown on the structural drawings are to be located, cut and reinforced by the trade requiring the opening.
 - 4. Make all cuts neat and trim using a metal saw, drill or punchout device; cutting with torches is expressly prohibited.
 - 5. Do not make any cuts in the metal deck that are not shown on the approved metal deck drawings. If an additional opening not shown on the approved shop drawings is required, submit a sketch, to scale, locating the required new opening and any other openings and supports in the immediate area. Do not cut the opening until the sketch has been reviewed and accepted by the Resident Engineer. Provide any additional reinforcing or framing required for the opening at no cost to the Government. Failure to comply with these requirements is cause for rejection of the work and removal and replacement of the affected metal deck.
 - 6. Reinforcement at Openings: Provide additional metal reinforcement and closure pieces as required for strength, continuity of decking and support of other work shown.
- N. Installation of shear connector studs through previously installed metal deck to conform to AWS D1.1, Section 7, except all studs will be installed with automatically timed welding equipment and as specified below:
 - 1. Do not place reinforcing steel temperature mesh or other materials and equipment which will interfere with stud installation on steel deck until shear connector studs are installed.
 - 2. Steel deck sheets shall be free of oil, rust, dirt, and paint. Release water in deck's valley so that it does not become entrapped between deck and beam. Surface to which stud is to be welded shall be clean and dry.

3. Rest metal deck tightly upon top flange of structural member with bottom of deck rib in full contact with top of beam flange.
4. Weld studs only through a single thickness of deck. Place decking so that a butt joint is obtained. Place studs directly over beam web, where one row of studs are required.
5. Ferrules specially developed for the weld-through technique must be used. Ferrules shall be appropriate for size of studs used and be removed after welding.
6. Submit report of successful test program for stud base qualification as required by AWS D1.1, Appendix K.

3.2 CLEANING:

- A. Clean deck in accordance with manufacturer's recommendation before concrete placement.

- - - E N D - - -

**SECTION 05 40 00
COLD-FORMED METAL FRAMING**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies materials and services required for installation of cold-formed steel, including tracks and required accessories as shown and specified. This Section includes the following:
1. Exterior load-bearing steel stud walls.
 2. Interior load-bearing steel stud walls.
 3. Exterior non-load-bearing steel stud curtain wall.

1.2 RELATED WORK:

- A. Structural steel framing: Section 05 12 00, STRUCTURAL STEEL FRAMING.
- B. Open web steel joists: Section 05 21 00, STEEL JOIST FRAMING.
- C. Non-load-bearing metal stud framing assemblies: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- D. Gypsum board assemblies: Section 09 29 00, GYPSUM BOARD.

1.3 DESIGN REQUIREMENTS:

- A. Design steel in accordance with American Iron and Steel Institute Publication "Specification for the Design of Cold-Formed Steel Structural Members", except as otherwise shown or specified.
- B. Structural Performance: Engineer, fabricate and erect cold-formed metal framing with the minimum physical and structural properties indicated.
- C. Structural Performance: Engineer, fabricate, and erect cold-formed metal framing to withstand design loads within limits and under conditions required.
1. Design Loads: As indicated.
 2. Design framing systems to withstand design loads without deflections greater than the following:
 - a. Exterior Load-Bearing Walls: Lateral deflection of $1/360$ of the wall height.
 - b. Interior Load-Bearing Walls: Lateral deflection of $1/360$ of the wall height.
 - c. Exterior Non-load-Bearing Curtain wall: Lateral deflection of $1/360$ of the wall height.
 - d. Floor Joists: Vertical deflection of $1/360$ of the span.
 - e. Roof Trusses: Vertical deflection of $1/360$ of the span.
 3. Design framing systems to provide for movement of framing members without damage or overstressing, sheathing failure, connection failure, undue strain on fasteners and anchors, or other detrimental

effects when subject to a maximum ambient temperature change (range) of 67 degrees C (120 degrees F).

4. Design framing system to accommodate deflection of primary building structure and construction tolerances, and to maintain clearances at openings.
5. Design exterior non-load-bearing curtain wall framing to accommodate lateral deflection without regard to contribution of sheathing materials.
6. Engineering Responsibility: Engage a fabricator who assumes undivided responsibility for engineering cold-formed metal framing by employing a qualified professional engineer to prepare design calculations, shop drawings, and other structural data.

1.4 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Shop and erection drawings showing steel unit layout, connections to supporting members, and information necessary to complete installation as shown and specified.
- C. Manufacturer's Literature and Data: Showing steel component sections and specifying structural characteristics.
- D. For cold-formed metal framing indicated to comply with certain design loadings, include structural analysis data sealed and signed by the qualified professional engineer who was responsible for its preparation.

1.5 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Iron and Steel Institute (AISI):
Specification and Commentary for the Design of Cold-Formed Steel Structural Members (1996)
- C. American Society of Testing and Materials (ASTM):
A36/A36M-08Standard Specifications for Carbon Structural Steel
A123/A123M-09Standard Specifications for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
A153/A153M-09Standard Specifications for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

- A307-10Standard Specifications for Carbon Steel Bolts and Studs
- A653/A653M-10Standard Specifications for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- C1107/C1107M-08Standard Specifications for Packaged Dry, Hydraulic-Cement Grout (Non-shrink)
- E488-96(R2003)Standard Test Methods for Strength of Anchors in Concrete and Masonry Elements
- E1190-95(R2007)Standard Test Methods for Strength of Power-Actuated Fasteners Installed in Structural Members
- D. American Welding Society (AWS):
- D1.3/D1.3M-08Structural Welding Code-Sheet Steel
- E. Military Specifications (Mil. Spec.):
- MIL-P-21035BPaint, High Zinc Dust Content, Galvanizing Repair

PART 2 - PRODUCTS

2.1 MATERIALS:

- A. Sheet Steel for joists, studs and accessories 16 gage and heavier: ASTM A653, structural steel, zinc coated G90, with a yield of 340 MPa (50 ksi) minimum.
- B. Sheet Steel for joists, studs and accessories 18 gage and lighter: ASTM A653, structural steel, zinc coated G90, with a yield of 230 MPa (33 ksi) minimum.
- C. Galvanizing Repair Paint: MIL-P-21035B.
- D. Nonmetallic, Non-shrink Grout: Premixed, nonmetallic, noncorrosive, nonstaining grout containing selected silica sands, Portland cement, shrinkage-compensating agents, plasticizing and water-reducing agents, complying with ASTM C1107, with fluid consistency and a 30 minute working time.

2.2 WALL FRAMING:

- A. Steel Studs: Manufacturer's standard C-shaped steel studs of web depth indicated, with lipped flanges, and complying with the following:
1. Design Uncoated-Steel Thickness: 1.52 mm (0.0598 inch)
 2. Flange Width: (2 inches)
 3. Web: Punched.

B. Steel Track: Manufacturer's standard U-shaped steel track, unpunched, of web depths indicated, with straight flanges, and complying with the following:

1. Design Uncoated-Steel Thickness: Matching steel studs.
2. Flange Width: Manufacturer's standard deep flange where indicated, standard flange elsewhere.

2.3 FRAMING ACCESSORIES:

- A. Fabricate steel framing accessories of the same material and finish used for framing members, with a minimum yield strength of 230 MPa (33 ksi).
- B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:
 1. Supplementary framing.
 2. Bracing, bridging, and solid blocking.
 3. Web stiffeners.
 4. Gusset plates.
 5. Deflection track and vertical slide clips.
 6. Stud kickers and girts.
 7. Joist hangers and end closures.
 8. Reinforcement plates.

2.4 ANCHORS, CLIPS, AND FASTENERS:

- A. Steel Shapes and Clips: ASTM A36, zinc coated by the hot-dip process according to ASTM A123.
- B. Cast-in-Place Anchor Bolts and Studs: ASTM A307, Grade A, zinc coated by the hot-dip process according to ASTM A153.
- C. Expansion Anchors: Fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times the design load, as determined by testing per ASTM E488 conducted by a qualified independent testing agency.
- D. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 10 times the design load, as determined by testing per ASTM E1190 conducted by a qualified independent testing agency.
- E. Mechanical Fasteners: Corrosion-resistant coated, self-drilling, self-threading steel drill screws. Low-profile head beneath sheathing, manufacturer's standard elsewhere.

2.5 REQUIREMENTS:

- A. Welding in accordance with AWS D1.3

- B. Furnish members and accessories by one manufacturer only.

PART 3 - EXECUTION

3.1 FABRICATION:

- A. Framing components may be preassembled into panels. Panels shall be square with components attached.
- B. Cut framing components squarely or as required for attachment. Cut framing members by sawing or shearing; do not torch cut.
- C. Hold members in place until fastened.
- D. Fasten cold-formed metal framing members by welding or screw fastening, as standard with fabricator. Wire tying of framing members is not permitted.
 - 1. Comply with AWS requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - 2. Locate mechanical fasteners and install according to cold-formed metal framing manufacturer's instructions with screw penetrating joined members by not less than 3 exposed screw threads.
- E. Where required, provide specified insulation in double header members and double jamb studs which will not be accessible after erection.

3.2 ERECTION:

- A. Handle and lift prefabricated panels in a manner as to not distort any member.
- B. Securely anchor tracks to supports as shown.
- C. At butt joints, securely anchor two pieces of track to same supporting member or butt-weld or splice together.
- D. Plumb, align, and securely attach studs to flanges or webs of both upper and lower tracks.
- E. All axially loaded members shall be aligned vertically to allow for full transfer of the loads down to the foundation. Vertical alignment shall be maintained at floor/wall intersections.
- F. Install jack studs above and below openings and as required to furnish support. Securely attach jack studs to supporting members.
- G. Install headers in all openings that are larger than the stud spacing in that wall.
- H. Attach bridging for studs in a manner to prevent stud rotation. Space bridging rows as shown.
- I. Studs in one piece for their entire length, splices will not be permitted.
- J. Provide a load distribution member at top track where joist is not located directly over bearing stud.

- K. Provide joist bridging and web stiffeners at reaction points where shown.
- L. Provide end blocking where joist ends are not restrained from rotation.
- M. Provide an additional joist under parallel partitions, unless otherwise shown, when partition length exceeds one-half joist span and when floor and roof openings interrupt one or more spanning members.
- N. Provide temporary bracing and leave in place until framing is permanently stabilized.
- O. Do not bridge building expansion joints with cold-formed metal framing. Independently frame both sides of joints.
- P. Fasten reinforcement plate over web penetrations that exceed size of manufacturer's standard punched openings.

3.3 TOLERANCES:

- A. Vertical alignment (plumbness) of studs shall be within 1/960th of the span.
- B. Horizontal alignment (levelness) of walls shall be within 1/960th of their respective lengths.
- C. Spacing of studs shall not be more than 3 mm (1/8 inch) +/- from the designed spacing providing that the cumulative error does not exceed the requirements of the finishing materials.
- D. Prefabricated panels shall be not more than 3 mm (1/8 inch) +/- out of square within the length of that panel.

3.4 FIELD REPAIR:

Touch-up damaged galvanizing with galvanizing repair paint.

- - - E N D - - -

**SECTION 05 50 00
METAL FABRICATIONS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies items and assemblies fabricated from structural steel shapes and other materials as shown and specified.
- B. Items specified.
 - 1. Support for Wall and Ceiling Mounted Items: (12, 14A, 14C)
 - 2. Frames: (24E)
 - 3. Loose Lintels
 - 4. Aluminum Grille
 - 5. Stainless Steel Privacy Screen
- C. Products furnished, but not installed, under this section includes the following:
 - 1. Loose steel lintels.

1.2 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
 - 1. Each item specified, showing complete detail, location in the project, material and size of components, method of joining various components and assemblies, finish, and location, size and type of anchors.
 - 2. Mark items requiring field assembly for erection identification and furnish erection drawings and instructions.
 - 3. Provide templates and rough-in measurements as required.
- C. Manufacturer's Certificates:
 - 1. Anodized finish as specified.
 - 2. Live load designs as specified.
- D. Design Calculations for specified live loads including dead loads.
- E. Furnish setting drawings and instructions for installation of anchors to be preset into concrete and masonry work, and for the positioning of items having anchors to be built into concrete or masonry construction.

1.3 QUALITY ASSURANCE

- A. Each manufactured product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.
- B. Each product type shall be the same and be made by the same manufacturer.

- C. Assembled product to the greatest extent possible before delivery to the site.
- D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
 - B18.6.1-97Wood Screws
 - B18.2.2-87(R2005)Square and Hex Nuts
- C. American Society for Testing and Materials (ASTM):
 - A36/A36M-08Structural Steel
 - A47-99(R2009)Malleable Iron Castings
 - A48-03(R2008)Gray Iron Castings
 - A53-10Pipe, Steel, Black and Hot-Dipped, Zinc-Coated
Welded and Seamless
 - A123-09Zinc (Hot-Dip Galvanized) Coatings on Iron and
Steel Products
 - A167-99(R2009)Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet and Strip
 - A269-10Seamless and Welded Austenitic Stainless Steel
Tubing for General Service
 - A307-10Carbon Steel Bolts and Studs, 60,000 PSI Tensile
Strength
 - A312/A312M-09Seamless, Welded, and Heavily Cold Worked
Austenitic Stainless Steel Pipes
 - A391/A391M-07Grade 80 Alloy Steel Chain
 - A653/A653M-10Steel Sheet, Zinc Coated (Galvanized) or Zinc-
Iron Alloy Coated (Galvannealed) by the Hot-Dip
Process
 - A786/A786M-09Rolled Steel Floor Plate
 - B221-08Aluminum and Aluminum-Alloy Extruded Bars, Rods,
Wire, Shapes, and Tubes
 - B456-03(R2009)Electrodeposited Coatings of Copper Plus Nickel
Plus Chromium and Nickel Plus Chromium
 - B632-08Aluminum-Alloy Rolled Tread Plate
 - C1107-08Packaged Dry, Hydraulic-Cement Grout (Nonshrink)
 - D3656-07Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns

- F436-10Hardened Steel Washers
- F468-10Nonferrous Bolts, Hex Cap Screws, and Studs for
General Use
- F593-02(R2008)Stainless Steel Bolts, Hex Cap Screws, and Studs
- F1667-11Driven Fasteners: Nails, Spikes and Staples
- D. American Welding Society (AWS):
 - D1.1-10Structural Welding Code Steel
 - D1.2-08Structural Welding Code Aluminum
 - D1.3-08Structural Welding Code Sheet Steel
- E. National Association of Architectural Metal Manufacturers (NAAMM)
 - AMP 521-01Pipe Railing Manual
 - AMP 500-06Metal Finishes Manual
 - MBG 531-09Metal Bar Grating Manual
 - MBG 532-09Heavy Duty Metal Bar Grating Manual
- F. Structural Steel Painting Council (SSPC)/Society of Protective Coatings:
 - SP 1-04No. 1, Solvent Cleaning
 - SP 2-04No. 2, Hand Tool Cleaning
 - SP 3-04No. 3, Power Tool Cleaning
- G. Federal Specifications (Fed. Spec):
 - RR-T-650ETreads, Metallic and Nonmetallic, Nonskid

PART 2 - PRODUCTS

2.1 DESIGN CRITERIA

- A. In addition to the dead loads, design fabrications to support the following live loads unless otherwise specified.
- B. Ladders and Rungs: 120 kg (250 pounds) at any point.
- C. Railings and Handrails: 900 N (200 pounds) in any direction at any point.

2.2 MATERIALS

- A. Structural Steel: ASTM A36.
- B. Primer Paint: As specified in Section 09 91 00, PAINTING.
- C. Grout: ASTM C1107, pourable type.
- D. Insect Screening: ASTM D3656.
- E. Aluminum: ASTM B209 and B221, Alloy 6063, Finish: Color Anodized to match adjacent Aluminum framing members.
- F. Stainless Steel: ASTM A667, Type 302 or 304.
- G. Stainless Steel Tubing: ASTM A296, Type 302 or 304.

2.3 HARDWARE

- A. Rough Hardware:
 - 1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated,

or zinc-coated by electro-galvanizing process. Galvanized G-90 where specified.

2. Use G90 galvanized coating on ferrous metal for exterior work unless non-ferrous metal or stainless is used.

B. Fasteners:

1. Bolts with Nuts:

- a. ASME B18.2.2.
- b. ASTM A307 for 415 MPa (60,000 psi) tensile strength bolts.
- c. ASTM F468 for nonferrous bolts.
- d. ASTM F593 for stainless steel.

2. Screws: ASME B18.6.1.

3. Washers: ASTM F436, type to suit material and anchorage.

4. Nails: ASTM F1667, Type I, style 6 or 14 for finish work.

2.4 FABRICATION GENERAL

A. Material

1. Use material as specified. Use material of commercial quality and suitable for intended purpose for material that is not named or its standard of quality not specified.
2. Use material free of defects which could affect the appearance or service ability of the finished product.

B. Size:

1. Size and thickness of members as shown.
2. When size and thickness is not specified or shown for an individual part, use size and thickness not less than that used for the same component on similar standard commercial items or in accordance with established shop methods.

C. Connections

1. Except as otherwise specified, connections may be made by welding, riveting or bolting.
2. Field riveting will not be approved.
3. Design size, number and placement of fasteners, to develop a joint strength of not less than the design value.
4. Holes, for rivets and bolts: Accurately punched or drilled and burrs removed.
5. Size and shape welds to develop the full design strength of the parts connected by welds and to transmit imposed stresses without permanent deformation or failure when subject to service loadings.
6. Use Rivets and bolts of material selected to prevent corrosion (electrolysis) at bimetallic contacts. Plated or coated material will not be approved.

7. Use stainless steel connectors for removable members machine screws or bolts.

D. Fasteners and Anchors

1. Use methods for fastening or anchoring metal fabrications to building construction as shown or specified.
2. Where fasteners and anchors are not shown, design the type, size, location and spacing to resist the loads imposed without deformation of the members or causing failure of the anchor or fastener, and suit the sequence of installation.
3. Use material and finish of the fasteners compatible with the kinds of materials which are fastened together and their location in the finished work.
4. Fasteners for securing metal fabrications to new construction only, may be by use of threaded or wedge type inserts or by anchors for welding to the metal fabrication for installation before the concrete is placed or as masonry is laid.
5. Fasteners for securing metal fabrication to existing construction or new construction may be expansion bolts, toggle bolts, power actuated drive pins, welding, self drilling and tapping screws or bolts.

E. Workmanship

1. General:

- a. Fabricate items to design shown.
- b. Furnish members in longest lengths commercially available within the limits shown and specified.
- c. Fabricate straight, true, free from warp and twist, and where applicable square and in same plane.
- d. Provide holes, sinkages and reinforcement shown and required for fasteners and anchorage items.
- e. Provide openings, cut-outs, and tapped holes for attachment and clearances required for work of other trades.
- f. Prepare members for the installation and fitting of hardware.
- g. Cut openings in gratings and floor plates for the passage of ducts, sumps, pipes, conduits and similar items. Provide reinforcement to support cut edges.
- h. Fabricate surfaces and edges free from sharp edges, burrs and projections which may cause injury.

2. Welding:

- a. Weld in accordance with AWS.
- b. Welds shall show good fusion, be free from cracks and porosity and accomplish secure and rigid joints in proper alignment.

- c. Where exposed in the finished work, continuous weld for the full length of the members joined and have depressed areas filled and protruding welds finished smooth and flush with adjacent surfaces.
 - d. Finish welded joints to match finish of adjacent surface.
3. Joining:
- a. Miter or butt members at corners.
 - b. Where frames members are butted at corners, cut leg of frame member perpendicular to surface, as required for clearance.
4. Anchors:
- a. Where metal fabrications are shown to be preset in concrete, weld 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 150 mm (6 inches) long with 25 mm (one inch) hooked end, to back of member at 600 mm (2 feet) on center, unless otherwise shown.
 - b. Where metal fabrications are shown to be built into masonry use 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 250 mm (10 inches) long with 50 mm (2 inch) hooked end, welded to back of member at 600 mm (2 feet) on center, unless otherwise shown.
5. Cutting and Fitting:
- a. Accurately cut, machine and fit joints, corners, copes, and miters.
 - b. Fit removable members to be easily removed.
 - c. Design and construct field connections in the most practical place for appearance and ease of installation.
 - d. Fit pieces together as required.
 - e. Fabricate connections for ease of assembly and disassembly without use of special tools.
 - f. Joints firm when assembled.
 - g. Conceal joining, fitting and welding on exposed work as far as practical.
 - h. Do not show rivets and screws prominently on the exposed face.
 - i. The fit of components and the alignment of holes shall eliminate the need to modify component or to use exceptional force in the assembly of item and eliminate the need to use other than common tools.

F. Finish:

- 1. Finish exposed surfaces in accordance with NAAMM Metal Finishes Manual.
- 2. Steel and Iron: NAAMM AMP 504.
 - a. Zinc coated (Galvanized): ASTM A123, G90 unless noted otherwise.
 - b. Surfaces exposed in the finished work:
 - 1) Finish smooth rough surfaces and remove projections.

- 2) Fill holes, dents and similar voids and depressions with epoxy type patching compound.

c. Shop Prime Painting:

- 1) Surfaces of Ferrous metal:
 - a) Items not specified to have other coatings.
 - b) Galvanized surfaces specified to have prime paint.
 - c) Remove all loose mill scale, rust, and paint, by hand or power tool cleaning as defined in SSPC-SP2 and SP3.
 - d) Clean of oil, grease, soil and other detrimental matter by use of solvents or cleaning compounds as defined in SSPC-SP1.
 - e) After cleaning and finishing apply one coat of primer as specified in Section 09 91 00, PAINTING.
- 2) Non ferrous metals: Comply with MAAMM-500 series.
- 3) Stainless Steel: NAAM AMP - 504 Finish No. 4.

G. Protection:

1. Spot prime all abraded and damaged areas of zinc coating which expose the bare metal, using zinc rich paint on hot-dip zinc coat items and zinc dust primer on all other zinc coated items.

H. Aluminum Members:

1. Accurately form metal parts and accurately fit and rigidly assemble joints, except those joints designed to accommodate movement. Seal joints to prevent leakage of water. Use members capable of resisting a 500 lb. per square foot applied pressure applied at any point. Grille must not allow a 4" sphere to pass through the assembly at any point.
2. Make welds in aluminum in accordance with the recommended practice AWA D1.2. Use electrodes and methods recommended by the manufacturers of the metals and alloys being welded. Make welds behind finished surfaces so as to cause no distortion or discoloration of the exposed side. Clean welded joints of welding flux and dress exposed and contact surfaces.
3. Make provisions in frames to receive grille assembly.
4. Fit and assemble the work at the manufacturer's plant. Mark work that cannot be permanently plant-assembled to assure proper assembly in the field.

2.5 PROTECTION OF ALUMINUM

- A. Isolate aluminum from contact with dissimilar metals other than stainless steel, white bronze, or zinc by any of the following:
1. Coat the dissimilar metal with two coats of heavy-bodied alkali resistant bituminous paint.

2. Place caulking compound, or non-absorptive tape, or gasket between the aluminum and the dissimilar metal.
3. Paint aluminum in contact with mortar, concrete and plaster, with a coat of aluminum paint primer.

2.6 ALUMINUM FINISH:

- A. In accordance with NAAMM AMP 500 series.
- B. Anodized Aluminum:
 1. Color Finish: Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 7 mils thick. More than 50 percent variation of the maximum shade range approved will not be accepted in a single component or in adjacent components, stiles, and rails on a continuous series.
 2. Color: As selected by Architect from Manufacturer's full range of available colors.

2.7 SUPPORTS

- A. General:
 1. Fabricate ASTM A36 structural steel shapes as shown.
 2. Use clip angles or make provisions for welding hangers and braces to overhead construction.
 3. Field connections may be welded or bolted.
- B. For Wall Mounted Items:
 1. For items supported by metal stud partitions.
 2. Steel strip or hat channel minimum of 1.5 mm (0.0598 inch) thick.
 3. Steel strip minimum of 150 mm (6 inches) wide, length extending one stud space beyond end of item supported.
 4. Steel hat channels where shown. Flange cut and flattened for anchorage to stud.
 5. Structural steel tube or channel for grab bar at water closets floor to structure above with clip angles or end plates formed for anchors.
 6. Use steel angles for thru wall counters. Drill angle for fasteners at ends and not over 100 mm (4 inches) on center between ends.
- C. For Trapeze Bars:
 1. Construct assembly above ceilings as shown and design to support not less than a 340 kg (750 pound) working load at any point.
 2. Fabricate trapeze supports as shown, with all exposed members, including screws, nuts, bolts and washers, fabricated of stainless steel.
 3. Fabricate concealed components of structural steel shapes unless shown otherwise.
 4. Stainless steel ceiling plate drilled for eye bolt.
 5. Continuously weld connections where welds shown.

6. Use modular channel where shown with manufacturers bolts and fittings.
 - a. Weld ends of steel angle braces to steel plates and secure to modular channel units as shown. Drill plates for anchor bolts.
 - b. Fabricate eye bolt, special clamp bolt, and plate closure full length of modular channel at ceiling line and secure to modular channel unit with manufacturers standard fittings.
- D. For Cubical Curtain Track:
 1. Fabricate assembly of steel angle as shown.
 2. Drill angle bent ends for anchor screws to acoustical suspension system and angle for hanger wires.
 3. Provide pipe sleeve welded to angle.
- E. Supports for Accordion Partition Tracks, Patient Lift Track, and Items at Various Conditions at Suspended Ceilings:
 1. Fabricate of structural steel shapes as shown.
 2. Drill for anchor bolts of suspended item.

2.8 FRAMES

- A. Elevator Entrance Wall Opening.
 1. Fabricate of channel shapes, plates, and angles as shown.
 2. Weld or bolt head to jamb as shown.
 3. Weld clip angles to bottom of frame and top of jamb members extended to structure above for framed construction.
 - a. Provide holes for anchors.
 - b. Weld head to jamb members.
- B. Channel Door Frames:
 1. Fabricate of structural steel channels of size shown.
 2. Miter and weld frames at corners.
 3. Where anchored to masonry or embedded in concrete, weld to back of frame at each jamb, 5 mm (3/16 inch) thick by 44 mm (1-3/4 inch) wide steel strap anchors with ends turned 50 mm (2 inches), and of sufficient length to extend at least 300 mm (12 inches) into wall. Space anchors 600 mm (24 inches) above bottom of frame and 600 mm (24 inches) o.c. to top of jamb. Weld clip angles to bottom of jambs and provide holes for expansion bolts.
 4. Where anchored to concrete or masonry in prepared openings, drill holes at jambs for anchoring with expansion bolts. Weld clip angles to bottom of frame and provide holes for expansion bolt anchors as shown. Drill holes starting 600 mm (24 inches) above bottom of frame and 600 mm (24 inches) o.c. to top of jamb and at top of jamb. Provide pipe spacers at holes welded to channel.
 5. Where closure plates are shown, continuously weld them to the channel flanges.

6. Weld continuous 19 x 19 x 3 mm (3/4 x 3/4 x 1/8 inch) thick steel angles to the interior side of each channel leg at the head and jambs to form a caulking groove.
7. Prepare frame for installation of hardware specified in Section 08 71 00, DOOR HARDWARE.
 - a. Cut a slot in the lock jamb to receive the lock bolt.
 - b. Where shown use continuous solid steel bar stops at perimeter of frame, weld or secure with countersunk machine screws at not more than 450 mm (18 inches) on center.

C. Frames for Breech Opening:

1. Fabricate from steel channels, or combination of steel plates and angles to size and contour shown.
2. Weld strap anchors on back of frame at not over 600 mm (2 feet) on centers for concrete or masonry openings.

2.9 LOOSE LINTELS

- A. Furnish lintels of sizes shown. Where size of lintels is not shown, provide the sizes specified.
- B. Fabricate lintels with not less than 150 mm (6 inch) bearing at each end for nonbearing masonry walls, and 200 mm (8 inch) bearing at each end for bearing walls.
- C. Provide one angle lintel for each 100 mm (4 inches) of masonry thickness as follows except as otherwise specified or shown.
 1. Openings 750 mm to 1800 mm (2-1/2 feet to 6 feet) - 100 x 90 x 8 mm (4 x 3-1/2 x 5/16 inch).
 2. Openings 1800 mm to 3000 mm (6 feet to 10 feet) - 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).
- D. For 150 mm (6 inch) thick masonry openings 750 mm to 3000 mm (2-1/2 feet to 10 feet) use one angle 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).
- E. Provide bearing plates for lintels where shown.
- F. Weld or bolt upstanding legs of double angle lintels together with 19 mm (3/4 inch bolts) spaced at 300 mm (12 inches) on centers.
- G. Insert spreaders at bolt points to separate the angles for insertion of metal windows, louver, and other anchorage.
- H. Where shown or specified, punch upstanding legs of single lintels to suit size and spacing of anchor bolts.
- I. Elevator Entrance:
 1. Fabricate lintel from plate bent to channel shape, and provide a minimum of 100 mm (4 inch) bearing each end.
 2. Cut away the front leg of the channel at each end to allow for concealment behind elevator hoistway entrance frame.

2.10 STAINLESS STEEL PRIVACY SCREEN

- A. Provide as noted on drawings.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Set work accurately, in alignment and where shown, plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Items set into concrete or masonry.
 - 1. Provide temporary bracing for such items until concrete or masonry is set.
 - 2. Place in accordance with setting drawings and instructions.
 - 3. Build strap anchors, into masonry as work progresses.
- C. Set frames of gratings, covers, corner guards, trap doors and similar items flush with finish floor or wall surface and, where applicable, flush with side of opening.
- D. Field weld in accordance with AWS.
 - 1. Design and finish as specified for shop welding.
 - 2. Use continuous weld unless specified otherwise.
- E. Install anchoring devices and fasteners as shown and as necessary for securing metal fabrications to building construction as specified. Power actuated drive pins may be used except for removable items and where members would be deformed or substrate damaged by their use.
- F. Spot prime all abraded and damaged areas of zinc coating as specified and all abraded and damaged areas of shop prime coat with same kind of paint used for shop priming.
- G. Isolate aluminum from dissimilar metals and from contact with concrete and masonry materials as required to prevent electrolysis and corrosion.
- H. Secure escutcheon plate with set screw.
- I. Aluminum Grille Installation:
 - 1. Allowable Installation Tolerances: Install work plumb and true, in alignment and in relation to lines and grades shown. Variation of 3 mm (1/8 inch) in 2400 mm (eight feet), non-accumulative, is maximum permissible for plumb, level, warp, bow and alignment.
 - 2. Anchor aluminum grille to adjoining construction at heads, jambs and bottom. Anchor frames with stainless steel or aluminum countersunk flathead, expansion bolts or machine screws, as applicable.
 - 3. Remove all mastic smears and other unsightly marks, and repair any damaged or disfiguration of the work. Protect the installed work against damage or abuse.

3.2 INSTALLATION OF SUPPORTS

- A. Anchorage to structure.

1. Secure angles or channels and clips to overhead structural steel by continuous welding unless bolting is shown.
 2. Secure supports to concrete inserts by bolting or continuous welding as shown.
 3. Secure supports to mid height of concrete beams when inserts do not exist with expansion bolts and to slabs, with expansion bolts. unless shown otherwise.
 4. Secure steel plate or hat channels to studs as detailed.
- B. Supports for Wall Mounted items:
1. Locate center of support at anchorage point of supported item.
 2. Locate support at top and bottom of wall hung cabinets.
 3. Locate support at top of floor cabinets and shelving installed against walls.
 4. Locate supports where required for items shown.
- C. Support for cantilever grab bars:
1. Locate channels or tube in partition for support as shown, and extend full height from floor to underside of structural slab above.
 2. Anchor at top and bottom with angle clips bolted to channels or tube with two, 9 mm (3/8 inch) diameter bolts.
 3. Anchor to floors and overhead construction with two 9 mm (3/8 inch) diameter bolts.
 4. Fasten clips to concrete with expansion bolts, and to steel with machine bolts or welds.
- D. Supports for Trapeze Bars:
1. Secure plates to overhead construction with fasteners as shown.
 2. Secure angle brace assembly to overhead construction with fasteners as shown and bolt plate to braces.
 3. Fit modular channel unit flush with finish ceiling, and secure to plate with modular channel unit manufacturer's standard fittings through steel shims or spreaders as shown.
 - a. Install closure plates in channel between eye bolts.
 - b. Install eyebolts in channel.

3.3 DOOR FRAMES

- A. Secure clip angles at bottom of frames to concrete slab with expansion bolts as shown.
- B. Level and plumb frame; brace in position required.
- C. At masonry, set frames in walls so anchors are built-in as the work progresses unless shown otherwise.
- D. Set frames in formwork for frames cast into concrete.
- E. Where frames are set in prepared openings, bolt to wall with spacers and expansion bolts.

3.4 OTHER FRAMES

- A. Set frame flush with surface unless shown otherwise.
- B. Anchor frames at ends and not over 450 mm (18 inches) on centers unless shown otherwise.
- C. Set in formwork before concrete is placed.

3.5 FIXED STEEL LINTELS, AND BEARING AND LEVELING PLATES

- A. Use lintel sizes and combinations shown or specified.
- B. Install lintels with longest leg upstanding, except for openings in 150 mm (6 inch) masonry walls install lintels with longest leg horizontal.
- C. Install lintels to have not less than 150 mm (6 inch) bearing at each end for nonbearing walls, and 200 mm (8 inch) bearing at each end for bearing walls.

3.6 LOOSE LINTELS

- A. Provide and furnish to Division 4 Unit Masonry contractor for installation.
 - 1. Coordinate with specification section 04 20 00 Unit Masonry.

3.7 CLEAN AND ADJUSTING

- A. Adjust movable parts including hardware to operate as designed without binding or deformation of the members centered in the opening or frame and, where applicable, contact surfaces fit tight and even without forcing or warping the components.
- B. Clean after installation exposed prefinished and plated items and items fabricated from stainless steel, aluminum and copper alloys, as recommended by the metal manufacture and protected from damage until completion of the project.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 06 10 00
ROUGH CARPENTRY**

PART 1 - GENERAL

1.1 DESCRIPTION:

Section specifies wood blocking, framing, sheathing, furring, nailers, sub-flooring, rough hardware, and light wood construction.

1.2 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings showing framing connection details, fasteners, connections and dimensions.

1.3 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Protect lumber and other products from dampness both during and after delivery at site.
- B. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.
- C. Stack plywood and other board products so as to prevent warping.
- D. Locate stacks on well drained areas, supported at least 150 mm (6 inches) above grade and cover with well ventilated sheds having firmly constructed over hanging roof with sufficient end wall to protect lumber from driving rain.

1.4 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Forest and Paper Association (AFPA):
National Design Specification for Wood Construction
NDS-05Conventional Wood Frame Construction
- C. American Institute of Timber Construction (AITC):
A190.1-07Structural Glued Laminated Timber
- D. American Society of Mechanical Engineers (ASME):
B18.2.1-96(R2005)Square and Hex Bolts and Screws
B18.2.2-87Square and Hex Nuts
B18.6.1-97Wood Screws
B18.6.4-98(R2005)Thread Forming and Thread Cutting Tapping Screws
and Metallic Drive Screws
- E. American Plywood Association (APA):
E30-07Engineered Wood Construction Guide

F. American Society for Testing And Materials (ASTM):

- A47-99(R2009)Ferritic Malleable Iron Castings
- A48-03(R2008)Gray Iron Castings
- A653/A653M-10Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process
- C954-10Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Studs from 0.033 inch (2.24 mm) to 0.112-inch (2.84 mm) in thickness
- C1002-07Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Metal Studs
- D143-09Small Clear Specimens of Timber, Method of Testing
- D1760-01Pressure Treatment of Timber Products
- D2559-10Adhesives for Structural Laminated Wood Products for Use Under Exterior (Wet Use) Exposure Conditions
- D3498-11Adhesives for Field-Gluing Plywood to Lumber Framing for Floor Systems
- F844-07Washers, Steel, Plan (Flat) Unhardened for General Use
- F1667-08Nails, Spikes, and Staples

G. Federal Specifications (Fed. Spec.):

- MM-L-736CLumber; Hardwood

H. Commercial Item Description (CID):

- A-A-55615Shield, Expansion (Wood Screw and Lag Bolt Self Threading Anchors)

I. Military Specification (Mil. Spec.):

- MIL-L-19140ELumber and Plywood, Fire-Retardant Treated

J. Truss Plate Institute (TPI):

- TPI-85Metal Plate Connected Wood Trusses

K. U.S. Department of Commerce Product Standard (PS)

- PS 1-95Construction and Industrial Plywood
- PS 20-05American Softwood Lumber Standard

PART 2 - PRODUCTS**2.1 LUMBER:**

- A. Unless otherwise specified, each piece of lumber bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.
 - 1. Identifying marks in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
 - 2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.
- B. Structural Members: Species and grade as listed in the AFPA, National Design Specification for Wood Construction having design stresses as shown.
- C. Lumber Other Than Structural:
 - 1. Unless otherwise specified, species graded under the grading rules of an inspection agency approved by Board of Review, American Lumber Standards Committee.
 - 2. Framing lumber: Minimum extreme fiber stress in bending of 1100.
 - 3. Furring, blocking, nailers and similar items 100 mm (4 inches) and narrower Standard Grade; and, members 150 mm (6 inches) and wider, Number 2 Grade.
- D. Sizes:
 - 1. Conforming to Prod. Std., PS20.
 - 2. Size references are nominal sizes, unless otherwise specified, actual sizes within manufacturing tolerances allowed by standard under which produced.
- E. Moisture Content:
 - 1. At time of delivery and maintained at the site.
 - 2. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.
 - 3. Lumber over 50 mm (2 inches) thick: 25 percent or less.
- F. Fire Retardant Treatment (All members used in canal completed work).
 - 1. Mil Spec. MIL-L-19140 with piece of treated material bearing identification of testing agency and showing performance rating.
 - 2. Treatment and performance inspection, by an independent and qualified testing agency that establishes performance ratings.

G. Preservative Treatment (All members used in completed work):

1. Do not treat Heart Redwood and Western Red Cedar.
2. Treat wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including framing of open roofed structures; sills, sole plates, furring, and sleepers that are less than 600 mm (24 inches) from ground; nailers, edge strips, blocking, crickets, curbs, cant, vent strips and other members used in connection with roofing and flashing materials.
3. Treat other members specified as preservative treated (PT).
4. Preservative treat by the pressure method complying with ASTM D1760, except any process involving the use of Chromated Copper arsenate (CCA) for pressure treating wood is not permitted.

2.2 ROUGH HARDWARE AND ADHESIVES:

A. Anchor Bolts:

1. ASME B18.2.1 and ANSI B18.2.2 galvanized, 13 mm (1/2 inch) unless shown otherwise.
2. Extend at least 200 mm (8 inches) into masonry or concrete with ends bent 50 mm (2 inches).

B. Miscellaneous Bolts: Expansion Bolts: C1D, A-A-55615; lag bolt, long enough to extend at least 65 mm (2-1/2 inches) into masonry or concrete. Use 13 mm (1/2 inch) bolt unless shown otherwise.

C. Washers

1. ASTM F844.
2. Use zinc or cadmium coated steel or cast iron for washers exposed to weather.

D. Screws:

1. Wood to Wood: ANSI B18.6.1 or ASTM C1002.
2. Wood to Steel: ASTM C954, or ASTM C1002.

E. Nails:

1. Size and type best suited for purpose unless noted otherwise. Use aluminum-alloy nails, plated nails, or zinc-coated nails, for nailing wood work exposed to weather and on roof blocking.
2. ASTM F1667:
 - a. Common: Type I, Style 10.
 - b. Concrete: Type I, Style 11.
 - c. Barbed: Type I, Style 26.
 - d. Underlayment: Type I, Style 25.
 - e. Masonry: Type I, Style 27.
 - f. Use special nails designed for use with ties, strap anchors, framing connectors, joists hangers, and similar items. Nails not less than 32 mm (1-1/4 inches) long, 8d and deformed or annular ring shank.

F. Adhesives:

1. For field-gluing plywood to lumber framing floor or roof systems:
ASTM D3498.

PART 3 - EXECUTION

3.1 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:

A. Conform to applicable requirements of the following:

1. AFPA National Design Specification for Wood Construction for timber connectors.
2. AFPA WCD-number 1, Manual for House Framing for nailing and framing unless specified otherwise.

B. Fasteners:

1. Nails.

- a. Nail in accordance with the Recommended Nailing Schedule as specified in AFPA Manual for House Framing where detailed nailing requirements are not specified in nailing schedule. Select nail size and nail spacing sufficient to develop adequate strength for the connection without splitting the members.
- b. Use special nails with framing connectors.
- c. For sheathing and subflooring, select length of nails sufficient to extend 25 mm (1 inch) into supports.
- d. Use eight penny or larger nails for nailing through 25 mm (1 inch) thick lumber and for toe nailing 50 mm (2 inch) thick lumber.
- e. Use 16 penny or larger nails for nailing through 50 mm (2 inch) thick lumber.
- f. Select the size and number of nails in accordance with the Nailing Schedule except for special nails with framing anchors.
- g. Nailing Schedule; Using Common Nails:
 - 1) Joist bearing on sill or girder, toe nail three-8d or framing anchor
 - 2) Bridging to joist, toe nail each end two-8d
 - 3) Ledger strip to beam or girder three-16d under each joint.
 - 4) Subflooring or Sheathing:
 - a) 150 mm (6 inch) wide or less to each joist face nail two-8d.
 - b) Subflooring, more than 150 mm (6 inches) wide, to each stud or joint, face nail three-8d.
 - c) Plywood or structural use panel to each stud or joist face nail 8d, at supported edges 150 mm (6 inches) on center and at intermediate supports 250 mm (10 inches) on center. When gluing plywood to joint framing increase nail spacing to 300 mm (12 inches) at supported edges and 500 mm (20 inches) o.c. at intermediate supports.

- 5) Sole plate to joist or blocking, through sub floor face nail 20d nails, 400 mm (16 inches) on center.
- 6) Top plate to stud, end nail two-16d.
- 7) Stud to sole plate, toe nail or framing anchor. Four-8d
- 8) Doubled studs, face nail 16d at 600 mm (24 inches) on center.
- 9) Built-up corner studs 16d at 600 mm (24 inches) (24 inches) on center.
- 10) Doubled top plates, face nails 16d at 400 mm (16 inches) on center.
- 11) Top plates, laps, and intersections, face nail two-16d.
- 12) Continuous header, two pieces 16d at 400 mm (16 inches) on center along each edge.
- 13) Ceiling joists to plate, toenail three-8d or framing anchor.
- 14) Continuous header to stud, four 16d.
- 15) Ceiling joists, laps over partitions, face nail three-16d or framing anchor.
- 16) Ceiling joists, to parallel rafters, face nail three-16d.
- 17) Rafter to plate, toe nail three-8d. or framing anchor. Brace 25 mm (1 inch) thick board to each stud and plate, face nail three-8d.
- 18) Built-up girders and beams 20d at 800 mm (32 inches) on center along each edge.

2. Bolts:

- a. Fit bolt heads and nuts bearing on wood with washers.
 - b. Countersink bolt heads flush with the surface of nailers.
 - c. Embed in concrete and solid masonry or use expansion bolts.
Special bolts or screws designed for anchor to solid masonry or concrete in drilled holes may be used.
 - d. Use toggle bolts to hollow masonry or sheet metal.
 - e. Use bolts to steel over 2.84 mm (0.112 inch, 11 gage) in thickness. Secure wood nailers to vertical structural steel members with bolts, placed one at ends of nailer and 600 mm (24 inch) intervals between end bolts. Use clips to beam flanges.
3. Drill Screws to steel less than 2.84 mm (0.112 inch) thick.
- a. ASTM C1002 for steel less than 0.84 mm (0.033 inch) thick.
 - b. ASTM C 954 for steel over 0.84 mm (0.033 inch) thick.
4. Power actuated drive pins may be used where practical to anchor to solid masonry, concrete, or steel.
5. Do not anchor to wood plugs or nailing blocks in masonry or concrete. Use metal plugs, inserts or similar fastening.

6. Screws to Join Wood:
 - a. Where shown or option to nails.
 - b. ASTM C1002, sized to provide not less than 25 mm (1 inch) penetration into anchorage member.
 - c. Spaced same as nails.
7. Installation of Timber Connectors:
 - a. Conform to applicable requirements of the NFPA National Design Specification for Wood Construction.
 - b. Fit wood to connectors and drill holes for fasteners so wood is not split.
- C. Set sills or plates level in full bed of mortar on masonry or concrete walls.
 1. Space anchor bolts 1200 mm (4 feet) on centers between ends and within 150 mm (6 inches) of end. Stagger bolts from side to side on plates over 175 mm (7 inches) in width.
 2. Use shims of slate, tile or similar approved material to level wood members resting on concrete or masonry. Do not use wood shims or wedges.
 3. Closely fit, and set to required lines.
- D. Cut notch, or bore in accordance with NFPA Manual for House-Framing for passage of ducts wires, bolts, pipes, conduits and to accommodate other work. Repair or replace miscut, misfit or damaged work.
- E. Blocking Nailers, and Furring:
 1. Install furring, blocking, nailers, and grounds where shown, or if not shown, where required.
 2. Use longest lengths practicable.
 3. Use fire retardant treated wood blocking.
 4. Layers of Blocking or Plates:
 - a. Stagger end joints between upper and lower pieces.
 - b. Nail at ends and not over 600 mm (24 inches) between ends.
 - c. Stagger nails from side to side of wood member over 125 mm (5 inches) in width.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 06 20 00
FINISH CARPENTRY**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies interior millwork.
- B. Items specified.
 - Counter Shelf
 - Counter or Work Tops
 - Mounting Strips, Shelves, and Rods
 - Standing and running trim
 - Window sills and aprons
 - Custom casework and millwork

1.2 RELATED WORK

- A. Framing, furring and blocking: Section 06 10 00, ROUGH CARPENTRY.
- B. Wood doors: Section 08 14 00, WOOD DOORS.
- C. Transparent and opaque finishes: Section 09 91 00 PAINTING.
- D. Chair rails: Section 10 26 00 WALL AND DOOR PROTECTION.
- E. Electrical light fixtures and duplex outlets: Division 26, ELECTRICAL.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
 - 1. Millwork items - Half full size scale for sections and details 1:50 (1/4-inch) for elevations and plans.
 - 2. Show construction and installation.
- C. Samples:
 - 1. Plastic laminate finished plywood or particleboard, 150 mm by 300 mm (six by twelve inches).
 - 2. Solid polymer material, 50 mm by 50 mm (2 inches by 2 inches).
- D. Manufacturer's literature and data:
 - 1. Finish hardware
 - 2. Sinks with fittings
 - 3. Electrical components

1.4 DELIVERY, STORAGE AND HANDLING

- A. Protect lumber and millwork from dampness, maintaining moisture content specified both during and after delivery at site.
- B. Store finishing lumber and millwork in weathertight well ventilated structures or in space in existing buildings designated by Resident Engineer. Store at a minimum temperature of 21°C (70°F) for not less than 10 days before installation.

- C. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Testing and Materials (ASTM):
- A36/A36M-08Structural Steel
 - A53-07Pipe, Steel, Black and Hot-Dipped Zinc Coated,
Welded and Seamless
 - A167-99 (R2009)Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet, and Strip
 - B26/B26M-09Aluminum-Alloy Sand Castings
 - B221-08Aluminum and Aluminum-Alloy Extruded Bars, Rods,
Wire, Profiles, and Tubes
 - E84-09Surface Burning Characteristics of Building
Materials
- C. American Hardboard Association (AHA):
- A135.4-04Basic Hardboard
- D. Builders Hardware Manufacturers Association (BHMA):
- A156.9-03Cabinet Hardware
 - A156.11-04Cabinet Locks
 - A156.16-02Auxiliary Hardware
- E. Hardwood Plywood and Veneer Association (HPVA):
- HP1-09Hardwood and Decorative Plywood
- F. National Particleboard Association (NPA):
- A208.1-99Wood Particleboard
- G. American Wood-Preservers' Association (AWPA):
- AWPA C1-03All Timber Products - Preservative Treatment by
Pressure Processes
- H. Architectural Woodwork Institute (AWI):
- AWI-99Architectural Woodwork Quality Standards and
Quality Certification Program
- I. National Electrical Manufacturers Association (NEMA):
- LD 3-05High-Pressure Decorative Laminates
- J. U.S. Department of Commerce, Product Standard (PS):
- PS20-05American Softwood Lumber Standard
- K. Military Specification (Mil. Spec):
- MIL-L-19140ELumber and Plywood, Fire-Retardant Treated
- L. Federal Specifications (Fed. Spec.):
- A-A-1922AShield Expansion

A-A-1936Contact Adhesive
 FF-N-836DNut, Square, Hexagon Cap, Slotted, Castle
 FF-S-111D(1)Screw, Wood
 MM-L-736(C)Lumber, Hardwood

1.6 QUALITY ASSURANCE

- A. Comply with AWI Custom Grade Construction Standards for finish carpentry and interior millwork, unless otherwise specified.

PART 2 - PRODUCTS

2.1 LUMBER

- A. Grading and Marking:
 - 1. Lumber shall bear the grade mark, stamp, or other identifying marks indicating grades of material.
 - 2. Such identifying marks on a material shall be in accordance with the rule or standard under which the material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
 - 3. The inspection agency for lumber shall be approved by the Board of Review, American Lumber Standards Committee, to grade species used.
- B. Sizes:
 - 1. Lumber Size references, unless otherwise specified, are nominal sizes, and actual sizes shall be within manufacturing tolerances allowed by the standard under which product is produced.
 - 2. Millwork, standing and running trim, and rails: Actual size as shown or specified.
- C. Hardwood: MM-L-736, white ash for each item or as recommended to receive transparent finish.
- D. Softwood: PS-20, exposed to view appearance grades:
 - 1. Use C select or D select, vertical grain for transparent finish including stain transparent finish.
 - 2. Use Prime for painted or opaque finish.

2.2 PLYWOOD

- A. Softwood Plywood:
 - 1. Prod. Std.
 - 2. Grading and Marking:
 - a. Each sheet of plywood shall bear the mark of a recognized association or independent inspection agency that maintains continuing control over the quality of the plywood.

- b. The mark shall identify the plywood by species group or identification index, and shall show glue type, grade, and compliance with PS1.
- 3. Plywood, 13 mm (1/2 inch) and thicker; not less than five ply construction, except 32 mm (1-1/4 inch) thick plywood not less than seven ply.
- 4. Plastic Laminate Plywood Cores:
 - a. Exterior Type, and species group.
 - b. Veneer Grade: A-C.
- 5. Shelving Plywood:
 - a. Interior Type, any species group.
 - b. Veneer Grade: A-B or B-C.
- 6. Other: As specified for item.

2.3 PARTICLEBOARD

- A. NPA A208.1
- B. Plastic Laminate Particleboard Cores:
 - 1. Use Industrial grade particleboard, medium density, Grade M-2, unless otherwise specified.
 - 2. Use Industrial grade particleboard, medium density, Grade M-2, exterior grade, for countertops with sinks.

2.4 PLASTIC LAMINATE

- A. NEMA LD-3.
- B. Exposed decorative surfaces including countertops, both sides of cabinet doors, and for items having plastic laminate finish. General Purpose, Type HGL.
- C. Cabinet Interiors including Shelving: Both of following options to comply with NEMA, CLS as a minimum.
 - 1. Plastic laminate clad plywood or particle board.
 - 2. Resin impregnated decorative paper thermally fused to particle board.
- D. Backing sheet on bottom of plastic laminate covered wood tops: Backer, Type HGP.
- E. Post Forming Fabrication, Decorative Surfaces: Post forming, Type HGP.
- F. Laminate thickness for casework shall be as follows:
 - 1. Countertop Surfaces: .050" (1.3 mm) unless otherwise specified.
 - 2. All other Surfaces: .028" (0.7 mm) vertical grade, unless otherwise specified.

2.5 SOLID POLYMER MATERIAL:

- A. Cast, filled, acrylic, not coated, laminated or composite construction meeting ANSI 2124, 1980.

B. Performance properties required.

Property	Result	Test
Elongation	0.3% min.	ATM D638
Hardness	90 Rockwell M	ASTM D785
Gloss (60°)	5-20	NEMA LD3.1
Color Stability	No Change	NEMA LD3 except 200 hour
Abrasion Resistance	No loss of pattern Max wear depth 0.0762 mm (0.003 in)-10000 cycles	NEMA LD3
Water absorption weight (5 max)	24 hours 0.9	ASTM D-570
Izod impact	14 Nym/m (0.25 ft-lb/in)	ASTM D256 (Method A)
Impact resistance	No fracture	NEMA LD-3 900 mm (36") drop 1 kg (2 lb.) ball
Boiling water surface resistance	No visible change	NEMA LD3
High temperature resistance	Slight surface dulling	NEMA LD3

C. Cast into sheet form and bowl form.

D. Color throughout with pattern through thickness.

E. Basis-of-Design Products: As indicated on the Drawings.

F. Joint adhesive and sealer: Manufacturers silicone adhesive and sealant for joining methyl methacrylic polymer sheet.

2.6 BUILDING BOARD (HARDBOARD)

A. ANSI/AHA A135.4, 6 mm (1/4 inch) thick unless specified otherwise.

2.7 ADHESIVE

A. For Plastic Laminate: Fed. Spec. A-A-1936.

B. For Interior Millwork: Unextended urea resin, unextended melamine resin, phenol resin, or resorcinol resin.

2.8 STAINLESS STEEL

A. ASTM A167, Type 302 or 304.

2.9 ALUMINUM CAST

A. ASTM B26

2.10 ALUMINUM EXTRUDED

A. ASTM B221

2.11 HARDWARE

A. Rough Hardware:

1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electric-galvanizing process. Galvanized where specified.
 2. Use galvanized coating on ferrous metal for exterior work unless non-ferrous metals or stainless is used.
 3. Fasteners:
 - a. Bolts with Nuts: FF-N-836.
 - b. Expansion Bolts: A-A-1922A.
 - c. Screws: Fed. Spec. FF-S-111.
- B. Finish Hardware:
1. Cabinet Hardware: ANSI A156.9.
 - a. Door/Drawer Pulls: Wire pulls, B22011, 100 mm (4 inches) long, 8 mm (5/16 inches) in diameter; B52011.
 - b. Drawer Slides:
 - 1) Pencil Drawer Slides: Knappe & Vogt #8200 or #8250 as appropriate, 75 lb. class, ¾ extensions, or approved equal.
 - 2) Box Drawers up to 6" deep: Knappe & Vogt #8300, 75 lb. class, ¾ extensions, or approved equal.
 - 3) Box Drawers over 6" deep and File Drawers: Knappe & Vogt #8500, 150 lb. class, full extension, for 12" and 14" long drawers, or approved equal. Knappe & Vogt # 8520, 175 lb. class, full extension for drawers longer than 14", or approved equal.
 - c. Pocket Drawer Slides: Blum #270E series, or approved equal.
 - d. Shelf Clips: Hafele #282.04.524, plug-in 32 mm spoon type, or approved equal.
 - e. Shelf Bracket: Hafele 287.35.159, or approved equal.
 - f. Concealed (European Type) Hinges (Provide unless indicated otherwise): B01602, Blum selfclosing, full overlay, 125°, nickel plated, clip style, or approved equal.
 - g. Butt Hinges: B01521 for doors where indicated provide concealed hinges if not indicated.
 - h. Door Locks: E07121. Keyed alike with in an area, different areas keyed differently.
 - i. Drawer Locks: E07041. Keyed alike within an area, different areas keyed differently.
 - j. Door Silencers: Clear plastic with self-adhesive.
 2. Auxiliary Hardware: ANSI A156.16.
 - a. Shelf Bracket: B04041, japanned or enameled finish.
 - b. Combination Garment rod and Shelf Support: B04051 japanned or enamel finish.

C. Edge Strips Moldings:

1. Driven type "T" shape with serrated retaining stem; vinyl plastic to match plastic laminate color, stainless steel, or 3 mm (1/8 inch) thick extruded aluminum.
2. Stainless steel or extruded aluminum channels.
3. Stainless steel, number 4 finish; aluminum, mechanical applied medium satin finish, clear anodized 0.1 mm (0.4 mils) thick.

D. Primers: Manufacturer's standard primer for steel providing baked enamel finish.

2.12 MOISTURE CONTENT

A. Moisture content of lumber and millwork at time of delivery to site.

1. Interior finish lumber, trim, and millwork 32 mm (1-1/4 inches) or less in nominal thickness: 12 percent on 85 percent of the pieces and 15 percent on the remainder.
2. Exterior treated or untreated finish lumber and trim 100 mm (4 inches) or less in nominal thickness: 15 percent.
3. Moisture content of other materials shall be in accordance with the standards under which the products are produced.

2.13 FIRE RETARDANT TREATMENT

A. Where wood members and plywood are specified to be fire retardant treated, the treatment shall be in accordance with Mil. Spec. MIL-L19140.

B. Treatment and performance inspection shall be by an independent and qualified testing agency that establishes performance ratings.

C. Each piece of treated material shall bear identification of the testing agency and shall indicate performance in accordance with such rating of flame spread and smoke developed.

D. Treat wood for maximum flame spread of 25 and smoke developed of 25.

E. Fire Resistant Softwood Plywood:

1. Use Grade A, Exterior, plywood for treatment.
2. Meet the following requirements when tested in accordance with ASTM E84.
 - a. Flame spread: 0 to 25.
 - b. Smoke developed: 100 maximum

2.14 PRESERVATIVE TREATMENT

A. Wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including wood members used for rough framing of millwork items except heart-wood Redwood and Western Red Cedar shall be preservative treated in accordance with AWP Standards.

B. Use Grade A, exterior plywood for treatment.

2.15 FABRICATION

A. General:

1. Except as otherwise specified, use AWI Custom Grade for architectural woodwork and interior millwork.
2. Finish woodwork shall be free from pitch pockets.
3. Except where special profiles are shown, trim shall be standard stock molding and members of the same species.
4. Plywood shall be not less than 13 mm (1/2 inch), unless otherwise shown or specified.
5. Edges of members in contact with concrete or masonry shall have a square corner caulking rebate.
6. Fabricate members less than 4 m (14 feet) in length from one piece of lumber, back channeled and molded as shown.
7. Interior trim and items of millwork to be painted may be fabricated from jointed, built-up, or laminated members, unless otherwise shown on drawings or specified.
8. Plastic Laminate Work:
 - a. Factory glued to either a plywood or a particle board core, thickness as shown or specified.
 - b. Cover exposed edges with plastic laminate, except where aluminum, stainless steel, or plastic molded edge strips are shown or specified. Use plastic molded edge strips on 19 mm (3/4-inch) molded thick or thinner core material.
 - c. Provide plastic backing sheet on underside of countertops, vanity tops, thru-wall counter including back splashes and end splashes of countertops.
 - d. Use backing sheet on concealed large panel surface when decorative face does not occur.

B. Mounting Strips, Shelves and Rods:

1. Plastic laminate covered, 19 mm (3/4 inch) thick plywood or particle board core with edges and ends having plastic molded edge strips. Size, finish and number as shown.
2. Rod or Closet Bar: L03131. Combination Garment and Shelf Support, intermediate support for closet bar: B04051 for rods over 1800 mm (6 feet) long.

C. Counter or Work Tops:

1. Fabrication with plastic laminate over 32 mm (1-1/4 inch) thick core unless shown otherwise.
 - a. Use decorative laminate for exposed edges of tops 38 mm (1-1/2 inches) wide and on back splash and end splash. Use plastic or metal edges for top edges less than 38 mm (1-1/2 inches) wide.

- b. Assemble back splash and end splash to counter top.
 - c. Use one piece counters for straight runs.
 - d. Miter corners for field joints with overlapping blocking on underside of joint.
- D. Solid Polymer Tops, Window Sills, and Aprons:
- 1. Fabrication countertop of solid polymer cast sheet, 19 mm (3/4 inch) thick.
 - 2. Fabricate countertop with integral solid polymer at locations indicated.
 - 3. Fabricate back splash and end splash to height shown.
 - 4. Fabricate skirt to depth shown.
 - 5. Fabricate in one piece for full length from corner to corner up to 3600 mm (12 feet).
 - 6. Join pieces with adhesive sealant.
 - 7. Cut out countertop for lavatories, plumbing trim.
 - 8. Provide concealed fasteners and epoxy cement for anchorage of sinks to countertop.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

- A. Maintain work areas and storage areas to a minimum temperature of 21°C (70°F) for not less than 10 days before and during installation of interior millwork.
- B. Do not install finish lumber or millwork in any room or space where wet process systems such as concrete, masonry, or plaster work is not complete and dry.

3.2 INSTALLATION

- A. General:
 - 1. Millwork receiving transparent finish shall be primed and back-painted on concealed surfaces. Set no millwork until primed and back-painted.
 - 2. Secure trim with fine finishing nails, screws, or glue as required.
 - 3. Set nails for putty stopping. Use washers under bolt heads where no other bearing plate occurs.
 - 4. Seal cut edges of preservative and fire retardant treated wood materials with a certified acceptable sealer.
 - 5. Coordinate with plumbing and electrical work for installation of fixtures and service connections in millwork items.
 - 6. Plumb and level items unless shown otherwise.
 - 7. Nail finish at each blocking, lookout, or other nailer and intermediate points; toggle or expansion bolt in place where nails are not suitable.

8. Exterior Work: Patch/repair existing exterior molding where indicated on Drawings. Joints shall be close fitted, metered, tongue and grooved, rebated, or lapped to exclude water.

B. Shelves:

1. Install mounting strip at back wall and end wall for shelves where shown secured with toggle bolts at each end and not over 600 mm (24 inch) centers between ends.
 - a. Nail Shelf to mounting strip at ends and to back wall strip at not over 900 mm (36 inches) on center.

C. Standing and Running Trim:

1. Install wood trim level, plumb, true, and straight. Shim as required with concealed shims. Install level and plumb to a tolerance of 1/8 inch in 96 inches (3 mm in 2400 mm).
2. Scribe and cut wood trim to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.
3. Anchor wood trim to anchors or blocking built in or directly attached to substrates. Secure with countersunk, concealed fasteners and blind nailing. Use fine finishing nails or finishing screws for exposed fastening, countersunk and filled flush with woodwork.
 - a. For shop-finished items, use filler matching finish of items being installed.
4. Install with minimum number of joints possible, using full-length pieces (from maximum length of lumber available) to greatest extent possible. Do not use pieces less than 60 inches (1500 mm) long except where shorter single-length pieces are necessary. Cope at returns, miter at outside corners, and cope at inside corners to produce tight-fitting joints with full surface contact throughout length of joint. Use scarf joints for end-to-end joints.

- - - E N D - - -

**SECTION 07 13 00
SHEET WATERPROOFING**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies sheet waterproofing materials used for shower pan waterproofing in personnel showers.

1.2 QUALITY CONTROL:

- A. Approval by the COTR is required of products of proposed manufacturers.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Sheet waterproofing.
 - 2. Adhesive.
 - 3. Waterproofed building paper.
 - 4. Printed installation instructions.
- C. Certificates:
 - 1. Sheet waterproofing manufacturer's approval of adhesive used.
 - 2. Waterproofing tests report indicating that water test as specified has been made for each shower area and that each area was found to be watertight.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Deliver materials to job in manufacturer's original unopened containers with brand name marked thereon.
- B. Unload and store so as to prevent injury to materials.
- C. Do not store material in areas where temperature is lower than 10°C (50°F), or where prolonged temperature is above 32°C (90°F).

1.5 WARRANTY

- A. Shower pan waterproofing is subject to the terms of Article titled "Warranty of Construction", FAR clause 52.246-21, except that warranty period is extended to two years.

1.6 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced by basic designation only.

B. Federal Specification (Fed. Spec.):

UU-B-790A INT AMDBuilding Paper, Vegetable Fiber: (Kraft,
Waterproof, Water Repellent and Fire Resistant)

PART 2 - PRODUCTS

2.1 SHOWER PAN WATERPROOFING SHEET:

- A. Rubber type sheet formed of non-reinforced, homogeneous, impermeable, sheeting compound reduced to thermoplastic state, resistant to fungus, mildew and bacteria, not less than 1.5 mm (60 mils) thick.
- B. Asphaltic sheet formed with a laminated asphalt construction consisting of eight plies of Kraft paper bonded and saturated by seven layers of asphalt, reinforced with three layers of glass fibers and faced with polyethylene sheet; total weight 1.9 kg/m² (0.40 pounds per square foot).

2.2 ADHESIVES:

- A. As furnished by the manufacturer of the sheet waterproofing.
- B. Compatible with adjacent materials where contact occurs.

2.3 WATERPROOFED BUILDING PAPER:

- A. Fed. Spec. UU-B-790, Type I, Grade C.

2.4 CONCRETE PATCHING COMPOUND:

- A. Portland cement base, acrylic polymer compound, manufactured specifically for resurfacing and leveling concrete floors.
- B. Have not less than the following physical properties:
 - 1. Compressive strength - 25 mPa (3500 psi).
 - 2. Tensile strength - 7 mPa (1000 psi).
 - 3. Flexural strength - 7 mPa (1000 psi).
 - 4. Density - 1.9.
- C. Capable of being applied in layers up to 50 mm (two inches) thick, being brought to a feather edge, and being troweled to a smooth finish.
- D. Ready for use in 48 hours after application.

PART 3 - EXECUTION

3.1 PREPARATION:

- A. Before installing shower pan waterproofing, adjoining surfaces shall be clean, smooth, firm and dry.
- B. Concrete surfaces shall be cured a minimum of seven days and be free from release agents, concrete curing agents, and other contaminants.
- C. Remove all high spots and loose and foreign particles and fill all voids, depressions joints and cracks with concrete patching compound.

- D. Ensure vertical surfaces have a continuous supportive back substrate for waterproofing.

3.2 INSTALLATION:

- A. Coat entire surfaces to receive shower pan waterproofing with adhesive spread at rate of 1 L/m² (one gallon per 40 square feet).
- B. Butt joints and cover with a strip of the waterproofing sheeting material eight inches in width and seal with adhesive.
- C. Carry sheeting up vertical surfaces not less than 4 inches above surface of shower floor. Carry over tops of curbs.
- D. Roll entire horizontal surfaces with 23 to 45 kg (50 to 100 pounds) roller and roll corners and vertical sections with a rubber roller to insure solid anchorage.
- E. Make cut out for floor drains and fit to drain for watertight assembly, coordinating with drain installation.

3.3 PROTECTION:

- A. When finish floor will not be immediately installed, protect waterproofing pan.
- B. Cover with 2 inches of sand or waterproofed building paper.
- C. Maintain protection until finished floor is placed.

3.4 WATER TEST:

- A. Test in presence of COTR for leaks before permanent finish is applied over shower pan waterproofing.
- B. Seal floor drain watertight and fill waterproofing pan with water to within approximately 25 mm (1 inch) of top of its vertical surfaces.
- C. When leakage occurs, repair waterproofing and repeat testing until no leakage occurs.
- D. Submit certificate to COTR of test results.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 13 52
MODIFIED BITUMINOUS SHEET WATERPROOFING

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies modified bituminous sheet material used for exterior below grade waterproofing.

1.2 MANUFACTURER'S QUALIFICATIONS:

- A. Approval by COTR is required of products and services of proposed manufacturers, and installers, and will be based upon submission by Contractor that:
 - 1. Manufacturer regularly and presently manufactures bituminous sheet waterproofing as one of its principal products.
 - 2. Installer has technical qualifications, experience, trained personnel and facilities to install specified items.
 - 3. Manufacturer's product submitted has been in satisfactory and efficient operation on three similar installations for at least three years.
 - 4. Submit list of installations, include name and location of project and name of owner.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Bituminous sheet.
 - 2. Primer.
 - 3. Mastic.
 - 4. Protection material, temporary and permanent.
 - 5. Printed installation instructions for conditions specified.
- C. Certificates:
 - 1. Indicating bituminous sheet manufacturer's approval of primer.
 - 2. Indicating bituminous sheet waterproofing manufacturer's qualifications as specified.
 - 3. Approval of installer by bituminous sheet manufacturers.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Deliver materials to job in manufacturer's original unopened container.
- B. Do not store material in areas where temperature is lower than 10 degrees C (50 degrees F,) or where prolonged temperature is above 32 degrees C (90 degrees F).

1.5 ENVIRONMENTAL REQUIREMENTS:

Ambient Surface and Material Temperature: Not less than 4 degrees C (40 degrees F), during application of waterproofing.

1.6 WARRANTY:

Warrant bituminous sheet waterproofing installation against moisture leaks and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period is two years.

1.7 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced by basic designation only.
- B. Federal Specifications (Fed. Spec.):
 UU-B-790ABuilding Paper, Vegetable Fiber: (Kraft, Water-INT AMD 1 Proof, Water Repellent and Fire Resistant)
- C. American Society for Testing and Materials (ASTM):
 C578-10Rigid Cellular Polystyrene Thermal Insulation
 D41-11Asphalt Primer Used in Roofing, Dampproofing and Waterproofing
 D2822-05Asphalt Roof Cement
 D6380-03(R2009)Asphalt Roll Roofing (Organic Felt)
- D. American Hardboard Association (AHA):
 A135.4-1995Basic Hardboard

PART 2 - PRODUCTS**2.1 BITUMINOUS SHEET:**

- A. Cold applied waterproofing membrane composed primarily of modified bituminous material prefabricated in sheet form designed for below grade exterior and split slab waterproofing. Sheet reinforced with fibers at manufacturer's option.
- B. Thickness of Bituminous Sheet: 1.5 mm (60 mils), plus or minus 0.13 mm (5 mils), and bonded to a 0.1 mm (4 mil) thick plastic sheet.
- C. Provide with a release sheet to prevent bonding of bituminous sheet to itself.

2.2 PRIMER:

- A. Furnished by manufacturer of bituminous sheet as required for particular application in accordance with sheet manufacturer's instructions.
- B. Primer: ASTM D41.

2.3 PROTECTION MATERIAL:

A. Hardboard: PS-58, Service Type, 6 mm (1/4-inch) thick.

2.4 PATCHING COMPOUND:

A factory prepared, non-shrinking, fast setting, cementitious adhesive compound containing no ferrous metal or oxide.

PART 3 - EXECUTION**3.1 PREPARATION:**

A. Surface Condition:

1. Before applying waterproofing materials, ensure concrete surfaces are fully cured, smooth, clean, dry, and free from high spots, depressions, loose and foreign particles and other deterrents to adhesion.
2. Fill voids, joints, and cracks with patching compound.

B. Concrete surfaces cured a minimum of seven days, free from release agents, concrete curing agents, and other contaminants.

3.2 APPLICATION:

A. Priming:

1. Prime concrete surfaces.
2. Application method, amount of primer and condition of primer before installation of bituminous sheet as recommended by primer manufacturer.
3. Reprime when required in accordance with manufacturer's instructions.

B. Bituminous Sheet Installation:

1. Remove release sheet prior to application.
2. Lay bituminous sheet from low point to high point so that laps shed water.
3. The sheets shall be installed starting halfway down face of footing, across the top of the footing, and up foundation wall to approximately 100 mm (4 inches) below final finished grade.
4. Treat expansion, construction and control joints and evident working cracks as expansion joints. Apply bituminous sheet in double thickness over joint by first applying a strip of bituminous sheet not less than 200 mm (8 inches) wide, centered over joint.
5. Lap seams not less than 50 mm (2 inches).
6. Lay succeeding sheet with laps, and roll or press into place.
7. Repair misaligned or inadequately lapped seams in accordance with manufacturer's instructions.

8. Seal seams and terminations in accordance with sheet manufacturer's instructions.

C. Corner Treatment:

1. At inside and outside corners apply double cover using an initial strip not less than 280 mm (11 inches) wide, centered along axis of corner.
2. Cover each strip completely by the regular application of bituminous sheet.
3. Provide a fillet or cant on inside corners.
4. Form cants using patching compound
5. Do not use wood, fiber, and insulating materials for cants.

D. Projection Treatment:

1. Apply a double layer of bituminous sheet around pipes and similar projections at least 150 mm (6 inches) wide.

3.3 PROTECTION:

- A. Protect bituminous sheet before backfill or wearing courses are placed.
- B. Install protection material and hold in place in accordance with instructions of manufacturer of waterproofing materials.

C. Permanent Protection:

1. Footings and Stem Walls:
 - a. Install hardboard protection material.
 - b. Extend protection full height where waterproofing is installed.

D. Temporary Protection:

When waterproofing materials are subjected to damage by sunlight and can not be immediately protected as specified, protect waterproofing materials by waterproof building paper or suitable coating approved by manufacturer of waterproofing system used.

3.4 PATCHING:

- A. Repair tears, punctures, air blisters, and inadequately lapped seams, in accordance with manufacturer's instructions before protection course is applied.

3.5 INSPECTION:

- A. Do not cover waterproofed surfaces by other materials or backfill until work is approved by COTR.

- - - E N D - - -

SECTION 07 19 00

WATER REPELLENTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes penetrating water-repellent treatments for the following vertical surfaces:

- 1. Clay brick masonry.

1.2 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples: For each type of water repellant and substrate indicated, two samples of each substrate shall be provided; one without water repellant and one with water repellant.
 - 1. Brick samples may be individual bricks of a similar color.

1.3 QUALITY ASSURANCE

- A. Preinstallation Conference: Conduct conference at Project site.

PART 2 - PRODUCTS

2.1 PENETRATING WATER REPELLENTS

- A. For Clay Brick Masonry: Silane/Siloxane-Blend, Penetrating Water Repellent: Clear, silane and siloxane blend with 400 g/L or less of VOCs.
 - 1. Products: Subject to compliance with requirements, provide the following product or an approved equivalent product:
 - a. BASF Construction Chemicals, LLC; Enviroseal Double 7 for Brick.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Applicator present, for compliance with requirements and conditions affecting performance of the Work.
 - 1. Verify that surfaces are clean and dry according to water-repellent manufacturer's requirements. Check moisture content in representative locations by method recommended by manufacturer.
 - 2. Inspect for previously applied treatments that may inhibit penetration or performance of water repellents.
 - 3. Verify that there is no efflorescence or other removable residues that would be trapped beneath the application of water repellent.
 - 4. Verify that required repairs are complete, cured, and dry before applying water repellent.

- B. Test pH level according to water-repellent manufacturer's written instructions to ensure chemical bond to silica-containing or siliceous minerals.

3.2 PREPARATION

- A. Cleaning: Before application of water repellent, clean substrate of substances that could impair penetration or performance of product according to water-repellent manufacturer's written instructions.
- B. Coordination with Mortar Joints: Do not apply water repellent until pointing mortar for joints adjacent to surfaces receiving water-repellent treatment has been installed and cured.
- C. Coordination with Sealant Joints: Do not apply water repellent until sealants for joints adjacent to surfaces receiving water-repellent treatment have been installed and cured.
 - 1. Water-repellent work may precede sealant application only if sealant adhesion and compatibility have been tested and verified using substrate, water repellent, and sealant materials identical to those required.

3.3 APPLICATION

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect the substrate before application of water repellent and to instruct Applicator on the product and application method to be used.
- B. Apply a heavy saturation coating of water repellent, on surfaces indicated for treatment, using low-pressure spray to the point of saturation. Remove excess material; do not allow material to puddle beyond saturation. Comply with manufacturer's written instructions for applications procedure unless otherwise indicated.
- C. Apply a second saturation coating, repeating first application. Comply with manufacturer's written instructions for limitations on drying time between coats and after rainstorm wetting of surfaces between coats. Consult manufacturer's technical representative if written instructions are not applicable to Project conditions.

3.4 CLEANING

- A. Immediately clean water repellent from adjoining surfaces and surfaces soiled or damaged by water-repellent application as work progresses. Correct damage to work of other trades caused by water-repellent application.
- B. Comply with manufacturer's written cleaning instructions.

---END---

**SECTION 07 21 13
THERMAL INSULATION**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies thermal and acoustical insulation for buildings.
- B. Acoustical insulation is identified by thickness and words "Acoustical Insulation" or "Sound Batt Insulation".

1.2 RELATED WORK

- A. Insulation in connection with roofing and waterproofing: Section 07 54 23, THERMOPLASTIC POLYOLEFIN (TPO) ROOFING.
- B. Safing insulation: Section 07 84 00, FIRESTOPPING.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES .
- B. Manufacturer's Literature and Data:
 - 1. Insulation, each type used
 - 2. Adhesive, each type used.
 - 3. Tape
- C. Certificates: Stating the type, thickness and "R" value (thermal resistance) of the insulation to be installed.

1.4 STORAGE AND HANDLING:

- A. Store insulation materials in weathertight enclosure.
- B. Protect insulation from damage from handling, weather and construction operations before, during, and after installation.

1.5 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C270-10Mortar for Unit Masonry
 - C516-08Vermiculite Loose Fill Thermal Insulation
 - C549-06Perlite Loose Fill Insulation
 - C552-07Cellular Glass Thermal Insulation.
 - C553-08Mineral Fiber Blanket Thermal Insulation for
Commercial and Industrial Applications
 - C578-10Rigid, Cellular Polystyrene Thermal Insulation
 - C591-09Unfaced Preformed Rigid Cellular
Polyisocyanurate Thermal Insulation

C612-10	Mineral Fiber Block and Board Thermal Insulation
C665-06	Mineral Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing
C728-05 (R2010)	Perlite Thermal Insulation Board
C954-10	Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Base to Steel Studs From 0.033 (0.84 mm) inch to 0.112 inch (2.84 mm) in thickness
C1002-07	Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
D312-00(R2006)	Asphalt Used in Roofing
E84-10	Surface Burning Characteristics of Building Materials
F1667-11	Driven Fasteners: Nails, Spikes and Staples.

PART 2 - PRODUCTS

2.1 INSULATION - GENERAL:

- A. Where thermal resistance ("R" value) is specified or shown for insulation, the thickness shown on the drawings is nominal. Use only insulation with actual thickness that is not less than that required to provide the thermal resistance specified.
- B. Where "R" value is not specified for insulation, use the thickness shown on the drawings.
- C. Where more than one type of insulation is specified, the type of insulation for each use is optional, except use only one type of insulation in any particular area.
- D. Insulation Products shall comply with following minimum content standards for recovered materials:

Material Type	Percent by Weight
Rigid foam	9 percent recovered material
Foam-in-place	5 percent recovered material
Glass fiber reinforced	6 percent recovered material
Rock wool material	75 percent recovered material

The minimum-content standards are based on the weight (not the volume) of the material in the insulating core only.

2.2 MASONRY CAVITY WALL INSULATION:

- A. On the exterior face of exterior stud walls, and where shown.
- B. Polystyrene Board: ASTM C578, Type X or as approved by stucco manufacturer as an acceptable base for stucco as specified in section 09 24 00, PORTLAND CEMENT PLASTERING.

2.3 PERIMETER INSULATION IN CONTACT WITH SOIL:

- A. Polystyrene Board: ASTM C578, Type IV, V, VI, VII, or IX where covered by soil or concrete.

2.4 EXTERIOR FRAMING OR FURRING INSULATION:

- A. Batt or Blanket: Glass Fiber.
- B. Mineral Fiber: ASTM C665, Type II, Class C, Category I where framing is faced with gypsum board.
- C. Mineral Fiber: ASTM C665, Type III, Class A where framing is not faced with gypsum board.

2.5 ACOUSTICAL INSULATION:

- A. Mineral Fiber boards: ASTM C553, Type II, flexible, or Type III, semirigid (4.5 pound nominal density).
- B. Mineral Fiber Batt or Blankets: ASTM C665. Maximum flame spread of 25 and smoke development of 450 when tested in accordance with ASTM E84.
- C. Thickness as shown; of widths and lengths to fit tight against framing.

2.6 INSULATION AT HEADERS AND JAMBS (SPRAY POLYURETHANE FOAM INSULATION):

- A. Closed-Cell Polyurethane Foam Insulation: ASTM C 1029, Type II, with maximum flame-spread and smoke-developed indexes of 75 and 450 respectively, per ASTM E 84.
- B. Minimum density of 1.5 lb/cu. ft. (24 kg/cu. mm), thermal resistivity of 6.2 deg. F x h x sq. ft./btu x in. at 75 deg. F (43 k x m/W at 24 deg. C).

2.7 FASTENERS:

- A. Staples or Nails: ASTM F1667, zinc-coated, size and type best suited for purpose.
- B. Screws: ASTM C954 or C1002, size and length best suited for purpose with washer not less than 50 mm (two inches) in diameter.
- C. Impaling Pins: Steel pins with head not less than 50 mm (two inches) in diameter with adhesive for anchorage to substrate. Provide impaling pins of length to extend beyond insulation and retain cap washer when washer is placed on the pin.

2.8 ADHESIVE:

- A. As recommended by the manufacturer of the insulation.
- B. Asphalt: ASTM D312, Type III or IV.
- C. Mortar: ASTM C270, Type 0.

2.9 TAPE:

- A. Pressure sensitive adhesive on one face.
- B. Perm rating of not more than 0.50.

PART 3 - EXECUTION**3.1 INSTALLATION - GENERAL**

- A. Install insulation with the vapor barrier facing the heated side, unless specified otherwise.
- B. Install rigid insulating units with joints close and flush, in regular courses and with cross joints broken.
- C. Install batt or blanket insulation with tight joints and filling framing void completely. Seal cuts, tears, and unlapped joints with tape.
- D. Fit insulation tight against adjoining construction and penetrations, unless specified otherwise.

3.2 MASONRY CAVITY WALLS:

- A. Bond polystyrene board to surfaces with adhesive or mechanical fasteners applied in accordance with recommendations of insulation manufacturer for wall assemblies as detailed. Attachment system shall be acceptable to stucco manufacturer at locations where stucco will be installed over polystyrene board.

3.3 PERIMETER INSULATION:

- A. Vertical insulation:
 - 1. Fill joints of insulation with same material used for bonding.
 - 2. Bond polystyrene board to surfaces with adhesive or Portland cement mortar mixed and applied in accordance with recommendations of insulation manufacturer.
- B. Horizontal insulation under concrete floor slab:
 - 1. Lay insulation boards and blocks horizontally on level, compacted and drained fill.
 - 2. Extend insulation from foundation walls towards center of building not less than 600 mm (24 inches) or as shown.

3.4 EXTERIOR FRAMING OR FURRING BLANKET INSULATION:

- A. Pack insulation around door frames and windows and in building expansion joints, door soffits and other voids. Pack behind outlets

around pipes, ducts, and services encased in walls. Open voids are not permitted. Hold insulation in place with pressure sensitive tape.

- B. Lap vapor retarder flanges together over face of framing for continuous surface. Seal all penetrations through the insulation.
- C. Fasten blanket insulation between metal studs or framing and exterior wall furring by continuous pressure sensitive tape along flanged edges.
- D. Ceiling Insulation and Soffit Insulation:
 - 1. In areas where shown, install either blanket, batt, or mineral fiberboard extending from the ceiling to underside of deck or slab above. Secure in place to prevent collapse or separation of hung blanket, batt, or board insulation and maintain in vertical position. Secure blanket or batt with continuous cleats to structure above.

3.5 ACOUSTICAL INSULATION:

- A. Fasten blanket insulation between metal studs and wall furring with continuous pressure sensitive tape along edges or adhesive.
- B. Pack insulation around door frames and windows and in cracks, expansion joints, control joints, door soffits and other voids. Pack behind outlets, around pipes, ducts, and services encased in wall or partition. Hold insulation in place with pressure sensitive tape or adhesive.
- C. Do not compress insulation below required thickness except where embedded items prevent required thickness.
- D. Where semirigid insulation is used which is not full thickness of cavity, adhere to one side of cavity maintaining continuity of insulation and covering penetrations or embedments in insulation.

3.6 HEADER AND JAMB INSULATION:

- A. Install insulation in header voids, jamb voids, and cavity spaces where required to prevent gaps in framing and furring insulation. Apply according to manufacturer's written instructions.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 25 00

WEATHER BARRIERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Weather Barrier Membrane.
 - 2. Seam Tape.
 - 3. Flashing.
 - 4. Fasteners.

1.2 SUBMITTALS

- A. Submit in accordance with Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Product Data: For each type of product.

1.3 WARRANTY

- A. Weather Barrier Manufacturer's warranty for weather barrier for a period of ten years from date of substantial completion.

1.4 APPLICABLE PUBLICATIONS

- A. ASTM International
 - 1. ASTM C 920; Standard Specification for Elastomeric Joint Sealants.
 - 2. ASTM C 1193; Standard Guide for Use of Joint Sealants.
 - 3. ASTM D 882; Test Method for Tensile Properties of Thin Plastic Sheeting.
 - 4. ASTM D 1117; Standard Guide for Evaluating Non-woven Fabrics.
 - 5. ASTM E 84; Test Method for Surface Burning Characteristics of Building Materials
 - 6. ASTM E 96; Test Method for Water Vapor Transmission of Materials.
 - 7. ASTM E 1677; Specification for Air Retarder Material or System for Framed Building Walls.

PART 2 - PRODUCTS

2.1 WATER-RESISTIVE BARRIER

- A. Building Wrap: ASTM E 1677, Type I air barrier; with flame-spread and smoke-developed indexes of less than 25 and 450, respectively, when tested according to ASTM E 84; UV stabilized; and acceptable to authorities having jurisdiction.
 - 1. Basis-of-Design Product: E.I. Du Pont De Nemours and Company, High Performance, Flash Spun-Bonded Olefin, Non-Woven, Non-

Perforated, Secondary Weather Barrier "DuPont Tyvek® Commercial Wrap® and related assembly components.

- a. Or approved equal.
2. Coordinate permeance value retained or inserted in "Water-Vapor Permeance" Subparagraph below with products retained. Consult manufacturers' literature.
3. Water-Vapor Transmission: 30 Perms, when tested in accordance with ASTM E 96, Method B.
4. Air Infiltration: >750 seconds, when tested in accordance with ASTM D 822, Method A.
- B. Building-Wrap Tape: Pressure-sensitive plastic tape recommended by building-wrap manufacturer for sealing joints and penetrations in building wrap.
- C. Fasteners: 1-5/8" rust resistant screw with 2-inch diameter plastic cap fasteners, or as recommended by weather barrier manufacturer.
- D. Adhesives: As recommended by the weather barrier manufacturer.

2.2 MISCELLANEOUS MATERIALS

- A. Flexible Flashing: Self-adhesive butyl rubber compound, bonded to a high-density polyethylene film, aluminum foil, or spunbonded polyolefin to produce an overall thickness of not less than 0.025 inch.
 1. Products: Provide flashing products as manufactured by weather barrier manufacturer.
 2. Flexible membrane flashing for window openings and penetrations.
 3. Straight flashing for windows and doors and sealing penetrations such as masonry ties.
 4. Thru-wall flashing with integrated drip edge for flashing at changes in direction or elevation, and at transitions between different assembly materials.
 5. Preformed inside and outside corners, and end dams.

PART 3 - EXECUTION

3.1 WATER-RESISTIVE BARRIER INSTALLATION

- A. Cover sheathing with water-resistive barrier as follows:
 1. Cut back barrier 1/2 inch on each side of the break in supporting members at expansion- or control-joint locations.
 2. Apply barrier to cover vertical flashing with a minimum 4-inch overlap unless otherwise indicated.
 3. Install weather barrier where indicated on Drawings in accordance with manufacturer's recommendations.

4. Install weather barrier prior to installation of windows and doors.
5. Start weather barrier at a building corner, leaving 6-12 inches of weather barrier extended beyond corner.
6. Install weather barrier in a horizontal manner starting at the lower portion of the wall surface with subsequent layers installed in shingling manner to overlap lower layers. Keep plumb and level.

B. Building Wrap: Comply with manufacturer's written instructions.

1. Seal seams, edges, fasteners, and penetrations with tape.
2. Extend into jambs of openings and seal corners with tape.

3.2 FLEXIBLE FLASHING INSTALLATION

A. Apply flexible flashing where indicated to comply with manufacturer's written instructions.

1. Lap seams and junctures with other materials at least 4 inches except that at flashing flanges of other construction, laps need not exceed flange width.
2. Lap flashing over water-resistive barrier at bottom and sides of openings.
3. Lap water-resistive barrier over flashing at heads of openings.

3.3 PROTECTION

A. Protect installed weather barrier from damage.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 07 51 00
BUILT-UP BITUMINOUS ROOFING**

PART 1 GENERAL

1.1 DESCRIPTION

- A. This section includes bituminous built-up roofing, aggregate surfacing, with base flashing for repairs and alterations to existing construction.

1.2 RELATED WORK

- A. Wood cants, blocking, and wood edge strips: Section 06 10 00, ROUGH CARPENTRY.
- B. Wood sheathing: Section 06 10 00, ROUGH CARPENTRY.
- C. Insulation: Section 07 21 13, THERMAL INSULATION.
- D. Base sheet for insulated roof assemblies: Section 07 22 00, ROOF AND DECK INSULATION.
- E. Metal base flashing, pipe flashing, counter flashing, coping, reglet, insulated expansion joint cover: Section 07 60 00, FLASHING AND SHEET METAL.
- F. Extruded aluminum gravel stop, coping, fascia, and expansion joint cover: Section 07 71 00, ROOF SPECIALTIES and Section 07 95 13, JOINT EXPANSION COVER ASSEMBLIES.

1.3 APPLICABLE PUBLICATIONS

- A. Applicable publications listed below form a part of this Specification as referenced. Publications are referenced in the text by the number designation only.
- B. American Society for Testing and Materials (ASTM):
- | | |
|----------------|--|
| A167-99(R2004) |Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip |
| B209-07 |Aluminum and Aluminum-Alloy Sheet and Plate |
| D41-05 |Asphalt Primer Used in Roofing, Dampproofing and Waterproofing |
| D43-00(R2006) |Coal Tar Primer Used in Roofing, Dampproofing and Waterproofing |
| D227-03 |Coal-Tar Saturated Organic Felt Used in Roofing and Waterproofing |
| D312-00(R2006) |Asphalt Used in Roofing |
| D448-08 |Sizes of Aggregate for Road and Bridge Construction |
| D450-07 |Coal-Tar Pitch Used in Roofing, Dampproofing and Waterproofing |

- D751-06Test Methods for Coated Fabrics
- D1863-05Mineral Aggregate Used on Built-Up Roofs
- D2178-04Asphalt Glass Felt Used in Roofing and
Waterproofing
- D3884-07Abrasion Resistance of Textile Fabrics
(Rotary Platform Double-Head Method)
- D3909-97(R2004)Asphalt Roll Roofing (Glass Felt) Surfaced
with Mineral Granules
- D4586-07Asphalt Roof Cement, Asbestos Free
- D4601-04Asphalt Coated Fiberglass Base Sheet Used
In Roofing
- D4897-01Asphalt Coated Glass Fiber Venting Base
Sheet Used in Roofing
- D6163-00Specification for Styrene Butadiene
Styrene (SBS) Modified Bituminous Sheet
Materials Using Glass Fiber Reinforcements
- F1667-05Driven Fasteners: Nails, Spikes, Staples
- C. FM Global (FMG):
- P7825C-05Approval Guide Building Materials
- 4450:Approved Standard for Class 1 Insulated
 Steel Deck Roofs
- 4470:Approved Standard for Class 1 Roof
 Coverings
- D. National Roofing Contractors Association (NRCA):
- "Quality Control Guidelines for the Application of Built-up
 Roofing."
- "The NRCA Roofing and Waterproofing Manual"

1.4 WARRANTY

- A. Roofing system is subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period is extended to five years.

1.5 QUALITY CONTROL

- A. Applicator Qualifications: Installer experienced in installation of systems similar in complexity to that required for this Project, including specific requirements indicated:
 - 1. Work shall be performed by installer approved in writing by roofing material manufacturer.
 - 2. Work shall comply with printed instructions of the roofing materials manufacturer.
- B. Product/Material Qualifications:

1. Provide manufacturer's label on each container or certification with each load of bulk bitumen, indicating Flash Point (FP), Finished Blowing Temperature (FBT), Softening Point (SP), Equiviscous Temperature (EVT).
2. Provide manufacturer's certification that field applied bituminous coatings and mastics, and field applied roof coatings comply with limits for Volatile Organic Compounds (VOC) per the National Volatile Organic Compound Emission Standards for Architectural Coatings pursuant to Section 183(e) of the Clean Air Act with limits as follows:
 - a. Bituminous Coatings and Mastics: 500 g/l (4.2#/gal.).
 - b. Roof Coatings: 250 g/l (2.1#/gal.).
3. Obtain products from single manufacturer or from sources recommended by manufacturer for use with roofing system.
- C. Comply with the recommendations of the NRCA "Roofing and Waterproofing Manual" applicable to built-up roofing for storage, handling and installation.
- D. FMG Listing: Provide roofing membrane, base flashing, and component materials that comply with requirements in FMG 4450 and FMG 4470 as part of a roofing system and that are listed in FMG "Approval Guide" for Class 1 or noncombustible construction, as applicable.
 1. Fire/Windstorm Classification: Class 1A-60 90.
 2. Hail Resistance: MH.

1.6 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Product Data:
 1. Asphalt materials, each type.
 2. Roofing cement, each type.
 3. Roof walkway.
 4. Fastening requirements.
- C. Certificates:
 1. Indicate materials and method of application of roofing system meet requirements of FMG.
 2. Statements of qualification for manufacturers and installers.
 3. Inspection Report: Copy of roofing system manufacturer's inspection report certifying completed roofing complies with manufacturer's warranty requirements.
- D. Warranty: As specified in Part 1 of this Section:

1. Warranty sample form with specific language to address Contract provisions.
- E. Contract Close-out Submittals:
 1. Maintenance Manuals.
 2. Warranty signed by installer and manufacturer.

1.7 DELIVERY, STORAGE AND MARKING

- A. Deliver roofing materials to the site in original sealed packages or containers marked with the name and brand or trademark of the manufacturer or seller.
- B. Keep roofing materials dry and store in a dry, weather-tight facility or under canvas covers. Do not use polyethylene or plastic covers to protect materials. Store above ground or deck level on wood pallets. Cover ground under pallet stored materials with plastic.
 1. Store rolled materials (felts, base sheets, and paper) on end. Do not store hems on top of rolled materials.
 2. Aggregates shall be maintained surface dry as defined by ASTM D1863.
- C. Protect from damage due to handling, weather and construction operations before, during and after installation.

1.8 ENVIRONMENTAL REQUIREMENTS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit roofing system to be installed according to manufacturer's written instructions and warranty requirements.
- B. Environmental Controls: Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- C. Protection of interior spaces: Refer to Section 01 00 00, GENERAL REQUIREMENTS.

PART 2 - PRODUCTS

2.1 ROOFING SYSTEM

- A. Install built-up roofing membrane system according to roofing system manufacturer's written instructions and applicable recommendations of NRCA "Quality Control Guidelines for the Application of Built-up Roofing."
- B. Glass sheet, asphalt bitumen, mineral surfaced.
 1. Substrate: Match existing.
 2. Substrate: Roof Insulation, match existing.
 3. Components: Quantity, match existing.
 - a. Ply Sheet: 3 Plies

- b. Mineral Surfaced Cap Sheet: 1 Ply
 - c. Asphalt Between Substrate and First Ply: 10-17.5 kg/10 sq. meters 20-35 lbs/100 sq. ft.
 - d. Asphalt Between Each Ply 10-17.5 kg/10 sq. meters 20-35 lbs/100 sq. ft.
4. Provide asphalt quantities within the indicated ranges, unless recommended otherwise in the roofing materials manufacturer's printed data.

2.2 MATERIALS

- A. Primer: ASTM D41.
- B. Base Sheet: ASTM D4601, Type II, nonperforated, asphalt-impregnated and coated, glass-fiber sheet, dusted with fine mineral surfacing on both sides.
- C. Asphalt: ASTM D312, Type III or IV for roof membrane. Use Type I for pour coat unless specified otherwise.
- D. Ply Sheet/Backer Sheet: ASTM D2178, Type VI, heavy-duty ply sheet.
- E. Cap Sheet: ASTM D3909, asphalt-impregnated and -coated, glass-fiber cap sheet, with white coarse mineral-granule top surfacing and fine mineral surfacing on bottom surface.
- F. Roof Cement: ASTM D4586, Type I or Type II as recommended by bituminous roofing manufacturer.
- G. Flashing Sheet: ASTM D6163, Type I or II, glass-fiber-reinforced, SBS-modified asphalt sheet; granular surfaced; suitable for application method specified.

2.3 MISCELLANEOUS MATERIALS

- A. Roof Walkway:
 - 1. Prefabricated asphalt plank consisting of a homogeneous core of asphalt, plasticizer and inert fillers, bonded by heat and pressure between two saturated and coated sheets of felt:
 - a. Topside of plank surfaced with ceramic granules.
 - b. Size: Minimum 13 mm (1/2-inch) thick, manufactures standard size, but not less than 300 mm (12 inches) in least dimension and 600 mm (24 inches) in length.

2.4 FASTENERS

- A. Nails and Staples: ASTM F1667.
- B. Nails for Securing built-up Flashing and Base Sheets to Wood Nailers and Deck:
 - 1. Zinc coated steel roofing nails with minimum head diameter of 10 mm (3/8-inch) through metal discs at least 25 mm (one inch) across.

2. One-piece nails with an integral flat cap at least 24 mm (15/16-inch) across.
- C. Fasteners for Securing Dry Felt Edge Strips to Wood Nailer and Decks:
 1. Zinc coated steel roofing nails, 16-mm (5/8-inch) minimum head diameter.
 2. Staples, Flat top Crown, zinc coated may be used.

2.5 PROTECTION MAT OR SEPARATION SHEETS

- A. General
 1. Match existing if extents of roof repairs provides the need for protection mats/separation sheets per the manufacturer's recommendations.

PART 3 - EXECUTION

3.1 GENERAL

- A. Do not apply if deck will be used for subsequent work platform, storage of materials, or staging or scaffolding will be erected thereon.
- B. Phased construction is not permitted. The complete installation of roofing system is required in the same day except for area where temporary protection is required when work is stopped. Complete installation includes ballast for ballasted systems.

3.2 EXAMINATION

- A. Verification of Conditions: Examine substrates, areas and conditions under which Work is to be performed and identify conditions detrimental to proper or timely completion:
 1. Do not proceed until unsatisfactory conditions, including moisture, have been corrected.
 2. Do not install roofing materials over wet insulation.
 3. Do not install roofing materials unless roof openings, wood nailers, edge venting, insulation board, flashing, curbs, and roof joints are constructed.
 4. Do not install roof materials unless deck and/or insulation provides designed drainage to working drains.
- B. Do not apply roof system if roofed deck will be used as a work platform.
- C. Existing Intake Louvers:
 1. Use large fans during placement to direct airflow away from existing intake louvers.

2. If required to install roof near intake louvers after work hours, it shall be done so without additional cost to the Government.

3.3 PREPARATION

- A. Sweep substrate to broom clean condition. Remove all dust, dirt and debris.
- B. Remove surface irregularities that may damage materials or cause installation defects.
- C. Cover wood sheathing, gypsum, gypsum plank and cement wood fiber plank with a layer of asphalt building paper.
- D. Coordinate operations with roof insulation and sheet metal work to permit continuous roofing operations.

3.4 INSTALLATION

- A. Comply with roofing system manufacturer's written instructions and applicable recommendations of NRCA "Quality Control Guidelines for the Application of Built-up Roofing."
- B. Cooperate with inspection and test agencies required to perform services in connection with built-up roofing system installation.
- C. General:
 1. Provide uniform and positive adhesion between all installed materials, including adhesion to insulation or substrate, and between each ply of felt.
 2. Substrate Penetrations: Do not allow bitumen to penetrate joints or enter building. Where mopping is applied directly to a substrate, tape joints. When applying steep asphalt, hold mopping back 50mm (2 inches) from each side of joint.
- D. Asphalt Products Schedule:
 1. Use asphalt only with asphalt-saturated or asphalt-impregnated felts.
 2. Use Type I asphalt for pour coats up to 1:10 (one inch per foot) slope.
 3. Use asphalt roof cement with asphalt products.
- E. Bitumen Schedule:
 1. Per square, unless otherwise specified.
 2. Between substrate and plies of organic felt:
 - a. Asphalt 7 to 11 Kg (15 to 25 pounds).
 3. Between substrate and plies of glass fiber felts asphalt, 9 to 14 kg (20 to 30 pounds).
 4. Glaze Coats:
 - a. Asphalt 7 to 11 Kg (15 to 25 pounds).
 5. Pour coats:

- a. Asphalt 25 to 30 Kg (55 to 65 pounds).

F. Heating Bitumen:

1. Heat the asphalt to the equiviscous temperature (EVT) plus or minus 4 C (25 degrees F) at the time of application.
 - a. Do not heat asphalt greater than 38 C (100 degrees F) above the EVT.
 - b. When the EVT is not furnished do not heat asphalt above 246 C (475 degrees F) for Type I and 275 C (525 degrees) F for Type II and IV, with an application not less than 218 C (425 degrees F) and 246 C (475 degrees F) respectively.
2. Do not heat bitumen above the flash point temperature.
3. Provide heating kettles with a thermometer kept in operating condition. Attend, during heating, to insure the bitumen is heated within the temperatures specified.
4. Do not mix different types of bitumen in kettle.

G. Terminations:

1. Where cants occur at vertical surfaces, cut off plies of membrane 50mm (2 inches) above top of cant strip, (except at prefabricated curbs, scuttles and other roof accessories having integral cants) extend membrane over cant and up vertical surface to top of curb or blocking.
2. Where wood blocking occurs at roof edge, under gravel stops or penetrations to receive base flashing, nail a continuous strip of 400 mm (16-inch) wide, loose applied organic felt envelope over the blocking before the first ply sheet is applied.
 - a. Install strip on top of venting base sheet.
 - b. After membrane is installed, turn the dry felt back over the roofing and secure in place with hot bitumen before gravel stops or metal flanges extending onto the membrane are installed.

H. Roof Ply Installation:

1. Install, asphalt, glass fiber felt construction. Base sheet is not considered a ply.
2. Extend the first ply 100 mm (4-inches) beyond the insulation and the second ply 75 mm (3-inches) beyond the first. Lap ends 75 mm (3-inches) with joints broken 450 mm (18-inches) in each ply.

I. Laps for felts:

1. Three plies of felt with 300 mm (12-inches) 600 mm (24-inches) and 900 mm (36-inch) starting widths, lapped 624 mm (24-1/2 inches), or as recommended by manufacturer.

2. End joints of felt and base sheet, lapped 50 mm (2-inches).
Stagger end joints in relation to joints in adjacent and proceeding plies.

J. Flashing:

1. Prime vertical surfaces of masonry and concrete with asphalt primer except where vented base sheet is required to provide edge venting.
2. Apply flashing on top of built-up roofing, up face of cant and vertical surfaces, at least 200 mm (8-inches) above the roof, full height beneath counter flashing or top of curb flashing:
3. Secure top edge of base flashing with nails on a line approximately one inch below top edge, spaced not more than 200 mm (8-inches) on center.
 - a. Cover all nail heads with roof cement.
 - b. Cover the top of the base flashing with counter flashing as specified in Section 07 60 00, FLASHING AND SHEET METAL. At the cants secure the top edge of the flashing with fascia compression clamp as specified in Section 07 60 00, FLASHING AND SHEET METAL.
4. Install flashing using longest pieces practicable. Complete splices between flashing and main roof sheet before bonding to vertical surface. Seal splice not less than 76mm (3-inches) beyond fasteners that attach membrane to blocking. Apply bonding adhesive to both flashing and surface to which flashing is being adhered per manufacturer recommendations. Nail top of flashing 300mm (12-inches) on center under metal counter flashing or cap.
5. Install flashing over cants to make system watertight.
6. Install flashing before final roofing coat and aggregate are installed.

K. Stripping:

1. Set flanges of metal flashing in roof cement before the final bituminous coat and roof aggregate are installed and nail to blocking per Section 07 60 00, FLASHING AND SHEET METAL.
2. Before the final bituminous coat and aggregate are installed, cover that portion of the horizontal flanges of metal base flashing, gravel stops and other flanges, extending onto the roofing with flashing sheet.

L. Aggregate Surfacing:

1. Reuse existing.

M. Roof Walkways:

1. Install roof walkways where shown.

3.5 REPAIR AND ALTERATIONS TO EXISTING ROOF

- A. Areas to be altered or repaired, remove loose aggregate and aggregate not firmly embedded where new penetrations occur or repairs are required:
 1. Remove aggregate 900 mm (3 feet) beyond areas to be cut.
 - a. Clean, dry and store aggregate away from roof area until ready to reuse.
 - b. Remove unsuitable and excess aggregate not used from Project.
- B. Cut and remove existing roof membrane for new work to be installed. Clean cut edges and install a temporary seal to cut surfaces. Use roof cement and one layer of 7 Kg (15 pound) felt strip cut to extend 150 mm (6 inches) on each side of cut surface. Bed strip in roof cement and cover with roof cement to completely embed the felt.
- C. Bend up cap flashing or temporarily remove at built-up base flashing to be repaired. Brush and scrape away deteriorated and loose bitumen, felts or surface material of built-up base flashing.
- D. Repairs to existing membrane and base flashing:
 1. Remove temporary patches prior to starting new work.
 2. Blisters and fish mouths:
 - a. Cut blisters open and turn membrane back to fully adhered portion. Cut fish mouths so membrane can be turned back and subsequently laid flat.
 - b. Heat membrane to facilitate bending and to dry surface of exposed blister areas.
 - c. Mop turned back membrane in hot bitumen. Roll to insure full adhesion and embedment in substrate.
 - d. Cover cut areas with two plies of felt. Extend first ply 100 mm (4-inches) beyond cut area edge. Extend second 100 mm (4 inches) beyond first ply. Mop down in hot bitumen as specified for new work. Resurface to match existing.
 3. Exposed Felts:
 - a. Cut away exposed deteriorated edges of sheets.
 - b. Glaze coat felt edges.
 - c. Resurface to match existing.
 4. Built-up Base Flashing:

- a. Restore felts and cap sheet removed, lapping 100 mm (4-inches) over existing.
 - b. Install new felts and cap sheet as specified for new work.
- 5. Horizontal Metal Flanges:
 - a. Remove loose, buckled or torn stripping.
 - b. Remove loose fasteners and install new fasteners.
 - c. Restrip flanges as specified for new work.
- 6. Resurfacing:
 - a. Over repaired membrane, embed aggregate as specified for new work.
 - b. Cover all membrane areas. Do not leave any exposed membrane surface.
- E. Match existing roofing materials and construction. Use bitumen compatible with existing for roof repair and alteration.
- F. Perform alterations, maintenance and repairs to roof membrane immediately after membrane has been cut or damaged, with permanent new work as specified in this specification. Repair items damaged in surface preparation and aggregate removal.

3.6 INSTALLATION OF BALLAST SYSTEM

- A. Install as soon as roof membrane is laid.
- B. Protective underpayment installation under ballast:
 - 1. Loose lay protection mat or separation sheet over roof membrane smooth and free of tension and stress without wrinkles. Do not stretch sheet.
 - 2. Use full sheet width at perimeters with end laps held back not less than 3 m (10 feet) from roof edge at corners.
 - 3. Lap ends not less than 300 mm (one foot).
 - 4. Extend 50 to 75 mm (2 to 3 inches) above ballast at perimeter and penetrations.
- C. Installation of aggregate:
 - 1. Uniformly distribute aggregate over the protection mat, per manufactures recommendations.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 54 23
THERMOPLASTIC POLYOLEFIN (TPO) ROOFING

PART 1 GENERAL

1.1 DESCRIPTION

- A. Thermoplastic Polyolefin (TPO) sheet roofing mechanically fastened to roof deck.
- B. Thermoplastic Polyolefin (TPO) sheet roofing installed as an adhered system where indicated.
- C. Roof insulation.

1.2 RELATED WORK

- A. Treated wood framing, blocking, and nailers: Section 06 10 00, ROUGH CARPENTRY
- B. Sheet metal components and wind uplift requirements for roof-edge design: Section 07 60 00, FLASHING AND SHEET METAL.
- C. Miscellaneous items: Section 07 71 00, ROOF SPECIALTIES.

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
 ANSI/SPRI ES-1-03Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems.
- C. American Society of Civil Engineers/Structural Engineering Institute (ASCE/SEI):
 ASCE/SEI-7-10Minimum Design Loads for Buildings and Other Structures
- D. ASTM International (ASTM):
 C67-09Standard Test Methods for Sampling and Testing Brick and Structural Clay Tile
 C140-09Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units
 C1371-04Standard Test Method for Determination of Emittance of Materials Near Room Temperature Using Portable Emissometers

- C1549-04Standard Test Method for Determination of Solar Reflectance Near Ambient Temperature Using a Portable Solar Reflectometer
- D4263Standard Test Method for Indicating Moisture in Concrete by the Plastic Sheet Method
- D4434-06Standard Specification for Poly (Vinyl Chloride) Sheet Roofing
- D6878-08Standard Specification for Thermoplastic Polyolefin Based Sheet Roofing
- E108-10Standard Test Methods for Fire Tests of Roof Coverings
- E408-71(R2008)Standard Test Methods for Total Normal Emittance of Surfaces Using Inspection-Meter Techniques
- E1918-06Standard Test Method for Measuring Solar Reflectance of Horizontal and Low-Sloped Surfaces in the Field
- E1980-01Standard Test Method for Measuring Solar Reflectance of Horizontal and Low-Sloped Surfaces in the Field
- E. American Society of Heating, Refrigeration, and Air Conditioning Engineers (ASHRAE)
- ASHRAE 90.1-2007Energy Standard for Buildings Except Low-Rise Residential Buildings, Appendix f.
- F. Cool Roof Rating Council:
- CRRC-1Product Rating Program, www.coolroofs.org
- G. FM Approvals: RoofNav Approved Roofing Assemblies and Products.
- 4450-89Approved Standard for Class 1 Insulated Steel Deck Roofs
- 4470-10Approved Standard for Class 1 Roof Coverings
- 1-28-09Loss Prevention Data Sheet: Design Wind Loads.
- 1-29-09Loss Prevention Data Sheet: Above-Deck Roof Components
- 1-49-09Loss Prevention Data Sheet: Perimeter Flashing
- H. National Roofing Contractors Association: Roofing and Waterproofing Manual
- I. U.S. Department of Agriculture (USDA): USDA BioPreferred Catalog, www.biopreferred.gov
- J. U.S. Department of Energy (DoE): Roof Products Qualified Product List, www.energystar.gov

1.4 PERFORMANCE REQUIREMENTS

- A. Material Compatibility: Provide roofing materials that are compatible with one another under conditions of service and application required, as demonstrated by membrane roofing manufacturer based on testing and field experience.
- B. Roofing System Energy Performance Requirements: Provide a roofing system identical to components that that have been successfully tested by a qualified independent testing and inspecting agency to meet the following requirements:
 - 1. Energy Performance, Energy Star: Provide roofing system that is listed on DOE's ENERGY STAR "Roof Products Qualified Product List" for low-slope roof products.
 - 2. Solar Reflectance Index: Not less than 78 when calculated according to ASTM E1980 based on testing identical products by a qualified testing agency.

1.5 QUALITY CONTROL

- A. Installer Qualifications:
 - 1. Licensed or approved in writing by manufacturer to perform work under warranty requirements of this Section.
 - 2. Employ full-time supervisors knowledgeable and experienced in roofing of similar types and scopes, and able to communicate with owner and workers.
- B. Inspector Qualifications: Inspection of work by third-party technical inspector or technical representative of manufacturer experienced in the installation and maintenance of the specified roofing system, qualified to perform roofing observation and inspection specified in Field Quality Control Article, to determine Installer's compliance with the requirements of this Project, and approved by the manufacturer to issue warranty certification. The Roofing Inspector shall be one of the following:
 - 1. An authorized full-time technical employee of the manufacturer, not engaged in the sale of products.
 - 2. An independent party certified as a Registered Roof Observer by the Roof Consultants Institute (RCI), retained by the Contractor or the Manufacturer and approved by the Manufacturer.
- C. Product/Material Requirements:
 - 1. Obtain products from single manufacturer or from sources recommended by manufacturer for use with roofing system and incorporated in manufacturer's warranty.

D. Roofing system design standard requirements:

1. Recommendations of the NRCA "Roofing and Waterproofing Manual" applicable to modified bituminous sheet roofing for storage, handling and application.
2. Recommendations of FM Approvals 1-49 Loss Prevention Data Sheet for Perimeter Flashings.
3. Recommendations of ANSI/SPRI ES-1 for roof edge design.
4. Roofing System Design: Provide roofing system that is identical to systems that have been successfully tested by a qualified testing and inspecting agency to resist uplift pressure calculated according to ASCE/SEI 7.

E. Pre-Roofing Meeting:

1. Upon completion of roof deck installation and prior to any roofing application, hold a pre-roofing meeting arranged by the Contractor and attended by the Roofing Inspector, Material Manufacturers Technical Representative, Roofing Applicator, Contractor, and the Owner (COTR).
2. Discuss specific expectations and responsibilities, construction procedures, specification requirements, application, environmental conditions, job and surface readiness, material storage, and protection.
3. Inspect roof deck at this time to:
 - a. Verify that work of other trades which penetrates roof deck is completed.
 - b. Determine adequacy of deck anchorage, presence of foreign material, moisture and unlevel surfaces, or other conditions that would prevent application of roofing system from commencing or cause a roof failure.
 - c. Examine samples and installation instructions of manufacturer.

1.6 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, SAMPLES.
- B. Product Data:
 1. Adhesive materials.
 2. Membrane sheet roofing and flashing membrane.
 3. Roofing cement.
 4. Roof walkway.
 5. Fastening requirements.
 6. Application instructions.

C. Samples:

1. Nails and fasteners, each type.
2. 8 inch (203 mm) by 8 inch (203 mm) sheet roofing sample, in color specified.

D. Shop Drawings: Include plans, sections, details, and attachments.

1. Base flashings and terminations.
2. Membrane applications and insulation applications.

E. Certificates:

1. Indicating compliance with Energy Star performance indicated in "Performance Requirements" Section of this specification.

F. Warranty: As specified.

G. Documentation of supervisors' and inspectors' qualifications.

H. Field reports of roofing inspector, if applicable.

I. Temporary protection plan. Include list of proposed temporary materials, if applicable.

J. Contract Close-out Submittals:

1. Maintenance Manuals.
2. Warranty signed by installer and manufacturer.

1.7 DELIVERY, STORAGE AND HANDLING

- A. Comply with the recommendations of the NRCA "Roofing and Waterproofing Manual" applicable to single ply membrane roofing for storage, handling and installation.

1.8 ENVIRONMENTAL REQUIREMENTS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit roofing system to be installed according to manufacturer's written instructions and warranty requirements.
- B. Environmental Controls: Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- C. Protection of interior spaces: Refer to Section 01 00 00, GENERAL REQUIREMENTS.

1.9 WARRANTY

- A. Roofing work subject to the terms of the Article "Warranty of Construction," FAR clause 52.246-21, except extend the warranty period to 20 years.

PART 2 - PRODUCTS**2.1 TPO MEMBRANE ROOFING**

- A. TPO Sheet: ASTM D6878, internally fabric or scrim reinforced, 1.5 mm (60 mils) thick, with backing as recommended by roof manufacturer.
 - 1. Color: White.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Carlisle SynTec Incorporated.
 - 2. Firestone Building Products Company.
 - 3. GAF Materials Corporation.
 - 4. Johns Manville.
 - 5. Stevens Roofing Systems.

2.2 ACCESSORIES:

- A. Sheet Flashing: Manufacturer's standard sheet flashing of same material, type, reinforcement, thickness, and color as TPO sheet membrane.
- B. Bonding Adhesive: Manufacturer's standard, water based.
- C. Metal Termination Bars: Manufacturer's standard, predrilled stainless-steel or aluminum bars, approximately 25 by 3 mm (1 by 1/8 inch) thick; with anchors.
- D. Metal Battens: Manufacturer's standard, aluminum-zinc-alloy-coated or zinc-coated steel sheet, approximately 25 mm wide by 1.3 mm (1 inch wide by 0.05 inch) thick, prepunched.
- E. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with FM Approvals 4470, designed for fastening membrane to substrate.
- F. Flexible Walkways: Factory-formed, nonporous, heavy-duty, slip-resisting, surface-textured walkway pads or rolls, approximately 5 mm (3/16 inch) thick, and acceptable to membrane roofing system manufacturer.
 - 1. Refer to roof plan drawings for locations of flexible roof walkway pad to be provided and installed.
- G. Miscellaneous Accessories: Provide sealers, preformed flashings, preformed inside and outside corner sheet flashings, T-joint covers, lap sealants, termination reglets, and other accessories acceptable to manufacturer.

2.3 ADHESIVE AND SEALANT MATERIALS:

- A. General: Adhesive and sealant materials recommended by roofing system manufacturer for intended use, identical to materials utilized in approved listed roofing system, and compatible with roofing membrane.
 - 1. Liquid-type auxiliary materials shall comply with VOC limits of authorities having jurisdiction.
 - 2. Adhesives and sealants that are not on the exterior side of weather barrier shall comply with the following limits for VOC content when calculated according to 40 CFR 59, Subpart D (EPA Method 24):
 - a. Plastic Foam Adhesives: 50 g/L.
 - b. Gypsum Board and Panel Adhesives: 50 g/L.
 - c. Multipurpose Construction Adhesives: 70 g/L.
 - d. Fiberglass Adhesives: 80 g/L.
 - e. Single-Ply Roof Membrane Adhesives: 250 g/L.
 - f. Other Adhesives: 250 g/L.
 - g. PVC Welding Compounds: 510 g/L.
 - h. Adhesive Primer for Plastic: 650 g/L.
 - i. Single-Ply Roof Membrane Sealants: 450 g/L.
 - j. Nonmembrane Roof Sealants: 300 g/L.
 - k. Sealant Primers for Nonporous Substrates: 250 g/L.
 - l. Sealant Primers for Porous Substrates: 775 g/L.

2.4 ROOF INSULATION

- A. Polyisocyanurate Board Insulation: ASTM C 1289, Type II, Class 1, Grade 2, felt or glass-fiber mat facer on both major surfaces.
 - 1. R-Value as indicated on Drawings.
- B. Tapered Insulation: Provide factory-tapered insulation boards fabricated to slope of 1/4 inch per 12 inches (1:48) unless otherwise indicated.
 - 1. Provide preformed saddles, crickets, tapered edge stripes, and other insulation shapes where indicated for sloping to drain. Fabricate to slopes indicated.
- C. Insulation Accessories:
 - 1. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Approvals 4470, designed for fastening roof insulation to substrate, and acceptable to roofing system manufacturer.
 - 2. Insulation Adhesive: Insulation manufacturer's recommend cold-applied adhesive formulated to attach roof insulation to substrate or to another insulation layer.

2.5 COVER BOARD

- A. Cellulosic-Fiber Board Insulation: ASTM C 208, Type II, Grade 2 fibrous-felted, rigid insulation boards of wood fiber or other cellulosic-fiber and water-resistant binders, asphalt impregnated, and chemically treated for deterioration.
 - 1. Cover board to be compatible with roof membrane manufacturer to achieve the indicated warranty.
 - 2. Minimum thickness = 1/2 inch (13 mm).

2.6 VAPOR RETARDER

- A. Vapor retarder
 - 1. Fabricated from two plies of high strength kraft paper.
 - 2. Edges reinforced for tear resistance during construction.
 - 3. Moisture Vapor Transmission Rate (MVTR) to be 30 ng/Pa x s x m² (0.50 perms) per ASTM E-96, procedure A.

PART 3 - EXECUTION

3.1 EXAMINATION:

- A. Examine substrates and conditions with roofing Installer and roofing inspector to verify compliance with project requirements and suitability to accept subsequent roofing work. Correct unsatisfactory conditions before proceeding with roofing work.
- B. Do not apply roofing if roof surface will be used for subsequent work platform, storage of materials, or staging or scaffolding will be erected thereon unless system is protected.

3.2 PREPARATION

- A. Complete roof deck construction prior to commencing roofing work:
 - 1. Install curbs, blocking, edge strips, nailers, cants, and other components where insulation, roofing, and base flashing is attached to, in place ready to receive insulation and roofing.
 - 2. Complete deck and insulation to provide designed drainage to working roof drains.
 - 3. Document installation of related materials to be concealed prior to installing roofing work.
- B. Dry out surfaces, including the flutes of metal deck that become wet from any cause during progress of the work before roofing work is resumed. Apply materials to dry substrates.
- C. Sweep decks to broom clean condition. Remove all dust, dirt or debris.
- D. Remove projections that might damage materials.

3.3 TEMPORARY PROTECTION

- A. Install temporary protection at the end of day's work and when work is halted for an indefinite period or work is stopped when precipitation is imminent. Comply with approved temporary protection plan.
- B. Install temporary cap flashing over the top of base flashings where permanent flashings are not in place to provide protection against moisture entering the roof system through or behind the base flashing. Securely anchor in place to prevent blow off and damage by construction activities.
- C. Provide for removal of water or drainage of water away from the work.
- D. Provide temporary protection over installed roofing by means of duckboard walkways, plywood platforms, or other materials, as approved by Resident Engineer, for roof areas that are to remain intact, and that are subject to foot traffic and damage. Provide notches in sleepers to permit free drainage.

3.4 INSTALLATION, GENERAL

- A. FM Approvals Installation Standard: Install roofing membrane, base flashings, wood cants, blocking, curbs, and nailers, and component materials in compliance with requirements in FMG 4450 and FMG 4470 as part of a membrane roofing system as listed in FM Approval's "RoofNav" for fire/windstorm classification indicated. Comply with recommendations in FM Approvals' Loss Prevention Data Sheet 1-49, including requirements for wood nailers and cants.
- B. NRCA Installation Standard: Install roofing system in accordance with applicable NRCA Manual Plates and NRCA recommendations.
- C. Manufacturer Recommendations: Comply with roofing system manufacturer's written installation recommendations.
- D. Coordination with related work: Coordinate roof operations with roof insulation and sheet metal work so that insulation and flashings are installed concurrently to permit continuous roofing operations.
- E. Installation Conditions:
 - 1. Apply dry roofing materials. Apply roofing work over dry substrates and materials.
 - 2. Apply materials within temperature range and surface and ambient conditions recommended by manufacturer.
 - 3. Except for temporary protection, do not apply materials during damp or rainy weather, during excessive wind conditions, nor while moisture (dew, snow, ice, fog or frost) is present in any amount in or on the materials to be covered or installed:

- a. Do not apply materials when the temperature is below 4 deg. C (40 deg. F).
- b. Do not apply materials to substrate having temperature of 4 deg. C (40 deg. F) or less.

3.5 VAPOR RETARDER

A. General

1. Install a continuous vapor retarder on roof decks to receive tapered insulation.
2. At vertical surfaces, turn up vapor retarder to top of insulation or base flashing.
3. At all pipes and similar penetrations through vapor retarder, seal openings with roof cement to prevent moisture entry below.

3.6 INSULATION INSTALLATION

- A. Coordinate installing membrane roofing system components so insulation is not exposed to precipitation or left exposed at the end of the workday.
- B. Comply with membrane roofing system and insulation manufacturers written instructions for installing roof insulation.
- C. Install tapered insulation under area of roofing to conform to slopes indicated.
- D. Install insulation under area roofing to achieve required thickness. Where overall insulation thickness is 2.7 inches (66 mm) or greater, install two or more layers with joints of each succeeding layer staggering from joints of previous layer a minimum of 6 inches (150 mm) in each direction.
- E. Mechanically Fastened Insulation: Install each layer of insulation and secure to deck using mechanical fasteners specifically designed and sized for fastening specified board-type roof insulation to deck type.
 1. Fast insulation to resist uplift pressure at corners, perimeter and field of roof.

3.7 INSTALLATION OF TPO ROOFING

- A. Do not allow the membrane to come in contact with surfaces contaminated with asphalt, coal tar, oil, grease, or other substances which are not compatible with TPO.
- B. Install the membrane so the sheets run perpendicular to the long dimension of the insulation boards.

- C. Commence installation at the low point of the roof and work towards the high point. Lap the sheets so the flow of water is not against the edges of the sheet.
- D. Position the membrane so it is free of buckles and wrinkles.
- E. Roll sheet out on deck; inspect for defects as being rolled out and remove defective areas. Allow for relaxing before proceeding.
 - 1. Lap edges and ends of sheets 50 mm (two inches) or more as recommended by the manufacturer.
 - 2. Heat weld laps. Apply pressure as required. Seam strength of laps as required by ASTM D4434.
 - 3. Check seams to ensure continuous adhesion and correct defects.
 - 4. Finish edges of laps with a continuous beveled bead of sealant to sheet edges to provide smooth transition.
 - 5. Finish seams as the membrane is being installed (same day).
 - 6. Anchor perimeter to deck or wall as specified.
- F. Repair areas of welded seams where samples have been taken or marginal welds, bond voids, or skips occurs.
- G. Repair fishmouths and wrinkles by cutting to lay flat and installing patch over cut area extending 100 mm (four-inches) beyond cut.
- H. Membrane Perimeter Anchorage:
 - 1. Install metal fastening strip at the perimeter of each roof level, curb flashing, expansion joints and similar penetrations as indicated and in accordance with membrane manufacturer's instructions on top of roof membrane to deck or wall.
 - 2. Mechanically Fastened Metal Fastening Strip:
 - a. Set top of mechanical fastener set flush with top surface of the metal fastening strip. Space mechanical fasteners a maximum 300 mm (12 inches) on center starting 25 mm (one inch) from the end of the nailing strip.
 - b. When strips are cut round corners and eliminate sharp corners.
 - c. After mechanically fastening strip cover and seal strip with a six-inch wide roof membrane strip; heat weld to roof membrane and seal edges.
 - d. At roof edge metal, turn the membrane down over the front edge of the blocking or the nailer to below blocking. Secure the membrane to the vertical portion of the nailer; or, if required by the membrane manufacturer with fasteners spaced not over 300 mm (12 inches) on centers.

- e. At parapet walls, intersecting building walls and curbs, secure the membrane to the structural deck with fasteners 300 mm (12 inches) on centers or as shown on NRCA manual.

I. Adhered System:

1. Provide an adhered system at locations indicated on the Drawings.
2. Apply adhesive in quantities required by roof membrane manufacturer.
3. Fold sheet back on itself after rolling out and coat the bottom side of the membrane and the top of the deck with adhesive. Do not coat the lap joint area.
4. After adhesive has set according to adhesive manufacturers application instruction, roll the membrane into the adhesive in a manner that minimizes voids and wrinkles.
5. Repeat for other half of sheet. Cut voids and wrinkles to lay flat and clean for repair patch over cut area.

J. Mechanically-Attached System:

1. Provide above new expansion unless noted otherwise.
2. Secure the membrane to the structural deck with fasteners through stress plate or batten strips spaced and patterned in accordance with the membrane manufacturer's instructions to achieve specified wind uplift performance.
3. When fasteners are installed within the laps of adjoining sheets, position the fastener so that the stress plates are a minimum 13 mm (1/2)inch) from the edge of the sheets.
4. Where fasteners are installed over the membrane after the seams have been welded, cover the fasteners with a minimum 175 mm (seven inch) wide round TPO membrane cap centered over the fasteners. If batten strips are used cover the strip with a minimum 175 mm (seven inch) wide TPO strip centered over the batten. Heat weld to the roof membrane and finish edges with sealant as specified. Finish edges with sealant as specified.

3.8 INSTALLATION OF FLASHING

- A. Install flashings as the membrane is being installed. If the flashing can not be completely installed in one day, complete the installation until the flashing is in a watertight condition and provide temporary covers or seals.

B. Flashing Roof Drains:

1. Install roof drain flashing as recommended by the membrane manufacturer, generally as follows:
 - a. Coordinate to set the metal drain flashing in asphalt roof cement, holding cement back from the edge of the metal flange.

- b. Do not allow the roof cement to come in contact with the TPO roof membrane.
 - c. Adhere the TPO roof membrane to the metal flashing with the membrane manufacturer's recommended adhesive.
- 2. Turn down the metal drain flashing and TPO roof membrane into the drain body and install clamping ring and strainer.
- C. Installing TPO Base Flashing and Pipe Flashing:
 - 1. Install TPO flashing membranes to pipes, wall or curbs to a height not less than eight-inches above roof surfaces and 100 mm (four inches) on roof membrane.
 - a. Adhere flashing to pipe, wall or curb with adhesive.
 - b. Form inside and outside corners of TPO flashing membrane in accordance with NRCA manual. Form pipe flashing in accordance with NRCA manual use pipe boot.
 - c. Lap ends not less than 100 mm (four inches).
 - d. Heat weld flashing membranes together and flashing membranes to roof membranes. Finish exposed edges with sealant as specified.
 - e. Install flashing membranes in accordance with NRCA manual.
 - 2. Anchor top of flashing to walls or curbs with fasteners spaced not over 200 mm (eight inches) on centers. Use fastening strip on ducts. Use pipe clamps on pipes or other round penetrations.
 - 3. Apply sealant to top edge of flashing.
- D. Installing Building Expansion Joints:
 - 1. Refer to Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES.

3.9 FLEXIBLE WALKWAYS

- A. Use reinforced sheet not less than 900 mm (three feet) wide.
- B. Heat weld walkway sheet to roof sheet at edges. Weld area 50 mm (two inches) wide by the entire length of the walkway sheet.
- C. Finish edges of laps with sealants as specified.

3.10 FIELD QUALITY CONTROL:

- A. Roofing Inspector: Owner may engage a qualified roofing inspector to perform roof tests and inspections and to prepare test reports. Owner's inspector may do the following:
 - 1. Examine and probe seams in the membrane and flashing in the presence of Resident Engineer and Membrane Manufacturer's Inspector.
 - 2. Probe edge of welded seams with a blunt tipped instrument. Use sufficient hand pressure to detect marginal welds, voids, skips, and fishmouths.

- B. Final Roof Inspection: Arrange for roofing system manufacturer's technical personnel to inspect roofing installation on completion.
 - 1. Notify Architect and Owner 48 hours in advance of date and time of inspection.
- C. Repair or remove and replace components of roofing work where test results or inspections indicate that they do not comply with specified requirements.
 - 1. Additional testing and inspecting, at Contractor's expense, will be performed to determine if replaced or additional work complies with specified requirements.

3.11 PROTECTING AND CLEANING

- A. Protect membrane roofing system from damage and wear during remainder of construction period.
- B. Correct deficiencies in or remove membrane roofing system that does not comply with requirements; repair substrates; and repair or reinstall membrane roofing system to a condition free of damage and deterioration at time of acceptance by Owner.
- C. Clean overspray and spillage from adjacent construction. Clean membrane and restore surface to like-new condition meeting solar reflectance requirements.

- - - E N D - - -

**SECTION 07 60 00
FLASHING AND SHEET METAL**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Formed sheet metal work for wall and roof flashing, copings, roof edge metal, fasciae, and drainage specialties, are specified in this section.

1.2 RELATED WORK

- A. Membrane base flashings and stripping: Section 07 54 23, THERMOPLASTIC POLYOLEFIN (TPO) ROOFING.
- B. Flashing components of factory finished roofing and wall systems: Division 07 roofing and wall system sections.
- C. Joint Sealants: Section 07 92 00, JOINT SEALANTS.
- D. Integral flashing components of manufactured roof specialties and accessories or equipment: Section 07 71 00, ROOF SPECIALTIES, Division 22, PLUMBING sections and Division 23 HVAC sections.
- E. Paint materials and application: Section 09 91 00, PAINTING.
- F. Flashing of Roof Drains: Section 22 14 00, FACILITY STORM DRAINAGE .

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. Aluminum Association (AA):
 - AA-C22A41Aluminum Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.7-mil thick
 - AA-C22A42Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.7 mils thick
 - AA-C22A44Chemically etched medium matte with electrolytically deposited metallic compound, integrally colored coating Class I Architectural, 0.7-mil thick finish
- C. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
 - ANSI/SPRI ES-1-03Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems

- D. American Architectural Manufacturers Association (AAMA):
- AAMA 620Voluntary Specification for High Performance
Organic Coatings on Coil Coated Architectural
Aluminum
- E. ASTM International (ASTM):
- A167-99(R2009)Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet, and Strip
- A653/A653M-09Steel Sheet Zinc-Coated (Galvanized) or Zinc
Alloy Coated (Galvanized) by the Hot- Dip
Process
- B32-08Solder Metal
- B209-07Aluminum and Aluminum-Alloy Sheet and Plate
- B370-09Copper Sheet and Strip for Building
Construction
- D173-03Bitumen-Saturated Cotton Fabrics Used in
Roofing and Waterproofing
- D412-06Vulcanized Rubber and Thermoplastic Elastomers-
Tension
- D1187-97(R2002)Asphalt Base Emulsions for Use as Protective
Coatings for Metal
- D1784-08Rigid Poly (Vinyl Chloride) (PVC) Compounds and
Chlorinated Poly (Vinyl Chloride) (CPVC)
Compounds
- D3656-07Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns
- D4586-07Asphalt Roof Cement, Asbestos Free
- F. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA): Architectural Sheet Metal Manual.
- G. National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500-06Metal Finishes Manual
- H. Federal Specification (Fed. Spec):
- A-A-1925AShield, Expansion; (Nail Anchors)
- UU-B-790ABuilding Paper, Vegetable Fiber
- I. International Code Commission (ICC): International Building Code,
Current Edition

1.4 PERFORMANCE REQUIREMENTS

- A. Wind Uplift Forces: Resist the following forces per FM Approvals 1-49:

1. Wind Zone 1: 1.00 to 1.44 kPa (21 to 30 lbf/sq. ft.): 2.87-kPa (60-lbf/sq. ft.) perimeter uplift force, 4.31-kPa (90-lbf/sq. ft.) corner uplift force, and 1.44-kPa (30-lbf/sq. ft.) outward force.
 2. Wind Zone 2: 1.48 to 2.15 kPa (31 to 45 lbf/sq. ft.): 4.31-kPa (90-lbf/sq. ft.) perimeter uplift force, 5.74-kPa (120-lbf/sq. ft.) corner uplift force, and 2.15-kPa (45-lbf/sq. ft.) outward force.
 3. Wind Zone 3: 2.20 to 4.98 kPa (46 to 104 lbf/sq. ft.): 9.96-kPa (208-lbf/sq. ft.) perimeter uplift force, 14.94-kPa (312-lbf/sq. ft.) corner uplift force, and 4.98-kPa (104-lbf/sq. ft.) outward force.
- B. Wind Design Standard: Fabricate and install copings and roof-edge flashings tested per ANSI/SPRI ES-1 to resist design pressure indicated on Drawings.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: For all specified items, including:
 1. Flashings
 2. Copings
 3. Rood Edge Metal
 4. Fascia
- C. Manufacturer's Literature and Data: For all specified items, including:
 1. Two-piece counterflashing
 2. Thru wall flashing
 3. Nonreinforced, elastomeric sheeting
 4. Copper clad stainless steel
 5. Polyethylene coated copper
 6. Bituminous coated copper
 7. Copper covered paper
- D. Certificates: Indicating compliance with specified finishing requirements, from applicator and contractor.

PART 2 - PRODUCTS

2.1 FLASHING AND SHEET METAL MATERIALS

- A. Stainless Steel: ASTM A167, Type 302B, dead soft temper.
- B. Copper ASTM B370, cold-rolled temper.
- C. Bituminous Coated Copper: Minimum copper ASTM B370, weight not less than 1 kg/m² (3 oz/sf). Bituminous coating shall weigh not less than 2 kg/m² (6 oz/sf); or, copper sheets may be bonded between two layers of

coarsely woven bitumen-saturated cotton fabric ASTM D173. Exposed fabric surface shall be crimped.

- D. Copper Covered Paper: Fabricated of electro-deposit pure copper sheets ASTM B 370, bonded with special asphalt compound to both sides of creped, reinforced building paper, UU-B-790, Type I, style 5, or to a three ply sheet of asphalt impregnated creped paper. Grooves running along the width of sheet.
- E. Polyethylene Coated Copper: Copper sheet ASTM B370, weighing 1 Kg/m² (3 oz/sf) bonded between two layers of (two mil) thick polyethylene sheet.
- F. Aluminum Sheet: ASTM B209, alloy 3003-H14 except alloy used for color anodized aluminum shall be as required to produce specified color. Alloy required to produce specified color shall have the same structural properties as alloy 3003-H14.
- G. Galvanized Sheet: ASTM, A653.
- H. Nonreinforced, Elastomeric Sheeting: Elastomeric substances reduced to thermoplastic state and extruded into continuous homogenous sheet (0.056 inch) thick. Sheeting shall have not less than 7 MPa (1,000 psi) tensile strength and not more than seven percent tension-set at 50 percent elongation when tested in accordance with ASTM D412. Sheeting shall show no cracking or flaking when bent through 180 degrees over a 1 mm (1/32 inch) diameter mandrel and then bent at same point over same size mandrel in opposite direction through 360 degrees at temperature of -30°C (-20 °F).

2.2 FLASHING ACCESSORIES

- A. Solder: ASTM B32; flux type and alloy composition as required for use with metals to be soldered.
- B. Rosin Paper: Fed-Spec. UU-B-790, Type I, Grade D, Style 1b, Rosin-sized sheathing paper, weighing approximately 3 Kg/10 m² (6 lbs/100 sf).
- C. Bituminous Paint: ASTM D1187, Type I.
- D. Fasteners:
 - 1. Use copper, copper alloy, bronze, brass, or stainless steel for copper, and copper clad stainless steel, and stainless steel for stainless steel and aluminum alloy. Use galvanized steel or stainless steel for galvanized steel.
 - 2. Nails:
 - a. Minimum diameter for copper nails: 3 mm (0.109 inch).
 - b. Minimum diameter for aluminum nails 3 mm (0.105 inch).

- c. Minimum diameter for stainless steel nails: 2 mm (0.095 inch) and annular threaded.
- d. Length to provide not less than 22 mm (7/8 inch) penetration into anchorage.
- 3. Rivets: Not less than 3 mm (1/8 inch) diameter.
- 4. Expansion Shields: Fed Spec A-A-1925A.
- E. Sealant: As specified in Section 07 92 00, JOINT SEALANTS for exterior locations.
- F. Insect Screening: ASTM D3656, 18 by 18 regular mesh.
- G. Roof Cement: ASTM D4586.

2.3 SHEET METAL THICKNESS

- A. Except as otherwise shown or specified use thickness or weight of sheet metal as follows:
- B. Concealed Locations (Built into Construction):
 - 1. Copper: 30g (10 oz) minimum 0.33 mm (0.013 inch thick).
 - 2. Stainless steel: 0.25 mm (0.010 inch) thick.
 - 3. Copper clad stainless steel: 0.25 mm (0.010 inch) thick.
 - 4. Galvanized steel: 0.5 mm (0.021 inch) thick.
- C. Exposed Locations:
 - 1. Copper: 0.4 Kg (16 oz).
 - 2. Stainless steel: 0.4 mm (0.015 inch).
 - 3. Copper clad stainless steel: 0.4 mm (0.015 inch).
 - 4. Thickness of aluminum or galvanized steel is specified with each item.

2.4 FABRICATION, GENERAL

- A. Jointing:
 - 1. In general, copper, stainless steel and copper clad stainless steel joints, except expansion and contraction joints, shall be locked and soldered.
 - 2. Jointing of copper over 0.5 Kg (20 oz) weight or stainless steel over 0.45 mm (0.018 inch) thick shall be done by lapping, riveting and soldering.
 - 3. Joints shall conform to following requirements:
 - a. Flat-lock joints shall finish not less than 19 mm (3/4 inch) wide.
 - b. Lap joints subject to stress shall finish not less than 25 mm (one inch) wide and shall be soldered and riveted.
 - c. Unsoldered lap joints shall finish not less than 100 mm (4 inches) wide.

4. Flat and lap joints shall be made in direction of flow.
5. Edges of bituminous coated copper, copper covered paper, nonreinforced elastomeric sheeting and polyethylene coated copper shall be jointed by lapping not less than 100 mm (4 inches) in the direction of flow and cementing with asphalt roof cement or sealant as required by the manufacturer's printed instructions.
6. Soldering:
 - a. Pre tin both mating surfaces with solder for a width not less than 38 mm (1 1/2 inches) of uncoated copper, stainless steel, and copper clad stainless steel.
 - b. Wire brush to produce a bright surface before soldering lead coated copper.
 - c. Treat in accordance with metal producers recommendations other sheet metal required to be soldered.
 - d. Completely remove acid and flux after soldering is completed.

B. Expansion and Contraction Joints:

1. Fabricate in accordance with the Architectural Sheet Metal Manual recommendations for expansion and contraction of sheet metal work in continuous runs.
2. Space joints as shown or as specified.
3. Space expansion and contraction joints for copper, stainless steel, and copper clad stainless steel at intervals not exceeding 7200 mm (24 feet).
4. Space expansion and contraction joints for aluminum at intervals not exceeding 5400 mm (18 feet), except do not exceed 3000 mm (10 feet) for gravel stops and fascia-cant systems.
5. Fabricate slip-type or loose locked joints and fill with sealant unless otherwise specified.
6. Fabricate joint covers of same thickness material as sheet metal served.

C. Cleats:

1. Fabricate cleats to secure flashings and sheet metal work over 300 mm (12 inches) wide and where specified.
2. Provide cleats for maximum spacing of 300 mm (12 inch) centers unless specified otherwise.
3. Form cleats of same metal and weights or thickness as the sheet metal being installed unless specified otherwise.

4. Fabricate cleats from 50 mm (2 inch) wide strip. Form end with not less than 19 mm (3/4 inch) wide loose lock to item for anchorage. Form other end of length to receive nails free of item to be anchored and end edge to be folded over and cover nail heads.

D. Edge Strips or Continuous Cleats:

1. Fabricate continuous edge strips where shown and specified to secure loose edges of the sheet metal work.
2. Except as otherwise specified, fabricate edge strips of minimum 1.25 mm (0.050 inch) thick aluminum.
3. Use material compatible with sheet metal to be secured by the edge strip.
4. Fabricate in 3000 mm (10 feet) maximum lengths with not less than 19 mm (3/4 inch) loose lock into metal secured by edge strip.
5. Fabricate Strips for fascia anchorage to extend below the supporting wood construction to form a drip and to allow the flashing to be hooked over the lower edge at least 19 mm (3/4-inch).
6. Fabricate anchor edge maximum width of 75 mm (3 inches) or of sufficient width to provide adequate bearing area to insure a rigid installation using 1.6 mm (0.0625 inch) thick aluminum.

E. Drips:

1. Form drips at lower edge of sheet metal counter-flashings (cap flashings), fascias, gravel stops, wall copings, by folding edge back 13 mm (1/2 inch) and bending out 45 degrees from vertical to carry water away from the wall.
2. Form drip to provide hook to engage cleat or edge strip for fastening for not less than 19 mm (3/4 inch) loose lock where shown.

F. Edges:

1. Edges of flashings concealed in masonry joints opposite drain side shall be turned up 6 mm (1/4 inch) to form dam, unless otherwise specified or shown otherwise.
2. Finish exposed edges of flashing with a 6 mm (1/4 inch) hem formed by folding edge of flashing back on itself when not hooked to edge strip or cleat. Use 6 mm (1/4 inch) minimum penetration beyond wall face with drip for through-wall flashing exposed edge.
3. All metal roof edges shall meet requirements of IBC, current edition.

G. Metal Options:

1. Where options are permitted for different metals use only one metal throughout.
2. Stainless steel may be used in concealed locations for fasteners of other metals exposed to view.

2.5 FINISHES

- A. Use same finish on adjacent metal or components and exposed metal surfaces unless specified or shown otherwise.
- B. In accordance with NAAMM Metal Finishes Manual AMP 500, unless otherwise specified.
- C. Finish exposed metal surfaces as follows, unless specified otherwise:
 1. Copper: Mill finish.
 2. Stainless Steel: Finish No. 2B or 2D.
 3. Aluminum:
 - a. Fluorocarbon Finish: AAMA 620, high performance organic coating.
 - 1) Color: As indicated on Drawings.

2.6 THROUGH-WALL FLASHINGS

- A. Form through-wall flashing to provide a mechanical bond or key against lateral movement in all directions. Install a sheet having 2 mm (1/16 inch) deep transverse channels spaced four to every 25 mm (one inch), or ribbed diagonal pattern, or having other deformation unless specified otherwise.
 1. Fabricate in not less than 2400 mm (8 feet) lengths; 3000 mm (10 feet) maximum lengths.
 2. Fabricate so keying nests at overlaps.
- B. For Masonry Work When Concealed Except for Drip:
 1. Either copper, stainless steel, or copper clad stainless steel.
 2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
 3. Form exposed portions of flashing with drip, approximately 6 mm (1/4 inch) projection beyond wall face.
- C. For Masonry Work When Exposed Edge Forms a Receiver for Counter Flashing:
 1. Use same metal and thickness as counter flashing.
 2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
 3. Form exposed portion as snap lock receiver for counter flashing upper edge.
- D. Window Sill Flashing and Lintel Flashing:

1. Use either copper, stainless steel, copper clad stainless steel plane flat sheet, or nonreinforced elastomeric sheeting, bituminous coated copper, copper covered paper, or polyethylene coated copper.
2. Fabricate flashing at ends with folded corners to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening.
3. Turn up back edge as shown.
4. Form exposed portion with drip as specified or receiver.

E. Door Sill Flashing:

1. Where concealed, use either 0.5 Kg (20 oz) copper, 0.5 mm (0.018 inch) thick stainless steel, or 0.5 mm (0.018 inch) thick copper clad stainless steel.
2. Where shown on drawings as combined counter flashing under threshold, sill plate, door sill, or where subject to foot traffic, use either 0.6 Kg (24 ounce) copper, or 0.6 mm (0.024 inch) thick stainless steel.
3. Fabricate flashing at ends to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening with folded corners.

2.7 COUNTERFLASHING (CAP FLASHING)

- A. Prefinished Aluminum, 1.25 mm (0.051 inch) thick, unless specified otherwise.
- B. Fabricate to lap base flashing a minimum of 100 mm (4 inches) with drip:
 1. Form lock seams for outside corners. Allow for lap joints at ends and inside corners.
 2. In general, form flashing in lengths not less than 2400 mm (8 feet) and not more than 3000 mm (10 feet).
 3. Two-piece, lock in type flashing may be used in-lieu-of one piece counter-flashing.
 4. Manufactured assemblies may be used.
 5. Where counterflashing is installed at new work use an integral flange at the top designed to be extended into the masonry joint or reglet in concrete.
 6. Where counterflashing is installed at existing work use surface applied type, formed to provide a space for the application of sealant at the top edge.
- C. One-piece Counterflashing:
 1. Upper edge formed to extend full depth of masonry unit in mortar joint with back edge turned up 6 mm (1/4 inch).

D. Two-Piece Counterflashing:

1. Receiver to extend into masonry wall depth of masonry unit with back edge turned up 6 mm (1/4 inch) and exposed edge designed to receive and lock counterflashing upper edge when inserted.
2. Counterflashing upper edge designed to snap lock into receiver.

E. Surface Mounted Counterflashing; one or two piece:

1. Use only at existing or new surfaces where flashing can not be inserted in vertical surface.
2. One piece fabricate upper edge folded double for 65 mm (2 1/2 inches) with top 19 mm (3/4 inch) bent out to form "V" joint sealant pocket with vertical surface. Perforate flat double area against vertical surface with horizontally slotted fastener holes at 400 mm (16 inch) centers between end holes. Option: One piece surface mounted counter-flashing (cap flashing) may be used. Fabricate as detailed on Plate 51 of SMACNA Architectural Sheet Metal Manual.
3. Two pieces: Fabricate upper edge to lock into surface mounted receiver. Fabricate receiver joint sealant pocket on upper edge and lower edge to receive counterflashing, with slotted fastener holes at 400 mm (16 inch) centers between upper and lower edge.

2.8 FASCIAS**A. General:**

1. Fabricate in lengths not less than 2400 mm (8 feet) long and maximum of 3000 mm (10 feet).
2. Fabricate internal and external corners as one-piece with legs not less than 600 mm (2 feet) or more than 1200 mm (4 feet) long.
3. Fabricate lower edge outward at an angle of 45 degrees to form drip and as fascia or as counter flashing as shown:
 - a. Fabricate of one-piece material of suitable width for fascia height of 250 mm (10 inch) maximum or counterflashing lap of not less than 100 mm (4 inch) over base flashing.
 - b. Fabricate bottom edge of formed fascia to receive edge strip.

B. Formed Flat sheet Metal Fascia:

1. Fabricate as shown of 1.25 mm (0.050 inch) thick aluminum.
2. When fascia exceeds 150 mm (6 inches) in depth, form one or more horizontal stops not less than 13 mm (1/2 inch) high in the fascia.
3. Fabricate as two-piece fascia when fascia depth exceeds 250 mm (10 inches).

4. At joint between ends of sheets, provide a concealed clip soldered or welded near one end of each sheet to hold the adjoining sheet in lapped position. The clip shall be approximately 100 mm (4 inches) wide and shall be the full depth of the fascia less 25 mm (1 inch) at top and bottom. Clip shall be of the same thickness as the fascia.
5. Provide edge strip as specified with lower hooked edge bent outward at an angle of 45 degrees.

2.9 COPINGS

- A. Form of 1.6 mm (0.0625 inch) thick prefinish aluminum.
- B. Fabricate copings in sections not less than 2400 mm (8 feet) long, except at the ends of runs where shorter lengths are required.
- C. Coping Cleat:
 1. Fabricate of same material and thickness as coping.

2.10 CONDUCTORS AND DOWNSPOUTS

- A. Existing conductor heads and downspouts are to be removed and reinstalled where indicated.
 1. Refer to drawings for locations.

2.11 REGLETS

- A. Fabricate reglets of one of the following materials:
 1. 0.4 Kg (16 ounce) copper.
 2. Stainless steel, not less than 0.3 mm (0.012 inch) thick.
 3. Prefinished aluminum, not less than 1.25 mm (0.05 inch) thick.
- B. Fill open-type reglets with fiberboard or other suitable separator, to prevent crushing of the slot during installation.
- C. Fabricate mitered corners, fittings, and special shapes as may be required by details.
- D. Reglets for concrete may be formed to receive flashing and have a 10 mm (3/8 inch), 45 degree snap lock.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General:
 1. Install flashing and sheet metal items as shown in Sheet Metal and Air Conditioning Contractors National Association, Inc., publication, ARCHITECTURAL SHEET METAL MANUAL, except as otherwise shown or specified.
 2. Apply Sealant as specified in Section 07 92 00, JOINT SEALANTS.

3. Apply sheet metal and other flashing material to surfaces which are smooth, sound, clean, dry and free from defects that might affect the application.
4. Remove projections which would puncture the materials and fill holes and depressions with material compatible with the substrate. Cover holes or cracks in wood wider than 6 mm (1/4 inch) with sheet metal compatible with the roofing and flashing material used.
5. Coordinate with masonry work for the application of a skim coat of mortar to surfaces of unit masonry to receive flashing material before the application of flashing.
6. Apply a layer of 7 Kg (15 pound) saturated felt followed by a layer of rosin paper to wood surfaces to be covered with copper. Lap each ply 50 mm (2 inch) with the slope and nail with large headed copper nails.
7. Confine direct nailing of sheet metal to strips 300 mm (12 inch) or less wide. Nail flashing along one edge only. Space nail not over 100 mm (4 inches) on center unless specified otherwise.
8. Install bolts, rivets, and screws where indicated, specified, or required in accordance with the SMACNA Sheet Metal Manual. Space rivets at 75 mm (3 inch) on centers in two rows in a staggered position. Use neoprene washers under fastener heads when fastener head is exposed.
9. Coordinate with roofing work for the installation of metal base flashings and other metal items having roof flanges for anchorage and watertight installation.
10. Nail continuous cleats on 75 mm (3 inch) on centers in two rows in a staggered position.
11. Nail individual cleats with two nails and bend end tab over nail heads. Lock other end of cleat into hemmed edge.
12. Install flashings in conjunction with other trades so that flashings are inserted in other materials and joined together to provide a water tight installation.
13. Where required to prevent galvanic action between dissimilar metal isolate the contact areas of dissimilar metal with sheet lead, waterproof building paper, or a coat of bituminous paint.
14. Isolate aluminum in contact with dissimilar metals others than stainless steel, white bronze or other metal compatible with aluminum by:

- a. Paint dissimilar metal with a prime coat of zinc-chromate or other suitable primer, followed by two coats of aluminum paint.
 - b. Paint dissimilar metal with a coat of bituminous paint.
 - c. Apply an approved caulking material between aluminum and dissimilar metal.
- 15. Paint aluminum in contact with or built into mortar, concrete, plaster, or other masonry materials with a coat of bituminous paint.
 - 16. Paint aluminum in contact with absorptive materials that may become repeatedly wet with two coats of bituminous paint or two coats of aluminum paint.

3.2 THROUGH-WALL FLASHING

A. General:

- 1. Install continuous through-wall flashing between top of concrete foundation walls and bottom of masonry building walls; at top of concrete floors; and elsewhere as shown.
- 2. Where exposed portions are used as a counterflashings, lap base flashings at least 100 mm (4 inches) and use thickness of metal as specified for exposed locations.
- 3. Exposed edge of flashing may be formed as a receiver for two piece counter flashing as specified.
- 4. Terminate exterior edge beyond face of wall approximately 6 mm (1/4 inch) with drip edge where not part of counter flashing.
- 5. Turn back edge up 6 mm (1/4 inch) unless noted otherwise where flashing terminates in mortar joint or hollow masonry unit joint.
- 6. Terminate interior raised edge in masonry backup unit approximately 38 mm (1 1/2 inch) into unit unless shown otherwise.
- 7. Lap end joints at least two corrugations, but not less than 100 mm (4 inches). Seal laps with sealant.
- 8. Where dowels, reinforcing bars and fastening devices penetrate flashing, seal penetration with sealing compound. Sealing compound is specified in Section 07 92 00, JOINT SEALANTS.
- 9. Coordinate with other work to set in a bed of mortar above and below flashing so that total thickness of the two layers of mortar and flashing are same as regular mortar joint.
- 10. Where ends of flashing terminate turn ends up 25 mm (1 inch) and fold corners to form dam extending to wall face in vertical mortar or veneer joint.

11. Turn flashing up not less than 200 mm (8 inch) between masonry or behind exterior veneer.
 12. When flashing terminates in reglet extend flashing full depth into reglet and secure with lead or plastic wedges spaced 150 mm (6 inch) on center.
- B. Flashing at Top of Concrete Foundation Walls Where concrete is exposed. Turn up not less than 200 mm (8 inch) high and into masonry backup mortar joint or reglet in concrete backup as specified.
- C. Flashing at Top of Concrete Floors (except where shelf angles occur): Place flashing in horizontal masonry joint not less than 200 mm (8 inch) below floor slab and extend into backup masonry joint at floor slab 38 mm (1 1/2 inch).
- D. Flashing at Veneer Walls:
1. Install near line of finish floors over shelf angles or where shown.
 2. Turn up against sheathing.
 3. At stud framing, hem top edge 19 mm (3/4 inch) and secure to each stud with stainless steel fasteners through sheathing.
 4. Coordinate with installation of waterproofing or asphalt felt for lap over top of flashing.
- E. Lintel Flashing when not part of shelf angle flashing:
1. Install flashing full length of lintel to nearest vertical joint in masonry over veneer.
 2. Turn ends up 25 mm (one inch) and fold corners to form dam and extend end to face of wall.
 3. Turn back edge up to top of lintel; terminate back edge as specified for back-up wall.
- F. Window Sill Flashing:
1. Install flashing to extend not less than 100 mm (4 inch) beyond ends of sill into vertical joint of masonry or veneer.
 2. Turn back edge up to terminate under window frame.
 3. Turn ends up 25 mm (one inch) and fold corners to form dam and extend to face of wall.
- G. Door Sill Flashing:
1. Install flashing under bottom of plate sills of doors over curbs opening onto roofs. Extend flashing out to form counter flashing or receiver for counter flashing over base flashing. Set in sealant.

2. Extend sill flashing 200 mm (8 inch) beyond jamb opening. Turn ends up one inch in vertical masonry joint, extend end to face of wall. Join to counter flashing for water tight joint.
3. Where doors thresholds cover over waterproof membranes install sill flashing over water proof membrane under thresholds. Extend beyond opening to cover exposed portion of waterproof membrane and not less than 150 mm (6 inch) beyond door jamb opening at ends. Turn up approximately 6 mm (1/4 inch) under threshold.

3.3 COUNTERFLASHING (CAP FLASHING)

A. General:

1. Install counterflashing over and in conjunction with installation of base flashings, except as otherwise specified or shown.
2. Install counterflashing to lap base flashings not less than 100 mm (4 inch).
3. Install upper edge or top of counterflashing not less than 225 mm (9 inch) above top of the roofing.
4. Lap joints not less than 100 mm (4 inch). Stagger joints with relation to metal base flashing joints.
5. Use surface applied counterflashing on existing surfaces and new work where not possible to integrate into item.
6. When fastening to concrete or masonry, use screws driven in expansion shields set in concrete or masonry. Use screws to wood and sheet metal. Set fasteners in mortar joints of masonry work.

B. One Piece Counterflashing:

1. Where flashing is installed at new masonry, coordinate to insure proper height, embed in mortar, and end lap.
2. Where flashing is surface mounted on flat surfaces.
 - a. When top edge is double folded anchor flat portion below sealant "V" joint with fasteners spaced not over 400 mm (16 inch) on center:
 - 1) Locate fasteners in masonry mortar joints.
 - 2) Use screws to sheet metal or wood.
 - b. Fill joint at top with sealant.

C. Two-Piece Counterflashing:

1. Where receiver is installed at new masonry coordinate to insure proper height, embed in mortar, and lap.
2. Surface applied type receiver:

- a. Secure to face construction in accordance, with manufacturers instructions.
- b. Completely fill space at the top edge of receiver with sealant.
- 3. Insert counter flashing in receiver in accordance with fabricator or manufacturer's instructions and to fit tight against base flashing.
- D. Where vented edge occur install so lower edge of counterflashing is against base flashing.
- E. When counter flashing is a component of other flashing install as shown.

3.4 REGLETS

- A. Install reglets in a manner to provide a watertight installation.
- B. Locate reglets not less than 225 mm (9 inch) nor more than 400 mm (16 inch) above roofing, and not less than 125 mm (5 inch) nor more than 325 mm (13 inch) above cant strip.
- C. Butt and align end joints on each section of reglet and securely hold in position until concrete or mortar are hardened:
 - 1. Coordinate reglets for anchorage into concrete with formwork construction.
 - 2. Coordinate reglets for masonry to locate horizontally into mortar joints.

3.5 FASCIAS

- A. General:
 - 1. Install fascias with allowance for expansion at each joint; minimum of 6 mm (1/4 inch).
 - 2. Install continuous cleat for fascia drip edge. Secure with fasteners as close to lower edge as possible on 75 mm (3 inch) centers.
 - 3. Where ends of fascias abut a vertical wall, provide a watertight, flashed and sealant filled joint.
- B. Sheet Metal Fascia:
 - 1. Install with end joints of splice plates sheets lapped three inches.
 - 2. Hood the lower edge of fascia into a continuous edge strip.
 - 3. Lock top section to bottom section for two piece fascia.

3.6 COPINGS

- A. General:
 - 1. Install a continuous edge strip on the front edge of the plank. Lock the coping to the edge strip with a 19 mm (3/4 inch) loose lock seam.

2. Where shown turn down roof side of coping and extend down over base flashing as specified for counter-flashing. Secure counter-flashing to lock strip in coping at continuous cleat.
3. Install ends adjoining existing construction so as to form space for installation of sealants. Sealant is specified in Section 07 92 00, JOINT SEALANTS.

B. Aluminum Coping:

1. Install with 6 mm (1/4 inch) joint between ends of coping sections.
2. Install joint covers, centered at each joint, and securely lock in place.

3.7 CONDUCTORS (DOWNSPOUTS) - EXISTING TO BE REINSTALLED

- A. Where scuppers discharge into downspouts install conductor head to receive discharge with back edge up behind drip edge of scupper. Fasten and seal joint. Sleeve conductors to gutter outlet tubes and fasten joint and joints between sections.
- B. Set conductors plumb and clear of wall, and anchor to wall with two anchor straps, located near top and bottom of each section of conductor. Strap at top shall be fixed to downspout, intermediate straps and strap at bottom shall be slotted to allow not less than 13 mm (1/2 inch) movement for each 3000 mm (10 feet) of downspout.
- C. Install elbows, offsets and shoes where shown and required. Slope not less than 45 degrees.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 07 71 00
ROOF SPECIALTIES**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies equipment curbs and supports.

1.2 RELATED WORK

- A. Sealant material and installation: Section 07 92 00, JOINT SEALANTS.
- B. General insulation: Section 07 21 13, THERMAL INSULATION. Rigid insulations for roofing: Section 07 54 23, THERMOPLASTIC POLYOLEFIN (TPO) ROOFING.

1.3 QUALITY CONTROL

- A. All roof accessories shall be the products of manufacturers regularly engaged in producing the kinds of products specified.
- B. Each accessory type shall be the same and be made by the same manufacturer.
- C. Each accessory shall be completely assembled to the greatest extent possible before delivery to the site.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Each item specified showing design, details of construction, installation and fastenings.
- C. Manufacturer's Literature and Data: Each item specified.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extend referenced. The publications are referenced in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
RR-G-1602DGrating, Metal, Other Than Bar Type (Floor, Except for Naval Vessels)
- C. American Society for Testing and Material (ASTM):
A653/A653M-10Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) By the Hot-Dip Process
B209/209M-07Aluminum and Aluminum Alloy-Sheet and Plate
B221/221M-08Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
C612-10Mineral Fiber Block and Board Thermal Insulation
D1187-97(R2002)Asphalt-Base Emulsions for Use as Protective Coatings for Metal

- D. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500 SeriesMetal Finishes Manual
- E. American Architectural Manufacturers Association (AAMA):
2605-11High Performance Organic Coatings on
Architectural Extrusions and Panels.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Aluminum, Extruded: ASTM B221/B221M.
- B. Aluminum Sheet: ASTM B209/B209M.
- C. Galvanized Sheet Steel: ASTM A526/A526M; G-90 coating.

2.2 EQUIPMENT CURBS AND SUPPORTS

- A. Fabricate equipment supports from 1.3 mm (0.0516 inch) thick galvanized steel.
- B. Form exterior curb with integral base, and deck closures for curbs installed on steel decking.
- C. Use galvanized steel liners for curbs having inside dimension over 305 mm (12 inches).
- D. Fabricate curb with a minimum height of 200 mm (8 inches) above roof surface.
- E. Attach preservative treated wood nailers to top of curb. Use 50 mm (2 inch) by 50 mm (2 inch) minimum nominal size on curb with openings and 50 mm (2 inch) thick, width of curb up to 300 mm (12 inches) on equipment support curbs.
- F. Make size of supports suit size of equipment furnished, with height as shown on drawings, but not less than 200 mm (8 inches) above roof surface.

2.3 FINISH

- A. In accordance with NAAMM Amp 500 Series.
- B. Aluminum, Mill Finish: AA-MIX, as fabricated.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install roof specialties where shown.
- B. Secure with fasteners in accordance with manufacture's printed installation instructions and approved shop drawings unless shown otherwise.
- C. Coordinate to install insulation where shown; see Section 07 21 13, THERMAL INSULATION and Section 07 54 23, THERMOPLASTIC POLYOLEFIN (TPO) ROOFING.
- D. Comply with section 07 92 00, JOINT SEALANTS to install sealants where manufactures installation instructions require sealant.

- E. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.
 - a. After completion of base flashing bend down cap flashing flange and secure to blocking with screws.
- F. Equipment Supports: Do not anchor to insulating concrete or metal deck. Anchor only to building structure as per manufacturers recommendations.

3.2 PROTECTION OF ALUMINUM

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with two coats of asphalt coating (complete coverage), or by separating the contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on side.
- B. Paint aluminum in contact with wood, concrete and masonry, or other absorptive materials, that may become repeatedly wet, with two coats of asphalt coating.

3.3 PROTECTION

- A. Protect roof accessories from damage during installation and after completion of the work from subsequent construction.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 07 81 00
APPLIED FIREPROOFING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies mineral fiber and cementitious coverings to provide fire resistance to interior structural steel members shown.

1.2 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Manufacturer's complete and detailed application instructions and specifications.
 - 2. Manufacturer's repair and patching instructions.
- C. Certificates:
 - 1. Certificate from testing laboratory attesting fireproofing material and application method meet the specified fire ratings.
 - a. List thickness and density of material required to meet fire ratings.
 - b. Accompanied by complete test report and test record.
 - 2. Manufacturer's certificate indicating sprayed-on fireproofing material supplied under the Contract is same within manufacturing tolerance as fireproofing material tested.
- D. Miscellaneous:
 - 1. Manufacturer's written approval of surfaces to receive sprayed-on fireproofing.
 - 2. Manufacturer's written approval of completed installation.
 - 3. Manufacturer's written approval of the applicators of fireproofing material.

1.3 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Deliver to job-site in sealed containers marked and labeled to show manufacturer's name and brand and certification of compliance with the specified requirements.
- B. Remove damaged containers from the site.
- C. Store the materials off the ground, under cover, away from damp surfaces.
- D. Keep dry until ready for use.
- E. Remove materials that have been exposed to water before installation from the site.

1.4 QUALITY CONTROL

- A. Test for fire endurance in accordance with ASTM E119, for fire rating specified, in a nationally recognized laboratory.
- B. Manufacturer's inspection and approval of surfaces to receive fireproofing as specified under paragraph Examination.
- C. Manufacturer's approval of fireproofing applications.
- D. Manufacturer's approval of completed installation.
- E. Manufacturer's representative shall observe and advise at the commencement of application, and shall visit the site as required thereafter for the purpose of ascertaining proper application.
- F. Pre-Application Test Area.
 - 1. Apply a test area consisting of a typical overhead fireproofing installation, including not less than 4.5 m (15 feet) of beam and deck.
 - a. Apply to one column.
 - b. Apply for the hourly ratings used.
 - 2. Install in location selected by the COTR, for approval by the representative of the fireproofing material manufacturer and by the Government.
 - 3. Perform Bond test on painted steel in accordance with ASTM E736.
 - 4. Do not proceed in other areas until installation of test area has been completed and approved.
 - 5. Keep approved installation area open for observation as criteria for sprayed-on fireproofing.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C841-03(R2008)Installation of Interior Lathing and Furring
 - C847-10Metal Lath
 - E84-10Surface Burning Characteristics of Building
Materials
 - E119-10Fire Tests of Building Construction and
Materials
 - E605-93(R2006)Thickness and Density of Sprayed Fire-Resistive
Materials Applied to Structural Members

E736-00(R2006)Cohesion/Adhesion of Sprayed Fire-Resistive
Materials Applied to Structural Members

E759-92(R2005)The Effect of Deflection on Sprayed Fire-
Resistive Material Applied to Structural
Members

E760-92(R2005)Impact on Bonding of Sprayed Fire-Resistive
Material Applied to Structural Members

E761-92(R2005)Compressive Strength of Fire-Resistive Material
Applied to Structural Members

E859-93(R2006)Air Erosion of Sprayed Fire-Resistive Materials
Applied to Structural Members

E937-93(R2005)Corrosion of Steel by Sprayed Fire-Resistive
Material Applied to Structural Members

E1042-02(R2008)Acoustically, Absorptive Materials Applied by
Trowel or Spray.

G21-09Determining Resistance of Synthetic Polymeric
Materials to Fungi

- C. Underwriters Laboratories, Inc. (UL):
Fire Resistance Directory...Latest Edition including Supplements
- D. Warnock Hersey (WH):
Certification Listings .Latest Edition
- E. Factory Mutual System (FM):
Approval GuideLatest Edition including Supplements

PART 2 - PRODUCTS

2.1 SPRAYED-ON FIREPROOFING

- A. ASTM E1042, Class (a), Category A.
 - 1. Type I, factory mixed cementitious materials with approved aggregate.
 - 2. Type II, factory mixed mineral fiber with integral inorganic binders minimum 240 kg/m³ (15 lb/ft³) density per ASTM E605 test unless specified otherwise. Use in areas that are completely encased.
- B. Materials containing asbestos are not permitted.

- C. Fireproofing characteristics when applied in the thickness and density required to achieve the fire-rating specified.

	Characteristic	Test	Results
1.	Deflection	ASTM E759	No cracking, spalling, or delamination when backing to which it is applied has a deflection up to 1/120 in 3m (10 ft.)
2.	Corrosion-Resistance	ASTM E937	No promotion of corrosion of steel.
3.	Bond Impact	ASTM E760	No cracking, spalling, or delamination.
4.	Cohesion/Adhesion (Bond Strength)	ASTM E736	Minimum cohesive/adhesive strength of 9.57 kPa (200 lbf/ft ²) for protected areas. 19.15 kPa (400 lbf/ft ²) for exposed areas.
5.	Air Erosion	ASTM E859	Maximum gain weight of the collecting filter 0.27gm/m ² (0.025 gm/ft ²).
6.	Compressive Strength	ASTM E761	Minimum compressive strength 48 kPa (1000psf).
7.	Surface Burning Characteristics with adhesive and sealer to be used	ASTM E84	Flame spread 25 or less smoke developed 50 or less
8.	Fungi Resistance	ASTM G21	Resistance to mold growth when inoculated with aspergillus niger (28 days for general application)

2.2 ADHESIVE

- A. Bonding adhesive for Type II (fibrous) materials as recommended and supplied by the fireproofing material manufacturer.
- B. Adhesive may be an integral part of the material or applied separately to surface receiving fireproofing material.

2.3 SEALER

- A. Sealer for Type II (fibrous) material as recommended and supplied by the fireproofing material manufacturer.
- B. Surface burning characteristics as specified for fireproofing material.
- C. Fungus resistant.
- D. Sealer may be an integral part of the material or applied separately to the exposed surface. When applied separately use contrasting color pigmented sealer, white preferred.

2.4 WATER

- A. Clean, fresh, and free from organic and mineral impurities.
- B. pH of 6.9 to 7.1.

2.5 MECHANICAL BOND MATERIAL

- A. Expanded Metal Lath: ASTM C847, minimum weight of 0.92 kg/m² (1.7 pounds per square yard).
- B. Fasteners: ASTM C841.

PART 3 - EXECUTION**3.1 EXAMINATION**

- A. Verify surfaces to receive fireproofing are clean and free of dust, soot, oil, grease, water soluble materials or any foreign substance which would prevent adhesion of the fireproofing material.
- B. Verify hangers, inserts and clips are installed before the application of fireproofing material.
- C. Verify ductwork, piping, and other obstructing material and equipment is not installed that will interfere with fireproofing installation.
- D. Verify concrete work on steel decking and concrete encased steel is completed.
- E. Verify temperature and enclosure conditions are required by fireproofing material manufacturer.

3.2 APPLICATION

- A. Do not start application until written approval has been obtained from manufacturer of fireproofing materials that surfaces have been inspected by the manufacturer or his representative, and are suitable to receive sprayed-on fireproofing.
- B. Coordinate application of fireproofing material with other trades.
- C. Application of Metal Lath:
 - 1. Apply to beam and columns having painted surfaces which fail ASTM E736 Bond Test requirements in pre-application test area.
 - 2. Apply to beam flanges 300 mm (12-inches) or more in width.
 - 3. Apply to column flanges 400 mm (16-inches) or more in width.
 - 4. Apply to beam or column web 400 mm (16-inches) or more in depth.
 - 5. Tack weld or mechanically fasten on maximum of 300 mm (12-inch) center.
 - 6. Lap and tie lath member in accordance with ASTM C841.

- D. Mix and apply in accordance with manufacturer's instructions.
 - 1. Mechanically control material and water ratios.
 - 2. Apply adhesive and sealer, when not an integral part of the materials, in accordance with the manufacturer's instructions.
 - 3. Apply to density and thickness indicated in UL Fire Resistance Directory, FM Approval Guide, or WH Certification Listings unless specified otherwise. Test in accordance with ASTM E119.
 - 4. Minimum applied dry density per cubic meter (cubic foot) for the underside of the walk on deck (interstitial) hung purl in or beam and steel deck, columns in interstitial spaces and mechanical equipment rooms shall be as follows:
 - a. Type I - 240 kg/m³ (15 lb/ft³).
 - b. Type II - 350 kg/m³ (22 lb/ft³).
- E. Application shall be completed in one area, inspected and approved by COTR before removal of application equipment and proceeding with further work.

3.3 FIELD TESTS

- A. Tests of applied material will be performed by contractor. See Section 01 45 29, TESTING LABORATORY SERVICES.
- B. COTR will select area to be tested in specific bays on each floor using a geometric grid pattern.
- C. Test for thickness and density in accordance with ASTM E605. Areas showing thickness less than that required as a result of fire endurance test will be rejected.
- D. Areas showing less than required fireproofing characteristics will be rejected on the following field tests.
 - 1. Test for cohesion/adhesion: ASTM E736.
 - 2. Test for bond impact strength: ASTM E760.

3.3 PATCHING AND REPAIRING

- A. Inspect after mechanical, electrical and other trades have completed work in contact with fireproofing material, but before sprayed material is covered by subsequent construction.
- B. Perform corrective measures in accordance with fireproofing material Manufacturer's recommendations.
 - 1. Respray areas requiring additional fireproofing material to provide the required thickness, and replace dislodged or removed material.
 - 2. Spray material for patching by machine directly on point to be patched, or into a container and then hand apply.
 - 3. Hand mixing of material is not permitted.

C. Repair:

1. Respray all test and rejected areas.
2. Patch fireproofing material which is removed or disturbed after approval.

D. Perform final inspection of sprayed areas after patching and repair.

3.5 SCHEDULE

A. Apply fireproofing material in interior structural steel members and on underside of interior steel floor and roof decks, except on following surfaces:

1. Structural steel and underside of steel decks in elevator or dumbwaiter machine rooms.
2. Steel members in elevator hoist ways.
3. Areas used as air handling plenums.
4. Steel to be encased in concrete or designated to receive other type of fireproofing.

B. Type I:

1. One hour fire rating: Columns supporting roofs only; beams and girders supporting roofs only; roof deck.
2. Two hour fire rating: Columns supporting floors; beams, girders and trusses supporting floors; floor deck.

C. Type II:

1. One hour fire rating: Columns supporting roofs only; beams and girders supporting roofs only; roof deck.
2. Two hour fire rating: Columns supporting floors; beams, girders and trusses supporting floors; floor deck.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 84 00

FIRESTOPPING PENETRATIONS, JOINTS AND PERIMETER FIRE CONTAINMENT

PART 1 - GENERAL

1.0 RELATED DOCUMENTS

- A. BIDDING REQUIREMENTS, CONTRACTING REQUIREMENTS, and applicable parts of DIVISION 1 - GENERAL REQUIREMENTS.

1.1 DESCRIPTION SUMMARY

- A. Provide firestop systems consisting of a material, or combination of materials installed to retain the integrity of fire-rated construction by maintaining an effective barrier against the spread of flame, smoke, and/or hot gases through penetrations, blank openings, construction joints, or at perimeter fire containment in or adjacent to fire-rated barriers in accordance with the requirements of the Building Code for this project.
- B. Firestop systems shall be used in locations including, but not limited to, the following:
 - 1. Penetrations through fire-resistance-rated floor and roof assemblies requiring protected openings including both empty openings and openings that contain ducts, pipes, wires, conduits, etc. Apply to both sides of the floor.
 - 2. Penetrations through fire-resistance-rated wall assemblies including both empty openings and openings that contain ducts, pipes, wires, conduits, etc.
 - 3. Membrane penetrations in fire-resistance-rated wall assemblies where items penetrate one side of the barrier.
 - 4. Joints in fire-resistance-rated assemblies to allow independent movement.
 - 5. Perimeter Fire Barrier System between a rated floor/roof and an exterior wall assembly or at a seismic joint.
 - 6. Joints, through penetrations, and membrane penetrations in Smoke Barriers and Smoke Partitions.
 - 7. Existing openings and abandoned penetrations in existing rated assemblies.
- C. Firestop contractor shall provide Documentation of non-conforming penetrations or systems, repairs made to existing conditions, new construction, and detailed barrier report. Report shall include the following unless otherwise provided in the solicitation.
 - 1. Identify previously existing non-conforming items. Take a photo of each non-conforming item and issue a unique number for reference in final report unless provided by the VA in the Statement of Work.
 - 2. Label each installed system with numbered label, the name of the installer, system installed, materials used, and date installed.

3. Label substrate (fire and smoke walls only, not floor separations) to identify rated designation i.e. 1 hour, 2 hour etc.
4. Take an 'after' photo of non-conforming items that receive corrective action and issue a unique number. The photo and unique number are to be included in the final report.
5. Develop and provide to the VA a 'rated barrier' compliance report detailing the nonconforming items to include barrier type, location, item type, size, quantity, current issue, and reason for being non-compliant. If corrective action is taken, identify the system installed, label number, and photo. If no corrective action is taken, provide colored photos and note the action required on the report. Separate the report into corrected items and items remaining to be corrected. Further, break down the report by building, floor, and rated barrier.
6. Provide a quote for non-conforming items identified during remediation/assessment work that are not corrected.
7. Develop a summary of all work performed to include linear feet of rated walls impacted by remediation/assessment work and recommendations for next steps based on Statement of Conditions PFI timelines.
8. Establish a tracking system for the manufacturer lot numbers of the products used on the job and/or used in each system.

1.2 RELATED WORK

- A. Examine Contract Documents for requirements that affect Work of this Section. Other Specification Sections that relate directly to Work of this Section include, but are not limited to:
 1. Division 3 - CAST-IN-PLACE CONCRETE; Concrete work
 2. Division 4 - UNIT MASONRY
 3. Division 7 - THERMAL AND MOISTURE PROTECTION; Joint Sealants and Expansion Joint cover Assemblies.
 4. Division 9 - GYPSUM WALLBOARD
 5. Divisions 22 and 23 - MECHANICAL
 6. Divisions 26, 27, and 28 - ELECTRICAL, LIGHTING, POWER, ALARMS, and COMMUNICATIONS

1.3 REFERENCES

- A. Comply with applicable requirements of the following standards. Where these standards conflict with other specified requirements, the most restrictive requirement shall govern.
 1. American Society for Testing and Materials (ASTM).
 - a) E 84 Test Method for Surface Burning Characteristics of Building Materials

- b) E 119 Test Method for Fire Tests of Building Construction and Materials
 - c) E 136 Test Method for Behavior of Materials in a Vertical Tube Furnace at 750F
 - d) E 814 Fire Tests of Through-Penetration Fire Stops
 - e) E 1399 Cyclic Movement and Measuring Minimum and Maximum Joint Widths
 - f) E 1966 Test Method for Resistance of Building Joint
 - g) E 2174 Standard Practice for On-Site Inspection of Installed Fire Stops
 - h) E 2393 Standard Practice for On-Site Inspection of Installed Fire Stop Joint Systems
 - i) E 2307 Standard Test Method for Determining the Fire Endurance of Perimeter Fire Barrier Systems Using the Intermediate-Scale, Multi Story Test Apparatus (ISMA)
2. Firestop Contractors International Association (FCIA):
 - a) M.O.P. Manual of Practice
 3. International Firestop Council (IFC):
 - a) Ref. 1 Recommended IFC Guidelines for Evaluating Firestop Engineering Judgments (April 2001)
 - b) Ref. 2 Inspectors Field Pocket Guide
 4. National Fire Protection Association (NFPA):
 - a) NFPA 70 - National Electric Code
 - b) NFPA 101 - Life Safety Code
 - c) NFPA 221 - Fire Walls and Fire Barriers (preliminary to be released)
 - d) NFPA 251 - Fire Tests of Building Construction and Materials
 5. Underwriters Laboratories, Inc. (UL):
 - a) UL Qualified Firestop Contractor Program
 - b) UL 263 Fire Tests of Building Construction and Materials
 - c) UL 723 Surface Burning Characteristics of Building Materials
 - d) UL 1479 Fire-Tests of Through-Penetration Fire Stops
 - e) UL 2079 Tests for Fire Resistance of Building Joint Systems

1.4 SYSTEM PERFORMANCE REQUIREMENTS

- A. Penetrations: Provide and install firestopping systems that are produced to resist the spread of fire, and the passage of smoke and other gases according to requirements indicated, including but not limited to the following:
 1. Firestop all penetrations passing through fire resistance rated wall and floor assemblies and other locations as indicated on the drawings.
 2. Provide and install complete penetration firestopping systems that have been tested and approved by third party testing agency.

3. F - Rated Through-Penetration Firestop Systems: Provide through-penetration firestop systems with F ratings indicated, as determined per ASTM E 814, but not less than one hour or the fire-resistance rating of the construction being penetrated.
4. T - Rated Through-Penetration Firestop Systems: Provide firestop systems with T ratings, in addition to F ratings, as determined per ASTM E 814, where indicated by Code.
5. L - Rated Through-Penetration Firestop Systems: Provide firestop systems with L ratings, in addition to F and T ratings, as determined per UL 1479, where indicated by Code.
6. W - Rated Through-Penetration Firestop Systems: Provide firestop systems with W Water Resistance ratings, in addition to F, T, and L ratings, as determined per UL 1479, where indicated.
- B. Perimeter Fire Containment Systems: Provide interior perimeter joint systems with fire-resistance ratings indicated, as determined per ASTM E 2307, but not less than the fire-resistance rating of the floor construction.
- C. Fire-Resistive Joints: Provide joint systems with fire-resistance ratings indicated, as determined per UL 2079, but not less than the fire-resistance rating of the construction in which the joint occurs.
- D. For firestopping exposed to view, traffic, moisture, or physical damage, provide appropriate firestop systems for these conditions.
- E. Where there is no specific third party tested and classified firestop system available for a particular firestop configuration, the firestopping contractor shall obtain from the firestop manufacturer, an Engineering Judgment (EJ) or Equivalent Fire Resistance Rated Assembly (EFFRA) for submittal.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, shop drawings, product data, and samples.
- B. Submit Manufacturers Product Data Sheets for each type of product selected. Certify that Firestop Material shall be asbestos free and complies with local regulations.
 1. Certification by firestopping manufacturer, that products supplied comply with local regulations controlling use of volatile organic compounds (VOC's) and are nontoxic to building occupants.
- C. Submit system design listings, including illustrations from a qualified testing and inspection agency that is applicable to each firestop configuration

1.6 QUALITY ASSURANCE

- A. Fire-Test-Response Characteristics: Provide firestopping System Design Listing by a testing and inspection agency in accordance with the

appropriate ASTM Standard(s) per article 1.04. A qualified testing and inspection agency may be UL, FM Research, Intertek Testing Services, Omega Point Laboratories (OPL) ,or another agency performing testing and follow-up inspection services for firestop materials that is acceptable to the authority having jurisdiction.

- B. Contractor Qualifications: Acceptable installer firms shall be:
 - 1. FM Approved in accordance with FM Standard 4991 - Approval of Firestop Contractors
 - 2. Underwriter Laboratories (UL) Qualified Firestop Contractor
 - 3. Licensed by the State or local authority, where applicable.
 - 4. Shown to have successfully completed not less than 5 comparable scale, or larger, projects.
 - 5. Evidence of a Quality Management System or equivalent system based on ISO 9000 principles
 - a. Must have approved QMS by UL or approved FM Certification Process
 - b. Shall demonstrate latest audit findings if completed prior to award by UL, FM, or Representatives of accrediting, qualifying, or certifying entities (Current is within established timelines set by UL or FM)
- C. Manufacturer Source Requirements: Obtain firestop systems for each kind of penetration and construction condition indicated from a single primary firestop systems manufacturer unless otherwise permitted by the organization.
 - 1. The organization reserves the right to approve and limit the manufactures and types of manufacturer's products. Materials of different manufacture than allowed by the tested and listed system shall not be intermixed in the same firestop system or opening.
 - 2. Tested and listed firestop systems are to be used before an Engineering Judgment (EJ) or Equivalent Fire Resistance Rated Assembly (EFRRA) is installed.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver firestopping products to project site in original, unopened containers or packages with intact and legible manufacturers' labels identifying product and manufacturer.
- B. Ensure that manufacturers products are not diluted mixed or otherwise altered unless permitted by the manufactures directions.
- C. Store and handle firestopping materials in accordance with manufacturers written instructions. Product and equipment staging and storage must be approved by the COTR.

1.8 PROJECT CONDITIONS

- A. Environmental Conditions: Install firestopping in accordance with manufacturers written instructions.
- B. Ventilation: Ventilate per firestopping manufacturers' instructions or Material Safety Data Sheet (MSDS)

1.9 SEQUENCING AND SCHEDULING

- A. Project coordination is essential to inform and educate all the parties involved with the firestopping process of their role and how they can affect firestopping on the project. A pre-construction meeting shall be scheduled and required for all parties involved prior to the start of construction.
- B. Do not cover up firestopping installations until Owner's inspection agency or the Authorities Having Jurisdiction have examined each installation.
- C. When work takes place within existing building that are not separated by a 2-hour barrier from occupied areas, and where it is not feasible to have a qualified firestop contractor providing fire sealing on a daily basis, it shall be the responsibility of the trade penetrating the fire rated barrier to provide temporary fire protection of all penetrations at the end of each work day. Temporary protection must meet all NFPA codes related to fire barrier penetrations. The temporary protection must be maintained in proper order until the permanent fire stopping material is installed.

1.10 ENVIRONMENTAL REGULATIONS

- A. All materials shall be asbestos free and comply with local VOC Regulations.
- B. If required, hazardous disposal of firestop materials shall be strictly observed as noted on the individual MSDS.
- C. Bulk storage shall be preapproved and in locations as to not present a hazard to the environment or risk to occupants.

PART 2 - PRODUCTS

2.1 FIRESTOPPING, GENERAL

- A. Systems listed by approved testing agencies, as identified in part 1 above, may be used, providing they conform to the construction type, penetrant type, annular space requirements and fire rating involved in each separate instance.
- B. Manufacturer of firestop products shall have been successfully producing and supplying these products for a period of not less than 3 years, and be able to show evidence of at least 10 projects where similar products have been installed and accepted.
- C. Allowable firestop products produced by FCIA Manufacturer Members in good standing.
 - 1. 3M Fire Protection Products
 - 2. HILTI, Inc.
 - 3. Specified Technologies, Inc.

4. Thermafiber, LLC

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with installer present, for compliance with requirements for opening configurations, penetrating items, substrates, and other conditions affecting performance of firestopping. Notify the responsible party or parties of any unsatisfactory conditions. Do not proceed with installation until unsatisfactory conditions have been corrected.
- B. Identifying any unique conditions that may create unusual construction dust, noise, or other impacts to infection control or life safety that may be outside of established and approved methods of the organization.

3.2 PREPARATION

- A. Priming: Prime substrates where recommended by firestopping manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond. Do not allow spillage and migration onto exposed surfaces.
- B. Masking Tape: Use masking tape to prevent firestopping from contacting adjoining surfaces that will remain exposed upon completion of work. Remove tape as soon as it is possible to do so without disturbing the firestopping seal with substrates.
- C. Verify that system components are clean, dry, and ready for installation.
- D. Verify that field dimensions are as shown on the drawings and as recommended by the manufacturer.

3.3 INSTALLING PENETRATION FIRESTOPS

- A. General: Comply with the "System Performance Requirements" article in Part 1 and the through-penetration firestop manufacturer's installation instructions and drawings pertaining to products and applications indicated.
 - 1. Coordinate with other trades to assure that all pipes, conduit, cable, and other items, which penetrate fire rated construction, have been permanently installed prior to installation of firestop assemblies.
 - 2. Schedule the work to assure that partitions and all other construction that conceals penetrations are not erected prior to the installation of firestop and smoke seals.
- B. Install forming/damming materials and other accessories in accordance with manufacturers written instructions.
- C. Install fill materials for through-penetration firestop systems by proven techniques to produce the following results:
 - 1. Completely fill voids and cavities formed by openings, forming materials, accessories, and penetrating items.

2. Install materials so they contact and adhere to substrates formed by openings and penetrating items.
 3. For fill materials that will remain exposed after completing Work, finish to produce smooth, uniform surfaces.
- D. Install approved fire stopping sealant around items that penetrate between floors. Install sealant around penetrations at both sides of floor level, at floor level of penetration and underside of floor level below.
 - E. Properly seal all abandoned penetrations through rated walls and floors. In floors, use grout, the full thickness of the slab, to meet fire rating requirements.

3.4 INSTALLING FIRESTOP JOINT SYSTEMS

- A. General: Comply with the "System Performance Requirements" article in Part 1 and with the firestop manufacturer's installation instructions and drawings pertaining to products and applications indicated.
 1. Install joint fillers to provide support of firestop materials during application and at the position required to produce the cross-sectional shapes and depths of installed firestop material relative to joint widths that allow optimum sealant movement capability and develop fire-resistance rating required.
- B. Install systems by proven techniques that result in a sound firestop system:
 1. Directly contacting and fully wetting joint substrates.
 2. Completely filling recesses provided for each joint configuration,
 3. Providing uniform, cross-sectional shapes and depths relative to joint width that optimize movement capability.
- C. Tool non-sag firestop materials immediately after their application and prior to the time skinning begins. Form smooth, uniform beads of configuration indicated or required to:
 1. Produce fire-resistance rating
 2. To eliminate air pockets
 3. To ensure contact and adhesion with sides of joint.

3.5 INSTALLING PERIMETER FIRE BARRIER SYSTEMS

- A. General: Comply with "System Performance Requirements" article in Part 1 and with the firestop manufacture's installation and drawings pertaining to products and applications indicated.
- B. Install metal framing, curtain wall insulation, mechanical attachments, and firestop materials as applicable within the system design.

3.6 FIELD QUALITY CONTROL

- A. Inspection - The VA organization may require an independent inspection agency employed and paid by the VA to examine penetration firestopping in accordance with ASTM E - 2174, "Standard Practice for On-Site Inspection of Installed Fire Stops and ASTM E-2393, "Standard Practice for On-Site

Inspection of Installed Fire Stop Joint Systems. Inspection agency will examine firestopping and will determine, in general, that firestopping has been installed in compliance with requirements of tested and listed firestop system, and installation process conforms to FM 4991 - Standard for Approval of Firestop Contractors or UL Qualified Firestop Contractor Program.

- B. The inspector shall advise the contractor of any deficiencies noted within one (1) working day.
- C. Do not proceed to enclose firestopping with other construction until inspection agency has verified that the firestop installation complies with the requirements.
- D. Where deficiencies are found, repair or replace the firestopping so that it complies with requirements of tested and listed system design.

3.7 CLEAN-UP AND SPECIAL WORKING CONDITIONS

- A. Firestop Material: Clean off excess fill materials and sealants adjacent to openings and joints as work progresses. Use methods and cleaning materials approved by manufacturers of firestopping products and or assemblies in which openings and joints occur.
- B. Protect firestopping during and after curing period from contact with contaminating substances. If damage caused by others, owner and general contractor to instruct firestop contractor to make appropriate repairs and charge to appropriate trades.
- C. Debris: Removal of litter and debris shall be in closed or covered containers at the end of each shift or more often as necessary to prevent unsafe fire conditions and reduce construction dusts. The organization may require additional measures in areas where compromised patients are housed or treated.
 - 1. Areas may include special procedure areas, operating rooms, special ventilation rooms, and other spaces deemed critical.
 - 2. Such areas may require specialized local barriers to be erected prior to commencing work. Special consideration to scheduling and potentially working in off tour hours may be necessary.
- D. Surfaces: Ceiling grids shall be replaced at the end of each shift unless prior approval by the Contracting Officer Technical Representative. Floors and other surfaces that may become contaminated by construction dust and debris as a result of the work shall be cleaned following completion of each repair location in a manner acceptable to the organization.
- E. Mitigation Measures: Where work may temporarily eliminate or restrict life safety features as determined by the organization. Special Interim Life Safety Measures (ILSMs) may be required as mitigating measures.

3.8 WARRANTY

- A. Firestopping work subject to the terms of the Article "Warranty of Construction", FAR clause 52.246-21, except extend the warranty period to five years.

- - - E N D - - -

**SECTION 07 92 00
JOINT SEALANTS**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. Section covers all sealant and caulking materials and their application, wherever required for complete installation of building materials or systems.

1.2 RELATED WORK:

- A. Sealing of site work concrete paving: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.
- B. Masonry control and expansion joint: Section 04 20 00, UNIT MASONRY.
- C. Firestopping penetrations: Section 07 84 00, FIRESTOPPING.
- D. Glazing: Section 08 80 00, GLAZING.
- E. Sound rated gypsum partitions/sound sealants: Section 09 29 00, GYPSUM BOARD.
- F. Mechanical Work: Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

1.3 QUALITY CONTROL:

- A. Installer Qualifications: An experienced installer who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance.
- B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.
- C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.
 - 1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
 - 2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.
 - 3. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.
- D. Preconstruction Field-Adhesion Testing: Before installing elastomeric sealants, field test their adhesion to joint substrates in accordance with sealant manufacturer's recommendations:

1. Locate test joints where indicated or, if not indicated, as directed by the COTR.
 2. Conduct field tests for each application indicated below:
 - a. Each type of elastomeric sealant and joint substrate indicated.
 - b. Each type of non-elastomeric sealant and joint substrate indicated.
 3. Notify COTR seven days in advance of dates and times when test joints will be erected.
- E. VOC: Acrylic latex and Silicon sealants shall have less than 50g/l VOC content.
- F. Mockups: Before installing joint sealants, apply elastomeric sealants as follows to verify selections made under sample Submittals and to demonstrate aesthetic effects and qualities of materials and execution:
1. Joints in mockups of assemblies specified in other Sections that are indicated to receive elastomeric joint sealants, which are specified by reference to this section.

1.4 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's installation instructions for each product used.
- C. Cured samples of exposed sealants for each color where required to match adjacent material.
- D. Manufacturer's Literature and Data:
 1. Caulking compound
 2. Primers
 3. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

1.5 PROJECT CONDITIONS:

- A. Environmental Limitations:
 1. Do not proceed with installation of joint sealants under following conditions:
 - a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 °C (40 °F).
 - b. When joint substrates are wet.
- B. Joint-Width Conditions:

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.6 DELIVERY, HANDLING, AND STORAGE:

- A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.
- B. Carefully handle and store to prevent inclusion of foreign materials.
- C. Do not subject to sustained temperatures exceeding 32° C (90° F) or less than 5° C (40° F).

1.7 DEFINITIONS:

- A. Definitions of terms in accordance with ASTM C717 and as specified.
- B. Back-up Rod: A type of sealant backing.
- C. Bond Breakers: A type of sealant backing.
- D. Filler: A sealant backing used behind a back-up rod.

1.8 WARRANTY:

- A. Warranty exterior sealing against leaks, adhesion, and cohesive failure, and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be extended to two years.
- B. General Warranty: Special warranty specified in this Article shall not deprive Government of other rights Government may have under other provisions of Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of Contract Documents.

1.9 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C509-06Elastomeric Cellular Preformed Gasket and Sealing Material.
 - C612-10Mineral Fiber Block and Board Thermal Insulation.

- C717-10Standard Terminology of Building Seals and Sealants.
- C834-10Latex Sealants.
- C919-08.Use of Sealants in Acoustical Applications.
- C920-10Elastomeric Joint Sealants.
- C1021-08Laboratories Engaged in Testing of Building Sealants.
- C1193-09Standard Guide for Use of Joint Sealants.
- C1330-02 (R2007)Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants.
- D1056-07Specification for Flexible Cellular Materials—Sponge or Expanded Rubber.
- E84-09Surface Burning Characteristics of Building Materials.

C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals' Guide

PART 2 - PRODUCTS

2.1 SEALANTS:

- A. S-1:
1. ASTM C920, polyurethane or polysulfide.
 2. Type M.
 3. Class 25.
 4. Grade NS.
 5. Shore A hardness of 20-40
- B. S-2:
1. ASTM C920, polyurethane or polysulfide.
 2. Type M.
 3. Class 25.
 4. Grade P.
 5. Shore A hardness of 25-40.
- C. S-3:
1. ASTM C920, polyurethane or polysulfide.
 2. Type S.
 3. Class 25, joint movement range of plus or minus 50 percent.
 4. Grade NS.
 5. Shore A hardness of 15-25.
 6. Minimum elongation of 700 percent.

D. S-4:

1. ASTM C920 polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-40.

E. S-5:

1. ASTM C920, polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade P.
5. Shore hardness of 15-45.

F. S-6:

1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class: Joint movement range of plus 100 percent to minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-20.
6. Minimum elongation of 1200 percent.

G. S-7:

1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Structural glazing application.

H. S-8:

1. ASTM C920, silicone, acetoxycure.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Structural glazing application.

I. S-9:

1. ASTM C920 silicone.
2. Type S.
3. Class 25.
4. Grade NS.

- 5. Shore A hardness of 25-30.
- 6. Non-yellowing, mildew resistant.

J. S-10:

- 1. ASTM C920, coal tar extended fuel resistance polyurethane.
- 2. Type M/S.
- 3. Class 25.
- 4. Grade P/NS.
- 5. Shore A hardness of 15-20.

K. S-11:

- 1. ASTM C920 polyurethane.
- 2. Type M/S.
- 3. Class 25.
- 4. Grade P/NS.
- 5. Shore A hardness of 35 to 50.

L. S-12:

- 1. ASTM C920, polyurethane.
- 2. Type M/S.
- 3. Class 25, joint movement range of plus or minus 50 percent.
- 4. Grade P/NS.
- 5. Shore A hardness of 25 to 50.

2.2 CAULKING COMPOUND:

- A. C-1: ASTM C834, acrylic latex.
- B. C-2: One component acoustical caulking, non drying, non hardening, synthetic rubber.

2.3 COLOR:

- A. Sealants used with exposed masonry shall match color of mortar joints.
- B. Sealants used with unpainted concrete shall match color of adjacent concrete.
- C. Color of sealants for other locations shall be light gray or aluminum, unless specified otherwise.
- D. Caulking shall be light gray or white, unless specified otherwise.

2.4 JOINT SEALANT BACKING:

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

- B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
 - 1. Type C: Closed-cell material with a surface skin.
- C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056, nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32° C (minus 26° F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.
- D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.5 FILLER:

- A. Mineral fiber board: ASTM C612, Class 1.
- B. Thickness same as joint width.
- C. Depth to fill void completely behind back-up rod.

2.6 PRIMER:

- A. As recommended by manufacturer of caulking or sealant material.
- B. Stain free type.

2.7 CLEANERS-NON POUROUS SURFACES:

- A. Chemical cleaners acceptable to manufacturer of sealants and sealant backing material, free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

PART 3 - EXECUTION

3.1 INSPECTION:

- A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.
- B. Coordinate for repair and resolution of unsound substrate materials.
- C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

- A. Prepare joints in accordance with manufacturer's instructions and SWRI.
- B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer

paint, or other foreign matter that would tend to destroy or impair adhesion.

1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include the following:
 - a. Concrete.
 - b. Masonry.
 - c. Unglazed surfaces of ceramic tile.
3. Remove laitance and form-release agents from concrete.
4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
 - a. Metal.
 - b. Glass.
 - c. Porcelain enamel.
 - d. Glazed surfaces of ceramic tile.
- C. Do not cut or damage joint edges.
- D. Apply masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
 1. Do not leave gaps between ends of sealant backings.
 2. Do not stretch, twist, puncture, or tear sealant backings.
 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions.
 1. Apply primer prior to installation of back-up rod or bond breaker tape.
 2. Use brush or other approved means that will reach all parts of joints.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

3.3 BACKING INSTALLATION:

- A. Install back-up material, to form joints enclosed on three sides as required for specified depth of sealant.

- B. Where deep joints occur, install filler to fill space behind the back-up rod and position the rod at proper depth.
- C. Cut fillers installed by others to proper depth for installation of back-up rod and sealants.
- D. Install back-up rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
- E. Where space for back-up rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

3.4 SEALANT DEPTHS AND GEOMETRY:

- A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.
- B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

- A. General:
 - 1. Apply sealants and caulking only when ambient temperature is between 5° C and 38° C (40° and 100° F).
 - 2. Do not use polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
 - 3. Do not use sealant type listed by manufacture as not suitable for use in locations specified.
 - 4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
 - 5. Avoid dropping or smearing compound on adjacent surfaces.
 - 6. Fill joints solidly with compound and finish compound smooth.
 - 7. Tool joints to concave surface unless shown or specified otherwise.
 - 8. Finish paving or floor joints flush unless joint is otherwise detailed.
 - 9. Apply compounds with nozzle size to fit joint width.
 - 10. Test sealants for compatibility with each other and substrate. Use only compatible sealant.
- B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise.

- C. Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.
 - 1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
 - 2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
 - 3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
 - 4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cut-outs to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
 - 5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

3.6 FIELD QUALITY CONTROL:

- A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates as recommended by sealant manufacturer.
 - 1. Perform tests where directed by COTR at each type of installation.
- B. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.
- C. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.7 CLEANING:

- A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by the caulking or sealant manufacturer.
- B. After filling and finishing joints, remove masking tape.
- C. Leave adjacent surfaces in a clean and unstained condition.

3.8 LOCATIONS:

- A. Exterior Building Joints, Horizontal and Vertical:
 - 1. Metal to Metal: Type S-1, S-2
 - 2. Metal to Masonry: Type S-1
 - 3. Masonry to Masonry: Type S-1
 - 4. Threshold Setting Bed: Type S-1, S-3, S-4
 - 5. Masonry Expansion and Control Joints: Type S-6
 - 6. Wood to Masonry: Type S-1
- B. Metal Reglets and Flashings:
 - 1. Flashings to Wall: Type S-6
 - 2. Metal to Metal: Type S-6
- C. Sanitary Joints:
 - 1. Walls to Plumbing Fixtures: Type S-9
 - 2. Counter Tops to Walls: Type S-9
 - 3. Pipe Penetrations: Type S-9
- D. Horizontal Traffic Joints:
 - 1. Concrete Paving: Type S-11 for normal use. Use S-12 at joints requiring movement of plus or minus 50 percent.
 - 2. Concrete Paving, adjacent to walls or columns: Type S-3
- E. High Temperature Joints over 204 degrees C (400 degrees F):
 - 1. Exhaust Pipes, Flues, Breech Stacks: Type S-7 or S-8
- F. Interior Caulking:
 - 1. Typical Narrow Joint 6 mm, (1/4 inch) or less at Walls and Adjacent Components: Types C-1 and C-2.
 - 2. Perimeter of Doors, Windows, Access Panels which Adjoin Concrete or Masonry Surfaces: Types C-1 and C-2.
 - 3. Joints at Masonry Walls and Columns, Piers, Concrete Walls or Exterior Walls: Types C-1 and C-2.
 - 4. Perimeter of Plaster or Gypsum Wallboard Walls: Types C-1 and C-2.
 - 5. Exposed Isolation Joints at Top of Full Height Walls: Types C-1 and C-2.
 - 6. Exposed Acoustical Joint at Sound Rated Partitions Type C-2.
 - 7. Concealed Acoustic Sealant Types S-4, C-1 and C-2.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 07 95 13
EXPANSION JOINT COVER ASSEMBLIES**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Section specifies floor-to-floor, floor-to-wall, interior wall, exterior wall, ceiling, and exterior roof expansion joint assemblies.
- B. Types of assemblies:
 - 1. Seismic joints with metal frames or metal covers as indicated on the Drawings

1.2 RELATED WORK

- A. Sheet Metal Expansion Joint Seals: Section 07 60 00, FLASHING AND SHEET METAL.

1.3 QUALITY ASSURANCE

- A. Project Conditions:
 - 1. Check actual locations of walls and other construction, to which work must fit, by accurate field measurements before fabrication.
 - 2. Show recorded measurements on final shop drawings.
- B. Fire tests performed by Factory Mutual, Underwriters Laboratories, Inc., Warnock Hersey or other approved independent testing laboratory.

1.4 DELIVERY STORAGE AND HANDLING

- A. Take care in handling of materials so as not to injure finished surface and components.
- B. Store materials under cover in a dry and clean location off the ground.
- C. Remove materials which are damaged or otherwise not suitable for installation from job site and replace with acceptable materials.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Submit copies of manufacturer's current literature and data for each item specified.
 - 2. Clearly indicate movement capability of cover assemblies and suitability of material used in exterior seals for ultraviolet exposure.
- C. Certificates: Material test reports from approved independent testing laboratory indicating and interpreting test results relative to compliance of fire-rated expansion joint assemblies with requirements specified.

D. Shop Drawings:

1. Showing full extent of expansion joint cover assemblies; include large-scale details indicating profiles of each type of expansion joint cover assembly, splice joints between sections, joiners with other type assemblies, special end conditions, anchorages, fasteners, and relationship to adjoining work and finishes.
2. Include description of materials and finishes and installation instructions.

E. Samples:

1. Samples of each type and color of metal finish on metal of same thickness and alloy used in work.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed form part of this specification to extent referenced. Publications are referred to in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

- A167-99 (R2009)Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet, and Strip
- B209M-07Aluminum and Aluminum-Alloy Sheet and Plate
(Metric)
- B221M-08Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Shapes, and Tubes (Metric)
- C864-05Dense Elastomeric Compression Seal Gaskets,
Setting Blocks, and Spacers
- C920-11Elastomeric Joint Sealants
- D1187-97 (R2002)Asphalt Base Emulsions for Use as Protective
Coatings for Metal
- D2287-96 (R2010)Non-rigid Vinyl Chloride Polymer and Copolymer
Molding and Extrusion Compounds
- E119-10Fire Tests of Building Construction and
Materials
- E814-11Fire Tests of Through-Penetration Fire Stops

C. Federal Specifications (Fed. Spec):

- TT-P-645BPrimer, Paint, Zinc-Molybdate, Alkyd Type

D. The National Association of Architectural Metal Manufacturers (NAAMM):

- AMP 500 SeriesMetal Finishes Manual.

E. National Fire Protection Association (NFPA):

251-06Tests of Fire Endurance of Building
Construction and Materials

F. Underwriters Laboratories Inc. (UL):

263-11Fire Tests of Building Construction and
Materials

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Stainless Steel: ASTM A167, Type 302 or 304.
- B. Aluminum:
 - 1. Extruded: ASTM B221, alloy 6063-T5.
 - 2. Plate and Sheet: ASTM B209, alloy 6061-T6.
- C. Elastomeric Sealant:
 - 1. ASTM C920, polyurethane.
 - 2. Type.
 - 3. Class 25.
 - 4. Grade P or NS.
 - 5. Shore A hardness 25, unless specified otherwise.
- D. Thermoplastic Rubber:
 - 1. ASTM C864.
 - 2. Dense Neoprene or other material standard with expansion joint manufacturers having the same physical properties.
- E. Vinyl Invertor Sealant Waterstops: Manufacturers' standard shapes and grade.
- F. Fire Barrier:
 - 1. Designed for indicated or required dynamic structural movement without material degradation or fatigue.
 - 2. Tested in maximum joint width condition as a component of an expansion joint cover assembly in accordance with UL 263 NFPA 251, or ASTM E119 and E814, including hose steam test at full-rated period.
- G. Zinc-Molybdate Primer: Fed. Spec. TT-P-645.
- H. Accessories:
 - 1. Manufacturer's standard anchors, fasteners, set screws, spaces, flexible secondary water stops or seals and filler materials, drain tubes, adhesive and other accessories as indicated or required for complete installations.
 - 2. Compatible with materials in contact.
 - 3. Water stops.

2.2 MANUFACTURERS

A. General:

1. All expansion joint cover assemblies shall be from the same manufacturer.

2.3 FABRICATION

A. General:

1. Use ceiling and wall expansion joint cover assemblies of same design as floor to wall and floor to floor expansion joint cover assemblies. Unless shown otherwise.
2. Provide expansion joint cover assemblies of design, basic profile, materials and operation indicated required to accommodate joint size variations in adjacent surfaces, and as required for anticipated structural movement. Joint size is as indicated on the Drawings.
3. Deliver to job site ready for use and fabricated in as large sections and assemblies as practical. Assemblies identical to submitted and reviewed shop drawings, samples and certificates.
4. Furnish units in longest practicable lengths to minimize number of end joints. Provide mitered corners where joint changes directions or abuts other materials.
5. Include closure materials and transition pieces, tee-joints, corners, curbs, cross-connections and other assemblies.
6. Fire Performance Characteristics:
 - a. Provide expansion joint cover assemblies identical to those of assemblies whose fire resistance has been determined per ASTM E119 and E814, NFPA 251, or UL 263 including hose stream test at full-rated period.
 - b. Fire rating: Not less than rating of adjacent floor or wall construction.
7. Fire Barrier Systems:
 - a. Material to carry label of approved independent testing laboratory, and be subject to follow-up system for quality assurance.
 - b. Include thermal insulation where necessary, in accordance with above tests, with factory cut miters and transitions.
 - c. For joint widths up to and including 150 mm (six inches), supply barrier in lengths up to 15000 mm (50 feet) to eliminate field splicing.

- d. For joints within enclosed spaces such as chase walls, include 1 mm (0.032-inch) thick galvanized steel cover where conventional expansion joint cover is not used.
- 8. Seal Strip factory - formed and bonded to metal frames and anchor members.
- 9. Compression Seals: Prefabricate from thermoplastic rubber or dense neoprene to sizes and approximate profiles shown.
- B. Floor-to-Floor Metal Plate Joints:
 - 1. Frames on each side of joint designed to support cover plate of design shown. Cover plate to be stainless steel.
 - a. Continuous frame designed to finish flush with adjacent floor of profile indicated with seating surface and raised floor rim to accommodate flooring.
 - b. Provide concealed bolt and steel anchors for embedment in concrete.
 - c. Designed for filler materials between raised rim of frame and edge of cover plate where shown.
 - d. Frame and cover plates of some metal where exposed.
 - 1) Design cover plates to support 180 Kg (400 lbs) per 0.3 square meters (1-square foot).
 - 2) Cover plates free of rattle due to traffic.
 - 3) No gaps or budges occur on filler material during design movement of joint.
 - 4) Provide manufacturer's continuous standard flexible vinyl water stop under floor joint cover assemblies.
- C. Floor-to-Wall Metal Plate Joints:
 - 1. Provide one frame on floor side of joint only. Provide wall side frame where required by manufacturer's design.
 - 2. Angle Cover Plates: Provide angle cover plates for joints to wall with countersunk flat-head exposed fasteners for securing to wall unless shown otherwise. Cover plate to be stainless steel.
 - 3. Space fasteners as recommended by manufacturer.
 - 4. Match cover of adjacent floor to floor cover.
- D. Interior Wall Joint Cover Assemblies:
 - 1. Provide joint assemblies as indicated on the drawings, including new wall parallel with existing wall, new wall perpendicular to existing wall, and new wall parallel with new wall.
 - 2. Surface Mounted Metal Cover Plates:

- a. Concealed frame for fastening to wall on one sides of joint.
 - b. Extend cover to lap each side of joint and to permit free movement on one side.
 - c. Provide concealed attachment of cover frame cover in close contact with adjacent finish wall surfaces.
 - d. Use angle cover plates at intersection of walls.
 - e. Use smooth surface cover plates matching floor plates.
- E. Exterior Wall Joint Assemblies:
- 1. Variable movement with seal designed to prevent water and air infiltration.
 - 2. Use vinyl seal strip as secondary seal behind primary seal.
 - 3. Extruded thermoplastic rubber joint assemblies.
 - a. Aluminum frames both sides of joint.
 - 1) Designed to receive flexible rubber primary seal on exposed face after installation of frame.
 - 2) Designed to receive continuous secondary vinyl sheet seal.
 - 3) Anchor spaced at ends and not over 600 mm (24-inches).
 - b. Variable movement extruded rubber primary seal designed to remain in aluminum frame, throughout movement of joint.
 - 1) Seismic seal minimum 3 mm (0.125-inch) thick with multi-movement grooves designed for plus or minus 100 percent movement of joint width.
 - c. Provide factory heat welded transitions where directional changes occur to ensure a watertight system.
 - d. Color: As selected by Architect from Manufacturer's full range.
- F. Ceiling Joint Assemblies:
- 1. Variable movement vinyl insert in metal frame on both sides of joint as indicated on Drawings.
 - 2. Designed for flush mounting with no exposed fasteners.
 - 3. Vinyl insert locked into stainless steel metal frame.
 - 4. Colors and finishes to be selected by Architect from Manufacturer's full range.
- G. Exterior Roof Joint Assemblies
- 1. Fabricate in 10 foot (3 meter) lengths with fastener openings slotted for expansion not over 24 inch (600 mm) centers.
 - 2. Provide joints for seismic movement, for joint widths shown.
 - a. Provide curb-to-curb seismic joint configuration shown.
 - b. Provide curb-to-sloped roof seismic joint configuration shown.

3. Roof joint assemblies to be stainless steel.
4. Form waterstop or moisture seals of continuous neoprene.
5. Fabrication:
 - a. Fabricate corners as one piece assemblies with mitered and welded joint and least dimension legs not less than 12-inches (300mm) long.
 - b. Factory fabricated end caps and transitions to ensure waterproof assembly.

2.4 METAL FINISHES

A. General:

1. Apply finishes in factory after products are fabricated.
2. Protect finishes on exposed surfaces with protective covering before shipment.

B. Aluminum Finishes:

1. Mill Finish: AA-MIX, as fabricated.
2. Finish letters and numbers for anodized aluminum are in accordance with the NAAMM AMP 501, Aluminum Association's Designation System).
 - a. Clear anodized finish: AA-C22A41 Chemically etched medium matte, clear anodic coating, Class I Architectural, 0.7 - mil thick.
3. Factory-Primed Concealed Surface: NAAMM AMP 505 Protect concealed aluminum surfaces that will be in contact with plaster, concrete or masonry surfaces when installed by applying a shop coat of zinc-molybdate primer to contact surfaces. Provide minimum dry film thickness of 2.0 mils.

C. Stainless Steel: NAAMM AMP 503, finish No. 2B.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Manufacturer's representative shall make a thorough examination of surfaces receiving work of this section.
- B. Before starting installation, notify prime contractor of defects which would affect satisfactory completion of work.

3.2 PREPARATION

- A. Verify measurements and dimensions at job site and cooperate in coordination and scheduling of work with work of related trades.
- B. Give particular attention to installation of items embedded in concrete and masonry so as not to delay job progress.
- C. Provide templates to related trade for location of support and anchorage items.

3.3 INSTALLATION

- A. Install in accordance with manufacturers installation instructions unless specified otherwise.
- B. Provide anchorage devices and fasteners for securing expansion joint assemblies to in-place construction including threaded fasteners with drilled-in fasteners for masonry and concrete where anchoring members are not embedded in concrete. Provide metal fasteners of type and size to suit type of construction indicated and provide for secure attachment of expansion joint cover assemblies.
- C. Perform cutting, drilling and fitting required for installation of expansion joint cover assemblies.
- D. Install joint cover assemblies in true alignment and proper relationship to expansion joint opening and adjoining finished surfaces measured from established lines and levels.
- E. Allow for thermal expansion and contraction of metal to avoid buckling.
- F. Set floor covers at elevations flush with adjacent finished floor materials unless shown otherwise.
- G. Material and method of grouting floor frames set in prepared recesses in accordance with manufacturer's instructions.
- H. Locate wall, ceiling and soffit covers in continuous contact with adjacent surfaces. Securely attach in place with required accessories.
- I. Locate anchors at interval recommended by manufacturer, but not less than 75 mm (3-inches) from each ends, and, not more than 600 mm (24-inches) on centers.
- J. Maintain continuity of expansion joint cover assemblies with end joints held to a minimum and metal members aligned mechanically using splice joints.
- K. Cut and fit ends to produce joints that will accommodate thermal expansion and contraction of metal to avoid buckling of frames or plates.
- L. Flush Metal Cover Plates:
 - 1. Secure flexible filler between frames so that it will compress and expand.
 - 2. Adhere flexible filler materials to frames with adhesive or pressure-sensitive tape as recommended by manufacturer.
- M. Waterstops:
 - 1. Install in conjunction with floor joints and where shown, run continuously to prevent water damage to finish spaces.

2. Provide seal with frame to prevent water leakage.
3. Provide outlet tubes from waterstops to drain to prevent damage to finish spaces.

N. Fire Barriers:

1. Install in compliance with tested assembly.
2. Install in floors and in fire rated walls.
3. Use fire barrier sealant or caulk supplied with system.

O. Sealants:

Install to prevent water and air infiltration.

P. Vertical Exterior Extruded Thermoplastic Rubber.

1. Install side frames mounted on sealant or butyl caulk tape with appropriate anchors 600 mm (24 inches) on center complete with independent continuous PVC back seal.
2. Install primary seals retained in extruded aluminum side frames.

Q. Installation of Extruded Thermoplastic Rubber or Seals:

1. For straight sections, provide preformed seals in continuous lengths.
2. Vulcanize or heat-seal field splice joints to provide watertight joints using manufacturer's recommended procedures.

R. Installation of Preformed Elastomeric Sealant Joint:

1. Locate joint directly over joints in wall or floor substrates.
2. Full length shall be fastened to substrate using a construction adhesive.
3. Install flush or slightly below finish material.

S. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.

T. Roof Expansion Joint Covers:

1. Install to terminate base flashing 200mm (8 inches) above roof.
2. Install moisture seals to drain water to outlets that do not permit water to enter buildings construction.
3. Use stainless steel screws when exposed.
4. Install per manufacturer's written instructions.

3.4 PROTECTION

- A. Take proper precautions to protect the expansion joint covers from damage after they are in place.
- B. Cover floor joints with plywood where wheel traffic occurs.
- C. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces

of the dissimilar material with two coats of asphalt coating (complete coverage), or by separating the contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on side.

- D. Paint aluminum in contact with wood, concrete and masonry, or other absorptive materials, that may become repeatedly wet, with two coats of asphalt coating.

3.5 ADJUSTING

Adjust exterior roof expansion joints to close tightly and be watertight; insuring maximum allowance for building movement.

- - - E N D - - -

**SECTION 08 11 13
HOLLOW METAL DOORS AND FRAMES**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies steel doors, steel frames and related components.
- B. Terms relating to steel doors and frames as defined in ANSI A123.1 and as specified.

1.2 RELATED WORK

- A. Frames fabricated of structural steel: Section 05 50 00, METAL FABRICATIONS.
- B. Aluminum frames entrance work: Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS.
- C. Doors and frames of a forced entry/ballistic resistant rated: Section 08 34 53, SECURITY DOORS AND FRAMES.
- D. Overhead doors including loading docks: Section 08 33 00, COILING DOORS AND GRILLES.
- E. Windows and frames of a forced entry/ballistic resistant rated: Section 08 56 53, SECURITY WINDOWS.
- F. Door Hardware: Section 08 71 00, DOOR HARDWARE.
- G. Glazing and ballistic rated glazing: Section 08 80 00, GLAZING.
- H. Package transfer boxes: Section 11 17 36, PACKAGE TRANSFER UNITS.
- I. Steel mesh partitions, doors, service windows and hardware: Section 10 22 13, WIRE MESH PARTITIONS.
- J. Vault doors and day gates including frame and hardware: Section 08 34 59, VAULT DOORS AND DAY GATES.
- K. Deal trays of a Forced Entry/Ballistic Resistant rating: Section 08 56 59, SERVICE AND TELLER WINDOW UNITS.
- L. Guard Booths: Section 13 34 19, METAL BUILDING SYSTEMS.
- M. Card readers and biometric devices: Section 28 13 00, ACCESS CONTROL.
- N. Intrusion Alarm: Section 28 16 11, INTRUSION DETECTION SYSTEM.
- O. Security Monitors: Section 28 51 00, SECURITY CONTROL CENTER.

1.3 TESTING

- A. An independent testing laboratory shall perform testing.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturers Literature and Data:

1. Fire rated doors and frames, showing conformance with NFPA 80 and Underwriters Laboratory, Inc., or Intertek Testing Services or Factory Mutual fire rating requirements.

1.5 SHIPMENT

- A. Prior to shipment label each door and frame to show location, size, door swing and other pertinent information.
- B. Fasten temporary steel spreaders across the bottom of each door frame.

1.6 STORAGE AND HANDLING

- A. Store doors and frames at the site under cover.
- B. Protect from rust and damage during storage and erection until completion.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
L-S-125BScreening, Insect, Nonmetallic
- C. Door and Hardware Institute (DHI):
A115 SeriesSteel Door and Frame Preparation for Hardware,
Series A115.1 through A115.17 (Dates Vary)
- D. Steel Door Institute (SDI):
113-01Thermal Transmittance of Steel Door and Frame
Assemblies
128-09Acoustical Performance for Steel Door and Frame
Assemblies
A250.8-03 (R2008)Standard Steel Doors and Frames
- E. American Society for Testing and Materials (ASTM):
A167-99(R2009)Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet, and Strip
A568/568-M-11Steel, Sheet, Carbon, and High-Strength, Low-
alloy, Hot-Rolled and Cold-Rolled
A1008-10Steel, sheet, Cold-Rolled, Carbon, Structural,
High Strength Low Alloy and High Strength Low
Alloy with Improved Formability
B209/209M-07Aluminum and Aluminum-Alloy Sheet and Plate
B221/221M-08Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Profiles and Tubes

- D1621-10Compressive Properties of Rigid Cellular
Plastics
- D3656-07Insect Screening and Louver Cloth Woven from
Vinyl Coated Glass Yarns
- E90-09Laboratory Measurement of Airborne Sound
Transmission Loss of Building Partitions
- F. The National Association Architectural Metal Manufacturers (NAAMM):
Metal Finishes Manual (AMP 500-06)
- G. National Fire Protection Association (NFPA):
80-10Fire Doors and Fire Windows
- H. Underwriters Laboratories, Inc. (UL):
Fire Resistance Directory
- I. Intertek Testing Services (ITS):
Certifications Listings...Latest Edition
- J. Factory Mutual System (FM):
Approval Guide

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Sheet Steel: ASTM A1008, cold-rolled for panels (face sheets) of doors.
- B. Anchors, Fastenings and Accessories: Fastenings anchors, clips
connecting members and sleeves from zinc coated steel.
- C. Prime Paint: Paint that meets or exceeds the requirements of A250.8.

2.2 FABRICATION GENERAL

- A. GENERAL:
 - 1. Follow SDI A250.8 for fabrication of standard steel doors, except as
specified otherwise. Doors to receive hardware specified in Section
08 71 00, DOOR HARDWARE. Tolerances as per SDI A250.8. Thickness, 44
mm (1-3/4 inches), unless otherwise shown.
 - 2. Close top edge of exterior doors flush weld and seal to prevent
water intrusion.
- B. Standard Duty Doors: SDI A250.8, Level 2, Model 2 of size and design
shown. Core Construction type (c) polystyrene. Use for interior
locations only. Do not use for stairwell doors, security doors and
detention doors.
- C. Heavy Duty Doors: SDI A250.8, Level 3, Model 2 of size and design
shown. Core construction type (c) polystyrene for interior doors, and,
type (b) polyurethane for exterior doors.

D. Extra Heavy Duty Doors: SDI A250.8, Level 3, Model 2 of size and design shown. Core construction Types (c) polystyrene for interior doors, and type (b) polyurethane, for exterior doors. Use for detention doors, stairwell doors and security doors. See additional requirements for detention doors, under paragraph "Custom Hollow Metal Doors.

E. Smoke Doors:

1. Close top and vertical edges flush.
2. Provide seamless vertical edges.
3. Apply Steel astragal to the meeting stile at the active leaf of pair of doors or double egress doors.
4. Provide clearance at head, jamb and sill as specified in NFPA 80.

F. Fire Rated Doors (Labeled):

1. Conform to NFPA 80 when tested by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual for the class of door or door opening shown.
2. Fire rated labels of metal, with raised or incised markings of approving laboratory shall be permanently attached to doors.
3. Close top and vertical edges of doors flush, weld and fill to make water tight. Vertical edges shall be seamless. Apply steel astragal to the meeting stile of the active leaf of pairs of fire rated doors, except where vertical rod exit devices are specified for both leaves swinging in the same direction.
4. Construct fire rated doors in stairwell enclosures for maximum transmitted temperature rise of 230 °C (450 °F) above ambient temperature at end of 30 minutes of fire exposure when tested in accordance with ASTM E152.

G. Custom Metal Hollow Doors:

1. Provide custom hollow metal doors where nonstandard steel doors are indicated. At the Contractor's option, custom hollow metal doors may be provided in lieu of standard steel doors. Door size(s), design, materials, construction, gages and finish shall be as specified for of standard steel doors.
2. Dutch Doors:
 - a. Construct with two leaves, of same construction as specified for flush doors.
 - b. Fabricate shelves of not less than 1.3 mm (0.053 inch) thick steel of size shown.

- c. Stock type brackets fabricated of the same type metal used to fabricate shelves.
- d. Shelves and brackets may be either welded, bolted, or screw-attached in place.

H. Detention Doors (Type 22):

- 1. SDI A250.8, Level 3, Model 2 with core Type 'd' or 'f'.
- 2. Vision panels:
 - a. Weld 3 mm (1/8 inch) thick steel channel reinforcements around cut-outs in doors to accommodate vision lights.
 - b. Fabricate glazing stops on room side of doors, of 3 mm (1/8 inch) thick steel sheets mitered and welded at corners, and continuously welded both sides into doors.
 - c. Fabricate glazing bead for corridor side of doors of 9 mm (3/8 inch) by 19 mm (3/4 inch) steel bar, miter and weld at the corners, and fasten to doors with 6 mm (1/4 inch) countersunk screws near corners and centers of each side. Back-up screw holes with 3 mm (1/8 inch) thick reinforcements, or weld nuts to back of the frames to receive screws.
 - d. Size rabbet to provide for installation of safety glass and glazing cushions specified.

2.3 METAL FRAMES

A. General:

- 1. SDI A250.8, 1.3 mm (0.053 inch) thick sheet steel, types and styles as shown or scheduled.
- 2. Frames for exterior doors: Fabricate from 1.7 mm (0.067 inch) thick galvanized steel conforming to ASTM A525.
- 3. Frames for labeled fire rated doors and windows.
 - a. Comply with NFPA 80. Test by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual.
 - b. Fire rated labels of approving laboratory permanently attached to frames as evidence of conformance with these requirements. Provide labels of metal or engraved stamp, with raised or incised markings.
- 4. Frames for lead-lined doors:
 - a. Frames for doors 900 mm (3 feet) or less in width and having lead lining of 1 mm or less in thickness, and not shown to have structural steel supports: Minimum 1.7 mm (0.067 inch) thick.

- b. Frames for doors over 900 mm (3 feet) in width or having lead-lining more than 1 mm in thickness shown to be supported by and attached to structural steel subframes: Minimum 1.3 mm (0.053 inch) thick.
 - c. Lead-lining and its application are specified in Section 13 49 00, RADIATION PROTECTION.
- 5. Frames for detention door (Type 22): Minimum 2 mm (0.093 inch) thick.
- 6. Frames for doors specified to have automatic door operators; Security doors (Type 36); service window: minimum 1.7 mm (0.067 inch) thick.
- 7. Knocked-down frames are not acceptable.
- B. Reinforcement and Covers:
 - 1. SDI A250.8 for, minimum thickness of steel reinforcement welded to back of frames.
 - 2. Provide mortar guards securely fastened to back of hardware reinforcements except on lead-lined frames.
- C. Terminated Stops: SDI A250.8.
- D. Glazed Openings:
 - 1. Integral stop on exterior, corridor, or secure side of door.
 - 2. Design rabbet width and depth to receive glazing material or panel shown or specified.
- E. Frame Anchors:
 - 1. Floor anchors:
 - a. Where floor fills occur, provide extension type floor anchors to compensate for depth of fill.
 - b. At bottom of jamb use 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive two 6 mm (1/4 inch) floor bolts. Use 50 mm x 50 mm (2 inch by 2 inch) 9 mm by (3/8 inch) clip angle for lead lined frames, drilled for 9 mm (3/8 inch) floor bolts.
 - c. Where mullions occur, provide 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two 6 mm (1/4 inch) floor bolts and frame anchor screws.
 - d. Where sill sections occur, provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for 6 mm (1/4 inch) floor bolts and frame anchor screws. Space floor bolts at 50 mm (24 inches) on center.

2. Jamb anchors:

- a. Locate anchors on jambs near top and bottom of each frame, and at intermediate points not over 600 mm (24 inches) apart, except for fire rated frames space anchors as required by labeling authority.
- b. Form jamb anchors of not less than 1 mm (0.042 inch) thick steel unless otherwise specified.
- c. Anchors set in masonry: Use adjustable anchors designed for friction fit against the frame and for extension into the masonry not less than 250 mm (10 inches). Use one of following type:
 - 1) Wire loop type of 5 mm (3/16 inch) diameter wire.
 - 2) T-shape or strap and stirrup type of corrugated or perforated sheet steel.
- d. Anchors for stud partitions: Either weld to frame or use lock-in snap-in type. Provide tabs for securing anchor to the sides of the studs.
- e. Anchors for frames set in prepared openings:
 - 1) Steel pipe spacers with 6 mm (1/4 inch) inside diameter welded to plate reinforcing at jamb stops or hat shaped formed strap spacers, 50 mm (2 inches) wide, welded to jamb near stop.
 - 2) Drill jamb stop and strap spacers for 6 mm (1/4 inch) flat head bolts to pass thru frame and spacers.
 - 3) Two piece frames: Subframe or rough buck drilled for 6 mm (1/4 inch) bolts.
- f. Anchors for observation windows and other continuous frames set in stud partitions.
 - 1) In addition to jamb anchors, weld clip anchors to sills and heads of continuous frames over 1200 mm (4 feet) long.
 - 2) Anchors spaced 600 mm (24 inches) on centers maximum.
- g. Modify frame anchors to fit special frame and wall construction and provide special anchors where shown or required.

2.4 TRANSOM PANELS

- A. Fabricate panels as specified for flush doors.
- B. Fabricate bottom edge with rabbet stop to fit top of door where no transom bar occurs.

2.5 LOUVERS

- A. General:

1. Sight proof type with stationary blades the full thickness of the door.
2. Design lightproof louvers to exclude passage of light but permit free ventilation.
3. Provide insect screen and wire guards at exterior doors, except where doors are located below completely enclosed areaways, the wire guard is not required.

B. Fabrication:

1. Steel louvers 0.8 mm (0.032 inch) thick for interior doors, and 1.3 mm (0.053 inch) inch thick for exterior doors.
2. Fabricate louvers as complete units. Install in prepared cutouts in doors.
3. Weld stationary blades to frames. Weld louvers into door openings.

C. Screen frames:

1. Frame of either extruded aluminum or tubular aluminum.
2. Fabricate frame to hold wire fabric in a channel with a retaining bar anchor and to mount on surface of door with screws.
3. Do not lap frame over louver opening.
4. Miter corners of frame members and join by concealed mechanical fastenings extending about 57 mm (2-1/4 inches) into ends of each member.
5. Drill frame and doors for screw attachment. Space screws 50 mm (2 inches) from end of each leg of frame and not over 300 mm (12 inches) on center between end screws.
6. Finish: Clear anodized finish, 0.4 mils thick.
7. Insect Screens: Fasten insect screens to interior side of doors with retaining bar against door and not exposed to view.
8. Wire Guards:
 - a. Wire fabric shall be wire guard screen as specified.
 - b. Fasten wire guard to exterior side of door with retaining bar against door and not exposed to view.

2.6 SHOP PAINTING

- A. SDI A250.8.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Plumb, align and brace frames securely until permanent anchors are set.
1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.

2. Use wood spreaders at bottom of frame if the shipping spreader is removed.
3. Protect frame from accidental abuse.
4. Where construction will permit concealment, leave the shipping spreaders in place after installation, otherwise remove the spreaders after the frames are set and anchored.
5. Remove wood spreaders and braces only after the walls are built and jamb anchors are secured.

B. Floor Anchors:

1. Anchor the bottom of door frames to floor with two 6 mm (1/4 inch) diameter expansion bolts. Use 9 mm (3/8 inch) bolts on lead lined frames.
2. Power actuated drive pins may be used to secure frame anchors to concrete floors.

C. Jamb Anchors:

1. Anchors in masonry walls: Embed anchors in mortar. Fill space between frame and masonry wall with grout or mortar as walls are built.
2. Coat frame back with a bituminous coating prior to lining of grout filling in masonry walls.
3. Secure anchors to sides of studs with two fasteners through anchor tabs. Use steel drill screws to steel studs.
4. Frames set in prepared openings of masonry or concrete: Expansion bolt to wall with 6 mm (1/4 inch) expansion bolts through spacers. Where subframes or rough bucks are used, 6 mm (1/4 inch) expansion bolts on 600 mm (24 inch) centers or power activated drive pins 600 mm (24 inches) on centers. Secure two piece frames to subframe or rough buck with machine screws on both faces.

D. Install anchors for labeled fire rated doors to provide rating as required.

E. Frames for Sound Rated Doors: Coordinate to line frames for sound rated doors with insulation.

F. Overhead Bracing (Lead Lined Frames): Where jamb extensions extend to structure above, anchor clip angles with not less than two, 9 mm (3/8 inch) expansion bolts or power actuated drive pins to concrete slab. Weld to steel overhead members.

3.2 INSTALLATION OF DOORS AND APPLICATION OF HARDWARE

- A. Install doors and hardware as specified in Sections Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, Section 08 14 00, WOOD DOORS, Section 08 71 00, DOOR HARDWARE.

- - - E N D - - -

**SECTION 08 11 61
DETENTION DOOR SCREENS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Detention screens consist of a sub-frame, main frame with woven rod panels and support assembly, handcuff slot, detention lock and bolt, hinges and all fittings and anchors required.

1.2 MANUFACTURERS QUALIFICATIONS

- A. Approval by COTR is required of products of proposed manufacturer or supplier, and will be based upon submission by Contractor of certification.
- B. Contractor certifies that the manufacturer regularly and presently manufactures detention and protection screens as one of his principal products.
- C. Contractor certifies that the manufacturer's product submitted has been in satisfactory and efficient operation on three installations similar or equivalent to this project for three years. Submit list of installations. List shall include name of project and owner and location of project.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Complete details (1/2 full scale), showing dimensions and details of construction and anchorage, relation to details of the door and clearances required and door operators.
 - 1. Identify work or components not part of detention door screen subcontractor's scope.
 - 2. Include a door elevation with dimensions.
- C. Manufacturer's Certificates:
 - 1. Indicating manufacturers qualification specified.
- D. Manufacturer's Literature and Data:
 - 1. Detention Door Screen, accessories, and hardware.
- E. Samples: One sample of woven rod panel, approximately 6-inch by 6-inch (152 mm x 152 mm).

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):

B18.6.2-98(R-2005)Slotted Head Cap Screws, Square Head Set Screws,
and Slotted Headless Set Screws.

B18.6.4-98Thread Forming and Thread Cutting Tapping Screws
and Metallic Drive Screws.

C. American Society for Testing and Material (ASTM):

A653/A653M-10Steel Sheet, Zinc-Coated (Galvanized) or Zinc-
Iron Alloy Coated (Galvannealed) by the Hot-Dip
Process.

PART 2 - PRODUCTS

2.1 BASIS-OF-DESIGN

A. The basis of design product is G-D12-P Door manufactured by the Kane Manufacturing Corporation (814-837-6464). Subject to compliance with requirements, provide the basis of design product or an approved equivalent product made by a different manufacturer.

2.2 SHEET STEEL

A. ASTM A653/A653M

2.3 DETENTION DOOR SCREEN

A. Main Frame

1. The main frame shall be built-up tubular type, measuring 1-3/4" x 2-1/2", with fixed concealment plates. The open channel frame members shall be formed of not less than 12-gauge galvanized sheet steel and shall have individual slots along the inner edges to support the woven rod panel. The corners of the open channel frame members shall be continuously welded on both sides and dressed smooth. Braces, which are similar to the frame, shall be furnished when required. Concealment plates of 12-gauge galvanized steel shall be welded to the back of the main frame approximately 8" on center to complete the tubular shape.

B. Rods

1. Woven rod panels shall be fabricated from double crimped electro-galvanized 1/4" diameter rods, woven with 2-inch open space.

C. Rod Attachment

1. Woven rod panels shall be installed symmetrically into the slotted main frame. Slots shall be centered according to the rod pattern. Each rod shall penetrate into each slot where it contacts the main frame. Every other rod shall be welded into the slot at both ends where it penetrates the main frame.

D. Handcuff Slot

1. The detention door screen shall include a horizontal rail centered approximately 38 inches (965 mm) above the bottom of the door. The

rail shall include an opening approximately 5-inches (127 mm) tall by 15-inches (381 mm) wide for applying handcuffs. The opening shall have a closure panel hinged on the bottom, latched on the top, and operated from the non-secure side of the door.

2.4 HARDWARE

- A. Operating hardware shall be extra heavy duty type.
- B. Locks for Door Screens: Provide concealed locking system for each screen consisting of one, bit-key operated locking mechanism having a minimum of two operable, concealed 13 mm (1/2-inch) diameter case-hardened steel bolts. Locate bolts near the top and bottom of screen. Design bolts to engage adjustable strike or keepers in the sub-frame when bit key is rotated in lock.
- C. Construct bit key lock of steel construction with three brass tumblers having beryllium copper springs. Fabricate lock case from steel using two piece construction having three brass pedestal bearing supports attached to the lower half of the case to support the slide bar, tumblers, case and cover. Fabricate slide bar of lock from steel with hardened steel guide tumbler block.
- D. Make provisions to insure that the bit key can not be removed except when the bolts are in a locked (extended) position. Locks shall be keyed alike. Furnish 4 bit keys. Make keys from forged steel or solid bronze with chromium or cadmium plated finish.
- E. Provide rubber cushion plugs (bumpers) on lock between fixed and hinged frames. Locate bumpers 150 mm (6-inches) from top and bottom on side of frame where lock bolts or slides occur.

2.5 FINISH

- A. All interior and exterior surfaces of the mainframe, rods and concealment plates shall be thoroughly cleaned in a 5-step bonderizing process. The surfaces shall receive an electrostatically applied thermoplastic, polyester powder coating which shall be applied and baked to a hard mar-resistant finish in one of Kane's standard colors.
 - 1. Color to be selected by Architect from Manufacturer's range of available colors.

PART 3 - EXECUTION

3.1 GENERAL

- A. Inspection
 - 1. Verify that openings fit allowable tolerances are plumb, level, provide a solid anchoring surface and comply with approved shop drawings.
- B. Installation

1. Install in accordance with approved shop drawings and specifications.
2. Plumb and align faces in a single plane and erect barriers square and true, adequately anchored.
3. After completion of installation, barriers shall be adjusted, in working order and clean.

- - - E N D - - -

SECTION 08 14 00
INTERIOR WOOD DOORS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies prefit, factory finished interior flush doors.
- B. Section includes fire and smoke rated doors.

1.2 RELATED WORK

- A. Metal door frames: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.
- B. Doors and frames of a forced entry/ballistic resistant rated: Section 08 34 53, SECURITY DOORS AND FRAMES.
- C. Overhead doors including loading docks: Section 08 33 00, COILING DOORS AND GRILLES.
- D. Windows and frames of a forced entry/ballistic resistant rated: Section 08 56 53, SECURITY WINDOWS
- E. Door hardware including hardware location (height): Section 08 71 00, DOOR HARDWARE.
- F. Installation of doors and hardware: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, Section 08 14 00, WOOD DOORS, or Section 08 71 00, DOOR HARDWARE.
- G. Glazing and ballistic rated glazing: Section 08 80 00, GLAZING.
- H. Finish: Section 09 06 00, SCHEDULE FOR FINISHES.
- I. Metal louvers: Section 08 90 00, LOUVERS AND VENTS.
- J. Lead lined wood door: Section 13 49 00, RADIATION PROTECTION.
- K. Card readers and biometric devices: Section 28 13 00, ACCESS CONTROL
- L. Intrusion alarm: Section 28 16 11, INTRUSION DETECTION SYSTEM
- M. Security monitors: Section 28 51 00, SECURITY CONTROL CENTER

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
 - 1. Corner section of flush veneered door 300 mm (12 inches) square, showing details of construction, labeled to show grade and type number and conformance to specified standard.
 - 2. Veneer sample 200 mm (8 inch) by 275 mm (11 inch) by 6 mm (1/4 inch) showing specified wood species sanded to receive a transparent finish. Factory finish veneer sample where the prefinished option is accepted.

C. Shop Drawings:

1. Show every door in project and schedule location in building.
2. Indicate type, grade, finish and size; include detail of glazing, louvers and pertinent details.
3. Provide information concerning specific requirements not included in the manufacturer's literature and data submittal.

D. Manufacturer's Literature and Data:

1. Labeled fire rated doors showing conformance with NFPA 80.

E. Laboratory Test Reports:

1. Screw holding capacity test report in accordance with WDMA T.M.10.
2. Split resistance test report in accordance with WDMA T.M.5.
3. Cycle/Slam test report in accordance with WDMA T.M.7.
4. Hinge-Loading test report in accordance with WDMA T.M.8.

1.4 WARRANTY

- A. Doors are subject to terms of Article titled "Warranty of Construction", FAR clause 52.246-21, except that warranty shall be as follows:

1. For interior doors, manufacturer's warranty for lifetime of original installation.

1.5 DELIVERY AND STORAGE

- A. Factory seal doors and accessories in minimum of 6 mill polyethylene bags or cardboard packages which shall remain unbroken during delivery and storage.
- B. Store in accordance with WDMA I.S.1-A, Job Site Information.
- C. Label package for door opening where used.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. Window and Door Manufacturers Association (WDMA):

I.S.1A-11	Architectural Wood Flush Doors
I.S.4-09	Water-Repellent Preservative Non-Pressure Treatment for Millwork
I.S.6A-11	Architectural Wood Stile and Rail Doors
T.M.6-08	Adhesive (Glue Bond) Durability Test Method
T.M.7-08	Cycle-Slam Test Method
T.M.8-08	Hinge Loading Test Method
T.M.10-08	Screwholding Test Method

C. National Fire Protection Association (NFPA):

80-10Protection of Buildings from Exterior Fire

252-08Fire Tests of Door Assemblies

D. ASTM International (ASTM):

E90-09Laboratory Measurements of Airborne Sound

Transmission Loss

PART 2 - PRODUCTS**2.1 FLUSH DOORS**

A. General:

1. Meet requirements of WDMA I.S.1-A, Extra Heavy Duty.
2. Adhesive: Type II
3. Thickness: 45 mm (1-3/4 inches) unless otherwise shown or specified.
4. Give exposed wood parts of exterior doors a water-repellent preservative treatment in accordance with WDMA I.S.4.

B. Face Veneer:

1. In accordance with WDMA I.S.1-A.
2. One species throughout the project unless scheduled or otherwise shown.
3. For transparent finishes: Premium Grade.
 - a. AA grade face veneer standard.
 - b. Match face veneers for doors for uniform effect of color and grain at joints.
 - c. Door edges shall be same species as door face veneer.
 - d. Use wood species of face veneers to match adjacent existing doors.
4. Factory sand doors for finishing.

C. Wood for stops, louvers, muntins and moldings of flush doors required to have transparent finish:

1. Solid Wood of same species as face veneer, except maple may be used on birch doors.
2. Glazing:
 - a. On non-labeled doors use applied wood stops nailed tight on room side and attached on opposite side with flathead, countersunk wood screws, spaced approximately 125 mm (5 inches) on centers.

D. Stiles and Rails:

1. Option for wood stiles and rails:
 - a. Composite material having screw withdrawal force greater than minimum performance level value when tested in accordance with WDMA T.M.10.
2. Provide adequate blocking for bottom of doors having mechanically operated door bottom seal meeting or exceeding the performance duty level per T.M.10 for horizontal door edge screw holding.

E. Fire rated wood doors:

1. Fire Performance Rating:
 - a. "B" label, 1-1/2 hours.
 - b. "C" label, 3/4 hour.
2. Labels:
 - a. Doors shall conform to the requirements of ASTM E2074, or NFPA 252, and, carry an identifying label from a qualified testing and inspection agency for class of door or opening shown designating fire performance rating.
 - b. Metal labels with raised or incised markings.
3. Performance Criteria for Stiles of doors utilizing standard mortise leaf hinges:
 - a. Hinge Loading: WDMA T.M.8. Average of 10 test samples for Extra Heavy Duty doors.
 - b. Direct screw withdrawal: WDMA T.M.10 for Extra Heavy Duty doors. Average of 10 test samples using a steel, fully threaded #12 wood screw.
 - c. Cycle Slam: 1,000,000 cycles with no loose hinge screws or other visible signs of failure when tested in accordance with WDMA T.M.7.
4. Additional Hardware Reinforcement:
 - a. Provide fire rated doors with hardware reinforcement blocking.
 - b. Size of lock blocks as required to secure hardware specified.
 - c. Top, bottom and intermediate rail blocks shall measure not less than 125 mm (five inches) minimum by full core width.
 - d. Reinforcement blocking in compliance with manufacturer's labeling requirements.
 - e. Mineral material similar to core is not acceptable.
5. Other Core Components: Manufacturer's standard as allowed by the labeling requirements.

6. Provide steel frame approved for use in labeled doors for vision panels.

F. Smoke Barrier Doors:

1. For glazed openings use steel frames approved for use in labeled doors.
2. Provide a steel astragal on one leaf of pairs of doors, including double egress doors.

2.2 PREFINISH PREFIT

- A. Flush doors must be factory machined to receive hardware, bevels, undercuts, cutouts, accessories and fitting for frame.
- B. Factory fitting to conform to specification for shop and field fitting, including factory application of sealer to edge and routings.
- C. Flush doors to receive transparent finish (in addition to being prefit) shall be factory finished as follows:
 1. WDMA I.S.1-A Section F-3 specification for System TR-4, Conversion Varnish or System TR-5, Catalyzed Vinyl.
 2. Factory finish to match stained finish of existing doors.

2.3 IDENTIFICATION MARK:

- A. On top edge of door.
- B. Either a stamp, brand or other indelible mark, giving manufacturer's name, door's trade name, construction of door, code date of manufacture and quality.
- C. Accompanied by either of the following additional requirements:
 1. An identification mark or a separate certification including name of inspection organization.
 2. Identification of standards for door, including glue type.
 3. Identification of veneer and quality certification.
 4. Identification of preservative treatment for stile and rail doors.

2.4 SEALING:

- A. Give top and bottom edge of doors two coats of catalyzed polyurethane or water resistant sealer before sealing in shipping containers.

PART 3 - EXECUTION

3.1 DOOR PREPARATION

- A. Field, shop or factory preparation: Do not violate the qualified testing and inspection agency label requirements for fire rated doors.

B. Clearances between Doors and Frames and Floors:

1. Maximum 3 mm (1/8 inch) clearance at the jambs, heads, and meeting stiles, and a 19 mm (3/4 inch) clearance at bottom, except as otherwise specified.
2. Maximum clearance at bottom of sound rated doors, light-proofed doors, doors to operating rooms, and doors designated to be fitted with mechanical seal: 10 mm (3/8 inch).

C. Provide cutouts for special details required and specified.

D. Doors prefit and machined for hardware using templates and location heights specified in Section, 08 71 00 DOOR HARDWARE. Through-bolt holes may be drilled on site.

E. Fit doors to frame, bevel lock edge of doors 3 mm (1/8 inch) for each 50 mm (two inches) of door thickness.

3.2 INSTALLATION OF DOORS APPLICATION OF HARDWARE

A. Install doors and hardware as specified in this Section.

3.3 DOOR PROTECTION

- A. As door installation is completed, place polyethylene bag or cardboard shipping container over door and tape in place.
- B. Provide protective covering over knobs and handles in addition to covering door.
- C. Maintain covering in good condition until removal is approved by Resident Engineer.

- - - E N D - - -

- B. Number of locks and non-continuous hinges as required to maintain alignment of panel with frame. For fire rated doors, use hinges and locks as required by fire test.
- C. Provide anchors or make provisions in frame for anchoring to adjacent construction. Provide size, number and location of anchors on four sides to secure access door in opening. Provide anchors as required by fire test.
- D. Fasteners: Exposed fasteners for access panels installed in Mental Health and Behavioral areas shall be tamper-proof screws.

2.3 ACCESS DOORS, FLUSH PANEL:

- A. Door Panel:
 - 1. Form of 1.9 mm (0.0747 inch) thick steel or 1.5 mm (0.0598 inch) thick stainless steel sheet.
 - 2. Steel sheet to be used at all locations except wet areas or tiled areas. Stainless steel to be used at wet areas and tiled areas.
 - 3. Reinforce to maintain flat surface.
- B. Frame:
 - 1. Form of 1.5 mm (0.0598 inch) thick steel or stainless steel sheet of depth and configuration to suit material and type of construction where installed.
 - 2. Provide surface mounted units having frame flange at perimeter where installed in concrete, masonry, or gypsum board construction.
 - 3. Weld exposed joints in flange and grind smooth.
- C. Hinge:
 - 1. Concealed spring hinge to allow panel to open 175 degrees.
 - 2. Provide removable hinge pin to allow removal of panel from frame.
- D. Lock:
 - 1. Flush, screwdriver operated cam lock.
 - 2. Provide tamper proof screws (spanner head locks) for access panels in Psychiatric Areas.

2.5 FINISH:

- A. Provide in accordance with NAAMM AMP 500 series on exposed surfaces.
- B. Steel Surfaces: Baked-on prime coat over a protective phosphate coating. Color as selected from manufacturer's full range.
- C. Stainless Steel: No. 4 for wet areas or ceramic tile surfaces.

2.6 SIZE:

- A. Minimum 600 mm (24 inches) square door unless otherwise shown.

PART 3 - EXECUTION**3.1 LOCATION:**

- A. Provide access panels or doors wherever any valves, traps, dampers, cleanouts, and other control items of mechanical, electrical and conveyor work are concealed in wall or partition, or are above ceiling of gypsum board or plaster.
- B. Use fire rated doors in fire rated partitions and ceilings.
- C. Use flush panels in partitions and gypsum board or plaster ceilings, except lay-in acoustical panel ceilings or upward access acoustical tile ceilings.

3.2 INSTALLATION, GENERAL:

- A. Install access doors in openings to have sides vertical in wall installations, and parallel to ceiling suspension grid or side walls when installed in ceiling.
- B. Set frames so that edge of frames without flanges will finish flush with surrounding finish surfaces.
- C. Set frames with flanges to overlap opening and so that face will be uniformly spaced from the finish surface.

3.3 ANCHORAGE:

- A. Secure frames to adjacent construction using anchors attached to frames or by use of bolts or screws through the frame members.
- B. Type, size and number of anchoring device suitable for the material surrounding the opening, maintain alignment, and resist displacement during normal use of access door.
- C. Use only tamper-proof screws for exposed fasteners at access panels that are installed in Mental Health and Behavioral areas.

3.4 ADJUSTMENT:

- A. Adjust hardware so that door panel will open freely.
- B. Adjust door when closed so door panel is centered in the frame.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 08 41 13
ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies aluminum entrance work including storefront construction, hung doors, and other components to make a complete assembly.

1.2 RELATED WORK:

- A. Glass and Glazing: Section 08 80 00, GLAZING.
- B. Hardware: Section 08 71 00, DOOR HARDWARE.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: (1/2 full scale) showing construction, anchorage, reinforcement, and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Doors, each type.
 - 2. Entrance and Storefront construction.
- D. Samples:
 - 1. Two samples of anodized aluminum of each color showing finish and maximum shade range.
- E. Manufacturer's Certificates:
 - 1. Stating that aluminum has been given specified thickness of anodizing.
 - 2. Indicating manufacturer's qualifications specified.

1.4 QUALITY ASSURANCE:

- A. Approval by Contracting Officer is required of products of proposed manufacturer, or supplier, and will be based upon submission by Contractor certification.
- B. Certify manufacturer regularly and presently manufactures aluminum entrances and storefronts as one of their principal products.

1.5 DELIVERY, STORAGE AND HANDLING:

- A. Deliver aluminum entrance and storefront material to the site in packages or containers; labeled for identification with the manufacturer's name, brand and contents.
- B. Store aluminum entrance and storefront material in weather-tight and dry storage facility.

- C. Protect from damage from handling, weather and construction operations before, during and after installation.

1.6 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - B209-07Aluminum and Aluminum-Alloy Sheet and Plate
 - B221-08Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
 - E283-04Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
 - E331-00(R2009)Water Penetration of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference
 - F468-10Nonferrous Bolts, Hex Cap Screws, and Studs for General Use
 - F593-02(R2008)Stainless Steel Bolts, Hex Cap Screws, and Studs
- C. National Association of Architectural Metal Manufacturers (NAAMM):
 - AMP 500 SeriesMetal Finishes Manual
- D. American Architectural Manufacturer's Association (AAMA):
 - 2604-10High Performance Organic Coatings on Architectural Aluminum Extrusions and Panels
- E. American Welding Society (AWS):
 - D1.2-08Structural Welding Code Aluminum

1.7 PERFORMANCE REQUIREMENTS:

- A. Shapes and thickness of framing members shall be sufficient to withstand the design wind load indicated on the Structural Drawings of supported area with a deflection of not more than 1/175 times the length of the member and a safety factor of not less than 1.65 (applied to overall load failure of the unit). Provide glazing beads, moldings, and trim of not less than 1.25 mm (0.050 inch) nominal thickness.
- B. Air Infiltration: When tested in accordance with ASTM E 283, air infiltration shall not exceed 2.63×10^{-5} cm per square meter (0.06 cubic feet per minute per square foot) of fixed area at a test pressure of 0.30 kPa (6.24 pounds per square foot) 80 kilometers (50 mile) per hour wind.

- C. Water Penetration: When tested in accordance with ASTM E 331, there shall be no water penetration at a pressure of 0.38 kPa (8 pounds per square foot) of fixed area.

PART 2 - PRODUCTS

2.1 BASIS-OF-DESIGN PRODUCT:

- A. Subject to compliance with the specifications, provide the following or an approved equivalent:
 - 1. Kawneer TRIFAB 601T Thermally Broken Storefront Framing System.

2.2 MATERIALS:

- A. Aluminum, ASTM B209 and B221:
 - 1. Alloy 6063 temper T5 for doors, door frames, fixed glass sidelights storefronts and transoms.
 - 2. Alloy 6061 temper T6 for guide tracks for sliding doors and other extruded structural members.
 - 3. For color anodized finish, use aluminum alloy as required to produce specified color.
- B. Thermal Break: Manufacturer standard low conductive material retarding heat flow in the framework, where insulating glass is scheduled.
- C. Fasteners:
 - 1. Aluminum: ASTM F468, Alloy 2024.
 - 2. Stainless Steel: ASTM F593, Alloy Groups 1, 2 and 3.

2.3 FABRICATION:

- A. Fabricate doors, of extruded aluminum sections not less than 3 mm (0.125 inch) thick. Fabricate glazing beads of aluminum not less than 1.0 mm (0.050 inch) thick.
- B. Accurately form metal parts and accurately fit and rigidly assemble joints, except those joints designed to accommodate movement. Seal joints to prevent leakage of both air and water.
- C. Make welds in aluminum in accordance with the recommended practice AWA D1.2. Use electrodes and methods recommended by the manufacturers of the metals and alloys being welded. Make welds behind finished surfaces so as to cause no distortion or discoloration of the exposed side. Clean welded joints of welding flux and dress exposed and contact surfaces.
- D. Make provisions in doors and frames to receive the specified hardware and accessories. Coordinate schedule and template for hardware specified under Section 08 71 00, DOOR HARDWARE. Where concealed closers or other mechanisms are required, provide the necessary space, cutouts, and reinforcement for secure fastening.

- E. Fit and assemble the work at the manufacturer's plant. Mark work that cannot be permanently plant-assembled to assure proper assembly in the field.

2.4 PROTECTION OF ALUMINUM:

- A. Isolate aluminum from contact with dissimilar metals other than stainless steel, white bronze, or zinc by any of the following:
 1. Coat the dissimilar metal with two coats of heavy-bodied alkali resistant bituminous paint.
 2. Place caulking compound, or non-absorptive tape, or gasket between the aluminum and the dissimilar metal.
 3. Paint aluminum in contact with mortar, concrete and plaster, with a coat of aluminum paint primer.

2.5 FRAMES:

- A. Fabricate doors, frames, mullions, transoms, frames for fixed glass and similar members from extruded aluminum not less than 3 mm (0.125 inch) thick.
- B. Provide integral stops and glass rebates and applied snap-on type trim.
- C. Use concealed screws, bolts and other fasteners. Secure cover boxes to frames in back of all lock strike cutouts.
- D. Fabricate framework with thermal breaks in frames where insulating glass is scheduled and specified under Section 08 80 00, GLAZING.

2.6 STILE AND RAIL DOORS:

- A. Nominal 45 mm (1-3/4 inch) thick, with medium stile and head rail 127 mm (5 inches) wide, and bottom rail 250 mm (10 inches) wide.
- B. Bevel single-acting doors 3 mm (1/8 inch) at lock, hinge and meeting stile edges. Provide clearances of 2 mm (1/16 inch) at hinge stiles, 3 mm (1/8 inch) at lock stiles and top rails, and 5 mm (3/16 inch) at floors and thresholds. Form glass rebates integrally with stiles and rails. Glazing beads may be formed integrally with stiles and rails or applied type secured with fasteners at 150 mm (six inches) on centers.
- C. Construct doors with a system of welded joints or interlocking dovetail joints between stiles and rails. Clamp door together through top and bottom rails with 9 mm (3/8 inch) primed steel rod extending into the stiles, and having a self-locking nut and washer at each end. Reinforce stiles and rails to prevent door distortion when tie rods are tightened. Provide a compensating spring-type washer under each nut to take up any stresses that may develop. Construct joints between rails and stiles to remain rigid and tight when door is operated.

- D. Weather-stripping: Provide removable, woven pile type (silicone-treated) weather-stripping attached to aluminum or vinyl holder. Make slots for applying weather-stripping integral with doors and door frame stops. Apply continuous weather-stripping to heads, jambs, bottom, and meeting stiles of doors and frames. Install weather-stripping so doors can swing freely and close positively.

2.7 REINFORCEMENT FOR BUILDERS HARDWARE:

- A. Fabricate from stainless steel plates.
- B. Hinge and pivot reinforcing: 4.55 mm (0.1793 inch) thick.
- C. Reinforcing for lock face, flush bolts, concealed holders, concealed or surface mounted closers: 2.66 mm (0.1046 inch) thick.
- D. Reinforcing for all other surface mounted hardware: 1.5 mm (0.0598 inch) thick.

2.8 ENTRANCE DOOR HARDWARE

- A. Pivot Hinges: BHMA A156.1, Grade 1, radiused corner.
 - 1. Non-removable pins: Provide set screw in hinge barrel that, when tightened into 2 groove in hinge pin, prevents removal of pin while entrance door is closed.
 - 2. Exterior Hinges: Stainless steel, with stainless steel pin.
- B. Thresholds: BHMA A156.21, raised thresholds beveled with a slope of not more than 1:2, with a maximum height of 13 mm (1/2-inch).

2.9 COLUMN COVERS AND TRIM

- A. Fabricate column covers and trim shown from 1.5 mm (0.0625 inch) thick sheet aluminum of longest available lengths.
- B. Use concealed fasteners.
- C. Provide aluminum stiffener and other supporting members shown or as required to maintain the integrity of the components.

2.10 FINISH

- A. In accordance with NAAMM AMP 500 series.
- B. Anodized Aluminum:
 - 1. Color Finish: Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 7 mils thick. More than 50 percent variation of the maximum shade range approved will not be accepted in a single component or in adjacent components, stiles, and rails on a continuous series.
 - 2. Color as indicated on the Drawings.

PART 3 - EXECUTION**3.1 INSTALLATION:**

- A. Allowable Installation Tolerances: Install work plumb and true, in alignment and in relation to lines and grades shown. Variation of 3 mm (1/8 inch) in 2400 mm (eight feet), non-accumulative, is maximum permissible for plumb, level, warp, bow and alignment.
- B. Anchor aluminum frames to adjoining construction at heads, jambs and bottom and to steel supports, and bracing. Anchor frames with stainless steel or aluminum countersunk flathead, expansion bolts or machine screws, as applicable. Use aluminum clips for internal connections of adjoining frame sections.
- C. Install hardware specified under Section 08 71 00, DOOR HARDWARE.

3.2 ADJUSTING:

- A. After installation of entrance and storefront work is completed, adjust and lubricate operating mechanisms to insure proper performance.

3.3 PROTECTION, CLEANING AND REPAIRING:

- A. Remove all mastic smears and other unsightly marks, and repair any damaged or disfiguration of the work. Protect the installed work against damage or abuse.

- - - E N D - - -

SECTION 08 51 13
ALUMINUM WINDOWS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Aluminum windows of type and size shown, complete with hardware, related components and accessories.
- B. Types:
 - 1. Simulated double-hung casement with integral blinds.

1.2 DEFINITIONS

- A. Accessories: Mullions, staff beads, casings, closures, trim, moldings, panning systems, sub-sills, clips anchors, fasteners, weather-stripping, insect screens mechanical operators, and other necessary components required for fabrication and installation of window units.
- B. Uncontrolled Water: Water not drained to the exterior, or water appearing on the room side of the window.

1.3 RELATED WORK

- A. Glazing: Section 08 80 00, GLAZING.

1.4 DELIVERY, STORAGE AND HANDLING

- A. Protect windows from damage during handling and construction operations before, during and after installation.
- B. Store windows under cover, setting upright.
- C. Do not stack windows flat.
- D. Do not lay building materials or equipment on windows.

1.5 QUALITY ASSURANCE

- A. Approval by contracting officer is required of products or service of proposed manufacturers and installers.
- B. Approval will be based on submission of certification by Contractor that:
 - 1. Manufacturer regularly and presently manufactures the specified windows as one of its principal products.
 - 2. Installer has technical qualifications, experience, trained personnel and facilities to install specified items.
- C. Provide each type of window produced from one source of manufacture.
- D. Quality Certified Labels or certificate:
 - 1. Architectural Aluminum Manufacturers Association, "AAMA label" affixed to each window indicating compliance with specification.
 - 2. Certificates in lieu of label with copy of recent test report (not more than 4 years old) from an independent testing laboratory and certificate signed by window manufacturer stating that windows provided comply with specified requirements and AAMA 101/I.S.2/A440 for type of window specified.

E. Simulated Human Impact Tests:

1. Conduct tests in general accordance with ANSI 297.1.

1.6 SUBMITTAL

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings:

1. Minimum of 1/2 full scale.
2. Identifying parts of window units by name and kind of metal or material, show construction, locking systems, mechanical operators, trim, installation and anchorages.
3. Include glazing details and standards for factory glazed units.

C. Manufacturer's Literature and Data:

1. Window.
2. Sash locks, keepers, and key.

D. Certificates:

1. Certificates as specified in paragraph QUALITY ASSURANCE.
2. Indicating manufacturers and installers qualifications.
3. Manufacturer's Certification that windows delivered to project are identical to windows tested.

E. Test Reports:

1. Copies of test reports as specified in paragraph QUALITY ASSURANCE.

F. Samples: Provide 150 mm (six-inch) length samples showing finishes, specified.

1.7 WARRANTY

A. Warrant windows against malfunctions due to defects in thermal breaks, hardware, materials and workmanship, subject to the terms of Article "WARRANTY OF CONSTRUCTION", FAR clause 52.246-21, except provide 10 year warranty period.

1.8 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society of Heating, Refrigerating and Air Conditioning Engineers (ASHRAE)

90.1-07Energy Standard of Buildings

- C. American Architectural Manufacturers Association (AAMA):
- 101/I.S.2/A440-11Windows, Doors, and Unit Skylights
 - 505-09Dry Shrinkage and Composite Performance Thermal
Cycling Test Procedures
 - 2605-05Superior Performing Organic Coatings on
Architectural Aluminum Extrusions and Panels
 - TIR-A8-08Structural Performance of Poured and Debridged
Framing Systems
- D. American Society for Testing and Materials (ASTM):
- A653/A653M-09Steel Sheet, Zinc Coated (Galvanized), Zinc-
Iron Alloy-Coated (Galvannealed) by the Hot-dip
Process
 - E 90-09Test Method for Laboratory Measurement of
Airborne Sound Transmission Loss of Building
Partitions
- E. National Fenestration Rating Council (NFRC):
- NFRC 100-10Determining Fenestration Product U-Factors
 - NFRC 200-10Determining Fenestration Product Solar Heat
Gain Coefficient and Visible Transmittance at
Normal Incidence
- F. National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500-06Metal Finishes Manual

PART 2- PRODUCTS

2.1 BASIS-OF-DESIGN:

- A. Wausau Window and Wall Systems - 4000i-DT Series Psychiatric In-Swing Casement Windows.

2.2 MATERIALS

- A. Aluminum Extrusions; Sheet and Plate: AAMA 101/I.S.2/A440.
- B. Sheet Steel, Galvanized: ASTM A653; G90 galvanized coating.
- C. Weather-strips: AAMA 101/I.S.2/A440; except leaf type weather-stripping is not permitted.
- D. Insect Screening:
 - 1. Regular mesh, 18 by 18, AAMA 101/I.S.2/A440.
 - 2. Aluminum with dark bronze anodized finish unless specified otherwise.

E. Fasteners: AAMA 101/I.S.2/A440. Screws, bolts, nuts, rivets and other fastening devices to be non-magnetic stainless steel.

1. Fasteners to be concealed when window is closed. Where wall thickness is less than 3 mm (0.125 inch) thick, provide backup plates or similar reinforcements for fasteners.
2. Stainless steel self tapping screws may be used to secure Venetian blind hanger clips, vent guide blocks, friction adjuster, and limit opening device.
3. Attach locking and hold-open devices to windows with concealed fasteners. Provide reinforcing plates where wall thickness is less than 3 mm (0.125 inch) thick.

F. Weather-strips: AAMA 101/I.S.2/A440.

G. Hardware:

1. Locks: Two position locking bolts or cam type tamperproof custodial locks with a single point control located not higher than five feet from floor level. Locate locking devices in the vent side rail. Fastenings for locks and keepers shall be concealed or nonremovable.
2. Locking Device Strikes: Locate strikes in frame jamb. Strikes shall be adjustable for locking tension. Fabricate strikes from Type 304 stainless steel or white bronze.
3. Fabricate hinges of noncorrosive metal. Hinges may be either fully concealed when window is closed or semi-concealed with exposed knuckles. All exposed knuckle hinges shall have hospital tips, at both ends. Surface mounted hinges will not be accepted.
4. Guide Blocks: Fabricate guide blocks of injection molded nylon. Install guide block fully concealed in vent/frame sill.
5. Hardware for Emergency Ventilation of Windows:
 - a. Provide windows with a hold open linkage for emergency ventilation.
 - b. Hold open hardware shall provide for maximum four inches of window opening and shall include an adjustable friction shoe to provide resistance when closing the window.
 - c. Handles shall be removable.
6. Hardware for Maintenance Opening of Windows: Opening beyond the four inch position shall be accomplished with a window washers key. The release device shall capture the key when window is in the open position.
7. Design operating device to prevent opening with standard tools, coins or bent wire devices.

2.3 THERMAL AND CONDENSATION PERFORMANCE

- A. Condensation Resistance Factor (CRF): Minimum CRF of C 55.
- B. Thermal Transmittance:
 - 1. Maximum U value class for insulating glass windows: 50 (U=0.50).
- C. Solar Heat Gain Coefficient (SHGC): SHGC shall comply with State or local energy code requirement.

2.4 FABRICATION

- A. Fabrication to exceed or meet requirements of Physical Load Tests, Air Infiltration Test, and Water Resistance Test of AAMA 101/I.S.2/A440.
- B. Glazing:
 - 1. Triple glazed access panel at sash ventilators and fixed panels with concealed hinges and hook latch for custodial operation.
 - 2. Integral Venetian Blinds: 5/8" wide aluminum slat blinds mounted between triple glazing.
 - 3. Interior glazing shall be 7/16" clear tempered laminated glass.
 - 4. Glaze outside unit in accordance with Section 08 80 00, GLAZING, 1" clear low 'E' insulated glazing unites, GL.
 - 5. Windows reglazable without dismantling sash framing.
 - 6. Design rabbet to suit glass thickness and glazing method specified.
 - 7. In Security Bedrooms and Security Psychiatric Nursing Units, glaze from outside.
 - 8. Provide removable fin type glazing beads.
- C. Trim:
 - 1. Trim includes casings, closures, and panning.
 - 2. Fabricate to shapes shown of aluminum not less than 1.6 mm (0.062 inch) thick
 - 3. Extruded or formed sections, straight, true, and smooth on exposed surfaces.
 - 4. Exposed external corners mitered and internal corners coped; fitted with hairline joints.
 - 5. Reinforce 1.6 mm (0.062 inch) thick members with not less than 3 mm (1/8-inch) thick aluminum.
 - 6. Except for strap anchors, provide reinforcing for fastening near ends and at intervals not more than 305 mm (12 inches) between ends.
 - 7. Design to allow unrestricted expansion and contraction of members and window frames.
 - 8. Secure to window frames with machine screws or expansion rivets.
 - 9. Exposed screws, fasteners or pop rivets are not acceptable on exterior of the casing or trim cover system.

D. Thermal-Break Construction:

1. Manufacturer's Standard.
2. Low conductance thermal barrier.
3. Capable of structurally holding sash in position and together.
4. All Thermal Break Assemblies (Pour & Debridge, Insulbar or others) shall be tested as per AAMA TIR A8 and AAMA 505 for Dry Shrinkage and Composite Performance.
5. Location of thermal barrier and design of window shall be such that, in closed position, outside air shall not come in direct contact with interior frame of the window.

E. Mullions: AAMA 101/I.S.2/A440.

F. Subsills and Stools:

1. Fabricate to shapes shown of not less than 2 mm (0.080 inch) thick extruded aluminum.
2. One piece full length of opening with concealed anchors.
3. Sills turned up back edge not less than 6 mm (1/4 inch). Front edge provide with drip.
4. Sill back edge behind face of window frame. Do not extend to interior surface or bridge thermal breaks.
5. Do not perforate for anchorage, clip screws, or other requirements.

G. Insect Screens:

1. AAMA 101/I.S.2/A440.
2. Aluminum screen cloth.

2.5 CASEMENT WINDOWS

- A. AAMA certified product to the AAMA 101/I.S.2/A440. - 11 standard.

2.6 FINISH

- A. In accordance with NAAMM AMP 500 series.

- B. Finish exposed aluminum surfaces as follows:

1. Anodized Aluminum:
 - a. Finish in accordance with AMP 501 letters and numbers.
 - b. Colored anodized Finish: AA-C22A42 (anodized) or AA-C22A44 (electrolytically deposited metallic compound) medium matte, integrally colored coating, Class 1 Architectural, 0.7 mils thick.
 - 1) Dyes not accepted.
 - 2) Coated Aluminum:
 - 3) Variation of more than 50 percent of maximum shade range approved will not be accepted in a single window or in adjacent windows and mullions on a continuous series.
 - a) AMP 501 and 505.

- b) Fluorocarbon Finish: AAMA 2605, superior performing organic coating.
- c) Steel: AMP 504.
- d) Stainless steel: AMP 503.
 - 1. Concealed: 2B or 2D.
 - 2. Exposed: No. 4 unless specified otherwise.
- C. Hardware: Finish hardware exposed when window is in the closed position: Match window color.

PART 3 - EXECUTION

3.1 PROTECTION (DISSIMILAR MATERIALS): AAMA 101/I.S.2/A440.

3.2 INSTALLATION, GENERAL

- A. Install window units in accordance with manufacturer's specifications and recommendations for installation of window units, hardware, operators and other components of work.
- B. Where type, size or spacing of fastenings for securing window accessories or equipment to building construction is not shown or specified, use expansion or toggle bolts or screws, as best suited to construction material.
 - 1. Provide bolts or screws minimum 6 mm (1/4-inch) in diameter.
 - 2. Sized and spaced to resist the tensile and shear loads imposed.
 - 3. Do not use exposed fasteners on exterior, except when unavoidable for application of hardware.
 - 4. Provide non-magnetic stainless steel Phillips flat-head machine screws for exposed fasteners, where required, or special tamper-proof fasteners.
 - 5. Locate fasteners to not disturb the thermal break construction of windows.
- C. Set windows plumb, level, true, and in alignment; without warp or rack of frames or sash.
- D. Anchor windows on four sides with anchor clips or fin trim.
 - 1. Do not allow anchor clips to bridge thermal breaks.
 - 2. Use separate clips for each side of thermal breaks.
 - 3. Make connections to allow for thermal and other movements.
 - 4. Do not allow building load to bear on windows.
 - 5. Use manufacturer's standard clips at corners and not over 600 mm (24 inches) on center.
 - 6. Where fin trim anchorage is shown build into adjacent construction, anchoring at corners and not over 600 mm (24 inches) on center.
- E. Replacement Windows:

1. Do not remove existing windows until new replacement is available, ready for immediate installation.
2. Remove existing work carefully; avoid damage to existing work to remain.
3. Perform all other operations as necessary to prepare openings for proper installation and operation of new units.
4. Do not leave openings uncovered at end of working day, during precipitation or temperatures below 16 degrees C (60 degrees F.).

3.3 MULLIONS CLOSURES, TRIM, AND PANNING

- A. Cut mullion full height of opening and anchor directly to window frame on each side.
- B. Closures, Trim, and Panning: External corners mitered and internal corners coped, fitted with hairline, tightly closed joints.
- C. Secure to concrete or solid masonry with expansion bolts, expansion rivets, split shank drive bolts, or powder actuated drive pins.
- D. Toggle bolt to hollow masonry units. Screwed to wood or metal.
- E. Fasten except for strap anchors, near ends and corners and at intervals not more than 300 mm (12 inches) between.
- F. Seal units following installation to provide weathertight system.

3.4 ADJUST AND CLEAN

- A. Adjust ventilating sash and hardware to provide tight fit at contact points, and at weather-stripping for smooth operation and weathertight closure.
- B. Clean aluminum surfaces promptly after installation of windows, exercising care to avoid damage to protective coatings and finishes.
- C. Remove excess glazing and sealant compounds, dirt, and other substances.
- D. Lubricate hardware and moving parts.
- E. Clean glass promptly after installation of windows. Remove glazing and sealant compound, dirt and other substances.
- F. Except when a window is being adjusted or tested, keep locked in the closed position during the progress of work on the project.

3.5 OPERATION DEVICES

- A. Provide wrenches, keys, or removable locking operating handles, as specified to operate windows.
- B. Provide one emergency ventilating operating handle for every four windows.
- C. Provide two maintenance or window washer operating handles.

- - - E N D - - -

SECTION 08 52 00**PART 1 - GENERAL****1.1 SUMMARY**

- A. This Section includes aluminum-clad wood-framed windows.

1.2 PERFORMANCE REQUIREMENTS

- A. General: Provide wood windows capable of complying with performance requirements indicated based on testing manufacturer's windows that are representative of those specified, and that are of test size required by AAMA/WDMA 101/I.S.2/NAFS.
- B. Structural Performance: Provide wood windows capable of withstanding the effects of the following loads based on testing units representative of those indicated for Projects that pass AAMA/WDMA 101/I.S.2/NAFS, Uniform Load Structural Test:
1. Design Wind Loads: Determine design wind loads applicable to Project from basic wind speed indicated in miles per hour (meters per second) at 33 feet (10 m) above grade, according to ASCE 7, Section 6.5, "Method 2-Analytical Procedure," based on mean roof heights above grade indicated on Drawings.
 - a. Basic Wind Speed: 90 mph (40 m/s).
 - b. Importance Factor: 1.5.
 - c. Exposure Category: C.
 2. Deflection: Design glass framing system to limit lateral deflections of glass edges to less than 1/175 of glass-edge length or 3/4 inch (19 mm), whichever is less, at design pressure based on testing performed according to AAMA/WDMA 101/I.S.2/NAFS, Uniform Load Deflection Test or structural computations.

1.3 SUBMITTALS

- A. Product Data: For each type of wood window indicated.
- B. Shop Drawings: Include plans, elevations, sections, details, hardware, attachments to other work, operational clearances, and installation details in accordance with Section 01340 Samples and Shop Drawings.
1. Samples: For each exposed finish.
 2. Product Schedule: Use same designations indicated on Drawings.
 3. Product test reports.
 4. Maintenance data.

1.4 QUALITY ASSURANCE

- A. Installer: A qualified installer, approved by manufacturer to install manufacturer's products.
- B. Manufacturer Qualifications: A qualified manufacturer who is certified for chain of custody by an FSC-accredited certification body.
- C. Glazing Publications: Comply with published recommendations of glass manufacturers and with GANA's "Glazing Manual" unless more stringent requirements are indicated.
- D. Preinstallation Conference: Conduct conference at Project site.

1.5 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace wood windows that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Failure to meet performance requirements.
 - b. Structural failures including excessive deflection, water leakage, air infiltration, or condensation.
 - c. Faulty operation of movable sash and hardware.
 - d. Deterioration of wood, metals, vinyl, other materials, and finishes beyond normal weathering.
 - e. Failure of insulating glass.
 - 2. Warranty Period:
 - a. Window: 10 years from date of Substantial Completion.
 - b. Glazing: 20 years from date of Substantial Completion.
 - c. Metal Finish: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS**2.1 MANUFACTURERS**

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Clad Ultimate Double Hung, Marvin Windows and Doors or approved equal product.

2.2 MATERIALS

- A. Wood: Clear ponderosa pine or another suitable fine-grained lumber; kiln dried to a moisture content of 6 to 12 percent at time of fabrication; free of visible finger joints, blue stain, knots, pitch pockets, and surface checks larger than 1/32 inch (0.8 mm) deep by 2 inches (51 mm) wide; water-repellent preservative treated.

- B. Aluminum Extrusions and Rolled Aluminum for Cladding, High-Performance Organic Finish: Two-coat thermocured system with fluoropolymer coats containing not less than 70 percent polyvinylidene fluoride resin by weight, complying with AAMA 2604.

- 1. Color: As indicated on drawings.

2.3 WINDOW

- A. Window Type: Double hung with fixed upper (single hung) as indicated on Drawings.
- B. Condensation-Resistance Factor (CRF): Provide wood windows tested for thermal performance according to AAMA 1503, showing a CRF of 45.
- C. Thermal Transmittance: Provide wood windows with a whole-window, U-factor maximum indicated at 15-mph (24-km/h) exterior wind velocity and winter condition temperatures when tested according to AAMA 1503.
 - 1. U-Factor: 0.35 Btu/sq. ft. x h x deg F. (2.0 W/sq. m x K)
- D. Solar Heat-Gain Coefficient (SHGC): Provide wood windows with a whole-window SHGC maximum of 0.32, determined according to NFRC 200 procedures.

2.4 GLAZING

- A. Glass and Glazing Materials: Refer to Division 08 Section "Glazing" for glass units and glazing requirements applicable to glazed wood window units.

2.5 FABRICATION

- A. Fabricate wood windows that are reglazable without dismantling sash or ventilator framing.
- B. Weather Stripping: Provide full-perimeter weather stripping for each operable sash and ventilator.
- C. Factory machine windows for openings and for hardware that is not surface applied.
- D. Mullions: Provide mullions and cover plates as shown, matching window units, complete with anchors for support to structure and installation of window units. Allow for erection tolerances and provide for movement of window units due to thermal expansion and building deflections, as indicated. Provide mullions and cover plates capable of withstanding design loads of window units.

- E. Glazing Stops: Provide nailed or snap-on glazing stops coordinated with Division 08 Section "Glazing" and glazing system indicated. Provide glazing stops to match sash and ventilator frames.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Comply with Drawings, Shop Drawings, and manufacturer's written instructions for installing windows, hardware, accessories, and other components.
- B. Install windows level, plumb, square, true to line, without distortion or impeding thermal movement, anchored securely in place to structural support, and in proper relation to wall flashing and other adjacent construction.
- C. Set sill members in bed of sealant or with gaskets, as indicated, for weathertight construction.
- D. Separate aluminum and other corrodible surfaces from sources of corrosion or electrolytic action at points of contact with other materials.
- E. Adjust hardware, and accessories for a tight fit at contact points and weather stripping for smooth operation and weathertight closure. Lubricate hardware and moving parts.
- F. Clean exposed surfaces immediately after installing windows. Avoid damaging protective coatings and finishes. Remove excess sealants, glazing materials, dirt, and other substances.
- G. Clean factory-glazed glass immediately after installing windows. Comply with manufacturer's written recommendations for final cleaning and maintenance. Remove nonpermanent labels, and clean surfaces.
- H. Remove and replace glass that has been broken, chipped, cracked, abraded, or damaged during construction period.
- I. Replacement Windows:
 - 1. Do not remove existing windows until new replacement is available, ready for immediate installation.
 - 2. Remove existing work carefully; avoid damage to existing work to remain.
 - 3. Perform all other operations as necessary to prepare openings for proper installation and operation of new units.
 - 4. Do not leave openings uncovered at end of working day, during precipitation or temperatures below 16 degrees C (60 degrees F).

3.2 MULLIONS CLOSURES, TRIM AND PANNING

- A. Cut mullion full height of opening and anchor directly to window frame on each side.
- B. Closures, Trim and Panning: External corners mitered and internal corners coped, fitted with hairline, tightly closed joints.
- C. Secure to concrete or solid masonry with expansion bolts, expansion rivets, split shank drive bolts, or powder actuated drive pins.
- D. Toggle bolt to hollow masonry units. Screwed to wood or metal.
- E. Fasten except for strap anchors, near ends and corners and at intervals not more than 300 mm (12 inches) between.
- F. Seal units following installation to provide weathertight system.

- - - E N D - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 087100

DOOR HARDWARE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes commercial door hardware for the following:
 - 1. Swinging doors.
 - 2. Sliding doors.
 - 3. Other doors to the extent indicated.
- B. Door hardware includes, but is not necessarily limited to, the following:
 - 1. Mechanical door hardware.
 - 2. Electromechanical door hardware, power supplies, back-ups and surge protection.
 - 3. Automatic operators.
 - 4. Cylinders specified for doors in other sections.
- C. Related Sections:
 - 1. Section 08 06 71 - Door Hardware Schedule.
 - 2. Section 08 11 13 - Hollow Metal Doors and Frames.
 - 3. Section 08 14 16 - Flush Wood Doors.
 - 4. Section 08 71 13 - Automatic Door Operators.
 - 5. Section 08 74 00 - Access Control Hardware.
- D. Codes and References: Comply with the version year adopted by the Authority Having Jurisdiction.
 - 1. ANSI A117.1 - Accessible and Usable Buildings and Facilities.
 - 2. ICC/IBC - International Building Code.
 - 3. NFPA 80 - Fire Doors and Windows.
 - 4. NFPA 101 - Life Safety Code.
 - 5. NFPA 105 - Installation of Smoke Door Assemblies.
 - 6. State Building Codes, Local Amendments.
- E. Standards: All hardware specified herein shall comply with the following industry standards:
 - 1. ANSI/BHMA Certified Product Standards - A156 Series
 - 2. UL10C - Positive Pressure Fire Tests of Door Assemblies

1.3 SUBMITTALS

- A. Product Data: Manufacturer's product data sheets including installation details, material descriptions, dimensions of individual components and profiles, operational descriptions and finishes.
- B. Door Hardware Schedule: Prepared by or under the supervision of supplier, detailing fabrication and assembly of door hardware, as well as procedures and diagrams. Coordinate the final Door Hardware Schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of door hardware.
 - 1. Format: Comply with scheduling sequence and vertical format in DHI's "Sequence and Format for the Hardware Schedule."
 - 2. Organization: Organize the Door Hardware Schedule into door hardware sets indicating complete designations of every item required for each door or opening. Organize door hardware sets in same order as in the Door Hardware Sets at the end of Part 3. Submittals that do not follow the same format and order as the Door Hardware Sets will be rejected and subject to resubmission.
 - 3. Content: Include the following information:
 - a. Type, style, function, size, label, hand, and finish of each door hardware item.
 - b. Manufacturer of each item.
 - c. Fastenings and other pertinent information.
 - d. Location of door hardware set, cross-referenced to Drawings, both on floor plans and in door and frame schedule.
 - e. Explanation of abbreviations, symbols, and codes contained in schedule.
 - f. Mounting locations for door hardware.
 - g. Door and frame sizes and materials.
 - 4. Submittal Sequence: Submit the final Door Hardware Schedule at earliest possible date, particularly where approval of the Door Hardware Schedule must precede fabrication of other work that is critical in the Project construction schedule. Include Product Data, Samples, Shop Drawings of other work affected by door hardware, and other information essential to the coordinated review of the Door Hardware Schedule.

- C. Shop Drawings: Details of electrified access control hardware indicating the following:
1. Wiring Diagrams: Upon receipt of approved schedules, submit detailed system wiring diagrams for power, signaling, monitoring, communication, and control of the access control system electrified hardware. Differentiate between manufacturer-installed and field-installed wiring. Include the following:
 - a. Elevation diagram of each unique access controlled opening showing location and interconnection of major system components with respect to their placement in the respective door openings.
 - b. Complete (risers, point-to-point) access control system block wiring diagrams.
 2. Electrical Coordination: Coordinate with related Division 26 Electrical Sections the voltages and wiring details required at electrically controlled and operated hardware openings.
- D. Keying Schedule: Prepared under the supervision of the Owner, separate schedule detailing final keying instructions for locksets and cylinders in writing. Include keying system explanation, door numbers, key set symbols, hardware set numbers and special instructions. Owner to approve submitted keying schedule prior to the ordering of permanent cylinders.
- E. Operating and Maintenance Manuals: Provide manufacturers operating and maintenance manuals for each item comprising the complete door hardware installation in quantity as required in Division 01, Closeout Submittals. The manual to include the name, address, and contact information of the manufacturers providing the hardware and their nearest service representatives. The final copies delivered after completion of the installation test to include "as built" modifications made during installation, checkout, and acceptance.
- F. Warranties and Maintenance: Special warranties and maintenance agreements specified in this Section.

1.4 QUALITY ASSURANCE

- A. Manufacturers Qualifications: Engage qualified manufacturers with a minimum 5 years of documented experience in producing hardware and equipment similar to that indicated for this Project and that have a proven record of successful in-service performance.

- B. Installer Qualifications: Installers, trained by the primary product manufacturers, with a minimum 3 years documented experience installing both standard and electrified builders hardware similar in material, design, and extent to that indicated for this Project and whose work has resulted in construction with a record of successful in-service performance.
- C. Door Hardware Supplier Qualifications: Experienced commercial door hardware distributors with a minimum 5 years documented experience supplying both mechanical and electromechanical hardware installations comparable in material, design, and extent to that indicated for this Project. Supplier recognized as a factory direct distributor in good standing by the manufacturers of the primary materials with a warehousing facility in Project's vicinity. Supplier to have on staff a certified Architectural Hardware Consultant (AHC) available during the course of the Work to consult with Contractor, Architect, and Owner concerning both standard and electromechanical door hardware and keying.
 - 1. Scheduling Responsibility: Preparation of door hardware and keying schedules.
- D. Source Limitations: Obtain each type and variety of Door Hardware specified in this Section from a single source, qualified supplier unless otherwise indicated.
 - 1. Electrified modifications or enhancements made to a source manufacturer's product line by a secondary or third party source will not be accepted.
 - 2. Provide electromechanical door hardware from the same manufacturer as mechanical door hardware, unless otherwise indicated.
- E. Regulatory Requirements: Comply with NFPA 70, NFPA 80, NFPA 101 and ANSI A117.1 requirements and guidelines as directed in the model building code including, but not limited to, the following:
 - 1. NFPA 70 "National Electrical Code", including electrical components, devices, and accessories listed and labeled as defined in Article 100 by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
 - 2. Where indicated to comply with accessibility requirements, comply with Americans with Disabilities Act (ADA), "Accessibility

Guidelines for Buildings and Facilities (ADAAG)," ANSI A117.1 as follows:

- a. Handles, Pulls, Latches, Locks, and other Operating Devices:
Shape that is easy to grasp with one hand and does not require tight grasping, tight pinching, or twisting of the wrist.
 - b. Door Closers: Comply with the following maximum opening-force requirements indicated:
 - 1) Interior Hinged Doors: 5 lbf applied perpendicular to door.
 - 2) Fire Doors: Minimum opening force allowable by authorities having jurisdiction.
 - c. Thresholds: Not more than 1/2 inch high. Bevel raised thresholds with a slope of not more than 1:2.
3. NFPA 101: Comply with the following for means of egress doors:
- a. Latches, Locks, and Exit Devices: Not more than 15 lbf to release the latch. Locks shall not require the use of a key, tool, or special knowledge for operation.
 - b. Thresholds: Not more than 1/2 inch high.
4. Fire-Rated Door Assemblies: Provide door hardware for assemblies complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire ratings indicated, based on testing according to NFPA 252 (neutral pressure at 40" above sill) or UL-10C.
- a. Test Pressure: Positive pressure labeling.
- F. Each unit to bear third party permanent label demonstrating compliance with the referenced standards.
- G. Keying Conference: Conduct conference to comply with requirements in Division 01 Section "Project Meetings." Keying conference to incorporate the following criteria into the final keying schedule document:
- 1. Function of building, purpose of each area and degree of security required.
 - 2. Plans for existing and future key system expansion.
 - 3. Requirements for key control storage and software.
 - 4. Installation of permanent keys, cylinder cores and software.

5. Address and requirements for delivery of keys.

H. Pre-Submittal Conference: Conduct coordination conference in compliance with requirements in Division 01 Section "Project Meetings" with attendance by representatives of Supplier(s), Installer(s), and Contractor(s) to review proper methods and the procedures for receiving, handling, and installing door hardware.

1. Prior to installation of door hardware, arrange for manufacturers' representatives to hold a project specific training meeting to instruct the installing contractors' personnel on the proper installation and adjustment of their respective products. Product training to be attended by installers of door hardware (including electromechanical hardware) for aluminum, hollow metal and wood doors. Training will include the use of installation manuals, hardware schedules, templates and physical product samples as required.

2. Inspect and discuss electrical roughing-in, power supply connections, and other preparatory work performed by other trades.

3. Review sequence of operation narratives for each unique access controlled opening.

4. Review and finalize construction schedule and verify availability of materials.

5. Review the required inspecting, testing, commissioning, and demonstration procedures

I. At completion of installation, provide written documentation that components were applied to manufacturer's instructions and recommendations and according to approved schedule.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Inventory door hardware on receipt and provide secure lock-up and shelving for door hardware delivered to Project site. Do not store electronic access control hardware, software or accessories at Project site without prior authorization.

B. Tag each item or package separately with identification related to the final Door Hardware Schedule, and include basic installation instructions with each item or package.

C. Deliver, as applicable, permanent keys, cylinders, cores, access control credentials, software and related accessories directly to

Owner via registered mail or overnight package service. Instructions for delivery to the Owner shall be established at the "Keying Conference".

1.6 COORDINATION

- A. Templates: Obtain and distribute to the parties involved templates for doors, frames, and other work specified to be factory prepared for installing standard and electrified hardware. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing hardware to comply with indicated requirements.
- B. Door Hardware and Electrical Connections: Coordinate the layout and installation of scheduled electrified door hardware and related access control equipment with required connections to source power junction boxes, low voltage power supplies, detection and monitoring hardware, and fire and detection alarm systems.
- C. Door and Frame Preparation: Related Division 08 Sections (Steel, Aluminum and Wood) doors and corresponding frames are to be prepared, reinforced and pre-wired (if applicable) to receive the installation of the specified electrified, monitoring, signaling and access control system hardware without additional in-field modifications.

1.7 WARRANTY

- A. General Warranty: Reference Division 01, General Requirements. Special warranties specified in this Article shall not deprive Owner of other rights Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of the Contract Documents.
- B. Warranty Period: Written warranty, executed by manufacturer(s), agreeing to repair or replace components of standard and electrified door hardware that fails in materials or workmanship within specified warranty period after final acceptance by the Owner. Failures include, but are not limited to, the following:
 - 1. Structural failures including excessive deflection, cracking, or breakage.
 - 2. Faulty operation of the hardware.
 - 3. Deterioration of metals, metal finishes, and other materials beyond normal weathering.
 - 4. Electrical component defects and failures within the systems operation.

C. Standard Warranty Period: One year from date of Substantial Completion, unless otherwise indicated.

D. Special Warranty Periods:

1. Ten years for mortise locks and latches.
2. Five years for exit hardware.
3. Twenty five years for manual door closers.
4. Two years for electromechanical door hardware.

1.8 MAINTENANCE SERVICE

A. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions as needed for Owner's continued adjustment, maintenance, and removal and replacement of door hardware.

B. Continuing Service: Beginning at Substantial Completion, and running concurrent with the specified warranty period, provide continuous (6) months full maintenance including repair and replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper door opening operation. Provide parts and supplies as used in the manufacture and installation of original products.

PART 2 - PRODUCTS

2.1 HANGING DEVICES

A. Hinges: ANSI/BHMA A156.1 certified butt hinges with number of hinge knuckles as specified in the Door Hardware Sets.

1. Quantity: Provide the following hinge quantity, unless otherwise indicated:
 - a. Two Hinges: For doors with heights up to 60 inches.
 - b. Three Hinges: For doors with heights 61 to 90 inches.
 - c. Four Hinges: For doors with heights 91 to 120 inches.
 - d. For doors with heights more than 120 inches, provide 4 hinges, plus 1 hinge for every 30 inches of door height greater than 120 inches.
2. Hinge Size: Provide the following, unless otherwise indicated, with hinge widths sized for door thickness and clearances required:
 - a. Widths up to 3'0": 4-1/2" standard or heavy weight as specified.

- b. Sizes from 3'1" to 4'0": 5" standard or heavy weight as specified.
 - 3. Hinge Weight and Base Material: Unless otherwise indicated, provide the following:
 - a. Exterior Doors: Heavy weight, non-ferrous, ball bearing hinges unless Hardware Sets indicate standard weight.
 - b. Interior Doors: Standard weight, steel, ball bearing hinges unless Hardware Sets indicate heavy weight.
 - c. Tornado Resistant Assemblies: At a minimum, provide heavy weight hinges with stainless steel screws used in accordance with and specified as part of a Severe Storm Shelter Opening meeting ICC 500 and FEMA 361.
 - 4. Hinge Options: Comply with the following where indicated in the Hardware Sets or on Drawings:
 - a. Non-removable Pins: Provide set screw in hinge barrel that, when tightened into a groove in hinge pin, prevents removal of pin while door is closed; for the following applications:
 - 1) Out-swinging exterior doors.
 - 2) Out-swinging access controlled doors.
 - 3) Out-swinging lockable doors.
 - 5. Acceptable Manufacturers:
 - a. Hager Companies (HA).
 - b. McKinney Products (MK).
 - c. Stanley Hardware (ST).
- B. Pin and Barrel Continuous Hinges: ANSI/BHMA A156.26 certified pin and barrel continuous hinges with minimum 12 gauge (.105) Type 304 stainless steel hinge leaves, concealed teflon-coated stainless pin, and twin self-lubricated nylon bearings at each knuckle separation. Fabricate hinges non-handed and U.L. listed for use on up to and including 3 hour rated doors and U.L. listed for windstorm components where applicable. Provide hinges with power transfer cutouts where indicated at electrified openings.
 - 1. Acceptable Manufacturers:
 - a. Markar Products (MR).
 - b. McKinney Products (MK).

c. Stanley Hardware (ST).

2.2 POWER TRANSFER DEVICES

A. Electrified Quick Connect Transfer Hinges: Provide electrified transfer hinges with Molex™ standardized plug connectors and sufficient number of concealed wires (up to 12) to accommodate the electrified functions specified in the Door Hardware Sets. Connectors plug directly to through-door wiring harnesses for connection to electric locking devices and power supplies. Wire nut connections are not acceptable.

1. Acceptable Manufacturers:

a. Hager Companies (HA) - ETW-QC (# wires) Option.

b. McKinney Products (MK) - QC (# wires) Option.

c. Stanley Hardware (ST) - QC (# wires) Option.

B. Concealed Quick Connect Electric Power Transfers: Provide concealed wiring pathway housing mortised into the door and frame for low voltage electrified door hardware. Furnish with Molex™ standardized plug connectors and sufficient number of concealed wires (up to 12) to accommodate the electrified functions specified in the Door Hardware Sets. Connectors plug directly to through-door wiring harnesses for connection to electric locking devices and power supplies. Wire nut connections are not acceptable.

1. Acceptable Manufacturers:

a. McKinney (MK) - EL-EPT.

b. Securitron (SU) - EL-CEPT Series.

c. Architectural Builders Hardware (AH) - PT-1000

Electric Door Hardware Cords: Provide electric transfer wiring harnesses with standardized plug connectors to accommodate up to twelve (12) wires. Connectors plug directly to through-door wiring harnesses for connection to electric locking devices and power supplies. Provide sufficient number of concealed wires to accommodate electric function of specified hardware. Provide a connector for through-door electronic locking devices and from hinge to junction box above the opening. Wire nut connections are not acceptable. Determine the length required for each electrified hardware component for the door type, size and construction, minimum of two per electrified opening.

2. Acceptable Manufacturers:

- a. McKinney Products (MK) - QC-C Series.

Provide one each of the following tools as part of the base bid contract:

- a. McKinney Products (MK) - Electrical Connecting Kit: QC-R001.
- b. McKinney Products (MK) - Connector Hand Tool: QC-R003.

2.3 DOOR OPERATING TRIM

- A. Flush Bolts and Surface Bolts: ANSI/BHMA A156.3 and A156.16, Grade 1, certified automatic, self-latching, and manual flush bolts and surface bolts. Manual flush bolts to be furnished with top rod of sufficient length to allow bolt location approximately six feet from the floor. Furnish dust proof strikes for bottom bolts. Surface bolts to be minimum 8" in length and U.L. listed for labeled fire doors and U.L. listed for windstorm components where applicable. Provide related accessories (mounting brackets, strikes, coordinators, etc.) as required for appropriate installation and operation.

1. Acceptable Manufacturers:

- a. Rockwood Manufacturing (RO).
- b. Trimco (TC).

- B. Door Push Plates and Pulls: ANSI/BHMA A156.6 certified door pushes and pulls of type and design specified below or in the Hardware Sets. Coordinate and provide proper width and height as required where conflicting hardware dictates.

- 1. Push/Pull Plates: Minimum .050 inch thick, 4-inches wide by 16-inches high, with square corners and beveled edges, secured with exposed screws unless otherwise indicated.
- 2. Straight Pull Design: Minimum 1-inch round diameter stainless steel bar or tube stock pulls with 2 1/2-inch projection from face of door unless otherwise indicated.
- 3. Offset Pull Design: Minimum 1-inch round diameter stainless steel bar or tube stock pulls with 2 1/2-inch projection and offset of 90 degrees unless otherwise indicated.
- 4. Push Bars: Minimum 1-inch round diameter horizontal push bars with minimum clearance of 2 1/2-inch projection from face of door unless otherwise indicated.

5. Fasteners: Provide manufacturer's designated fastener type as indicated in Hardware Sets.

a. Acceptable Manufacturers:

- 1) Burns Manufacturing (BU).
- 2) Rockwood Manufacturing (RO).
- 3) Trimco (TC).

2.4 CYLINDERS AND KEYING

A. General: Cylinder manufacturer to have minimum (10) years experience designing secured master key systems and have on record a published security keying system policy.

B. Source Limitations: Obtain each type of keyed cylinder and keys from the same source manufacturer as locksets and exit devices, unless otherwise indicated.

1. Acceptable Manufacturers:

a. Stanley Best (BE). No Sub

C. Cylinders: Original manufacturer cylinders complying with the following:

1. Mortise Type: Threaded cylinders with rings and straight- or clover-type cam.
2. Rim Type: Cylinders with back plate, flat-type vertical or horizontal tailpiece, and raised trim ring.
3. Bored-Lock Type: Cylinders with tailpieces to suit locks.
4. Mortise and rim cylinder collars to be solid and recessed to allow the cylinder face to be flush and be free spinning with matching finishes.

D. Permanent Cores: Manufacturer's standard; finish face to match lockset; complying with the following:

1. Interchangeable Cores: Core insert, removable by use of a special key; usable with other manufacturers' cylinders.

E. Keying System: Each type of lock and cylinders to be factory keyed. Conduct specified "Keying Conference" to define and document keying system instructions and requirements. Furnish factory cut, nickel-silver large bow permanently inscribed with a visual key control number as directed by Owner. Incorporate decisions made in keying conference, and as follows:

1. Existing System: Master key or grand master key locks to Owner's existing system.
- F. Key Quantity: Provide the following minimum number of keys:
1. Change Keys per Cylinder: Two (2)
 2. Construction Control Keys (where required): Two (2)
 3. Permanent Control Keys (where required): Two (2)
- G. Construction Keying: Provide construction master keyed cylinders or temporary keyed construction cores where specified. Provide construction master keys in quantity as required by project Contractor. Replace construction cores with permanent cores. Furnish permanent cores for installation as directed under specified "Keying Conference".

2.5 MECHANICAL LOCKS AND LATCHING DEVICES

- A. Mortise Locksets, Grade 1 (Heavy Duty): ANSI/BHMA A156.13, Series 1000, Operational Grade 1 certified mortise locksets furnished in the functions as specified in the Hardware Sets. Locksets to be manufactured with a corrosion resistant, stamped 12 gauge minimum formed steel case and be field-reversible for handing without disassembly of the lock body. Lockset trim (including knobs, levers, escutcheons, roses) to be the product of a single manufacturer. Furnish with standard 2 3/4" backset, 3/4" throw anti-friction stainless steel latchbolt, and a full 1" throw stainless steel bolt for deadbolt functions.
1. Acceptable Manufacturers:
 - a. Sargent Manufacturing (SA) - 8200 Series.
 - b. Stanley Best (BE) - 47H Series.
- B. Lock Trim Design: As specified in Hardware Sets.

2.6 ELECTROMECHANICAL LOCKING DEVICES

- A. Electromechanical Mortise Locksets, Grade 1 (Heavy Duty): Subject to same compliance standards and requirements as mechanical mortise locksets, electrified locksets to be of type and design as specified below.
1. Electrified Lock Options: Where indicated in the Hardware Sets, provide electrified options including: outside door lock/unlock trim control, latchbolt and lock/unlock status monitoring, and request-to-exit signaling. Unless otherwise indicated, provide electrified locksets standard as fail secure.

2. Acceptable Manufacturers:\
 - a. Sargent Manufacturing (SA) - 8200 Series.
 - b. Stanley Best (BE) - 47HW EL/EU Series.

2.7 LOCK AND LATCH STRIKES

- A. Strikes: Provide manufacturer's standard strike with strike box for each latch or lock bolt, with curved lip extended to protect frame, finished to match door hardware set, unless otherwise indicated, and as follows:
 1. Flat-Lip Strikes: For locks with three-piece antifriction latchbolts, as recommended by manufacturer.
 2. Extra-Long-Lip Strikes: For locks used on frames with applied wood casing trim.
 3. Aluminum-Frame Strike Box: Provide manufacturer's special strike box fabricated for aluminum framing.
- B. Standards: Comply with the following:
 1. Strikes for Mortise Locks and Latches: BHMA A156.13.
 2. Strikes for Bored Locks and Latches: BHMA A156.2.
 3. Strikes for Auxiliary Deadlocks: BHMA A156.5.
 4. Dustproof Strikes: BHMA A156.16.

2.8 ELECTROMAGNETIC LOCKING DEVICES

- A. Surface Electromagnetic Locks (Heavy Duty): Electromagnetic locks to be surface mounted type conforming to ANSI A156.23, Grade 1 with minimum holding force strength of 1,200 pounds. Locks to be capable of either 12 or 24 voltage and be UL listed for use on fire rated door assemblies. Electronics are to be fully sealed against tampering and allow exterior weatherproof applications. As indicated in Hardware Sets, provide specified mounting brackets and housings. Power supply to be by the same manufacturer as the lock with combined products having a lifetime replacement warranty.
 1. Acceptable Manufacturers:
 - a. Security Door Controls (SD) - EMLock 1500 Series.
 - b. Securitron (SU) - M62 Series.

2.9 ELECTRIC STRIKES

- A. Standard Electric Strikes: Heavy duty, cylindrical and mortise lock electric strikes conforming to ANSI/BHMA A156.31, Grade 1, UL listed for both Burglary Resistance and for use on fire rated door assemblies. Stainless steel construction with dual interlocking

plunger design tested to exceed 3000 lbs. of static strength and 350 ft-lbs. of dynamic strength. Strikes tested for a minimum 1 million operating cycles. Provide strikes with 12 or 24 VDC capability and supplied standard as fail-secure unless otherwise specified. Option available for latchbolt and latchbolt strike monitoring indicating both the position of the latchbolt and locked condition of the strike.

1. Acceptable Manufacturers:

- a. Folger Adam EDC (FO).
- b. HES (HS).
- c. Security Door Controls (SD).

- B. Provide electric strikes with in-line power controller and surge suppressor by the same manufacturer as the strike with combined products having unlimited lifetime warranty.

2.10 CONVENTIONAL EXIT DEVICES

- A. Conventional Push Rail Exit Devices (Heavy Duty): ANSI/BHMA A156.3, Grade 1 certified panic and fire exit hardware devices furnished in the functions specified in the Hardware Sets. Mounting rails to be formed from smooth stainless steel, brass or bronze architectural materials no less than 0.072" thick, with push rails a minimum of 0.062" thickness. Painted or aluminum metal rails are not acceptable. Exit device latch to be investment cast stainless steel, pullman type, with deadlock feature.

1. Acceptable Manufacturers:

- a. Corbin Russwin Hardware (RU) - ED4000 / ED5000 Series.
- b. Sargent Manufacturing (SA) - 80 Series.
- c. Stanley Precision (PR) - Apex 2000 Series.

2.11 DOOR CLOSERS

- A. All door closers specified herein shall meet or exceed the following criteria:

1. General: Door closers to be from one manufacturer, matching in design and style, with the same type door preparations and templates regardless of application or spring size. Closers to be non-handed with full sized covers including installation and adjusting information on inside of cover.

2. Standards: Closers to comply with UL-10C and UBC 7-2 for Positive Pressure Fire Test and be U.L. listed for use of fire rated doors.
 3. Size of Units: Comply with manufacturer's written recommendations for sizing of door closers depending on size of door, exposure to weather, and anticipated frequency of use. Where closers are indicated for doors required to be accessible to the physically handicapped, provide units complying with ANSI ICC/A117.1.
 4. Closer Arms: Provide heavy duty, forged steel closer arms unless otherwise indicated in Hardware Sets.
 - a. Where closers are indicated to have mechanical dead-stop, provide heavy duty arms and brackets with an integral positive stop.
 - b. Where closers are indicated to have mechanical hold open, provide heavy duty units with an additional built-in mechanical holder assembly designed to hold open against normal wind and traffic conditions. Holder to be manually selectable to on-off position.
 - c. Where closers are indicated to have a cushion-type stop, provide heavy duty arms and brackets with spring stop mechanism to cushion door when opened to maximum degree.
 - d. Closers shall not be installed on exterior or corridor side of doors; where possible install closers on door for optimum aesthetics. Provide drop plates or other accessories as required for proper mounting.
 5. Closer Accessories: Provide door closer accessories including custom templates, special mounting brackets, spacers and drop plates, and through-bolt or security type fasteners as specified in the door Hardware Sets.
- B. Door Closers, Surface Mounted (Heavy Duty): ANSI/BHMA A156.4, Grade 1 surface mounted, heavy duty door closers with complete spring power adjustment, sizes 1 thru 6; and fully operational adjustable according to door size, frequency of use, and opening force. Closers to be rack and pinion type, one piece cast iron or aluminum alloy body construction, with adjustable backcheck and separate non-critical valves for closing sweep and latch speed control. Provide non-handed units and high impact, non-corrosive plastic covers standard.

1. Acceptable Manufacturers:
 - a. LCN (LC) - 4040XP Series.
 - b. Norton Door Controls (NO) - 7500 Series.
 - c. Stanley Hardware (ST) - DC100 Series.

2.12 AUTOMATIC DOOR OPERATORS

- A. General: Provide operators of size recommended by manufacturer for door size, weight, and movement; for condition of exposure; and for compliance with UL 325. Coordinate operator mechanisms with door operation, hinges, and activation devices.
 1. Fire-Rated Doors: Provide door operators for fire-rated door assemblies that comply with NFPA 80 for fire-rated door components and are listed and labeled by a qualified testing agency.
- B. Electromechanical Door Operators: Self-contained units powered by permanent magnet DC motor, with closing speed controlled mechanically by gear train, connections for power, activation and safety device wiring, and manual operation including spring closing when power is off.
- C. Electrohydraulic Door Operators: Self-contained low-pressure units with separate cylinders for power and checking, connections for power, activation, and safety device wiring and manual operation including spring closing when power is off.
- D. Brackets and Reinforcements: Manufacturer's standard, fabricated from aluminum with nonferrous shims for aligning system components.
- E. Standard: Certified ANSI/BHMA A156.19.
 1. Performance Requirements:
 - a. Opening Force if Power Fails: Not more than 15 lbf required to release a latch if provided, not more than 30 lbf required to manually set door in motion, and not more than 15 lbf required to fully open door.
 - b. Entrapment Protection: Not more than 15 lbf required to prevent stopped door from closing or opening.
- F. Configuration: Surface mounted. Door operators to control single swinging and pair of swinging doors.
- G. Operation: Power opening and spring closing operation capable of meeting ANSI A117.1 accessibility guideline. Provide time delay for

door to remain open before initiating closing cycle as required by ANSI/BHMA A156.19. When not in automatic mode, door operator to function as manual door closer with fully adjustable opening and closing forces, with or without electrical power.

1. On-off switch to control power to be key switch operated.

H. Features: Operator units to have full feature adjustments for door opening and closing force and speed, backcheck, motor assist acceleration from 0 to 30 seconds, time delay, vestibule interface delay, obstruction recycle, and hold open time from 0 up to 30 seconds.

I. Provide outputs and relays on board the operator to allow for coordination of exit device latch retraction, electric strikes, magnetic locks, card readers, safety and motion sensors and specified auxiliary contacts.

J. Activation Devices: Provide activation devices in accordance with ANSI/BHMA A156.19 standard, for condition of exposure indicated and for long term, maintenance free operation under normal traffic load operation. Coordinate activation control with electrified hardware and access control interfaces. Activation switches are standard SPST, with optional DPDT availability.

K. Signage: As required by cited ANSI/BHMA A156.19 standard for the type of operator.

1. Acceptable Manufacturers:

a. Besam Automated Entrance Systems (BE) - SW200 Series.

b. Sargent Manufacturing (SA) - MPower CL4000 Series.

c. Stanley Hardware (ST) D4990 Series

2.13 ARCHITECTURAL TRIM

A. Door Protective Trim

1. General: Door protective trim units to be of type and design as specified below or in the Hardware Sets.

2. Size: Fabricate protection plates (kick, armor, or mop) not more than 2" less than door width (LDW) on stop side and not more than 1" less than door width on pull side. Coordinate and provide proper width and height as required where conflicting hardware dictates. Height to be as specified in the Hardware Sets.

3. Metal Protection Plates: ANSI/BHMA A156.6 certified metal protection plates (kick, armor, or mop), beveled on four edges (B4E), fabricated from the following.
 - a. Stainless Steel: 050-inch thick, with countersunk screw holes (CSK).
 - b. Brass or Bronze: 050-inch thick, with countersunk screw holes (CSK).
 - c. Laminate Plastic or Acrylic: 1/8-inch thick, with countersunk screw holes (CSK).
4. Fasteners: Provide manufacturer's designated fastener type as specified in the Hardware Sets.
5. Metal Door Edging: Door protection edging fabricated from a minimum .050-inch thick metal sheet, formed into an angle or "U" cap shapes, surface or mortised mounted onto edge of door. Provide appropriate leg overlap to account for protection plates as required. Height to be as specified in the Hardware Sets.
6. Acceptable Manufacturers:
 - a. Burns Manufacturing (BU).
 - b. Rockwood Manufacturing (RO).
 - c. Trimco (TC).

2.14 DOOR STOPS AND HOLDERS

- A. General: Door stops and holders to be of type and design as specified below or in the Hardware Sets.
- B. Door Stops and Bumpers: ANSI/BHMA A156.16, Grade 1 certified door stops and wall bumpers. Provide wall bumpers, either convex or concave types with anchorage as indicated, unless floor or other types of door stops are specified in Hardware Sets. Do not mount floor stops where they will impede traffic. Where floor or wall bumpers are not appropriate, provide overhead type stops and holders.
 1. Acceptable Manufacturers:
 - a. Burns Manufacturing (BU).
 - b. Rockwood Manufacturing (RO).
 - c. Trimco (TC).
- C. Overhead Door Stops and Holders: ANSI/BHMA A156.6, Grade 1 certified overhead stops and holders to be surface or concealed types as indicated in Hardware Sets. Track, slide, arm and jamb bracket to be

constructed of extruded bronze and shock absorber spring of heavy tempered steel. Provide non-handed design with mounting brackets as required for proper operation and function.

1. Acceptable Manufacturers:

- a. Rixson Door Controls (RF).
- b. Rockwood Manufacturing (RO).
- c. Sargent Manufacturing (SA).

2.15 ARCHITECTURAL SEALS

- A. General: Thresholds, weatherstripping, and gasket seals to be of type and design as specified below or in the Hardware Sets. Provide continuous weatherstrip gasketing on exterior doors and provide smoke, light, or sound gasketing on interior doors where indicated. At exterior applications provide non-corrosive fasteners and elsewhere where indicated.
- B. Smoke Labeled Gasketing: Assemblies complying with NFPA 105 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for smoke control ratings indicated, based on testing according to UL 1784.
 1. Provide smoke labeled perimeter gasketing at all smoke labeled openings.
- C. Fire Labeled Gasketing: :Assemblies complying with NFPA 80 that are listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire ratings indicated, based on testing according to UL-10C.
 1. Provide intumescent seals as indicated to meet UL10C Standard for Positive Pressure Fire Tests of Door Assemblies, and UBC 7-2, Fire Tests of Door Assemblies.
- D. Sound-Rated Gasketing: Assemblies that are listed and labeled by a testing and inspecting agency, for sound ratings indicated, based on testing according to ASTM E 1408.
- E. Replaceable Seal Strips: Provide only those units where resilient or flexible seal strips are easily replaceable and readily available from stocks maintained by manufacturer.
- F. Acceptable Manufacturers:
 1. Pemko Manufacturing (PE).
 2. Reese Enterprises, Inc. (RS).

2.16 ELECTRONIC ACCESSORIES

- A. Exit Delay Locking Systems: Exit delay locking systems are fully integrated units consisting of a minimum 1200 pound holding force magnetic lock, movement initiating device, reset bypass switch, and exit delay timer module. Unit to include an adjustable initiation gap allowing door travel of up to 1 inch before going into alarm condition. Operates on either 12VDC or 24VDC.
1. Acceptable Manufacturers:
 - a. Security Door Controls (SD) - 101 Exit Check Series.
 - b. Securitron (SU) - iMXD Series.
- B. Key Switches: Key switches furnished standard with stainless steel single gang face plate with a 12/24VDC bi-color LED indicator. Integral backing bracket permits integration with any 1 1/4" or 1 1/2" mortise type cylinder. Key switches available as momentary or maintained action and in narrow face plate options.
1. Acceptable Manufacturers:
 - a. Security Door Controls (SD) - 800 Series.
 - b. Securitron (SU) - MK Series.
- C. Door Position Switches: Door position magnetic reed contact switches specifically designed for use in commercial door applications. On recessed models the contact and magnetic housing snap-lock into a 1" diameter hole. Surface mounted models include wide gap distance design complete with armored flex cabling. Provide SPDT, N/O switches with optional Rare Earth Magnet installation on steel doors with flush top channels.
1. Acceptable Manufacturers:
 - a. Sargent Manufacturing (SA) - 3280 Series.
 - b. Security Door Controls (SD) - DPS Series.
 - c. Securitron (SU) - DPS Series.
- D. Power Supplies: Provide Nationally Recognized Testing Laboratory Listed 12VDC or 24VDC (field selectable) filtered and regulated power supplies. Include battery backup option with integral battery charging capability in addition to operating the DC load in event of line voltage failure. Provide the least number of units, at the appropriate amperage level, sufficient to exceed the required total draw for the specified electrified hardware and access control equipment.

1. Acceptable Manufacturers:
 - a. Securitron Door Controls (SU) - BPS 12/24 Series.
 - b. Sargent (SA) - BPS 12/24 Series.
 - c. Stanley Precision (PR) - ELR150 Series
- E. Emergency Door Alarm: Door sensor bars are activated by attempts to drape an item over the door. The sensor bar incorporates a curved design providing maximum sensitivity to pressure.
 1. Acceptable Manufacturers:
 - a. Stanley Best (BE) - SEDA
- F. Electrified full surface continuous hinges designed in an anti-ligature fashion and transfers signal from the door sensor to the controller
 1. Acceptable Manufacturers:
 - a. Stanley Best (BE) - ECHFS-MH
- G. Nurse station console: Desk mounted, provides remote visual and audible status to the Door Sensor. Must include adjustable piezo alarm, remote siren output, console output, strobe output, reset key-switch inputs
 1. Acceptable Manufacturers:
 - a. Stanley Best (BE) - SEDA-DCRS
- H. Controller & Power supply: This is the central point for electrical power and switch termination for the following SEDA elements. Door sensor, strobe output, reset key-switch, console, remote signal output (dry or 12v), adjustable nuisance delay (3 seconds)
 1. Acceptable Manufacturers:
 - a. Stanley Best (BE) - SEDA-CPS
- I. Seclusion Room Lock: Single or multi point bolts protrude into the frame or strike to provide added protection against unauthorized egress attempts. To meet local codes it must have continuous supervision. Bolts remains extended by facility staff engaging the lever.
 1. Acceptable Manufacturers:
 - a. Stanley Best (BE) - SSRLS

2.17 FABRICATION

- A. Fasteners: Provide door hardware manufactured to comply with published templates generally prepared for machine, wood, and sheet metal

screws. Provide screws according to manufacturers recognized installation standards for application intended.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine scheduled openings, with Installer present, for compliance with requirements for installation tolerances, labeled fire door assembly construction, wall and floor construction, and other conditions affecting performance.
- B. Notify architect of any discrepancies or conflicts between the door schedule, door types, drawings and scheduled hardware. Proceed only after such discrepancies or conflicts have been resolved in writing.

3.2 PREPARATION

- A. Hollow Metal Doors and Frames: Comply with ANSI/DHI A115 series.
- B. Wood Doors: Comply with ANSI/DHI A115-W series.

3.3 INSTALLATION

- A. Install each item of mechanical and electromechanical hardware and access control equipment to comply with manufacturer's written instructions and according to specifications.
 - 1. Installers are to be trained and certified by the manufacturer on the proper installation and adjustment of fire, life safety, and security products including: hanging devices; locking devices; closing devices; and seals.
- B. Mounting Heights: Mount door hardware units at heights indicated in following applicable publications, unless specifically indicated or required to comply with governing regulations:
 - 1. Standard Steel Doors and Frames: DHI's "Recommended Locations for Architectural Hardware for Standard Steel Doors and Frames."
 - 2. Wood Doors: DHI WDHS.3, "Recommended Locations for Architectural Hardware for Wood Flush Doors."
 - 3. Where indicated to comply with accessibility requirements, comply with ANSI A117.1 "Accessibility Guidelines for Buildings and Facilities."
 - 4. Provide blocking in drywall partitions where wall stops or other wall mounted hardware is located.
- C. Retrofitting: Install door hardware to comply with manufacturer's published templates and written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces

that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing work specified in Division 9 Sections. Do not install surface-mounted items until finishes have been completed on substrates involved.

- D. Thresholds: Set thresholds for exterior and acoustical doors in full bed of sealant complying with requirements specified in Division 7 Section "Joint Sealants."
- E. Storage: Provide a secure lock up for hardware delivered to the project but not yet installed. Control the handling and installation of hardware items so that the completion of the work will not be delayed by hardware losses before and after installation.

3.4 FIELD QUALITY CONTROL

- A. Field Inspection: Supplier will perform a final inspection of installed door hardware and state in report whether work complies with or deviates from requirements, including whether door hardware is properly installed, operating and adjusted.

3.5 ADJUSTING

- A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.

3.6 CLEANING AND PROTECTION

- A. Protect all hardware stored on construction site in a covered and dry place. Protect exposed hardware installed on doors during the construction phase. Install any and all hardware at the latest possible time frame.
- B. Clean adjacent surfaces soiled by door hardware installation.
- C. Clean operating items as necessary to restore proper finish. and provide final protection and maintain conditions that ensure door hardware is without damage or deterioration at time of owner occupancy.

3.7 DEMONSTRATION

- A. Instruct Owner's maintenance personnel to adjust, operate, and maintain mechanical and electromechanical door hardware.

3.8 DOOR HARDWARE SCHEDULE

- A. The hardware sets represent the design intent and direction of the owner and architect. They are a guideline only and should not be considered a detailed hardware schedule. Discrepancies, conflicting hardware and missing items should be brought to the attention of the architect with corrections made prior to the bidding process. Omitted items not included in a hardware set should be scheduled with the appropriate additional hardware required for proper application and functionality.
- B. Manufacturer's Abbreviations
1. MK - McKinney
 2. RO - Rockwood
 3. AD - Adams Rite
 4. AH - Architectural Builders Hardware
 5. SA - Sargent
 6. BE - Stanley Security Solutions Inc.
 7. HS - HES
 8. SU - Securitron
 9. ST - Stanley
 10. NO - Norton
 11. BM - Besam
 12. PE - Pemko

Hardware Schedule

Set: 1.0

Doors: 211A

1	Electrified Power Transfer Hinge	ECHFS-MH-AL-4	628	BE
1	Mortise Deadlock	4900	628	AD
1	Paddle Trim	4591	628	AD
1	Cylinder	1E74	626	BE
1	Cylinder Guard	MS4043-00	RC130	AD
1	Door Sensor	SEDA-DSA	Beige	BE
1	Strobe Light	SEDA-SL		BE
1	Access Controller for 2 doors		7S-512	
	BE			

1	Push Bar & Pull	BF15747	US32D	RO
1	Door Closer	7500 (7788 as required)	689	NO
1	Door Stop	441H/400 (as required)	US26D	RO
1	Threshold	271A		PE
1	Gasketing	by door mfg.		
1	Card Reader	GS3		BE
1	Point to Point wiring diagram			

Notes: Presenting valid card to card reader shuts strobe off. Mount Strobe in corridor.

Set: 2.0

Doors: C21

2	Electrified Power Transfer Hinge ECHFS-MH-AL-4		628	BE
2	Exit Device	12 NB WD8610	US32D	SA
2	Closers	7700PTD	689	NO
2	Door Sensors	SEDA-DSA	Beige	BE
1	Strobe Light	SEDA-SL		BE
1	Access Controller for 2 doors		7S-512	
	BE			
2	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
2	Armor Plate	K2060 36" x 2" LDW CSK	Beige	RO
2	Edge Guard	306B 36"	US32D	RO
2	Door Stop	441H/400 (as required)	US26D	RO
1	Power Supply	BPS-24-3		SU
2	Position Switch	DPS		SU
2	Card Reader	GS3		BE
1	Point to Point wiring diagram			

Notes: Presenting valid card to card reader shuts strobe off.

Set: 3.0

Doors: 202, ST21B, ST23, ST31A, ST31B, ST32, ST33, ST11

1	Continuous Hinge	HT651 EPT	US32D	ST
1	Electric Exit Device	12 59 8875-24v ETL	US32D	SA

2	Cylinders	1E74	626	BE
1	Door Closer	PR7500	689	NO
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
1	Door Stop	441H/400 (as required)	US26D	RO
1	Gasketing	S773BL		PE
1	Frame Harness	QC-C1500 (as required)		MK
1	Door Harness	QC-C_06P (as required)		MK
1	Electric Power Transfer	EL-CEPT		SU
1	Power Supply	BPS-24-2		SU
1	Position Switch	DPS		SU
2	Card Reader	GS3		BE

Point to Point wiring diagram

Notes: Presenting card on stair side releases trim and momentarily disarms on corridor side. Pressing exit rail activate alarm, exit releases in 15 seconds.

Set: 4.0

Doors: C22

2	Electrified Power Transfer Hinge	ECHFS-MH-AL-4	628	BE
2	Exit Device	12 NB 55 56 WD8610	US32D	SA
2	Door Sensors	SEDA-DSA	Beige	BE
1	Strobe Light	SEDA-SL		BE
1	Access Controller for 2 doors		7S-512	
	BE			
1	Card Reader	GS3		BE
1	Auto Operator	SW200i DE (low energy)	689	BM
2	Wall Switch	4396HP		SA
2	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
2	Armor Plate	K2060 36" x 2" CSK	Beige	RO
2	Edge Guard	306B 36"	US32D	RO
2	Door Stop	441H/400 (as required)	US26D	RO
2	Frame Harness	QC-C1500 (as required)		MK
2	Door Harness	QC-C_06P (as required)		MK
1	Power Supply	BPS-24-3		SU

1 Point to Point wiring diagram

Notes: Presenting card to card reader shuts strobe off.

Set: 5.0

Doors: 132, 132B, C16

3 Hinge	HT FBB199 4-1/2" x 4-1/2"	US32D	ST
1 Exit Device	8813 ETL	US32D	SA
1 Cylinder	1E74	626	BE
1 Door Closer	PR7500	689	NO
1 Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1 Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
1 Door Stop	441H/400 (as required)	US26D	RO
3 Silencer	608		RO

Set: 6.0

Doors: ST21A

1 Continuous Hinge	HT651	US32D	ST
1 Exit Device	12 8815 ETL	US32D	SA
1 Door Closer	PR7500	689	NO
1 Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1 Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
1 Door Stop	441H/400 (as required)	US26D	RO
1 Gasketing	S773BL		PE

Set: 7.0

Doors: 208

2 Electrified Power Transfer Hinge ECHFS-MH-AL-4		628	BE
2 Flush Bolt	555	US26D	RO
1 Dust Proof Strike	570	US26D	RO
1 Dormitory Lock	8225 BHW	US32D	SA
1 Cylinder	1E74	626	BE
1 Electric Strike	1006-12/24	630	HS
2 Door Sensors	SEDA-DSA	Beige	BE
1 Strobe Light	SEDA-SL		BE

1	Access Controller for 2 doors		7S-512	
	BE			
2	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
2	Armor Plate	K2060 36" x 2" LDW CSK	Beige	RO
1	Edge Guard	306B 36"	US32D	RO
1	Edge Guard	306B 36" (Cutout for flush bolt)	US32D	RO
2	Door Stop	441H/400 (as required)	US26D	RO
2	Silencer	608		RO
1	Door Harness	QC-C_06P (as required)		MK
1	Power Supply	BPS-24-1		SU
1	Splice Box	SEDA-SPLB-1		BE
2	Card Reader	GS3		BE
1	Point to Point wiring diagram			

Note: 1 Card Reader is for releasing the electric strike, the other Card Reader which is mounted at 60" OFF near is to shut off the strobe light. Wire bathroom door into splice box, if either bath or entry door are activated alarm will sound and strobe will go off.

Set: 8.0

Doors: 206, 207, 217, 218

1	Electrified Power Transfer Hinge ECHFS-MH-AL-4		628	BE
1	Dormitory Lock	8225 BHW	US32D	SA
1	Cylinder	1E74	626	BE
1	Electric Strike	1006-12/24	630	HS
1	Sensor	SEDA-DSA	Beige	BE
1	Strobe Light	SEDA-SL		BE
1	Access Controller for 2 doors		7S-512	
	BE			
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Armor Plate	K2060 36" x 2" LDW CSK	Beige	RO
1	Edge Guard	306B 36"	US32D	RO
1	Overhead Stop	690 Series	US32D	SA
3	Silencer	608		RO
1	Power Supply	BPS-24-1		SU
1	Position Switch	DPS		SU

1	Splice Box	SEDA-SPLB-1		BE
2	Card Reader	GS3		BE
1	Point to Point wiring diagram			

Note: 1 Card Reader is for releasing the electric strike, the other Card Reader which is mounted at 60" OFF is to shut off the strobe light. Wire bathroom door into splice box, if either bath or entry door are activated alarm will sound and strobe will go off.

Set: 8.1

Doors: 209, 215, 220, 230A,

1	Electrified Power Transfer Hinge ECHFS-MH-AL-4	628	BE
1	Dormitory Lock	8225 BHW	US32D SA
1	Cylinder	1E74	626 BE
1	Electric Strike	1006-12/24	630 HS
1	Sensor	SEDA-DSA	Beige BE
1	Strobe Light	SEDA-SL	BE
1	Access Controller for 2 doors	7S-512	
	BE		
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige RO
1	Armor Plate	K2060 36" x 2" LDW CSK	Beige RO
1	Edge Guard	306B 36"	US32D RO
1	Door Stop	441H/400 (as required)	US26D RO
3	Silencer	608	RO
1	Power Supply	BPS-24-1	SU
1	Position Switch	DPS	SU
1	Splice Box	SEDA-SPLB-1	BE
2	Card Reader	GS3	BE
1	Point to Point wiring diagram		

Note: 1 Card Reader is for releasing the electric strike, the other Card Reader which is mounted at 60" OFF is to shut off the strobe light. Wire bathroom door into splice box, if either bath or entry door are activated alarm will sound and strobe will go off.

Set: 9.0

Doors: 216, 221, 222, 228, 314, 318, 319, 320, 329, 330, 331, 341, 342, 348, 349, 353, XXX-SOILED, XXX-STOR

1	Electric Continuous Hinge HT651 EPT	US32D	ST
1	Fail Secure Electric Lock 8271-24V LNL	US32D	SA
1	Cylinder 1E74	626	BE
1	Door Closer 7500	689	NO
1	Mop Plate K2060 6" x 1" LDW CSK	Beige	RO
1	Armor Plate K2060 36" x 2" LDW CSK	Beige	RO
1	Edge Guard 306B 36"	US32D	RO
1	Door Stop 441H/400 (as required)	US26D	RO
3	Silencer 608		RO
1	Frame Harness QC-C1500 (as required)		MK
1	Door Harness QC-C_06P (as required)		MK
1	Electric Power Transfer EL-CEPT		SU
1	Position Switch DPS		SU
1	Power Supply BPS24-1		SU
1	Card Reader GS3		BE

Point to Point wiring diagram

Set: 9.1

Doors: 301, 305, XXX-SOILED, XXX-STOR

1	Electric Continuous Hinge HT651 EPT	US32D	ST
1	Fail Secure Electric Lock 8271-24V LNL	US32D	SA
1	Cylinder 1E74	626	BE
1	Door Closer CPS 7500	689	NO
1	Mop Plate K2060 6" x 1" LDW CSK	Beige	RO
1	Armor Plate K2060 36" x 2" LDW CSK	Beige	RO
1	Edge Guard 306B 36"	US32D	RO
3	Silencer 608		RO
1	Frame Harness QC-C1500 (as required)		MK
1	Door Harness QC-C_06P (as required)		MK
1	Electric Power Transfer EL-CEPT		SU
1	Position Switch DPS		SU
1	Power Supply BPS24-1		SU

1 Card Reader	GS3	BE
Point to Point wiring diagram		

Set: 10.0

Doors: 205A, 210, 214, 223, 229, 233, 234, 237, 253, 254, 311, 313, 316, 325, 336, 347

2 Hinge	HT FBB199 4-1/2" x 4-1/2"	US32D	ST
1 Hinge	HT FBB199 QC 4-1/2" x 4-1/2"	US32D	ST
1 Fail Secure Electric Lock	8271-24V LNL	US32D	SA
1 Cylinder Core	1E74	626	BE
1 Door Closer	7500	689	NO
1 Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1 Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
1 Door Stop	441H/400 (as required)	US26D	RO
3 Silencer	608		RO
1 Frame Harness	QC-C1500 (as required)		MK
1 Door Harness	QC-C_06P (as required)		MK
1 Power Supply	BPS 24-1		SU
1 Position Switch	DPS		SU
1 Card Reader	GS3		BE1
Point to Point wiring diagram			

Set: 10.1

Doors: 224, 227, 229, 231, 232, 235, 236, 328, 333, 334, 351

2 Hinge	HT FBB199 4-1/2" x 4-1/2"	US32D	ST
1 Hinge	HT FBB199 QC 4-1/2" x 4-1/2"	US32D	ST
1 Fail Secure Electric Lock	8271-24V LNL	US32D	SA
1 Cylinder Core	1E74	626	BE
1 Door Closer	CPS 7500	689	NO
1 Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1 Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
3 Silencer	608		RO
1 Frame Harness	QC-C1500 (as required)		MK
1 Door Harness	QC-C_06P (as required)		MK
1 Power Supply	BPS 24-1		SU

1	Position Switch	DPS		SU
1	Card Reader	GS3		BE
	Point to Point wiring diagram			

Set: 11.0

Doors: 219, 324, 350

6	Hinge	HT FBB191 4-1/2" x 4-1/2"	US32D	ST
2	Flush Bolt	555	US26D	RO
1	Dust Proof Strike	570	US26D	RO
1	Storeroom Lock	8204 LNL	US32D	SA
1	Cylinder	1E74	626	BE
2	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
2	Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
2	Overhead Stops	690 Series	US32D	SA
2	Silencer	608		RO

Set: 12.0

Doors: 131, 137

3	Hinge	HT FBB191 4-1/2" x 4-1/2"	US32D	ST
1	Storeroom Lock	8204 LNL	US32D	SA
1	Cylinder Core	1E74	626	BE
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
1	Overhead Stop	690 Series	US32D	SA
3	Silencer	608		RO

Set: 13.0

Doors: 135, 136, 138, 139

3	Hinge	HT FBB191 4-1/2" x 4-1/2"	US32D	ST
1	Office Lock	8205 LNL	US32D	SA
1	Cylinder	1E74	626	BE
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
1	Door Stop	441H/400 (as required)	US26D	RO

3	Silencer	608		RO
---	----------	-----	--	----

Set: 14.0

Doors: ~~203~~, 205B, 205C, C06

3	Hinge	HT FBB199 4-1/2" x 4-1/2"	US32D	ST
1	Entry Lock	8216 LNL	US32D	SA
2	Cylinder	1E74	626	BE
1	Door Closer	7500	689	NO
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
1	Door Stop	441H/400 (as required)	US26D	RO
3	Silencer	608		RO

Set: 15.0

Doors: 205, ~~321~~

3	Hinge	HT FBB199 4-1/2" x 4-1/2"	US32D	ST
1	Storeroom Lock	50 8251 LNL	US32D	SA
1	Cylinder	1E74	626	BE
1	Electric Strike	1006-12/24	630	HS
1	Door Closer	7500	689	NO
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Armor Plate	K2060 36" x 2" LDW CSK	Beige	RO
1	Door Stop	441H/400 (as required)	US26D	RO
3	Silencer	608		RO
1	Power Supply	BPS24-1		SU
1	Position Switch	DPS		SU
1	Card Reader	GS3		BE

Point to Point wiring diagram

Set: 15.1

Doors: 225

3	Hinge	HT FBB199 4-1/2" x 4-1/2"	US32D	ST
1	Storeroom Lock	50 8251 LNL	US32D	SA
1	Cylinder	1E74	626	BE

1	Electric Strike	1006-12/24	630	HS
1	Door Closer	CPS 7500	689	NO
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Armor Plate	K2060 36" x 2" LDW CSK	Beige	RO
3	Silencer	608		RO
1	Power Supply	BPS24-1		SU
1	Position Switch	DPS		SU
1	Card Reader		GS3	

BE

Point to Point wiring diagram

Set: 16.0

Doors: 206A, 207A, 208A, 209A, 215A, 217A, 218A, 220A, 230B,

1	Electrified Power Transfer Hinge	ECHFS-MH-AL-4	628	BE
1	Privacy Set	8266 BHW x thumbturn both sides	US32D	SA
1	Sensor	SEDA-DSA	Beige	BE
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Armor Plate	K2060 36" x 2" LDW CSK	Beige	RO
1	Edge Guard	306B 36"	US32D	RO
1	Door Stop	441H/400 (as required)	US26D	RO
1	Power Supply	BPS24-1		SU
3	Silencer	608		RO
1	Point to Point wiring diagram			

Note: Sensor wired to splice box for either entry or bath room door when activated alarm and strobe will activate.

Set: 17.0

Doors: 226, 308, 343, 321

3	Hinge	HT FBB199 4-1/2" x 4-1/2"	US32D	ST
1	Institutional Privacy Lock		50 8267 LNL	
	US32D	SA		
1	Cylinder	1E74	626	BE
1	Door Closer	7500	689	NO
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO

1 Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
1 Door Stop	441H/400 (as required)	US26D	RO
3 Silencer	608		RO

Set: 18.0

Doors: 302, 303, 304, 309, 310, 312, 315, 317, 322, 326, 327, 332, 335, 337, 338, 339, 340, 344, 345, 346

3 Hinges	FBB199 4-1/2" x 4-1/2"	US32D	ST
1 Passage Set	8215 BHW	US32D	SA
1 Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1 Armor Plate	K2060 36" x 2" LDW CSK	Beige	RO
1 Edge Guard	306B 36"	US32D	RO
1 Door Stop	441H/400 (as required)	US26D	RO
3 Silencer	608		RO

Set: 19.0

Doors: 211

2 Continuous Hinge	HT651	US32D	ST
2 Flush Bolt	555	US26D	RO
1 Dust Proof Strike	570	US26D	RO
1 Classroom Lock	8237 BHW	US32D	SA
2 Cylinder	1E74	626	BE
2 Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
2 Armor Plate	K2060 36" x 2" LDW CSK	Beige	RO
2 Edge Guard	306B 36"	US32D	RO
2 Door Stop	441H/400 (as required)	US26D	RO
2 Silencer	608		RO

Set: 20.0

Doors: 133, 134

3 Hinge	HT FBB199 4-1/2" x 4-1/2"	US32D	ST
1 Push Plate	70C	US32D	RO
1 Pull Plate	111x70C	US32D	RO
1 Door Closer	CPS 7500	689	NO

1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
3	Silencer	608		RO

Set: 21.0

Doors: 132B

1	Hardware	by door mfg.		
---	----------	--------------	--	--

Set: 22.0

Doors: 264

1	Dbl Acting Pivot	DAP-3	652	ST
1	Emergency Door Stop	ES-1	626	ST
1	Privacy	49-8265 LNL	US32D	SA
1	Dbl Lipped Strike	DLS	626	ST
1	Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Door Stop	441H/400 (as required)	US26D	RO

Set 23.0

Doors: C31, C31A

2	Electric Continuous Hinge	HT651 EPT	US32D	ST
2	Exit Device	12 NB 55 56 WD8610	US32D	SA
1	Card Reader	GS3		BE
1	Auto Operator	SW200i DE (low energy)	689	BM
2	Wall Switch	4396HP		SA
2	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
2	Armor Plate	K2060 36" x 2" LDW CSK	Beige	RO
2	Edge Guard	306B 36"	US32D	RO
2	Door Stop	441H/400 (as required)	US26D	RO
2	Frame Harness	QC-C1500 (as required)		MK
2	Door Harness	QC-C_06P (as required)		MK
1	Power Supply	BPS-24-3		SU
1	Point to Point wiring diagram			

Set: 24.0

Doors: 323, 352

2	Electric Continuous Hinge HT651 EPT	US32D	ST
2	Flush Bolt 555	US26D	RO
1	Dust Proof Strike 570	US26D	RO
1	Dormitory Lock 8225 BHW	US32D	SA
1	Cylinder 1E74	626	BE
1	Electric Strike 1006-12/24	630	HS
2	Mop Plate K2060 6" x 1" LDW CSK	Beige	RO
2	Armor Plate K2060 36" x 2" LDW CSK	Beige	RO
1	Edge Guard 306B 36"	US32D	RO
1	Edge Guard 306B 36" (Cutout for flush bolt)	US32D	RO
2	Door Stop 441H/400 (as required)	US26D	RO
2	Silencer 608		RO
1	Door Harness QC-C_06P (as required)		MK
1	Power Supply BPS-24-1		SU
2	Position Switch DPS		SU
1	Card Reader GS3		BE
1	Point to Point wiring diagram		

Set: 25.0

Doors: 302A, 303A, 304A, 309A, 310A, 312A, 315A, 317A, 322A, 323A, 326A, 327A, 332A, 335A, 337A, 338A, 339A, 340A, 344A, 345A, 346A, 352A

1	Continuous Hinge HT651	US32D	ST
1	Privacy Set 8266 BHW x thumbturn both sides	US32D	SA
1	Mop Plate K2060 6" x 1" LDW CSK	Beige	RO
1	Armor Plate K2060 36" x 2" LDW CSK	Beige	RO
1	Edge Guard 306B 36"	US32D	RO
1	Door Stop 441H/400 (as required)	US26D	RO
3	Silencer 608		RO

Set: 26.0

Doors: 230

1	Continuous Hinge HT651	US32D	ST
---	------------------------	-------	----

1	Seclusion Lock	SSRLS-3	US32D	BE
1	Seclusion Lock Strike	SSRL-SK3	US32D	BE
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Armor Plate	K2060 36" x 2" LDW CSK	Beige	RO
1	Edge Guard	306B 36"	US32D	RO
1	Door Stop	441H/400 (as required)	US26D	RO
3	Silencer	608		RO

Set: 27.0

Doors: 203

3	Hinge	HT FBB199 4-1/2" x 4-1/2"	US32D	ST
1	Passage	8215 LNL	US32D	SA
1	Door Closer	7500	689	NO
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Kick Plate	K2060 10" x 2" LDW CSK	Beige	RO
1	Door Stop	441H/400 (as required)	US26D	RO
3	Silencer	608		RO

Set: 28.0

Doors: 157

3	Hinge	HT FBB199 4-1/2" x 4-1/2"	US32D	ST
1	Storeroom Lock	8217 LNL	US32D	SA
2	Cylinder	1E74	626	BE
1	Electric Strike	1006-12/24	630	HS
1	Door Closer	PR7500	689	NO
1	Mop Plate	K2060 6" x 1" LDW CSK	Beige	RO
1	Armor Plate	K2060 36" x 2" LDW CSK	Beige	RO
1	Door Stop	441H/400 (as required)	US26D	RO
3	Silencer	608		RO
1	Power Supply	BPS24-1		SU
1	Position Switch	DPS		SU
1	Card Reader	GS3		BE

Point to Point wiring diagram

Set Misc.

1	Power Supply & Controller SEDA-CPS-1A52-24	Beige	BE
1	Console SEDA-DCRS-24	Blue/Beige	BE
1	Standard Edition Software 7S-PACSE		ST
1	USB Prox Card Enrollment Reader 7S-USBRDR		ST
1	Access & Alarm Controller 7S-500		ST
4	Six Way Din-Rail Enclosure	7S-DIN6X	
	ST		
4	12/24 7A Din-Rail Power Supply	7S-PSU7	
	ST		
4	Battery Backup NP7A 12V		ST
10	Prox Cards 7S-STCARD (10 Cards each pack)		ST
100	HID Cards		BE

Notes: Customer responsible to supply computer and or server to Stanley PAC's Specifications. Customer responsible to coordinate 110 Power runs to the PAC Power Supplies. Customer responsible to run CAT5/6 Cable to the PAC500 Controller and run low voltage 658AFS Composite Cable to tie into the SEDA above door Alarm, Prox Reader and Strobe light (location of strobes by owner). Customer responsible to coordinate final connections of all electrified hardware.

- - - END - - -

SECTION 08 80 00
GLAZING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies glass, related glazing materials and accessories. Glazing products specified apply to factory or field glazed items.

1.2 RELATED WORK

- A. Factory glazed by manufacturer in following units:
1. Doors: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, and Section 08 14 00, WOOD DOORS.
 2. Mirrors: Section 10 28 00, TOILET, BATH, AND LAUNDRY ACCESSORIES.
 3. Section 08 56 53 SECURITY WINDOWS.
 4. Section 08 41 13, ALUMINUM FRAMED ENTRANCES AND STOREFRONTS.
 5. Section 08 52 00, WOOD WINDOWS.
 6. Section 28 13 11, PHYSICAL ACCESS CONTROL SYSTEMS.

1.3 LABELS

- A. Temporary labels:
1. Provide temporary label on each light of glass identifying manufacturer or brand and glass type, quality and nominal thickness.
 2. Label in accordance with NFRC (National Fenestration Rating Council) label requirements.
 3. Temporary labels shall remain intact until glass is approved by COTR.
- B. Permanent labels:
1. Locate in corner for each pane.
 2. Label in accordance with ANSI Z97.1 and SGCC (Safety Glass Certification Council) label requirements.
 - a. Tempered glass.
 - b. Laminated glass or have certificate for panes without permanent label.
 - c. Organic coated glass.

1.4 PERFORMANCE REQUIREMENTS

- A. Building Enclosure Vapor Retarder and Air Barrier:
1. Utilize the inner pane of multiple pane sealed units for the continuity of the air barrier and vapor retarder seal.
 2. Maintain a continuous air barrier and vapor retarder throughout the glazed assembly from glass pane to heel bead of glazing sealant.

B. Glass Thickness:

1. Select thickness of exterior glass to withstand dead loads and wind loads acting normal to plane of glass at design pressures calculated in accordance with ASCE 7.
2. Test in accordance with ASTM E 1300.
3. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Certificates:

1. Certificate on shading coefficient, where value is specified.
2. Certificate on "R" value when value is specified.

C. Warranty: Submit written guaranty, conforming to General Condition requirements, and to "Warranty of Construction" Article in this Section.

D. Manufacturer's Literature and Data:

1. Glass, each kind required.
2. Insulating glass units.
3. Spandrel glazing color data and product data for initial color selection.

E. Samples:

1. Size: 150 mm by 150 mm (6 inches by 6 inches).
2. Insulated glass.
3. Spandrel insulated glass. Provide up to four samples of different colors for final selection.
4. Patterned (fritted) glass.

1.6 DELIVERY, STORAGE AND HANDLING

A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.

B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.

C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.

D. Protect laminated security glazing units against face and edge damage during entire sequence of fabrication, handling, and delivery to installation location. Provide protective covering on exposed faces of glazing plastics, and mark inside as "INTERIOR FACE" or "PROTECTED FACE":

1. Treat security glazing as fragile merchandise, and packaged and shipped in export wood cases with width end in upright position and blocked together in a mass. Storage and handling shall comply with Manufacturer's directions and as required to prevent edge damage or other damage to glazing resulting from effects of moisture, condensation, temperature changes, direct exposure to sun, other environmental conditions, and contact with chemical solvents.
2. Protect sealed-air-space insulating glazing units from exposure to abnormal pressure changes, as could result from substantial changes in altitude during delivery by air freight. Provide temporary breather tubes which do not nullify applicable warranties on hermetic seals.
3. Temporary protections: The glass front and polycarbonate back of glazing shall be temporarily protected with compatible, peelable, heat-resistant film which will be peeled for inspections and re-applied and finally removed after doors and windows are installed at destination. Since many adhesives will attack polycarbonate, the film used on exposed polycarbonate surfaces shall be approved and applied by manufacturer.
4. Edge protection: To cushion and protect glass clad, polycarbonate, and Noviflex edges from contamination or foreign matter, the four edges shall be sealed the depth of glazing with continuous standard-thickness Santoprenetape. Alternatively, continuous channel shaped extrusion of Santoprene shall be used, with flanges extending into face sides of glazing.
5. Protect "Constant Temperature" units including every unit where glass sheet is directly laminated to or directly sealed with metal-tube type spacer bar to polycarbonate sheet, from exposures to ambient temperatures outside the range of 16 to 24 C, during the fabricating, handling, shipping, storing, installation, and subsequent protection of glazing.

1.7 PROJECT CONDITIONS

- A. Field Measurements: Field measure openings before ordering tempered glass products. Be responsible for proper fit of field measured products.

1.8 WARRANTY

- A. Warranty: Conform to terms of "Warranty of Construction", FAR clause 52.246-21, except extend warranty period for the following:
1. Insulating glass units to remain sealed for 10 years.
 2. Laminated glass units to remain laminated for 5 years.

1.9 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
- Z97.1-09Safety Glazing Material Used in Building -
Safety Performance Specifications and Methods
of Test.
- C. American Society for Testing and Materials (ASTM):
- C542-05Lock-Strip Gaskets
- C716-06Installing Lock-Strip Gaskets and Infill
Glazing Materials.
- C794-10Adhesion-in-Peel of Elastomeric Joint Sealants
- C864-05Dense Elastomeric Compression Seal Gaskets,
Setting Blocks, and Spacers
- C920-11Elastomeric Joint Sealants
- C964-07Standard Guide for Lock-Strip Gasket Glazing
- C1036-06Flat Glass
- C1048-12Heat-Treated Flat Glass-Kind HS, Kind FT Coated
and Uncoated Glass.
- C1376-10Pyrolytic and Vacuum Deposition Coatings on
Flat Glass
- E84-10Surface Burning Characteristics of Building
Materials
- E119-10Standard Test Methods for Fire Test of Building
Construction and Material
- E2190-10Insulating Glass Unit
- D. Code of Federal Regulations (CFR):
- 16 CFR 1201 - Safety Standard for Architectural Glazing Materials; 2010

- E. National Fire Protection Association (NFPA):
 - 80-13Fire Doors and Windows.
 - 252-12Standard Method of Fire Test of Door Assemblies
 - 257-12Standard on Fire Test for Window and Glass
Block Assemblies
- F. National Fenestration Rating Council (NFRC)
- G. Safety Glazing Certification Council (SGCC) 2012:
Certified Products Directory (Issued Semi-Annually).
- H. Underwriters Laboratories, Inc. (UL):
 - 752-11Bullet-Resisting Equipment.
- I. Unified Facilities Criteria (UFC):
 - 4-010-01-2012DOD Minimum Antiterrorism Standards for
Buildings
- J. Glass Association of North America (GANA):
 - Glazing Manual (Latest Edition)
 - Sealant Manual (2009)
- K. American Society of Civil Engineers (ASCE):
 - ASCE 7-10Wind Load Provisions

PART 2 - PRODUCT

2.1 GLASS

- A. Use thickness stated unless specified otherwise in assemblies.
- B. Clear Glass:
 - 1. ASTM C1036, Type I, Class 1, Quality q3.
 - 2. Thickness, 6 mm (1/4 inch) or as indicated.
- C. Tinted Heat reflective and low emissivity coated glass:
 - 1. ASTM C1036, Type I, Class 2, Quality q3.
 - 2. Color: Clear
 - 3. Thickness, 6 mm (1/4 inch) or as indicated.

2.2 HEAT-TREATED GLASS

- A. Clear Heat Strengthened Glass:
 - 1. ASTM C1048, Kind HS, Condition A, Type I, Class 1, Quality q3.
 - 2. Thickness, 6 mm (1/4 inch) or as indicated.
- B. Tempered Patterned Glass (fritted):
 - 1. ASTM C1048, Kind FT, Type II, Class 1, Form 3, Quality q8, Finish f1, Pattern p3.
 - 2. Thickness 24 mm (1 inch) or as indicated.
 - 3. Basis-of-Design: Viraspan Design Line Series 2032: 50% coverage, 1/2" lines - 1/2" space.

2.3 COATED GLASS**A. Spandrel Glass:**

1. ASTM C1048, Kind HS, Condition B, Type I.
2. Thickness, 6 mm (1/4 inch) or as indicated.

B. Low-E Tempered Glass:

1. ASTM C1048, Kind FT, Condition C, Type I, Class 1, Quality q3 with low emissivity pyrolytic coating having an E of 0.15.
2. Apply coating to second surface of insulating glass units.
3. Thickness, 4.8 mm (3/16 inch) or as indicated.

C. Ceramic Coated Spandrel Glass:

1. ASTM C1048, Kind HS or FT, Condition B, Type I, Class 1, Quality q3 with ceramic coating applied over and fused into glass surface.
2. Color as selected by Architect from manufacturer's full color line.
3. Apply coating to second surface.
4. Thickness, 6 mm (1/4 inch) or as indicated.

2.4 LAMINATED GLASS

- A. Two or more lites of glass bonded with an interlayer material for use in building glazing
- B. Use 1.5 mm (0.060 inch) thick interlayer for:
 1. Heat strengthened or fully tempered glass assemblies.
- C. Use min. 0.75 mm (0.030 inch) thick interlayer for vertical glazing where 1.5 mm (0.060 inch) interlayer is not otherwise shown or required.

2.5 GLASS CLAD POLYCARBONATE SECURITY GLAZING ASSEMBLY

- A. Use 1.3 mm (0.050 inch) polyurethane sheeting for interlayer between glass and polycarbonate.
- B. Clear Heat Strengthened Glass Clad Polycarbonate.
 1. Use ASTM C1048, Kind HS, Condition A, Type I, Class 1, Quality q3, outer glass panes.
 2. Use clear polycarbonate sheet, 3 mm (1/8 inch) thick core.
 3. Thickness, 11 mm (7/16 inch).
- C. Clear Tempered Glass Clad Polycarbonate:
 1. Use ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3, 3 mm (1/8 inch) thick outer glass panes.
 2. Use clear polycarbonate sheet, 3 mm (1/8 inch) thick core.
 3. Thickness, 11 mm (7/16 inch).
- D. Maximum Allowable Area: Laminated glazing shall not exceed 1.32 meter
- E. Square unless glazing has been certified.

2.6 INSULATING GLASS UNITS

- A. Provide factory fabricated, hermetically sealed glass unit consisting of two panes of glass separated by a dehydrated air space and comply with ASTM E2190.
- B. Assemble units using glass types specified:
- C. Sealed Edge Units (SEU) = Aluminum Storefront Framed Units (GL1):
 - 1. Insulating Glass Unit Makeup
 - a. Outboard Lite: Basis of Design: Pilkington Solar-E, Solar Control Low E (#2) or approved equal
 - 1) Glass type: Class 1 (Clear) Low-E
 - 2) Glass Tint: Clear
 - 3) Nominal Thickness: 6 mm (1/4-inch)
 - 4) Glass Strength: (Heat-Strengthened, Provide tempered where required)
 - 5) Coating Orientation: (N/A, Surface #2)
 - b. Spacer
 - 1) Nominal Thickness: 13 mm (1/2-inch)
 - 2) Gas Fill: (Air)
 - c. Inboard Lite: Basis-of-Design: Pilkington Optifloat Clear or approved equal
 - 1) Glass Type: Class 1 (clear)
 - 2) Glass Tint: Clear
 - 3) Nominal Thickness: 6 mm (1/4-inch)
 - 4) Glass Strength: (Heat-Strengthened, provided tempered where required)
 - 5) Coating Orientation: (N/A)
 - 2. Performance Characteristics (Center of Glass)
 - a. Visible Transmittance: 53%
 - b. Visible Reflectance: Exterior = 11%; Interior = 15%
 - c. Winter U-factor (U-value): .29
 - d. Shading Coefficient (SC): .51
 - e. Solar heat Gain Coefficient (SHGC): .44
 - 3. Glass shall be heat strengthened or tempered as required by codes, or as required to meet thermal stress and wind loads.
 - 4. Glass heat-treated by horizontal (roller hearth) process with inherent roller wave distortion parallel to the bottom edge of the glass as installed when specified.

D. Sealed Edge Units (SEU) Installed in Wood Windows (GL5).

1. Insulating Glass Unit Makeup

a. Outboard Lite: Basis-of-Design: Cardinal IG, Low E-272 (#2-Clear), or approved equal

1) Glass Type: Class 1 (clear)

2) Glass Tint: Clear

3) Nominal Thickness: 3.1 mm (1/8-inch)

4) Glass Strength: Heat strengthened. Provide tempered where required

5) Coating orientation: Surface #2

b. Spacer:

1) Nominal thickness: 13 mm (1/2-inch)

2) Gas Fill: Air

c. Inboard Lite:

1) Glass Type: Class 1 (clear)

2) Glass Tint: Clear

3) Nominal Thickness: 3.1 mm (1/8-inch)

4) Glass strength: Heat strengthened. Provide tempered where required.

2. Performance Characteristics (Center of Glass):

a. Visible Transmittance: 72%.

b. Visible Exterior Reflectance: 11%

c. Visible Exterior Reflectance: 12%

d. Winter U-factor (0-value): 0.25

e. Shading Coefficient (SC): 0.48

f. Solar Heat Gain Coefficient (SHGC): 0.44

3. Glass shall be heat strengthened or tempered as required by codes, or as required to meet thermal stress and wind loads.

4. Glass heat-treated by horizontal (roller hearth) process with inherent roller wave distortion parallel to the bottom edge of the glass as installed when specified.

E. Sealed Edge Units (SEU) = Spandrel Glazing Units (GL2):

1. Insulated Glass Unit Makeup

a. Outboard Lite:

1) Glass Type: Ceramic Coated Spandrel Glass

2) Color: As selected by Architect from manufacturer's full color line

3) Nominal Thickness: 6 mm (1/4-inch)

4) Glass Strength: Heat strengthened. Provide tempered where required.

5) Coating orientation: (N/A, Surface #2)

- b. Spacer:
 - 1) Nominal Thickness: 13 mm (1/2-inch)
 - 2) Gas Fill: Air
- c. Inboard Lite:
 - 1) Glass Type: Class 1 (clear)
 - 2) Glass Tint: Clear
 - 3) Nominal Thickness: 6 mm (1/4-inch)
 - 4) Glass strength: Heat strengthened. Provide tempered where required.
- 2. Glass shall be heat strengthened or tempered as required by codes or as required to meet thermal stress and wind loads.
- 3. Glass heat treated horizontal (roller hearth) process with inherent roller wave distortion parallel to the bottom edge of the glass as installed when specified.

2.7 FIRE RESISTANT GLASS WITHOUT WIRE MESH

- A. Type 1 (Transparent float glass), Class 1 (Clear).
- B. Fire-protective glass products used to protect against smoke and flames only shall be rated for [20] [45] minutes as required by local building code and shall be tested in accordance with NFPA 252 (Standard Methods of Fire Tests of Door Assemblies) and NFPA 257 (Standard on Fire Test for Window and Glass Block Assemblies)
- C. Fire-resistive products used to protect against smoke, flame, and the transmission of radiant heat shall be rated for [60] [90] [120] minutes and shall be tested in accordance with NFPA 252, NFPA 257, and ASTM E119 (Standard Test Methods for Fire Tests of Building Construction and Materials).
- D. Fire-rated glass or glass assembly shall be classified by Underwriters Laboratory (UL), Intertek Testing Services- Warnock Hersey (ITS-WHI) or any other OSHA certified testing laboratory. All glass shall bear a permanent mark of classification in accordance with local building code.
- E. Maximum size is per the manufacturer's test agency listing for doors, transoms, side lights, borrowed lights, and windows.
- F. Where safety glazing is required by local building code, fire-rated glass shall be tested in accordance with CPSC 16 CFR 1201 Category I or II and bear a permanent mark of classification.
 - 1. Category I products are limited to 0.84 m² - 9 ft² and tested to no less than 203 Nm-150 ft-lbs impact loading.

2. Category II products are greater than 0.84 m² - 9 ft² and tested to no less than 542 Nm-400 ft-lbs impact loading. Category II products can be used in lieu of Category I products.

2.8 GLAZING ACCESSORIES

- A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work shall have a finish that will not corrode or stain while in service.
- B. Setting Blocks: ASTM C864:
 1. Channel shape; having 6 mm (1/4 inch) internal depth.
 2. Shore a hardness of 80 to 90 Durometer.
 3. Block lengths: 50 mm (two inches) except 100 to 150 mm (four to six inches) for insulating glass.
 4. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
 5. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.
- C. Spacers: ASTM C864:
 1. Channel shape having a 6 mm (1/4 inch) internal depth.
 2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
 3. Lengths: One to 25 to 76 mm (one to three inches).
 4. Shore a hardness of 40 to 50 Durometer.
- D. Sealing Tapes:
 1. Semi-solid polymeric based material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
 2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
- E. Spring Steel Spacer: Galvanized steel wire or strip designed to position glazing in channel or rabbeted sash with stops.
- F. Glazing Gaskets: ASTM C864:
 1. Firm dense wedge shape for locking in sash.
 2. Soft, closed cell with locking key for sash key.
 3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.
- G. Lock-Strip Glazing Gaskets: ASTM C542, shape, size, and mounting as indicated.

H. Glazing Sealants: ASTM C920, silicone neutral cure:

1. Type S.
2. Class 25
3. Grade NS.
4. Shore A hardness of 25 to 30 Durometer.

I. Color:

1. Color of glazing compounds, gaskets, and sealants used for aluminum color frames shall match color of the finished aluminum and be nonstaining.
2. Color of other glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted shall be black, gray, or neutral color.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verification of Conditions:

1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer's approved shop drawings.

B. Advise Contractor of conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation: Do not proceed with installation until unsatisfactory conditions have been corrected.

C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units to prevent damage to glass and glazing units by cleaning materials.

3.2 PREPARATION

- A. For sealant glazing, prepare glazing surfaces in accordance with GANA-02 Sealant Manual.
- B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.
- C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.
- D. Verify that components used are compatible.
- E. Clean and dry glazing surfaces.
- F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

3.3 INSTALLATION - GENERAL

- A. Install in accordance with GANA-01 Glazing Manual and GANA-02 Sealant Manual unless specified otherwise.
- B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.
- C. Set glazing without bending, twisting, or forcing of units.
- D. Do not allow glass to rest on or contact any framing member.
- E. Glaze doors and operable sash, in a securely fixed or closed and locked position, until sealant, glazing compound, or putty has thoroughly set.
- F. Patterned Glass:
 - 1. Install units with one patterned surface with smooth surface on the weather side.
 - 2. Install units in interior partitions with pattern in same direction in all openings.
- G. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.
- H. Laminated Glass:
 - 1. Tape edges to seal interlayer and protect from glazing sealants.
 - 2. Do not use putty or glazing compounds.
- I. Insulating Glass Units:
 - 1. Glaze in compliance with glass manufacturer's written instructions.
 - 2. When glazing gaskets are used, they shall be of sufficient size and depth to cover glass seal or metal channel frame completely.
 - 3. Do not use putty or glazing compounds.
 - 4. Do not grind, nip, cut, or otherwise alter edges and corners of fused glass units after shipping from factory.
 - 5. Install with tape or gunnable sealant in wood sash.
- J. Fire Resistant Glass:
 - 1. Glaze in accordance with UL design requirements.

3.4 INSTALLATION - DRY METHOD (TAPE AND GASKET SPLINE GLAZING)

- A. Cut glazing tape to length; install on glazing pane. Seal corners by butting and sealing junctions with butyl sealant.
- B. Place setting blocks 1/3 points with edge block no more than 150 mm (6 inches) from corners.
- C. Rest glazing on setting blocks and push against fixed stop with sufficient pressure to attain full contact.

- D. Install removable stops without displacing glazing spline. Exert pressure for full continuous contact.
- E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
- F. Trim protruding tape edge.

3.5 INSTALLATION - WET/DRY METHOD (PREFORMED TAPE AND SEALANT)

- A. Cut glazing tape to length and set against permanent stops, 5 mm (3/16 inch) below sight line. Seal corners by butting tape and dabbing with butyl sealant.
- B. Apply heel bead of butyl sealant along intersection of permanent stop with frame ensuring full perimeter seal between glass and frame to complete the continuity of the air and vapor seal.
- C. Place setting blocks at 1/3 points with edge block no more than 150 mm (6 inches) from corners.
- D. Rest glazing on setting blocks and push against tape and heel bead of sealant with sufficient pressure to achieve full contact at perimeter of pane or glass unit.
- E. Install removable stops, with spacer strips inserted between glazing and applied stops, 6 mm (1/4 inch) below sight line. Place glazing tape on glazing pane or unit with tape flush with sight line.
- F. Fill gap between glazing and stop with sealant to depth equal to bite of frame on glazing, but not more than 9 mm (3/8 inch) below sight line.
- G. Apply cap bead of sealant along void between the stop and the glazing, to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.6 INSTALLATION - WET METHOD (SEALANT AND SEALANT)

- A. Place setting blocks at 1/3 points and install glazing pane or unit.
- B. Install removable stops with glazing centered in space by inserting spacer shims both sides at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.
- C. Fill gaps between glazing and stops with sealant to depth of bite on glazing, but not more than 9 mm (3/8 inch) below sight line to ensure full contact with glazing and continue the air and vapor seal.
- D. Apply sealant to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.7 INSTALLATION - INTERIOR WET/DRY METHOD (TAPE AND SEALANT)

- A. Cut glazing tape to length and install against permanent stops, projecting 1.6 mm (1/16 inch) above sight line.
- B. Place setting blocks at 1/3 points with edge block no more than 150 mm (6 inches) from corners.
- C. Rest glazing on setting blocks and push against tape to ensure full contact at perimeter of pane or unit.
- D. Install removable stops, spacer shims inserted between glazing and applied stops at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.
- E. Fill gaps between pane and applied stop with sealant to depth equal to bite on glazing, to uniform and level line.
- F. Trim protruding tape edge.

3.8 REPLACEMENT AND CLEANING

- A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by Resident Engineer.
- B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.
- C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

3.9 PROTECTION

- A. Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

3.10 GLAZING SCHEDULE

- A. Fire Resistant Glass:
 - 1. Install fire resistant glass without wire mesh in interior fire rated or labeled doors and windows.
- B. Tempered Glass:
 - 1. Install in full and half-glazed doors unless indicated otherwise.
 - 2. Install in storefront, windows, and door sidelights adjacent to doors.
 - 3. Use clear tempered glass on interior side lights and doors, and on exterior doors and sidelights unless otherwise indicated or specified.
 - 4. Use SEU Low E tempered and clear glass, G-41, on storefront and sidelights.

C. Clear Glass:

1. Interior windows not specified otherwise.
2. Interior pane of dual glazed windows not receiving tempered, laminated or organic coated glass, or other special glass indicated or specified.

D. Insulating Glass:

1. Install SEU clear tempered glass in windows, interior pane of dual glazed windows, storefronts, adjacent to entrances or walks.
2. Install SEU clear glass in windows, interior pane of dual glazed windows, storefronts, not adjacent to entrances or walks.

E. Laminated Glass: Install as specified in doors, observation windows and interior pane of dual glazed windows where indicated.

1. Provide laminated glass for all windows in Psychiatric Nursing Units, Alcohol Dependency Treatment Nursing Units, Drug Abuse Treatment Nursing Units and Security Bedrooms. Laminated glass shall be 7/16-in thick in locked patient units and security rooms, 5/16-in thick elsewhere (min. 1.5 mm interlayer).
2. If laminated glass is required for double glazed windows, provide it for interior panes only.

F. Pattern Glass (fritted):

1. Install where indicated on Drawings.

G. Spandrel Glass: Install specified spandrel glazing where indicated.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 08 90 00
LOUVERS AND VENTS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies fixed and operable wall louvers.

1.2 RELATED WORK

- A. Louvers in steel doors: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.
B. HVAC ducts and devices: Division 23 specification sections.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Shop Drawings:
Each type, showing material, finish, size of members, operating devices, method of assembly, and installation and anchorage details.
C. Manufacturer's Literature and Data:
Each type of louver.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
B. The Master Painters Institute (MPI):
Approved Product List - September 2011
C. American Society for Testing and Materials (ASTM):
A167-99(R2009)Stainless and Heat-Resisting Chromium - Nickel
Steel Plate, Sheet, and Strip
A1008/A1008M-10Steel, Sheet, Carbon, Cold Rolled, Structural,
and High Strength Low-Alloy with Improved
Formability
B209/B209M-03(R2007) ...Aluminum and Aluminum Alloy, Sheet and Plate
B221-08Aluminum and Aluminum Alloy Extruded Bars, Rods,
Wire, Shapes, and Tubes
B221M-07Aluminum and Aluminum Alloy Extruded Bars, Rods,
Wire Shapes, and Tubes
D. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06Metal Finishes Manual
E. National Fire Protection Association (NFPA):
90A-09Installation of Air Conditioning and Ventilating
Systems
G. American Architectural Manufacturers Association (AAMA):

2605-11High Performance Organic Coatings on
Architectural Extrusions and Panels

H. Air Movement and Control Association, Inc. (AMCA):

500-L-07Testing Louvers

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Aluminum, Extruded: ASTM B221/B221M.
- B. Carbon Steel: ASTM A1008/A1008M.
- C. Aluminum, Plate and Sheet: ASTM B209/B209M.
- D. Fasteners: Fasteners for securing louvers to adjoining construction, except as otherwise specified or shown, shall be toggle or expansion bolts, of size and type as required for each specific type of installation and service condition.
 - 1. Where type, size, or spacing of fasteners is not shown or specified, submit shop drawings showing proposed fasteners, and method of installation.
 - 2. Fasteners for louvers and louver frames shall be of stainless steel or aluminum.
- E. Inorganic Zinc Primer: MPI No. 19.

2.2 EXTERIOR WALL LOUVERS

- A. General:
 - 1. Provide fixed type louvers of size and design shown.
 - 2. Heads, sills and jamb sections shall have formed caulking slots or be designed to retain caulking. Head sections shall have exterior drip lip, and sill sections an integral water stop.
 - 3. Furnish louvers with sill extension or separate sill as shown.
 - 4. Frame shall be mechanically fastened or welded construction with welds dressed smooth and flush.
- B. Performance Characteristics:
 - 1. Weather louvers shall have a minimum of 50 percent free area and shall pass (400) mm/s (fpm) free area velocity at a pressure drop not exceeding (0.15) mm (inch) water gage and carry not more than (60.2)g (ounces) of water per m² (square foot) of free area for 15 minutes when tested per AMCA Standard 500-L.
 - 2. Louvers shall bear AMCA certified rating seals for air performance and water penetration ratings.
- C. Aluminum Louvers:
 - 1. General: Frames, blades, sills and mullions (sliding interlocking type); 2 mm (0.081-inch) thick extruded aluminum. Blades shall be drainable type and have reinforcing bosses.

2. Louvers, fixed: Make frame sizes 13 mm (1/2-inch) smaller than openings. Single louvers frames shall not exceed 1700 mm (66 inches) wide. When openings exceed 1700 mm (66 inches), provide twin louvers separated by mullion members.

2.3 CLOSURE ANGLES AND CLOSURE PLATES

- A. Fabricate from 2 mm (0.074-inch) thick stainless steel or aluminum.
- B. Provide continuous closure angles and closure plates on inside head, jambs and sill of exterior wall louvers.
- C. Secure angles and plates to louver frames with screws, and to masonry or concrete with fasteners as specified.

2.4 FINISH

- A. In accordance with NAAMM Metal Finishes Manual: AMP 500-505
- B. Aluminum Louvers:
 1. Organic Finish: AAMA 2605 (Fluorocarbon coating).
- C. Color: Color to match existing dormer louvers on Building 67.

2.5 PROTECTION

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with a heavy coat of bituminous paint (complete coverage), or by separating the contact surfaces with a preformed synthetic rubber tape having pressure sensitive adhesive coating on one side.
- B. Isolate the aluminum from plaster, concrete and masonry by coating aluminum with zinc-chromate primer.
- C. Protect finished surfaces from damage during fabrication, erection, and after completion of the work. Strippable plastic coating on organic finish is not approved.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Set work accurately, in alignment and where shown. Items shall be plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Furnish setting drawings and instructions for installation of anchors and for the positioning of items having anchors to be built into masonry construction. Provide temporary bracing for such items until masonry is set.
- C. Provide anchoring devices and fasteners as shown and as necessary for securing louvers to building construction as specified. Power actuated drive pins may be used, except for removal items and where members would be deformed or substrate damaged by their use.

- D. Generally, set wall louvers in masonry walls during progress of the work. If wall louvers are not delivered to job in time for installation in prepared openings, make provision for later installation. Set in cast-in-place concrete in prepared openings.

3.2 CLEANING AND ADJUSTING

- A. After installation, all exposed prefinished and plated items and all items fabricated from stainless steel and aluminum shall be cleaned as recommended by the manufacturer and protected from damage until completion of the project.
- B. All movable parts, including hardware, shall be cleaned and adjusted to operate as designed without binding or deformation of the members, so as to be centered in the opening of frame, and where applicable, to have all contact surfaces fit tight and even without forcing or warping the components

- - - E N D - - -

SECTION 09 22 16
NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies steel studs wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board, abuse resistant plaster veneer bases or other building boards.

1.2 RELATED WORK

- A. Load bearing framing: Section 05 40 00, COLD-FORMED METAL FRAMING.
- B. Support for wall mounted items: Section 05 50 00, METAL FABRICATIONS.
- C. Pull down tabs in steel decking: Section 05 36 00, COMPOSITE METAL DECKING.
- D. Ceiling suspension systems for acoustical tile or panels and lay in gypsum board panels: Section 09 51 00, ACOUSTICAL CEILINGS.

1.3 TERMINOLOGY

- A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.
- C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Studs, runners and accessories.
 - 2. Hanger inserts.
 - 3. Channels (Rolled steel).
 - 4. Furring channels.
 - 5. Screws, clips and other fasteners.
- C. Test Results: Fire rating test designation, each fire rating required for each assembly.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

- A. In accordance with the requirements of ASTM C754.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM)
 - A123-09Zinc (Hot-dip Galvanized) Coatings on Iron and Steel Products
 - A653/A653M-09Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot-Dip Process
 - A641-09Zinc-Coated (Galvanized) Carbon Steel Wire
 - C11-10Terminology Relating to Gypsum and Related Building Materials and Systems
 - C635-07Manufacture, Performance, and Testing of Metal Suspension System for Acoustical Tile and Lay-in Panel Ceilings
 - C636-06Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
 - C645-09Non-Structural Steel Framing Members
 - C754-09Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products
 - C841-03(R2008)Installation of Interior Lathing and Furring
 - C954-07Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness
 - C1002-07Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
 - E580-09Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Moderate Seismic Restraint.

PART 2 - PRODUCTS

2.1 PROTECTIVE COATING

- A. Galvanize steel studs, runners (track), rigid (hat section) furring channels, "Z" shaped furring channels, and resilient furring channels, with coating designation of G-60 minimum, per ASTM 123.

2.2 STEEL STUDS AND RUNNERS (TRACK)

- A. ASTM C645, modified for thickness specified and sizes as shown.
 - 1. Use ASTM A525 steel, 0.8 mm (0.0329-inch) minimum thickness bare metal (33 mil or 20 gauge).
 - 2. Runners same thickness as studs.
- B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.
- C. Doubled studs for openings and studs for supporting concrete backer-board.
- D. Studs 3600 mm (12 feet) or less in length shall be in one piece.
- E. Shaft Wall Framing:
 - 1. Conform to rated wall construction, and wall types indicated on the Drawings.
 - 2. C-H Studs.
 - 3. E Studs.
 - 4. J Runners.
 - 5. Steel Jamb-Strut.

2.3 FURRING CHANNELS

- A. Rigid furring channels (hat shape): ASTM C645.
- B. Resilient furring channels:
 - 1. Not less than 0.45 mm (0.0179-inch) thick bare metal.
 - 2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.
- C. "Z" Furring Channels:
 - 1. Not less than 0.45 mm (0.0179-inch)-thick bare metal, with 32 mm (1-1/4 inch) and 19 mm (3/4-inch) flanges.
 - 2. Web furring depth to suit thickness of insulation with slotted perforations.
- D. Rolled Steel Channels: ASTM C754, cold rolled; or, ASTM C841, cold rolled.

2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES

- A. ASTM C754, except as otherwise specified.
- B. For fire rated construction: Type and size same as used in fire rating test.
- C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.

- D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.
- E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.
- F. Tie Wire and Hanger Wire:
 - 1. ASTM A641, soft temper, Class 1 coating.
 - 2. Gage (diameter) as specified in ASTM C754 or ASTM C841.
- G. Attachments for Wall Furring:
 - 1. Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
 - 2. For existing concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.
- H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

2.5 SUSPENDED CEILING SYSTEM FOR GYPSUM BOARD (OPTION)

- A. Conform to ASTM C635, heavy duty, with not less than 35 mm (1-3/8 inch) wide knurled capped flange face designed for screw attachment of gypsum board.
- B. Wall track channel with 35 mm (1-3/8 inch) wide flange.

PART 3 - EXECUTION

3.1 INSTALLATION CRITERIA

- A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.
- B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2) of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

3.2 INSTALLING STUDS

- A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.
- B. Space studs not more than 406 mm (16 inches) on center, unless indicated otherwise on the Drawings.
- C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.

- D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.
 - E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, sound rated partitions, and insulated exterior wall furring.
 - F. Openings:
 - 1. Frame jambs of openings in stud partitions and furring with two studs placed back to back or as shown.
 - 2. Fasten back to back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
 - 3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.
 - G. Fastening Studs:
 - 1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
 - 2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.
 - H. Chase Wall Partitions:
 - 1. Locate cross braces for chase wall partitions to permit the installation of pipes, conduits, carriers and similar items.
 - 2. Use studs or runners as cross bracing not less than 63 mm (2-1/2 inches wide).
 - I. Form building seismic or expansion joints with double studs back to back spaced 75 mm (three inches) apart plus the width of the seismic or expansion joint.
 - J. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.
- 3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY**
- A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.
 - B. Wall furring-Stud System:
 - 1. Framed with 63 mm (2-1/2 inch) or narrower studs, 406 mm (16 inches) on center.
 - 2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
 - 3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.

- C. Direct attachment to masonry or concrete; rigid channels or "Z" channels:
 - 1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.
 - 2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.
 - 3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.
 - 4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
 - 5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.
 - 6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.
- D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES

- A. Provide for attachment and support of electrical outlets, plumbing or heating fixtures, recessed type plumbing fixture accessories, access panel frames, wall bumpers, toilet stall partitions, whiteboards, tackboards, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other similar items supported by stud construction.
- B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

3.5 INSTALLING SHAFT WALL SYSTEM

- A. Conform to UL Design No. U438 for two-hour fire rating. Provide two hour rating unless indicated otherwise on the Drawings.
- B. Position J runners at floor and ceiling with the short leg toward finish side of wall. Securely attach runners to structural supports with power driven fasteners at both ends and 600 mm (24 inches) on center.
- C. After liner panels have been erected, cut C-H studs and E studs, from 9 mm (3/8-inch) to not more than 13 mm (1/2-inch) less than floor-to-ceiling height. Install C-H studs between liner panels with liner panels inserted in the groove.
- D. Install full-length steel E studs over shaft wall line at intersections, corners, hinged door jambs, columns, and both sides of closure panels.

- E. Suitably frame all openings to maintain structural support for wall:
 - 1. Provide necessary liner fillers and shims to conform to label frame requirements.
 - 2. Frame openings cut within a liner panel with E studs around perimeter.
 - 3. Frame openings with vertical E studs at jambs, horizontal J runner at head and sill.

3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS

- A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841 except as otherwise specified or shown for screw attached gypsum board ceilings or soffits.
 - 1. Space framing at 406 mm (16-inch) centers for gypsum board anchorage.
- B. Concrete slabs on steel decking composite construction:
 - 1. Use pull down tabs when available.
 - 2. Use power activated fasteners when direct attachment to structural framing can not be accomplished.
- C. Where bar joists or beams are more than 1200 mm (48 inches) apart, provide intermediate hangers so that spacing between supports does not exceed 1200 mm (48 inches). Use clips, bolts, or wire ties for direct attachment to steel framing.
- D. Existing concrete construction exposed or existing concrete on steel decking:
 - 1. Use power actuated fasteners either eye pin, threaded studs or drive pins for type of hanger attachment required.
 - 2. Install fasteners at approximate mid height of concrete beams or joists. Do not install in bottom of beams or joists.
- E. Steel decking without concrete topping:
 - 1. Do not fasten to steel decking 0.76 mm (0.0299-inch) or thinner.
 - 2. Toggle bolt to decking 0.9 mm (0.0359-inch) or thicker only where anchorage to steel framing is not possible.
- F. Installing suspended ceiling system for gypsum board (ASTM C635 Option):
 - 1. Install only for ceilings to receive screw attached gypsum board.
 - 2. Install in accordance with ASTM C636.
 - a. Install main runners spaced 1200 mm (48 inches) on center.
 - b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.
 - c. Install wall track channel at perimeter.

G. Installing Ceiling Bracing System:

1. Construct bracing of 38 mm (1-1/2 inch) channels for lengths up to 2400 mm (8 feet) and 50 mm (2 inch) channels for lengths over 2400 mm (8 feet) with ends bent to form surfaces for anchorage to carrying channels and over head construction. Lap channels not less than 600 mm (2 feet) at midpoint back to back. Screw or bolt lap together with two fasteners.
2. Install bracing at an approximate 45 degree angle to carrying channels and structure overhead; secure as specified to structure overhead with two fasteners and to carrying channels with two fasteners or wire ties.
3. Brace suspended ceiling or soffit framing in seismic areas in accordance with ASTM E580.

3.7 TOLERANCES

- A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.
- B. Plumb and align vertical members within 3 mm (1/8-inch.)
- C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -

**SECTION 09 24 00
PORTLAND CEMENT PLASTERING**

PART 1 GENERAL

1.1 DESCRIPTION

This section specifies lathing and Portland cement based plaster (stucco).

1.2 RELATED WORK

- A. Steel framing members for attachment of plaster bases: Section 05 40 00, COLD-FORMED METAL FRAMING, and Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- B. Rigid exterior insulation used as a plaster base: Section 07 21 13, THERMAL INSULATION.

1.3 TERMINOLOGY

- A. Definitions and description of terms shall be in accordance with ASTM C11, C841, and C926 and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, and bar joists.
- C. Self-furring Lath: Metal plastering bases having dimples or crimps designed to hold the plane of the back of the lath 6 to 10 mm (1/4 to 3/8 inch) away from the plane of the solid backing.
- D. Solid Backing or Solid Bases: Concrete, masonry, sheathing, rigid insulation, and similar materials to which plaster is directly applied.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Accessories for plaster, each type.
 - 2. Metal plastering bases, each type.
 - 3. Fasteners.
 - 4. Bonding compounds, including application instructions.
 - 5. Admixtures, including mixing and application instructions.
- C. Samples:
 - 1. Panel showing finish coat 150 mm by 300 mm (6 x 12 inches).

1.5 PROJECT CONDITIONS

- A. Maintain work areas for interior work at a temperature of not less than 4°C (40°F) for not less than 48 hours prior to application of plaster, during application of plaster and until plaster is completely dry.

- B. Exterior plaster shall not be applied when the ambient temperature is less than 4°C (40°F).
- C. Plaster shall not be applied to frozen surfaces or surfaces containing frost.
- D. Frozen materials shall not be used in the mix.
- E. Plaster coats shall be protected against freezing for a period of not less than 24 hours after application.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A653/A653M-10Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
 - A641-09Zinc-Coated (Galvanized) Carbon Steel Wire
 - C11-10Terminology Relating to Gypsum and Related Building Materials and Systems.
 - C91-05Masonry Cement
 - C150-09Portland Cement
 - C207-06Hydrated Lime for Masonry Purposes
 - C260-10Air Entraining Admixtures for Concrete.
 - C841-08Installation of Interior Lathing and Furring
 - C847-10Metal Lath
 - C897-05(R2009)Aggregate for Job-Mixed Portland Cement Based Plasters
 - C926-06Application of Portland Cement-Based Plaster
 - C933-09Welded Wire Lath
 - C979-10Pigments for Integrally Colored Concrete
 - C1002-07Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
- C. Commercial Item Description (CID):
 - A-A-55615Shield, Expansion (Wood Screw and Lag Bolt Self-Threading Anchors)
- D. Federal Specifications (Fed Spec.):
 - UU-B-790ABuilding Paper, Vegetable Fiber (Kraft, Waterproofed, Water Repellent and Fire Resistant)

PART 2 - PRODUCTS**2.1 METAL PLASTERING BASES****A. Expanded Metal Lath:**

1. ASTM C847, zinc-coated (galvanized) except as modified by ASTM C841 and this specification. Self furring where applied over solid backing.
2. Flat diamond mesh weighing not less than 1.8 kg/m² (3.4 pounds per square yard).
3. Stucco Mesh: Flat expanded diamond mesh pattern, with openings approximately 38 by 75 mm (1-1/2 by 3 inches), weighing not less than 1.9 kg/ m² (3.6 pounds per square yard), with backing as specified.

B. Wire Lath:

1. Zinc coated (Galvanized).
2. Welded Wire Lath: ASTM C933, with backing as specified.
3. Self furring where applied over solid backing.

C. Building Paper Backing for Metal Plastering Bases:

1. Backing attached to lath as specified in ASTM C933.
2. Vapor Permeable Backing: Fed. Spec. UU-B-790, Type I, Grade D.
3. Water Resistant Backing: Fed. Spec. UU-B-790, Type I, Grade B.

2.2 ACCESSORIES FOR CEMENT PLASTER (STUCCO)

- A. ASTM C841, except fabricate from zinc alloy.
- B. Control Joints: ASTM C841, zinc.

2.3 FASTENERS

- A. Tie, wire, screws, clips, and other fasteners ASTM C841, except as otherwise specified.
- B. Fasteners for securing metal plastering bases shall have heads, or be through washers large enough to engage two strands of the metal plastering base.
- C. For fire rated construction; type and size as used in fire rated test.
- D. Screws: ASTM C1002.
- E. Expansion Shields: CID A-A-55615, of the Type and Class applicable.

2.4 CEMENT

- A. Portland: ASTM C150, Type I.
- B. Masonry: ASTM C91. Lime where added, ASTM C207, Type S.
- C. White where required for white finish coat.

2.5 LIME

- A. ASTM C206, Type S.
- B. ASTM C207, Type S.

2.6 AGGREGATES (SAND)

- A. ASTM C897, graded as required to suit texture of finish specified.

- B. White where white finish coat is specified.

2.7 BONDING AGENT

ASTM C932.

2.8 FACTORY PREPARED FINISH COAT FOR CEMENT PLASTER (STUCCO)

- A. Factory prepared dry blend of materials, integrally colored, designed for exterior finish coat application.
- B. Pigments: ASTM C979, lime proof mineral oxide.
- C. Not more than 35 percent, by weight of all ingredients (cement, aggregate, hydrated lime, admixture and coloring pigment) shall pass a number 100 sieve.

2.9 ADMIXTURES

Air Entrainment: ASTM C260.

PART 3 - EXECUTION

3.1 METAL PLASTERING BASES (LATH) LOCATIONS

- A. Where plaster is required on rigid insulation, provide and install metal plastering base where recommended by stucco manufacturer. Use wire lath or stucco mesh.
- B. On ceiling or soffit framing use flat diamond mesh lath.
- C. Where metal plastering bases are used as a base for exterior cement plaster over wall sheathing, use wire lath or stucco mesh with water resistant backing.

3.2 APPLYING METAL PLASTERING BASES

- A. In accordance with ASTM C841, except as otherwise specified or shown.
- B. Form true surfaces, straight or in fair curves where shown, without sags or buckles and with long dimension of lath at right angles to direction of supports.
- C. Lath for ceiling or soffit construction shall terminate at casing bead (floating angle construction) at perimeter angles between walls and ceilings or soffits.
- D. Lath with backing shall be applied to produce a paper to paper and metal to metal lap at ends and sides of adjacent sheets, whether full sheets or less than full sheets are used:
 - 1. Backing shall be lapped 50 mm (2 inches) for both horizontal and vertical laps.
 - 2. Horizontal laps shall be ship lap fashion to conduct water to the outside and over flashing or waterproofing.
- E. Metal plastering bases shall not be continuous through expansion and control joints, but shall be stopped at each side.
- F. Wood plugs are not acceptable.

3.3 INSTALLING PLASTERING ACCESSORIES

- A. Install accessories in accordance with ASTM C841, except as otherwise specified.
 - 1. Set plastering accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified for metal lath.
 - 2. Install in one piece, within the limits of the longest commercially available lengths.
- B. Corner Beads: Install at all vertical and horizontal external plaster corners, as required to establish grounds, and where shown.
- C. Strip Lath:
 - 1. Install metal lath strips centered over joints between dissimilar materials, such as hollow tile, brick, concrete masonry units, concrete, and joints with metal lath on framing or furring, where both such surfaces are required to be plastered and are in contact with each other in same plane, except where expansion joints and casing beads are required.
 - 2. Wire tie or fasten strip lath to base along both edges at not over 150 mm (six inches) on centers.
- D. Casing Beads:
 - 1. Install casing beads where shown and at following locations where plaster terminates to provide finish trim.
 - a. Where plaster terminates against non-plastered surfaces such as masonry, concrete, and wood.
 - b. Where plaster terminates against trim of steel frames and trim of other materials and equipment, except where trim overlaps plaster.
 - c. Around perimeter of openings except where edge is covered by flanges. Locate to conform to dimensions shown on shop drawings.
 - d. Where plaster for new walls or furring (vertical or horizontal) terminates against existing construction.
 - e. Both sides of expansion and control joints unless shown otherwise.
 - f. Install casing bead at perimeter angles between walls and ceilings so as to provide floating angle (unrestrained) construction in accordance with ASTM C841.
- E. Cornerites:
 - 1. Install at interior corners of walls, partitions, and other vertical surfaces to be plastered, except where metal lath is carried around angle.
 - 2. Fasten only as necessary to retain position during plastering.
 - 3. Omit cornerites at junction of new plastered walls with existing plastered walls at locations where casing beads are specified.

F. Control Joints:

1. Where control joints are placed parallel to framing members, install joints within 100 mm (four inches) of the framing member.
2. Install control joints only to the edges of abutting sheets of lath so that the lath is not continuous or tied across the joint.
3. Joints shall extend the full width and height of the wall or length of soffit/ceiling plaster membrane.

3.4 SURFACE PREPARATION OF SOLID BASES

- A. Surfaces that are to receive plaster shall be prepared and conditioned in accordance with ASTM C926, except as otherwise specified.

3.5 PORTLAND CEMENT BASED PLASTER

- A. Provide portland cement based plaster where cement plaster (stucco) is shown and specified, and as follows:
1. Three coat work shall be used over all metal plastering bases, with or without solid backing.
- B. Proportion, mix and apply plaster in accordance with ASTM C926, except as otherwise specified.
1. Use air entrained plaster for all exterior work.
 2. Use coloring pigments for finish coat when integral color other than white is specified.
 3. Use white cement with white sand when white finish coat is specified.
 4. Factory prepared finish coat: Add water, mix, and apply as specified by manufacturer.
 5. Color:
 - a. Color of finish coat shall be selected from manufacturer's full line of available colors.
 6. Finish coat shall be sand float texture.

- - - E N D - - -

**SECTION 09 29 00
GYPSUM BOARD**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies installation and finishing of gypsum board.

1.2 RELATED WORK

- A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 05 40 00, COLD-FORMED METAL FRAMING, and Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- B. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.
- C. Installation of tile finish: Section 09 30 13, CERAMIC/PORCELAIN TILING.
- D. Lay in gypsum board ceiling panels: Section 09 51 00, ACOUSTICAL CEILING.

1.3 TERMINOLOGY

- A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.
- C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Cornerbead and edge trim.
 2. Finishing materials.
 3. Laminating adhesive.
 4. Gypsum board, each type.
- C. Test Results:
1. Fire rating test, each fire rating required for each assembly.
 2. Sound rating test.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

- A. In accordance with the requirements of ASTM C840.

1.6 ENVIRONMENTAL CONDITIONS

- A. In accordance with the requirements of ASTM C840.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C11-08Terminology Relating to Gypsum and Related Building Materials and Systems
 - C475-02Joint Compound and Joint Tape for Finishing Gypsum Board
 - C840-08Application and Finishing of Gypsum Board
 - C919-08Sealants in Acoustical Applications
 - C954-07Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness
 - C1002-07Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
 - C1047-05Accessories for Gypsum Wallboard and Gypsum Veneer Base
 - C1177-06Glass Mat Gypsum Substrate for Use as Sheathing
 - C1658-06Glass Mat Gypsum Panels
 - C1396-06Gypsum Board
 - E84-08Surface Burning Characteristics of Building Materials
- C. Underwriters Laboratories Inc. (UL):
 - Latest EditionFire Resistance Directory
- D. Inchcape Testing Services (ITS):
 - Latest EditionsCertification Listings

PART 2 - PRODUCTS

2.1 GYPSUM BOARD

- A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise. Shall contain a minimum of 20 percent recycled gypsum.
- B. Coreboard or Shaft Wall Liner Panels.
 - 1. ASTM C1396, Type X.
 - 2. ASTM C1658: Glass Mat Gypsum Panels,
 - 3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.
- C. Water Resistant Gypsum Backing Board: ASTM C620, Type X, 16 mm (5/8 inch) thick.

- D. Cement Board: ASTM C 1325, ANSI A118.9, fiber-mat reinforced cement board for porcelain or ceramic tile backer, and in showers, 16 mm (5/8-inch) thick unless shown otherwise.
- E. Abuse Resistant Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise.
 - 1. Surface Abrasion: Tested in accordance with ASTM C1629. Classification Level 2.
 - 2. Surface Indentation: Tested in accordance with ASTM C1629. Classification Level 2.
 - 3. Soft-Body Impact Test: Tested in accordance with ASTM C1629. Classification Level 1.
 - 4. Basis-of-Design Product: Sheetrock AR gypsum panel by USG. Subject to compliance with requirements, provide the basis-of-design product or an approved equivalent product.
- F. Gypsum cores shall contain a minimum of 95 percent post industrial recycled gypsum content. Paper facings shall contain 100 percent post-consumer recycled paper content.

2.2 GYPSUM SHEATHING BOARD

- A. ASTM C1396, Type X, water-resistant core, 16 mm (5/8 inch) thick.
- B. Dens-Glass Gold or approved equal.

2.3 ACCESSORIES

- A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.
- B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

2.4 FASTENERS

- A. ASTM C1002 and ASTM C840, except as otherwise specified.
- B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).
- C. Select screws of size and type recommended by the manufacturer of the material being fastened.
- D. For fire rated construction, type and size same as used in fire rating test.
- E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE

- A. ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

PART 3 - EXECUTION**3.1 GYPSUM BOARD HEIGHTS**

- A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring unless indicated otherwise on the Drawings:
 - 1. Two sides of partitions:
 - a. Fire rated partitions.
 - b. Smoke partitions.
 - c. Sound rated partitions.
 - d. Full height partitions shown (FHP).
 - 2. One side of partitions or furring:
 - a. Inside of exterior wall furring or stud construction.
 - b. Room side of room without suspended ceilings.
 - c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
 - d. Corridor partitions.
 - 3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.
- B. In locations other than those specified, extend gypsum board from floor to heights as follows unless otherwise indicated on the Drawings:
 - 1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
 - 2. At ceiling of suspended gypsum board ceilings.
 - 3. At existing ceilings.

3.2 INSTALLING GYPSUM BOARD

- A. Coordinate installation of gypsum board with other trades and related work.
- B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.
- C. Moisture and Mold-Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-resistant surfaces complying with ASTM C1658 where shown and in locations which might be subject to moisture exposure during construction.
 - 1. Cementitious Backer Units at ceramic/porcelain tile locations and in showers.
 - 2. Glass-Mat Liner Panels full height of wall, on all walls within rooms that contain moisture.
- D. Use gypsum boards in maximum practical lengths to minimize number of end joints.
- E. Bring gypsum board into contact, but do not force into place.

F. Ceilings:

1. For single-ply construction, use perpendicular application.
2. Suspend where indicated on the Drawings. Suspend with 7/8-inch (22 mm) hat channels and 1-1/2-inch (38 mm) channels with wire hangers.

G. Walls (Except Shaft Walls):

1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
3. Stagger screws on abutting edges or ends.
4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.
5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
6. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
7. Control Joints ASTM C840 and as follows:
 - a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
 - b. Not required for wall lengths less than 9000 mm (30 feet).
 - c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.
8. Refer to drawings for locations to receive abuse resistant gypsum board.

H. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:

1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.

I. Electrical and Telecommunications Boxes:

1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.

J. Accessories:

1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
2. Install in one piece, without the limits of the longest commercially available lengths.
3. Corner Beads:
 - a. Install at all vertical and horizontal external corners and where shown.
 - b. Use screws only. Do not use crimping tool.
4. Edge Trim (casings Beads):
 - a. At both sides of expansion and control joints unless shown otherwise.
 - b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
 - c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
 - d. Where shown.

3.3 INSTALLING GYPSUM SHEATHING

- A. Install in accordance with ASTM C840, except as otherwise specified or shown.
- B. Use screws of sufficient length to secure sheathing to framing.
- C. Space screws 9 mm (3/8 inch) from ends and edges of sheathing and 200 mm (8 inches) on center. Space screws a maximum of 200 mm (8 inches) on center on intermediate framing members.
- D. Apply 600 mm by 2400 mm (2 foot by 8 foot) sheathing boards horizontally with tongue edge up.
- E. Apply 1200 mm by 2400 mm or 2700 mm (4 ft. by 8 ft. or 9 foot) gypsum sheathing boards vertically with edges over framing.

3.4 CAVITY SHAFT WALL

- A. Coordinate assembly with Section 09 22 16, NON-STRUCTURAL METAL FRAMING, for erection of framing and gypsum board.
- B. Conform to UL Design No. U438 or FM WALL CONSTRUCTION 12-2/HR for two-hour fire rating and conform to FM WALL CONSTRUCTION 25-1/HR for one-hour fire rating where shown.
- C. Cut coreboard (liner) panels 25 mm (one inch) less than floor-to-ceiling height, and erect vertically between J-runners on shaft side.

1. Where shaft walls exceed 4300 mm (14 feet) in height, position panel end joints within upper and lower third points of wall.
2. Stagger joints top and bottom in adjacent panels.
3. After erection of J-struts of opening frames, fasten panels to J-struts with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.

D. Gypsum Board:

1. Two hour wall:
 - a. Erect base layer (backing board) vertically on finish side of wall with end joints staggered. Fasten base layer panels to studs with 25 mm (one inch) long screws, spaced 600 mm (24 inches) on center.
 - b. Use laminating adhesive between plies in accordance with UL or FM if required by fire test.
 - c. Apply face layer of gypsum board required by fire test vertically over base layer with joints staggered and attach with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.
2. One hour wall with one layer on finish side of wall: Apply face layer of gypsum board vertically. Attach to studs with screws of sufficient length to secure to framing, spaced 300 mm (12 inches) on center in field and along edges.
3. Where coreboard is covered with face layer of gypsum board, stagger joints of face layer from those in the coreboard base.

- E. Treat joints, corners, and fasteners in face layer as specified for finishing of gypsum board.

3.5 FINISHING OF GYPSUM BOARD

- A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 5 finish for all finished areas open to public view.
- B. Before proceeding with installation of finishing materials, assure the following:
 1. Gypsum board is fastened and held close to framing or furring.
 2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.
- C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings. Sanding is not required of surfaces above suspended ceilings. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings.
- D. Finishing Abuse Resistant Gypsum Board:

1. Finish joints, edges, corners, and fastener heads as indicated above such that abuse resistant gypsum board will receive a Level 5 finish where exposed to view.
2. Finish abuse resistant gypsum board with sheetrock Tuff-Hide primer-surfacer, or an approved equivalent product.
 - a. Install Tuff-Hide for Level 5 finish.
 - b. Install Tuff-Hide in two coats, each approximately 9 to 10 mils wet film thickness, for total of 18 to 20 mils thickness. Install the two coats in a cross-hatch method.
 - c. Installer to follow manufacturer's installation instructions for primer-surfacer.

3.6 REPAIRS

- A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.
- B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.
- C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.
- D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide smoke tight construction and fire protection equivalent to the fire rated construction and STC equivalent to the sound rated construction.

- - - E N D - - -

**SECTION 09 30 13
CERAMIC/PORCELAIN TILING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies porcelain tile, marble thresholds waterproofing membranes for thin-set applications, crack isolation membranes, and tile backer board.

1.2 RELATED WORK

- A. Sealing of joints where specified: Section 07 92 00, JOINT SEALANTS.
- B. Color, texture and pattern of field tile and trim shapes, size of field tile, trim shapes, and color of grout specified: As indicated in Drawings.
- C. Metal and resilient edge strips at joints with new resilient flooring, and carpeting.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
 - 1. Base tile, each type, each color, each size.
 - 2. Mosaic floor tile panels, 225 mm by 225 mm (9 inches by 9 inches), each type, color, size and pattern.
 - 3. Porcelain tile, each type, color, patterns and size.
 - 4. Wall (or wainscot) tile, each color, size and pattern.
 - 5. Trim shapes, bullnose cap and cove including bullnose cap and base pieces at internal and external corners of vertical surfaces, each type, color, and size.
- C. Product Data:
 - 1. Ceramic and porcelain tile, marked to show each type, size, and shape required.
 - 2. Chemical resistant mortar and grout (Epoxy and Furan).
 - 3. Cementitious backer unit.
 - 4. Crack isolation membrane.
 - 5. Divider strip.
 - 6. Reinforcing tape.
 - 7. Leveling compound.
 - 8. Latex-Portland cement mortar and grout.
 - 9. Slip resistant tile.
 - 10. Waterproofing isolation membrane.
 - 11. Fasteners.
- D. Shop Drawings:

1. Show location of each type of tile and tile pattern.
2. Show widths, details, and location of expansion, contraction, control, and isolation joints in the substrate and finished tile.

1.4 DELIVERY AND STORAGE

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
 - A108.1A-11Installation of Ceramic Tile in the Wet-Set Method with Portland Cement Mortar
 - A108.1B-11Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with dry-Set or latex-Portland Cement Mortar
 - A108.1C-11Contractors Option; Installation of Ceramic Tile in the Wet-Set method with Portland Cement Mortar or Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar
 - A137.1-08Ceramic Tile
- C. American Society For Testing And Materials (ASTM):
 - A185-07Steel Welded Wire Fabric, Plain, for Concrete Reinforcing
 - C109/C109M-11Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2 inch. or [50-mm] Cube Specimens)
 - C241-09Abrasion Resistance of Stone Subjected to Foot Traffic
 - C348-08Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars
 - C627-10Evaluating Ceramic Floor Tile Installation Systems Using the Robinson-Type Floor Tester
 - C954-11Steel Drill Screws for the Application of Gypsum Board on Metal Plaster Base to Steel Studs from 0.033 in (0.84 mm) to 0.112 in (2.84 mm) in thickness
 - C979-10Pigments for Integrally Colored Concrete

- C1002-07Steel Self-Piercing Tapping Screws for the
Application of Panel Products
- C1027-09Determining "Visible Abrasion Resistance on
Glazed Ceramic Tile"
- C1028-07Determining the Static Coefficient of Friction
of Ceramic Tile and Other Like Surfaces by the
Horizontal Dynamometer Pull Meter Method
- C1127-09Standard Guide for Use of High Solids Content,
Cold Liquid-Applied Elastomeric Waterproofing
Membrane with an Integral Wearing Surface
- C1178/C1178M-11Standard Specification for Coated Glass Mat
Water-Resistant Gypsum Backing Panel
- C1325-08Non-Asbestos Fiber-Mat Reinforced Cementitious
Backer Units
- D4397-10Standard Specification for Polyethylene Sheeting
for Construction, Industrial and Agricultural
Applications
- D5109-99(R2004)Standard Test Methods for Copper-Clad
Thermosetting Laminates for Printed Wiring
Boards
- D. Marble Institute of America (MIA): Design Manual III-2007
- E. Tile Council of America, Inc. (TCA):
2007Handbook for Ceramic Tile Installation

PART 2 - PRODUCTS

2.1 TILE

- A. Comply with ANSI A137.1, Standard Grade, except as modified:
 - 1. Inspection procedures listed under the Appendix of ANSI A137.1.
 - 2. Abrasion Resistance Classification:
 - a. Tested in accordance with values listed in Table 1, ASTM C 1027.
 - b. Class V, 12000 revolutions for floors in Corridors, Kitchens,
Storage including Refrigerated Rooms
 - c. Class IV, 6000 revolutions for remaining areas.
 - 3. Slip Resistant Tile for Floors:
 - a. Coefficient of friction, when tested in accordance with ASTM
C1028, required for level of performance:
 - 1) Not less than 0.6 (wet condition) for bathing areas.
 - 2) Not less than 0.8 on ramps for wet and dry conditions.
 - 3) Not less than 0.6, except 0.8 on ramps as stated above, for wet
and dry conditions for other areas.
 - 4. Mosaic tile may be mounted or joined together by a resinous bonding
material along tile edges.

5. Do not use back mounted tiles in showers unless certified by manufacturer as noted in paragraph 1.3.D.
6. Factory Blending: For tile with color variations, within the ranges selected during sample submittals blend tile in the factory and package so tile units taken from one package show the same range in colors as those taken from other packages and match approved samples.
7. Factory-Applied Temporary Protective Coating:
 - a. Protect exposed face surfaces (top surface) of tile against adherence of mortar and grout by pre-coating with a continuous film of petroleum paraffin wax, applied hot.
 - b. Do not coat unexposed tile surfaces.
 - c. Pre-wax tiles set or grouted with furan or epoxy or latex modified mortars.
- B. Glazed Wall Tile: Cushion edges, glazing, as specified in Drawings.
- C. Porcelain Paver Tile: Nominal 9.525 mm (3/8 inch) thick, with cushion edges. Porcelain tile produced by the dust pressed method shall be made of approximately 50% feldspar; the remaining 50% shall be made up of various high-quality light firing ball clays yielding a tile with a water absorption rate of 0.5% or less and a breaking strength of between 390 to 400 pounds.
- D. Trim Shapes:
 1. Conform to applicable requirements of adjoining floor and wall tile.
 2. Use trim shapes sizes conforming to size of adjoining field wall tile unless detailed or specified otherwise in Drawings.
 3. Internal and External Corners:
 - a. Square internal and external corner joints are not acceptable.
 - b. External corners including edges: Use bullnose shapes.
 - c. Internal corners: Use cove shapes.
 - d. Base to floor internal corners: Use special shapes providing integral cove vertical and horizontal joint.
 - e. Base to floor external corners: Use special shapes providing bullnose vertical edge with integral cove horizontal joint. Use stop at bottom of openings having bullnose return to wall.
 - f. Wall top edge internal corners: Use special shapes providing integral cove vertical joint with bullnose top edge.
 - g. Wall top edge external corners: Use special shapes providing bullnose vertical and horizontal joint edge.
 - h. Provide cove and bullnose shapes where shown, and as required to complete tile work.

2.2 CEMENTITIOUS BACKER UNITS

- A. Use in showers or wet areas.

B. ASTM C1325.

C. Use Cementitious backer units in maximum available lengths.

2.3 JOINT MATERIALS FOR CEMENTITIOUS BACKER UNITS

A. Reinforcing Tape: Vinyl coated woven glass fiber mesh tape, open weave, 50 mm (2 inches) wide. Tape with pressure sensitive adhesive backing will not be permitted.

B. Tape Embedding Material: Latex-Portland cement mortar complying with ANSI A108.1.

C. Joint material, including reinforcing tape, and tape embedding material, shall be as specifically recommended by the backer unit manufacturer.

2.4 FASTENERS

A. Screws for Cementitious Backer Units.

1. Standard screws for gypsum board are not acceptable.

2. Minimum 11 mm (7/16 inch) diameter head, corrosion resistant coated, with washers.

3. ASTM C954 for steel 1 mm (0.033 inch) thick.

4. ASTM C1002 for steel framing less than 0.0329 inch thick.

B. Washers: Galvanized steel, 13 mm (1/2 inch) minimum diameter.

2.5 SETTING MATERIALS OR BOND COATS

A. Conform to TCA Handbook for Ceramic Tile Installation.

B. Latex-Portland Cement Mortar: ANSI A108.1.

1. When using an impervious porcelain tile provide manufacturer's product with a bond strength of 400 psi.

2. For wall applications, provide non-sagging, latex-Portland cement mortar complying with ANSI A108.1.

3. Prepackaged Dry-Mortar Mix: Factory-prepared mixture of Portland cement; dry, redispersible, ethylene vinyl acetate additive; and other ingredients to which only water needs to be added at Project site.

C. Urethane Water proofing and Tile-Setting Adhesive: One-part liquid-applied urethane in a consistency suitable for trowel application and intended for use as both water proofing and tile-setting adhesive in a two-step process.

D. Waterproofing Isolation Membrane:

1. Sheet System TCA F122-02.

2. Optional System to elastomeric waterproof membrane.

3. Composite sheet consisting of ASTM D5109, Type II, Grade I Chlorinated Polyethylene (CM) sheet reinforced on both sides with a non-woven polyester fiber.

4. Designed for use in wet areas as an isolation and positive waterproofing membranes for thin-set bonding of sheet to substrate

and thin-set bonding of ceramic and porcelain tile or marble to sheet. Suited for both horizontal and vertical applications.

5. Conform to the following additional physical properties:

Property	Units	Results	Test Method
Hardness Shore A	Points	70-80	ASTM D2240 (10 Second Reading)
Shrinkage	Percent	5 maximum	ASTM D1204
Brittleness		No crack remains flexible at temperature-37 degrees C (-25 degrees F)	ASTM D2497 13 mm (1/2- inch) Mandrel Bend
Retention of Properties after Heat Aging	Percent of original	80 Tensile 80 Breaking 80 Elongation	ASTM D3045, 90 degrees C (194 degrees F) for 168 hours

6. Manufacturer's standard sheet size with prefabricated or preformed inside and outside corners.
7. Sheet manufacturer's solvent welding liquid or xylene and edge sealant.

2.6 GROUTING MATERIALS

A. Chemical-Resistant Grout:

1. Epoxy grout, ANSI A108.1.

B. Grout Sealer:

1. Manufacturer's standard silicone product for sealing grout joints that does not change color or appearance of grout.

2.7 PATCHING AND LEVELING COMPOUND

- A. Portland cement base, polymer-modified, self-leveling compound, manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.

B. Shall have minimum following physical properties:

1. Compressive strength - 25 MPa (3500 psig) per ASTM C109/C109M.
2. Flexural strength - 7 MPa (1000 psig) per ASTM C348 (28 day value).
3. Tensile strength - 600 psi per ANSI 118.7.
4. Density - 1.9.

- C. Capable of being applied in layers up to 38 mm (1-1/2 inches) thick without fillers and up to 100 mm (four inches) thick with fillers, being brought to a feather edge, and being trowelled to a smooth finish.

- D. Primers, fillers, and reinforcement as required by manufacturer for application and substrate condition.

- E. Ready for use in 48 hours after application.

2.8 MARBLE

- A. Soundness Classification in accordance with MIA Design Manual III Groups.
- B. Thresholds:
 - 1. Group A, Minimum abrasive hardness (Ha) of 10.0 per ASTM C241.
 - 2. Honed finish on exposed faces.
 - 3. Fabricate from one piece without holes, cracks, or open seams; full depth of wall or frame opening by full width of wall or frame opening; 19 mm (3/4-inch) minimum thickness and 6 mm (1/4-inch) minimum thickness at beveled edge.
 - 4. Set not more than 13 mm (1/2-inch) above adjoining finished floor surfaces, with transition edges beveled on a slope of no greater than 1:2. On existing floor slabs provide 13 mm (1/2-inch) above ceramic tile surface with bevel edge joint top flush with adjacent floor.
 - 5. One piece full width of door opening. Notch thresholds to match profile of door jambs.

2.9 METAL DIVIDER STRIPS

- A. Aluminum or brass as specified.

2.10 WATER

- A. Clean, potable and free from salts and other injurious elements to mortar and grout materials.

2.11 CLEANING COMPOUNDS

- A. Specifically designed for cleaning masonry and concrete and which will not prevent bond of subsequent tile setting materials including patching and leveling compounds and elastomeric waterproofing membrane and coat.
- B. Materials containing acid or caustic material not acceptable.

2.12 POLYETHYLENE SHEET

- A. Polyethylene sheet conforming to ASTM D4397.
- B. Nominal thickness: 0.15 mm (six mils).
- C. Use sheet width to minimize joints.

2.13 CRACK ISOLATION MEMBRANE

- A. Chlorinated-Polyethylene Sheet: Non-plasticized, chlorinated polyethylene faced on both sides with non-woven polyester fabric; 0.76 mm (0.030 inch) nominal thickness.

PART 3 - EXECUTION**3.1 ENVIRONMENTAL REQUIREMENTS**

- A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before installation and not less than three days after installation.

- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation and ANSI Specifications for installation.
- C. Do not install tile when the temperature is above 38 degrees C (100 degrees F).
- D. Do not install materials when the temperature of the substrate is below 16 degrees C (60 degrees F).
- E. Do not allow temperature to fall below 10 degrees C (50 degrees F) after fourth day of completion of tile work.

3.2 ALLOWABLE TOLERANCE

- A. Variation in plane of sub-floor, including concrete fills leveling compounds and mortar beds:
 - 1. Not more than 1 in 500 (1/4 inch in 10 feet) from required elevation where Portland cement mortar setting bed is used.
 - 2. Not more than 1 in 1000 (1/8 inch in 10 feet) where dry-set Portland cement, and latex-Portland cement mortar setting beds and chemical-resistant bond coats are used.
- B. Variation in Plane of Wall Surfaces:
 - 1. Not more than 1 in 400 (1/4 inch in eight feet) from required plane where Portland cement mortar setting bed is used.
 - 2. Not more than 1 in 800 (1/8 inch in eight feet) where dry-set or latex-Portland cement mortar or organic adhesive setting materials is used.

3.3 SURFACE PREPARATION

- A. Cleaning New Concrete or Masonry:
 - 1. Chip out loose material, clean off all oil, grease dirt, adhesives, curing compounds, and other deterrents to bonding by mechanical method, or by using products specifically designed for cleaning concrete and masonry.
 - 2. Use self-contained power blast cleaning systems to remove curing compounds and steel trowel finish from concrete slabs where ceramic tile will be installed directly on concrete surface with thin-set materials.
 - 3. Steam cleaning or the use of acids and solvents for cleaning will not be permitted.
- B. Patching and Leveling:
 - 1. Mix and apply patching and leveling compound in accordance with manufacturer's instructions.
 - 2. Fill holes and cracks and align concrete floors that are out of required plane with patching and leveling compound.

- a. Thickness of compound as required to bring finish tile system to elevation shown.
 - b. Float finish.
 - c. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through underlayment.
 3. Apply patching and leveling compound to concrete that are out of required plane.
 4. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
- C. Mortar Bed for Slopes to Drains:
1. Slope compound to drain where drains are shown.
 2. Install mortar bed sloped to drains not less than 1 in 200 (1/16 inch per foot).
 3. Screed for slope to drain and float finish.
 4. Cure mortar bed for not less than seven days. Do not use curing compounds or coatings.
- D. Additional preparation of concrete floors for tile set with epoxy, or furan-resin shall be in accordance with the manufacturer's printed instructions.
- E. Walls:
1. In showers or other wet areas cover studs with polyethylene sheet.
 2. Apply patching and leveling compound to concrete and masonry surfaces that are out of required plane.
 3. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
- F. Existing Floors and Walls:
1. Remove existing composition floor finishes and adhesive. Prepare surface by grinding, chipping, self-contained power blast cleaning or other suitable mechanical methods to completely expose uncontaminated concrete or masonry surfaces. Follow safety requirements of ANSI A10.20.
 2. Remove existing concrete fill or topping to structural slab. Clean and level the substrate for new setting bed and waterproof membrane or cleavage membrane.
 3. Where new tile bases are required to finish flush with plaster above or where they are extensions of similar bases in conjunction with existing floor tiles cut channel in floor slab and expose rough wall construction sufficiently to accommodate new tile base and setting material.

3.4 CEMENTITIOUS BACKER UNITS

- A. Remove polyethylene wrapping from cementitious backer units and separate to allow for air circulation. Allow moisture content of backer units to dry down to a maximum of 35 percent before applying joint treatment and tile.
- B. Install in accordance with ANSI A108.1 except as specified otherwise.
- C. Install units horizontally or vertically to minimize joints with end joints over framing members. Units with rounded edges; face rounded edge away from studs to form a V joint for joint treatment.
- D. Secure cementitious backer units to each framing member with screws spaced not more than 200 mm (eight inches) on center and not closer than 13 mm (1/2 inch) from the edge of the backer unit or as recommended by backer unit manufacturer. Install screws so that the screw heads are flush with the surface of the backer unit.
- E. Where backer unit joins shower pans or waterproofing, lap backer unit over turned up waterproof system. Install fasteners only through top one-inch of turned up waterproof systems.
- F. Do not install joint treatment for seven days after installation of cementitious backer unit.
- G. Joint Treatment:
 - 1. Fill horizontal and vertical joints and corners with latex-Portland cement mortar. Apply fiberglass tape over joints and corners and embed with same mortar.
 - 2. Leave 6 mm (1/4 inch) space for sealant at lips of tubs, sinks, or other plumbing receptors.

3.5 MARBLE

- A. Secure thresholds and stools in position with minimum of two stainless steel dowels.
- B. Set in dry-set Portland cement mortar or latex-Portland cement mortar bond coat.
- C. Set threshold to finish 12mm (1/2 inch) above ceramic tile floor unless shown otherwise, with bevel edge joint top flush with adjacent floor similar to TCA detail TR611-02.

3.6 METAL DIVIDER STRIPS

- A. Install metal divider strips in floor joints between ceramic and quarry tile floors and between tile floors and adjacent flooring of other materials where the finish floors are flush unless shown otherwise.
- B. Set divider strip in mortar bed to line and level centered under doors or in openings.
- C. At preformed sealant joint: Refer to Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES.

1. Comply with recommendations in TCA "Handbook for Ceramic Tile Installation" Vertical and Horizontal Joint Design Essentials. TCA System EJ 171-02.
 - a. Locate joint in tile surfaces directly above joint in sub-floor or where indicated when used with isolation membranes to allow off-setting of joint location from sub-floor joint.
 - b. Fasten full length to sub-floor using a construction adhesive.
 - c. Trowel setting material with full coverage over the entire leg.
2. Set tile up against the joint ensuring that the top edge of the joint is flush or slightly below the top of the tile.

3.7 CERAMIC TILE - GENERAL

- A. Comply with ANSI A108 series of tile installation standards in "Specifications for Installation of Ceramic Tile" applicable to methods of installation.
- B. Comply with TCA Installation Guidelines:
- C. Installing Mortar Beds for Floors:
 1. Install mortar bed to not damage cleavage or waterproof membrane; 32 mm (1-1/2 inch) minimum thickness.
 2. Install floor mortar bed reinforcing centered in mortar fill.
 3. Screed finish to level plane or slope to drains where shown, float finish.
 4. For thin set systems cure mortar bed not less than seven days. Do not use curing compounds or coatings.
 5. For tile set with Portland cement paste over plastic mortar bed coordinate to set tile before mortar bed sets.
- D. Setting Beds or Bond Coats:
 1. Where recessed or depressed floor slabs are filled with Portland cement mortar bed, set ceramic mosaic floor tile in either Portland cement paste over plastic mortar bed or latex-Portland cement mortar bed except as specified otherwise, ANSI A108-1C, TCA System F121-02 or F111-02.
 2. Set wall tile installed over concrete backer board in latex-Portland cement mortar, ANSI A108.1B.
 3. Set trim shapes in same material specified for setting adjoining tile.
- E. Workmanship:
 1. Lay out tile work so that no tile less than one-half full size is used. Make all cuts on the outer edge of the field.
 2. Set tile firmly in place with finish surfaces in true planes. Align tile flush with adjacent tile unless shown otherwise.
 3. Form intersections and returns accurately.

4. Cut and drill tile neatly without marring surface.
5. Cut edges of tile abutting penetrations, finish, or built-in items:
 - a. Fit tile closely around electrical outlets, piping, fixtures and fittings, so that plates, escutcheons, collars and flanges will overlap cut edge of tile.
 - b. Seal tile joints water tight as specified in Section 07 92 00, JOINT SEALANTS, around electrical outlets, piping fixtures and fittings before cover plates and escutcheons are set in place.
6. Completed work shall be free from hollow sounding areas and loose, cracked or defective tile.
7. Remove and reset tiles that are out of plane or misaligned.
8. Floors:
 - a. Extend floor tile beneath casework and equipment, except those units mounted in wall recesses.
 - b. Align finish surface of new tile work flush with other and existing adjoining floor finish where shown.
 - c. In areas where floor drains occur, slope to drains where shown.
 - d. Shove and vibrate tiles over 200 mm (8 inches) square to achieve full support of bond coat.
9. Walls:
 - a. Cover walls and partitions, including pilasters, furred areas, and freestanding columns from floor to ceiling, or from floor to nominal wainscot heights shown with tile.
 - b. Finish reveals of openings with tile, except where other finish materials are shown or specified.
 - c. Finish wall surfaces behind and at sides of casework and equipment, except those units mounted in wall recesses, with same tile as scheduled for room proper.
10. Joints:
 - a. Keep all joints in line, straight, level, perpendicular and of even width unless shown otherwise.
 - b. Make joints in porcelain tile according to manufacturer's recommendations.
11. Back Buttering: For installations indicated below, obtain 100 percent mortar coverage by complying with applicable special requirements for back buttering of tile in referenced ANSI A108 series of tile installation standards:
 - a. Tile wall installations in wet areas, including showers.
 - b. Tile installed with chemical-resistant mortars and grouts.
 - c. Tile wall installations composed of tiles 200 by 200 mm (8 by 8 inches or larger).

3.8 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH DRY-SET PORTLAND CEMENT AND LATEX-PORTLAND CEMENT MORTAR

- A. Installation of Tile: ANSI A108.1, except as specified otherwise.
- B. Slope tile work to drains not less than 1 in 100 (1/8 inch per foot).

3.9 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH CHEMICAL-RESISTANT BOND COAT

- A. Epoxy Resin Type: Install tile in accordance with Installation of Tile with Epoxy Mortar; ANSI A108.1.

3.10 GROUTING

- A. Grout Type and Location:
 - 1. Grout for glazed wall and base tile, paver tile and unglazed mosaic tile Portland cement grout, latex-Portland cement grout, dry-set grout, or commercial Portland cement grout.
- B. Workmanship:
 - 1. Install and cure grout in accordance with the applicable standard.
 - 2. Epoxy Grout: ANSI A108.1.

3.11 MOVEMENT JOINTS

- A. Prepare tile expansion, isolation, construction and contraction joints for installation of sealant. Refer to Section 07 92 00, JOINT SEALANTS.
- B. TCA details EJ 171-02.
- C. At expansion joints, rake out joint full depth of tile and setting bed and mortar bed. Do not cut waterproof or isolation membrane.
- D. Rake out grout at joints between tile, at toe of base, not less than 6 mm (1/4 inch) deep.

3.12 CLEANING

- A. Thoroughly sponge and wash tile. Polish glazed surfaces with clean dry cloths.
- B. Methods and materials used shall not damage or impair appearance of tile surfaces.
- C. The use of acid or acid cleaners on glazed tile surfaces is prohibited.
- D. Clean tile grouted with epoxy, furan and commercial Portland cement grout and tile set in elastomeric bond coat as recommended by the manufacturer of the grout and bond coat.

3.13 PROTECTION

- A. Keep traffic off tile floor, until grout and setting material is firmly set and cured.
- B. Where traffic occurs over tile floor, cover tile floor with not less than 9 mm (3/8 inch) thick plywood, wood particle board, or hardboard securely taped in place. Do not remove protective cover until time for final inspection. Clean tile of any tape, adhesive and stains.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 09 51 00
ACOUSTICAL CEILINGS**

PART 1- GENERAL

1.1 DESCRIPTION

- A. Metal ceiling suspension system for acoustical ceilings.
- B. Acoustical units.

1.2 RELATED WORK

- A. Color, pattern, and location of each type of acoustical unit:
As indicated on Drawings.

1.3 SUBMITTAL

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
 - 1. Acoustical units, each type, with label indicating conformance to specification requirements.
 - 2. Colored markers for units providing access.
- C. Manufacturer's Literature and Data:
 - 1. Ceiling suspension system, each type, showing complete details of installation.
 - 2. Acoustical units, each type.
- D. Manufacturer's Certificates: Acoustical units, each type, in accordance with specification requirements.

1.4 DEFINITIONS

- A. Standard definitions as defined in ASTM C634.
- B. Terminology as defined in ASTM E1264.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A641/A641M-03Zinc-coated (Galvanized) Carbon Steel Wire
 - A653/A653M-07Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-coated (Galvannealed) by the Hot-Dip Process
 - C423-07Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
 - C634-02 (E2007)Standard Terminology Relating to Environmental Acoustics
 - C635-04Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings

C636-06	Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
E84-07	Surface Burning Characteristics of Building Materials
E119-07	Fire Tests of Building Construction and Materials
E413-04	Classification for Rating Sound Insulation.
E580-06	Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Seismic Restraint
E1264-(R2005)	Classification for Acoustical Ceiling Products

PART 2- PRODUCTS

2.1 METAL SUSPENSION SYSTEM

- A. Basis-of-Design: Subject to compliance with requirements, provide the following or approved equal product:
 - 1. Armstrong World Industries, Inc. Prelude XL, 15/16" Exposed Tee Systems
- B. Exposed grid suspension system for support of lay-in panels:
 - 1. Exposed grid width not less than 23.81 mm(15/16 inch).
 - 2. Fabricate wall molding and other special molding from the same material with same exposed width and finish as the exposed grid members.
 - 3. On exposed metal surfaces apply baked-on enamel flat texture finish in color to match adjacent acoustical units unless specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Suspension system for support of Metal Type V, VI, and VII tiles: Concealed grid type having runners designed for the snap-in attachment of metal tile (pans).
- D. Exposed Tec System Accessories: Provide retention clips and exterior hold down clips as indicated in Drawings.

2.2 PERIMETER SEAL

- A. Vinyl, polyethylene or polyurethane open cell sponge material having density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.
- B. Thickness as required to fill voids between back of wall molding and finish wall.
- C. Not less than 9 mm (3/8 inch) wide strip.

2.3 WIRE

- A. ASTM A641.
- B. For wire hangers: Minimum diameter 2.68 mm (0.1055 inch).

C. For bracing wires: Minimum diameter 3.43 mm (0.1350 inch).

2.4 ANCHORS AND INSERTS

A. Use anchors or inserts to support twice the loads imposed by hangers attached thereto.

B. Hanger Inserts:

1. Fabricate inserts from steel, zinc-coated (galvanized after fabrication).
2. Flush ceiling insert type:
 - a. Designed to provide a shell covered opening over a wire loop to permit attachment of hangers and keep concrete out of insert recess.
 - b. Insert opening inside shell approximately 16 mm (5/8 inch) wide by 9 mm (3/8 inch) high over top of wire.
 - c. Wire 5 mm (3/16 inch) diameter with length to provide positive hooked anchorage in concrete.

C. Clips:

1. Galvanized steel.
2. Designed to clamp to steel beam or bar joists, or secure framing member together.
3. Designed to rigidly secure framing members together.
4. Designed to sustain loads imposed by CISCA standards.

D. Tile Splines: ASTM C635.

2.5 CARRYING CHANNELS FOR SECONDARY FRAMING

A. Fabricate from cold-rolled or hot-rolled steel, black asphaltic paint finish, free of rust.

B. Weighing not less than the following, per 300 m (per thousand linear feet):

Size mm	Size Inches	Cold-rolled		Hot-rolled	
		Kg	Pound	Kg	Pound
38	1 1/2	215.4	475	508	1120
50	2	267.6	590	571.5	1260

2.6 ACOUSTICAL UNITS

A. General:

1. Ceiling Tile shall meet minimum 37% bio-based content in accordance with USDA Bio-Preferred Product requirements.
2. ASTM E1264, weighing 3.6 kg/m² (3/4 psf) minimum for mineral fiber panels or tile.
3. Class A Flame Spread: ASTM 84

4. Minimum NRC (Noise Reduction Coefficient): 0.55 unless specified otherwise: ASTM C423.
5. Minimum CAC (Ceiling Attenuation Class): 30-35 range unless specified otherwise: ASTM E413.
6. Manufacturers standard finish, minimum Light Reflectance (LR) minimum coefficient of 0.75 on the exposed surfaces.
7. Lay-in panels: Sizes as shown, with tegular edges.
8. Acoustical Ceiling (ACT 1):
 - a. Basis-of-Design: Subject to compliance with requirements, provide the following or approved equal product.
 - 1) Armstrong World Industries, Inc. Fissured, #755, 5/8" square lay-in.
9. Acoustical Ceiling (ACT 2):
 - a. Basis-of-Design: Subject to compliance with requirements, provide the following or approved equal product.
 - 1) Armstrong World Industries, Inc. Cortega Second Look II, #2767, 15/16" Angled Tegular.
- B. Type III Units - Mineral base with water-based painted finish less than 10 g/l VOC, Form 2 - Water felted, minimum 16 mm (3/4 inch) thick. Mineral base to contain minimum 65 percent recycled content.

2.7 ACCESS IDENTIFICATION

- A. Markers:
 1. Use colored markers with pressure sensitive adhesive on one side.
 2. Make colored markers of paper or plastic, 6 to 9 mm (1/4 to 3/8 inch) in diameter.
- B. Use markers of the same diameter throughout building.
- C. Color Code: Use following color markers for service identification:

Color	Service
Red	Sprinkler System: Valves and Controls
Green	Domestic Water: Valves and Controls
Yellow	Chilled Water and Heating Water
Orange	Ductwork: Fire Dampers
Blue	Ductwork: Dampers and Controls
Black	Gas: Laboratory, Medical, Air and Vacuum
- D. The contractor installing the above listed service(s) shall be responsible for installing required colored markers for their own work. Contractor removing existing suspended ceilings shall be responsible for installing new color coded markers in locations that had markers.

PART 3 EXECUTION**3.1 CEILING TREATMENT**

- A. Treatment of ceilings shall include sides and soffits of ceiling beams, furred work 600 mm (24 inches) wide and over, and vertical surfaces at changes in ceiling heights unless otherwise shown. Install acoustic tiles after wet finishes have been installed and solvents have cured.
- B. Lay out acoustical units symmetrically about center lines of each room or space unless shown otherwise on reflected ceiling plan.
- C. Perimeter Seal:
 - 1. Install perimeter seal between vertical leg of wall molding and finish wall, partition, and other vertical surfaces.
 - 2. Install perimeter seal to finish flush with exposed faces of horizontal legs of wall molding.

3.2 CEILING SUSPENSION SYSTEM INSTALLATION

- A. General:
 - 1. Install metal suspension system for acoustical tile and lay-in panels in accordance with ASTM C636, except as specified otherwise.
 - 2. Use direct or indirect hung suspension system or combination thereof as defined in ASTM C635.
 - 3. Support a maximum area of 1.48 m² (16 sf) of ceiling per hanger.
 - 4. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
 - 5. Provide extra hangers, minimum of one hanger at each corner of each item of mechanical, electrical and miscellaneous equipment supported by ceiling suspension system not having separate support or hangers.
 - 6. Provide not less than 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit, secondary suspension channels, concrete beams or joists; and steel beam or bar joist unless furred system is shown,
 - 7. Use main runners not less than 1200 mm (48 inches) in length.
 - 8. Install hanger wires vertically. Angled wires are not acceptable except for seismic restraint bracing wires.
 - 9. Install end hangers at 200 mm (8 inches) maximum from wall, for main and cross runners.
 - 10. Attach hangers to main and cross runners to allow easy removal of acoustical tile and lay-in panels. All hangers shall be taut with 3 complete turns around self.
- B. Anchorage to Structure:
 - 1. Concrete:
 - a. Install hanger inserts and wire loops required for support of hanger and bracing wire in concrete forms before concrete is

placed. Install hanger wires with looped ends through steel deck if steel deck does not have attachment device.

- b. Use eye pins or threaded studs with screw-on eyes in existing or already placed concrete structures to support hanger and bracing wire. Install in sides of concrete beams or joists at mid height.

2. Steel:

- a. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels for attachment of hanger wires.
 - (1) Size and space carrying channels to insure that the maximum deflection specified will not be exceeded.
 - (2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
 - b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fire proofing is installed. Weld or use steel clips to attach to beam to develop full strength of carrying channel.
 - c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.
- C. Direct Hung Suspension System:
- 1. As illustrated in ASTM C635.
 - 2. Support main runners by hanger wires attached directly to the structure overhead.
 - 3. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.
- D. Indirect Hung Suspension System:
- 1. As illustrated in ASTM C635.
 - 2. Space carrying channels for indirect hung suspension system not more than 1200 mm (4 feet) on center. Space hangers for carrying channels not more than 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) on center so as to insure that specified requirements are not exceeded.
 - 3. Support main runners by specially designed clips attached to carrying channels.
- E. Seismic Ceiling Bracing System:
- 1. Construct system in accordance with ASTM E580.

2. Connect bracing wires to structure above as specified for anchorage to structure and to main runner or carrying channels of suspended ceiling at bottom.

3.3 ACOUSTICAL UNIT INSTALLATION

- A. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.
- B. Install lay-in acoustic panels in exposed grid with not less than 6 mm (1/4 inch) bearing at edges on supports.
 1. Install tile to lay level and in full contact with exposed grid.
 2. Replace cracked, broken, stained, dirty, or tile not cut for minimum bearing.
- C. Markers:
 1. Install markers of color code specified to identify the various concealed piping, mechanical, and plumbing systems.
 2. Attach colored markers to exposed grid on opposite sides of the units providing access.
 3. Attach marker on exposed ceiling surface of upward access acoustical unit.

3.4 CLEAN-UP AND COMPLETION

- A. Replace damaged, discolored, dirty, cracked and broken acoustical units.
- B. Leave finished work free from defects.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 65 13
RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the installation of vinyl or rubber base and resilient stair treads with sheet rubber flooring on landings.

1.2 RELATED WORK

- A. Color and texture: As indicated in Drawings.
- B. Integral base with sheet flooring: Section 09 65 16, RESILIENT SHEET FLOORING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Base material manufacturer's recommendations for adhesives.
 - 3. Application and installation instructions.
- C. Samples:
 - 1. Base: 150 mm (6 inches) long, each type and color.
 - 2. Adhesive: Literature indicating each type.

1.4 DELIVERY

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Materials from containers which have been distorted, damaged or opened prior to installation will be rejected.

1.5 STORAGE

- A. Store materials in weather tight and dry storage facility.
- B. Protect material from damage by handling and construction operations before, during, and after installation.

1.6 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM).

PART 2 - PRODUCTS

2.1 GENERAL

- A. Use only products by the same manufacturer and from the same production run.

2.2 RESILIENT BASE

- A. ASTM F1861, 3 mm (1/8 inch) thick, 100 mm (4 inches) high, Thermoplastics, Group 2-layered. Style B-cove.
- B. Where carpet occurs, use Style A-straight.

2.3 ADHESIVES

- A. Use products recommended by the material manufacturer for the conditions of use.
- B. Use low-VOC adhesive during installation. Water based adhesive with low VOC is preferred over solvent based adhesive.

PART 3 - EXECUTION**3.1 PROJECT CONDITIONS**

- A. Maintain temperature of materials above 21° C (70 °F), for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs, between 21° C and 27° C (70°F and 80°F) for at least 48 hours, before, during, and after installation.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.

3.2 INSTALLATION REQUIREMENTS

- A. The respective manufacturer's instructions for application and installation will be considered for use when approved by the COTR.
- B. Submit proposed installation deviation from this specification to the COTR indicating the differences in the method of installation.
- C. The COTR reserves the right to have test portions of material installation removed to check for non-uniform adhesion and spotty adhesive coverage.

3.3 PREPARATION

- A. Examine surfaces on which material is to be installed.
- B. Fill cracks, pits, and dents with leveling compound.
- C. Level to 3 mm (1/8 inch) maximum variations.
- D. Do not use adhesive for leveling or filling.
- E. Grind, sand, or cut away protrusions; grind high spots.
- F. Clean substrate area of oil, grease, dust, paint, and deleterious substances.
- G. Substrate area dry and cured. Perform manufacturer's recommended bond and moisture test.
- H. Preparation of existing installation:
 - 1. Remove existing base including adhesive.
 - 2. Do not use solvents to remove adhesives.
 - 3. Prepare substrate as specified.

3.4 BASE INSTALLATION

A. Location:

1. Unless otherwise specified or shown, where base is scheduled, install base over toe space of base of casework, lockers, laboratory, pharmacy furniture island cabinets and where other equipment occurs.
2. Extend base scheduled for room into adjacent closet, alcoves, and around columns.

B. Application:

1. Apply adhesive uniformly with no bare spots.
2. Set base with joints aligned and butted to touch for entire height.
3. Before starting installation, layout base material to provide the minimum number of joints with no strip less than 600 mm (24 inches) length.
 - a. Short pieces to save material will not be permitted.
 - b. Locate joints as remote from corners as the material lengths or the wall configuration will permit.

C. Job form corners and end stops as follows:

1. Score back of outside corner.
2. Score face of inside corner and notch cove.

D. Roll base for complete adhesion.

3.5 CLEANING AND PROTECTION

A. Clean all exposed surfaces of base and adjoining areas of adhesive spatter before it sets.

B. Keep traffic off resilient material for at least 72 hours after installation.

C. Clean and polish materials in the following order:

1. After two weeks, scrub resilient base, with a minimum amount of water and a mild detergent. Leave surfaces clean and free of detergent residue. Polish resilient base to a gloss finish.

D. Where protective materials are removed and immediately prior to acceptance, replace damaged materials and re-clean resilient materials. Damaged materials are defined as having cuts, gouges, scrapes or tears and not fully adhered.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 65 16
RESILIENT SHEET FLOORING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This Section specifies the installation of sheet flooring with backing and integral cove base.
- B. Grades of resilient sheet vinyl floor covering without backing having vinyl plastic wearlayer with backing.
- C. Installation of sheet flooring including following:
 - 1. Heat welded seams.
 - 2. Integral cove base: Installed at intersection of floor and vertical surfaces.

1.2 RELATED WORK

- A. Concrete floors: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- B. Color, pattern and texture: As indicated on Drawings.
- C. Resilient base over base of lockers, equipment and casework: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

1.3 QUALITY CONTROL-QUALIFICATIONS:

- A. The Contracting Officer shall approve products or service of proposed manufacturer, suppliers, and installers, and the Contractor shall submit certification that:
 - 1. Heat welded seaming is manufacturer's prescribed method of installation.
 - 2. Installer is approved by manufacturer of materials and has technical qualifications, experience, trained personnel, and facilities to install specified items.
 - 3. Manufacturer's product submitted has been in satisfactory operation, on three installations similar and equivalent in size to this project for three years. Submit list of installations.
- B. The sheet vinyl floor coverings shall meet fire performance characteristics as determined by testing products, per ASTM test method, indicated below by Underwriters Laboratories, Inc. (UL) or another recognized testing and inspecting agency acceptable to authorities having jurisdiction.
 - 1. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.
 - 2. Smoke Density: Less than 450 per ASTM E662.
- C. The floor covering manufacturer shall certify that products supplied for installation comply with local regulations controlling use of volatile organic compounds (VOC's).

1.4 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, submit following:
- B. Manufacturer's Literature and Data:
 - 1. Description of resilient material and accessories to be provided.
 - 2. Resilient material manufacturer's recommendations for adhesives, weld rods, sealants, and underlayment.
 - 3. Application and installation instructions.
- C. Samples:
 - 1. Sheet material, 38 mm by 300 mm (1-1/2 inch by 12 inch), of each color and pattern with a welded seam using proposed welding rod 300 mm (12 inches) square for each type, pattern and color.
 - 2. Cap strip and fillet strip, 300 mm (12 inches) for integral base.
 - 3. Shop Drawings and Certificates: Layout of joints showing patterns where joints are expressed, and type and location of obscure type joints, edges, columns, doorways, enclosing partitions, built-in furniture, cabinets and cut-outs. Indicate orientation of directional patterns.
 - 4. Certificates: Quality Control Certificate Submittals and lists specified in paragraph, QUALIFICATIONS.
 - 5. Edge strips: 150 mm (6 inches) long each type.
 - 6. Adhesive, underlayment and primer: Pint container, each type.

1.5 PROJECT CONDITIONS

- A. Maintain temperature of floor materials and room, where work occurs, above 18 °C (65 °F) and below 38 °C (100 °F) for 48 hours before, during and for 48 hours after installation. After above period, room temperature shall not fall below 13 °C (55 °F), and as recommended by floor covering manufacturer.
- B. Construction in or near areas to receive flooring work shall be complete, dry and cured. Do not install resilient flooring over slabs until they have been cured and are sufficiently dry to achieve a bond with adhesive. Follow flooring manufacturer's recommendations for bond and moisture testing.
- C. Building shall be permanently enclosed. Schedule construction so that floor receives no construction traffic when completed.

1.6 DELIVERY, STORAGE AND HANDLING

- A. Deliver materials to site in original sealed packages or containers; labeled for identification with manufacturer's name and brand.

- B. Deliver sheet flooring full width roll, completely enclosed in factory wrap, clearly marked with the manufacturer's number, type and color, production run number and manufacture date.
- C. Store materials in weathertight and dry storage facility. Protect from damage due to handling, weather, and construction operations before, during and after installation. Store sheet flooring on end with ambient temperatures maintained as recommended by manufacturer.
- D. Store sheet flooring on end.
- E. Move sheet vinyl floor coverings and installation accessories into spaces where they will be installed at least 48 hours in advance of installation.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing Materials (ASTM):
 - E648-09.....Critical Radiant Flux of Floor-Covering Systems Using a Radiant Energy Source.
 - E662-09.....Specific Optical Density of Smoke Generated by Solid Materials.
 - F710-08.....Practice for Preparing Concrete Floors and Other Monolithic Floors to Receive Resilient Flooring.
 - F1303-04.....Sheet Vinyl Floor Covering with Backing.
 - F1869-04Moisture Vapor Emission Rate of Concrete Subfloor using Anhydrous Calcium Chloride
 - F1913-04Sheet Vinyl Flooring without Backing
 - F2170-09Determining Relative Humidity in Concrete Floor Slabs using In-situ Probes
- C. Resilient Floor Covering Institute (RFCI):
 - Recommended Work Practices for Removal of Resilient Floor Coverings.

1.8 SCHEDULING

- A. Interior finish work such as plastering, drywall finishing, concrete, terrazzo, ceiling work, and painting work shall be complete and dry before installation. Mechanical, electrical, and other work above ceiling line shall be completed. Heating, ventilating, and air conditioning systems shall be installed and operating in order to maintain temperature and humidity requirements.

1.9 WARRANTY:

- A. Submit written warranty, in accordance with FAR clause 52.246-21, Warranty of Construction requirements except that warranty period shall be extended to include five (5) years.

PART 2 - PRODUCTS

2.1 SHEET VINYL FLOOR COVERINGS (SV1, SV2, SV3)

- A. Basis-of-Design: Teknoflor Wood Grain Resilient Sheet flooring with backing (ASTM F 1303).
- B. Vinyl Sheet Floor Covering with Backing: ASTM F 1303.
 - 1. Type (Binder Content): Type I, minimum binder content of 90 percent.
 - 2. Wear-Layer Thickness: Grade 1.
 - 3. Overall Thickness: As standard manufacturer.
 - 4. Interlayer Material: Manufacturer's standard.
 - 5. Backing Class: Class A.
- C. Wearing Surface: Embossed 20-mil wear layer.
- D. Sheet Width: 6 feet (1.8 m).
- E. Each color and pattern of sheet flooring shall be of same production run.
- F. Colors and Patterns as indicated on Drawings.

2.2 SHEET VINYL FLOOR COVERINGS (SV4)

- A. Basis-of-Design: Mannington Fine Fields Resilient Sheet flooring with backing (ASTM F 1303).
- B. Vinyl sheet Floor Covering with backing: ASTM F 1303.
 - 1. Type (Binder content). Type II.
 - 2. Wear-Layer Thickness: Grade I.
 - 3. Overall Thickness: As standard per manufacturer.
 - 4. Interlayer Material: Manufacturer's standard.
 - 5. Backing Class: Class A.
 - 6. Patten Repeat: Random repeat, reverse sheet for seaming.
 - 7. Colors and Patterns: As indicated in Drawings.

2.3 WELDING ROD

- A. Product of floor covering manufacturer in color shall match field color of sheet vinyl covering.

2.4 APPLICATION MATERIALS AND ACCESSORIES

- A. Floor and Base Adhesive (Water Resistant): Type recommended by sheet flooring material manufacturer for conditions of use.
- B. Mastic Underlayment (for concrete floors): Provide products with latex-modified Portland Cement based or blended hydraulic-cement-based formulation provided or approved by manufacturer for applications indicated. Condition to be corrected shall determine type of underlayment selected for use.
- C. Base Accessories:
 - 1. Fillet Strip: 19 mm (3/4 inch) radius fillet strip compatible with resilient sheet material.

2. Cap Strip: Extruded flanged zero edge vinyl reducer strip approximately 25 mm (one inch) exposed height with 13 mm (1/2 inch) flange.

2.5 SHEET FLOORING

- A. ASTM F1303, Type I, Grade 1 and Type II, Grade I, except for backing requirements. Foam backed sheet flooring is not acceptable.
- B. Minimum nominal thickness 2 mm (0.08 inch); 1800 mm (6 feet) minimum width.
- C. Critical Radiant Flux: 0.45 watts per sq.cm or more, Class I, per ASTM E648.
- D. Smoke density: less than 450 per ASTM E662.
- E. Color and pattern of sheet flooring of the same production run.

2.6 ADHESIVES

- A. Water resistant type recommended by the sheet flooring manufacturer for the conditions of use. VOC not to exceed 50g/L.
- B. At bed locations only, apply "epoxy adhesive"-type recommended by Sheet Flooring Material Manufacturer.

2.7 BASE CAP STRIP AND COVE STRIP

- A. Cap strip "J" shape with feathered edge flange approximately 25 mm (one inch) wide; top designed to receive sheet flooring with 13 mm (1/2 inch) flange lapping top of flooring
- B. Cove strip 70 mm (2-3/4 inch) radius.

2.8 LEVELING COMPOUND (FOR CONCRETE FLOORS)

- A. Provide cementitious products with latex or polyvinyl acetate resins in the mix.

2.9 PRIMER (FOR CONCRETE SUBFLOORS)

- A. As recommended by the adhesive or sheet flooring manufacturer.

2.10 EDGE STRIPS

- A. Extruded aluminum, mill finish, mechanically cleaned.
- B. 28 mm (1-1/8 inch) wide, 6 mm (1/4 inch) thick, bevel one edge to 3 mm (1/8 inch) thick.
- C. Drill and counter sink edge strips for flat head screws. Space holes near ends and approximately 225 mm (9 inches) on center in between.

2.11 SEALANT

- A. As specified in Section 07 92 00, JOINT SEALANTS.
- B. Compatible with sheet flooring.

PART 3 - EXECUTION

3.1 PROJECT CONDITIONS

- A. Maintain temperature of sheet flooring above 36 °C (65 °F), for 48 hours before installation.

- B. Maintain temperature of rooms where sheet flooring work occurs above 36 °C (65 °F), for 48 hours, before installation and during installation, and as recommended by floor covering manufacturer.
- C. After installation, maintain temperature at or above 36 °C (65 °F.)
- D. Building is permanently enclosed.
- E. Wet construction in or near areas to receive sheet flooring is complete, dry and cured.

3.2 SUBFLOOR PREPARATION

- A. Concrete Subfloors: Verify that concrete slabs comply with ASTM F710.
 - 1. Installer shall examine surfaces on which resilient sheet flooring is to be installed, and shall advise Contractor, in writing, of areas which are unacceptable for installation of flooring material. Installer shall advise Contractor which methods are to be used to correct conditions that will impair proper installation. Installation shall not proceed until unsatisfactory conditions have been corrected by contractor.
 - 2. Slab substrates dry, free of curing compounds, sealers, hardeners, and other materials which would interfere with bonding of adhesive. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by Resilient Floor Covering Institute recommendations in manual RFCI-MRP.
- B. Broom or vacuum clean substrates to be covered by sheet vinyl floor coverings immediately before installation. Following cleaning, examine substrates to determine if there is visually any evidence of moisture, alkaline salts, carbonation, or dust.
- C. Primer: If recommended by flooring manufacturer, prior to application of adhesive, apply concrete slab primer in accordance with manufacturer's directions.
- D. Correct all conditions which will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints.
- E. Fill all cracks, joints, depressions, and other irregularities in concrete with leveling compound.
 - 1. Do not use adhesive for filling or leveling purposes.
 - 2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
 - 3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joint lines.
- F. Clean floor of oil, paint, dust and deleterious substances. Leave floor dry and cured free of residue from existing curing or cleaning agents.

- G. Moisture Testing: Perform moisture and pH test as recommended by the flooring and adhesive manufacturers. Perform test locations starting on the deepest part of the concrete structure. Proceed with installation only after concrete substrates meet or exceed the manufacturer's requirements. In the absence of specific guidance from the flooring or adhesive manufacturer the following requirements are to be met:
1. Perform moisture vapor emission tests in accordance with ASTM F1869. Proceed with installation only after substrates have a maximum moisture-vapor-emission rate of 1.36 kg of water/92.9 sq. m (3lb of water/1000 sq. ft.) in 24 hours.
 2. Perform concrete internal relative humidity testing using situ probes in accordance with ASTM F2170. Proceed with installation only after concrete reaches maximum 75 percent relative humidity level measurement.

3.3 INSTALLATION OF FLOORING

- A. Install work in strict compliance with manufacturer's instructions and approved layout drawings.
- B. Maintain uniformity of sheet floor covering direction and avoid cross seams.
- C. Arrange for a minimum number of seams and place them in inconspicuous and low traffic areas, but in no case less than 150 mm (6 inches) away from parallel joints in flooring substrates.
- D. Match edges of resilient floor coverings for color shading and pattern at seams.
- E. Where resilient sheet flooring abuts other flooring material floors shall finish level.
- F. Extend sheet floor coverings into toe spaces, door reveals, closets, and similar openings.
- G. Inform the COTR of conflicts between this section and the manufacturer's instructions or recommendations for auxiliary materials, or installation methods, before proceeding.
- H. Preparation shall include the removal of existing resilient floor and existing adhesive. Do not use solvents to remove adhesives. Coordinate with Asbestos Abatement Section if asbestos abatement procedures will be involved.
- I. Remove existing resilient flooring and adhesive completely in accordance with Resilient Floor Covering Institute recommendations in manual RFCI-WP. Solvents shall not be used.
- J. Install sheet in full coverage adhesives.
 1. Air pockets or loose edges will not be accepted.

2. Trim sheet materials to touch in the length of intersection at pipes and vertical projections; seal joints at pipe with waterproof cement or sealant.
- K. Keep joints to a minimum; avoid small filler pieces or strips.
- L. Follow manufacturer's recommendations for seams at butt joints. Do not leave any open joints that would be readily visible from a standing position.
- M. Follow manufacturer's recommendations regarding pattern match, if applicable.
- N. Installation of Edge Strips:
1. Locate edge strips under center lines of doors unless otherwise indicated.
 2. Set aluminum strips in adhesive, anchor with lead anchors and stainless steel Phillips screws.
- O. Integral Cove Base Installation:
1. Set preformed fillet strip to receive base.
 2. Install the base with adhesive, terminate expose edge with the cap strip.
 3. Form internal and external corners to the geometric shape generated by the cove at either straight or radius corners.
 4. Heat weld joints as specified for the flooring. Seal cap strip to wall with an adhesive type sealant.
 5. Unless otherwise specified or shown where sheet flooring is scheduled, provide integral base at intersection of floor and vertical surfaces. Provide sheet flooring and base scheduled for room on floors and walls under and behind areas where casework, laboratory and pharmacy furniture and other equipment occurs, except where mounted in wall recesses.

3.4 INSTALLATION OF INTEGRAL COVED BASE

- A. Set preformed cove to receive base. Install base material with adhesive and terminate exposed edge with cap strip. Integral base shall be 150 mm (6 inches) high.
- B. Internal and external corners shall be formed to geometric shape generated by cove at either square or radius corners.

3.5 WELDING

- A. Heat weld all joints of flooring and base using equipment and procedures recommended by flooring manufacturer.
- B. Welding shall consist of routing joint, inserting a welding rod into routed space, and terminally fusing into a homogeneous joint.
- C. Upon completion of welding, surface across joint shall finish flush, free from voids, and recessed or raised areas.

- D. Fusion of Material: Joint shall be fused a minimum of 65 percent through thickness of material, and after welding shall meet specified characteristics for flooring.

3.6 CLEANING

- A. Clean small adhesive marks during application of sheet flooring and base before adhesive sets, excessive adhesive smearing will not be accepted.
- B. Remove visible adhesive and other surface blemishes using methods and cleaner recommended by floor covering manufacturers.
- C. Clean and polish materials per flooring manufacturer's written recommendations.
- D. Sweep or vacuum floor thoroughly to remove any loose dirt, dust and other foreign materials.
- E. Do not wash floor until after period recommended by floor covering manufacturer and then prepare in accordance with manufacturer's recommendations.
- F. Upon completion, COTR shall inspect floor and base to ascertain that work was done in accordance with manufacturer's printed instructions.
- G. Perform initial maintenance according to flooring manufacturer's written recommendations.

3.7 PROTECTION:

- A. Protect installed flooring as recommended by flooring manufacturer against damage from rolling loads, other trades, or placement of fixtures and furnishings.
- B. Keep traffic off sheet flooring for 24 hours after installation. Do not allow rolling carts to be used on the floor for at least 72 hours.
- C. Where construction traffic is anticipated, cover sheet flooring with reinforced kraft paper properly secured and maintained until removal is authorized by the COTR.
- D. Where protective materials are removed and immediately prior to acceptance, repair any damage, re-clean sheet flooring, lightly re-apply polish and buff floor.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 67 23.20
RESINOUS (EPOXY BASE) WITH VINYL CHIP BROADCAST (RES-2)

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies Resinous (Resinous epoxy base with vinyl chip flake broadcast) flooring with integral cove base:
 - 1. Res-2 Resinous (epoxy) vinyl chip flake broadcast flooring system.

1.2 RELATED WORK

- A. Concrete: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- B. Location of each type of resinous flooring: As indicated in Drawings.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product to be provided.
 - 2. Application and installation instructions.
 - 3. Maintenance Instructions: Submit manufacturer's written instructions for recommended maintenance practices.
- C. Qualification Data: For Installer.
- D. Sustainable Submittal:
 - 1. Product data for products having recycled content, submit documentation indicating percentages by weight of post-consumer and pre-consumer recycled content.
 - a. Include statements indicating costs for each product having recycled content.
 - 2. Product data for field applied, interior, paints, coatings, and primers, include printed statement of VOC content indicating compliance with environmental requirements.
- E. Samples:
 - 1. Samples for verification: For each (color and texture) resinous flooring system required, 6 inches (152 mm) square, applied to a rigid backing by installer for this project.
 - 2. Sample showing construction from substrate to finish surface in thickness specified and color and texture of finished surfaces. Finished flooring must match the approved samples in color and texture.
- F. Shop Drawings: Include plans, sections, component details, and attachment to other trades. Indicate layout of the following:
 - 1. Patterns.
 - 2. Edge configurations.

G. Certifications and Approvals:

1. Manufacturer's certification of material and substrate compliance with specification.
2. Manufacturer's approval of installers.
3. Contractor's certificate of compliance with Quality Assurance requirements.

H. Warranty: As specified in this section.

1.4 QUALITY ASSURANCE

- A. Manufacture Certificate: Manufacture shall certify that a particular resinous flooring system has been manufactured and in use for a minimum of five (5) years.
- B. Installer Qualifications: Engage an experienced installer (applicator) who is experienced in applying resinous flooring systems similar in material, design, and extent to those indicated for this project for a minimum period of five (5) years, whose work has resulted in applications with a record of successful in-service performance, and who is acceptable to resinous flooring manufacturer.
 1. Engage an installer who is certified in writing by resinous flooring manufacturer as qualified to apply resinous flooring systems indicated.
 2. Contractor shall have completed at least ten (10) projects of similar size and complexity. Include list of at least five (5) projects. List must include owner (purchaser); address of installation, contact information at installation project site; and date of installation.
 3. Installer's Personnel: Employ persons trained for application of specified product.
- C. Source Limitations:
 1. Obtain primary resinous flooring materials including primers, resins, hardening agents, grouting coats and finish or sealing coats from a single manufacturer.
 2. Provide secondary materials, including patching and fill material, joint sealant, and repair material of type and from source recommended by manufacturer of primary materials.
- D. Mockups: Apply mockups to verify selections made under sample submittals and to demonstrate aesthetic effects and establish quality standards for materials and execution.
 1. Apply full-thickness mockups on 48 inch (1200 mm)square floor area selected by VA Resident Engineer.
 - a. If applicable include 48 inch (1200 mm)length of integral cove base.

2. Approved mockups not damaged during the testing may become part of the completed work if undisturbed at time of Substantial Completion.
3. Sign off from COTR on texture for slip resistance and clean ability must be complete before installation of flooring system.

E. Pre-Installation Conference:

1. Convene a meeting not less than thirty days prior to starting work.
2. Attendance:
 - a. Contractor
 - b. COTR
 - c. Manufacturer and Installer's Representative
3. Review the following:
 - a. Environmental requirements
 - 1) Air and surface temperature
 - 2) Relative humidity
 - 3) Ventilation
 - 4) Dust and contaminants
 - b. Protection of surfaces not scheduled to be coated
 - c. Inspect and discuss condition of substrate and other preparatory work performed
 - d. Review and verify availability of material; installer's personnel, equipment needed
 - e. Design and edge conditions
 - f. Performance of the coating with chemicals anticipated in the area receiving the resinous (urethane and epoxy mortar/cement) flooring system
 - g. Application and repair
 - h. Field quality control
 - i. Cleaning
 - j. Protection of coating systems
 - k. One-year inspection and maintenance
 - l. Coordination with other work

F. Manufacturer's Field Services: Manufacturer's representative shall provide technical assistance and guidance for surface preparation and application of resinous flooring systems.

G. Contractor Job Site Log: Contractor shall document daily; the work accomplished environmental conditions and any other condition event significant to the long term performance of the urethane and epoxy mortar/cement flooring materials installation. The Contractor shall maintain these records for one year after Substantial Completion.

1.5 MATERIAL PACKAGING DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Protect materials from damage and contamination in storage or delivery, including moisture, heat, cold, direct sunlight, etc.
- C. Maintain temperature of storage area between 60 and 80 degrees F (15 and 26 degrees C).
- D. Keep containers sealed until ready for use.
- E. Do not use materials beyond manufacturer's shelf life limits.
- F. Package materials in factory pre-weighed and in single, easy to manage batches sized for ease of handling and mixing proportions from entire package or packages. No On site weighing or volumetric measurements are allowed.

1.6 PROJECT CONDITIONS

- A. Environmental Limitations: Comply with resinous flooring manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting resinous flooring applications.
 - 1. Maintain material and substrate temperature between 65 and 85 degrees F (18 and 30 degrees C) during resinous flooring application and for not less than 24 hours after application.
- B. Lighting: Provide permanent lighting or, if permanent lighting is not in place, simulate permanent lighting conditions during resinous flooring application.
- C. Close spaces to traffic during resinous flooring application and for not less than 24 hours after application, unless manufacturer recommends a longer period.
- D. Concrete substrate shall be properly cured for a minimum of 30 days. A vapor barrier must be present for concrete subfloors on or below grade. Otherwise, an osmotic pressure resistant grout must be installed prior to the resinous flooring.

1.7 WARRANTY

- A. Work subject to the terms of the Article "Warranty of Construction" FAR clause 52.246-21.
- B. Warranty: Manufacture shall furnish a single, written warranty covering the full assembly (including substrata) for both material and workmanship for a extended period of three (3) full years from date of installation, or provide a joint and several warranty signed on a single document by manufacturer and applicator jointly and severally warranting the materials and workmanship for a period of three (3) full years from

date of installation. A sample warranty letter must be included with bid package or bid may be disqualified.

1.8 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. ACI (American Concrete Institute):
Comm. 503.1-92Four Epoxy Specifications (Reapproved 2003).
- C. American Society for Testing and Materials (ASTM):
C109Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2" or 50 mm Cube Specimens)
C150Standard Specification for Portland Cement
C219-07aStandard Terminology Relating to Hydraulic Cement
C267-01(2006)Standard Test Methods for Chemical Resistance of Mortars, Grouts, and Monolithic Surfacing and Polymer Concretes
C307-03 (2008)Standard Test Method for Tensile Strength of Chemical-Resistant Mortar, Grouts, and Monolithic Surfacing
C413-01(2006)Standard Test Method for Absorption of Chemical-Resistant Mortars, Grouts, Monolithic Surfacing and Polymer Concretes
C501-84(2002)Standard Test Method for Relative Resistance to Wear of Unglazed Ceramic Tile by the Taber Abraser
C579-01(2006)Standard Test Method for Compressive Strength of Chemical-Resistant Mortars, Grouts, Monolithic Surfacing, and Polymer Concretes
C580-02(2008)Standard Test Method for Flexural Strength and Modulus of Elasticity of Chemical-Resistant Mortars, Grouts, Monolithic Surfacing, and Polymer Concretes
C722-04Standard Specification for Chemical-Resistant Monolithic Floor Surfacing
C811-98(2008)Standard Practice for Surface Preparation of Concrete for Application of Chemical-Resistant Resin Monolithic Surfacing
C881/C881M-02Standard Specification for Epoxy-Resin-Base Bonding Systems for Concrete

- D1308-02(2007)Standard Test Method for Effect of Household Chemicals on Clear and Pigmented Organic Finishes
- D1652-04Standard Test Method for Epoxy Content of Epoxy Resins
- D2240-05Standard Test Method for Rubber Property – Durometer Hardness
- D4060-07Standard Test Method for Abrasion Resistance of Organic Coatings by the Taber Abraser
- E162-09Standard Test Method for Surface Flammability of Using a Radiant Heat Energy Source
- E648-09aStandard Test Method for Critical Radiant Flux of Floor- Covering Systems Using a Radiant Heat Energy Source
- F1869-09Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride
- D. Military Specification (Mil Spec):
- MIL-PRF-3134Para. 4.7.3, Indentation, No Cracking or Loss of Bond Water Absorption
- MIL-PRF-23003APara. 4.6.11, Resistance to Immersion
- E. National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 501Finishes for Aluminum
- F. National Fire Protection Association (NFPA):
- 56AInhalation Aesthetics replaced by NFPA 99 Standard for Health Care Facilities
- G. The Society For Protective Coatings (SSPC):
- SP6Commercial Blast Cleaning

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION FOR RES-2 (BROADCAST VINYL CHIP FLAKE)

- A. System Descriptions:
1. Monolithic, multi-component epoxy chemistry resinous flooring system. Primer with broadcast quartz aggregates, High performance multi-component solvent free epoxy undercoat, Vinyl chip flake broadcast media in desired flake size (1/8", 1/4"). High performance multi component epoxy and solvent free sealers.
- B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up.
- C. System Components: Verify specific requirements as systems vary by manufacturer. Verify build up layers of broadcast and installation

method. Verify compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:

1. Epoxy Resin (EP1)

- a. 100% solids, epoxy resin and colored quartz aggregate.
- b. Finish: Clear catalyst - cured coats; satin.
- c. Top Coat: Novolac #615.
- d. Total System Thickness: 1/8 inch (3.175 mm).
- e. Color as selected from manufacturer's full range.
- f. Integral cove base; 1/2" radius; 4" high.

2. Epoxy Resin (EP2)

- a. 100% solids, flexible epoxy used as a base.
- b. Waterproof slab.
- c. Seal perimeter; scrim cloth.
- d. Top Coat: Broadcast.
- e. Color as selected from manufacturer's full range.

D. Physical Properties:

1. Physical Properties of flooring system when tested as follows:

Property	Test	Value
Tensile Strength	ASTM D638	5,200 psi
Volatile Organic Compound Limits (V.O.C.)	EPA & LEED	Below 100 g/l
Flexural Strength	ASTM D790	4,000 psi
Water Absorption	ASTM C413	0.056%
Coefficient of friction dry/slip index wet	ASTM D2047	>.79 dry >.65 wet
Impact Resistance	ASTM D4226	> 160 in. lbs
Abrasion Resistance	ASTM D4060 CS-17	0.03 gm maximum weight loss
Thermal Coefficient of Linear Expansion	ASTM C531	17×10^{-6} in/in °F
Hardness Shore D	ASTM D2240	85 to 90
Bond Strength	ASTM D7234	>300 psi 100% concrete failure
Chemical Resistance of the following:	ASTM D1380	No Effect
Acetic acid	5 percent	
Ammonium hydroxide	10 percent	
Citric Acid	50 percent	
Fatty acid Motor Oil, 20W		
Hydrochloric acid		
Salt water	10 percent	
Sodium Hydroxide	10 percent	
Sulfuric acid	10 percent	
Trisodium phosphate	10 percent	
	5 percent	
Urine		
Feces		
Hydrogen peroxide	28 percent	
Distilled Water		
Sodium Hypochloride	5.28 percent	

E. System Characteristics:

1. Color and Pattern: As selected by COTR from manufacturer's standard colors.
2. Integral cove base: 1/2 inch (12.7 mm) radius epoxy mortar cove keyed into concrete substrate and or resinous flooring mortar system. No fillers integral cove base must be troweled in place with specified resinous mortar base.
3. Overall System Thickness: Nominal 1/8 to 1/4 inches (3.175 to 6.35 mm).
4. Finish: anti-slip resistant.

5. Temperature Range: Systems vary by manufacturer; approximate range from a minimum of 45 to 150 degrees F.

F. Physical Properties:

1. Physical Properties of flooring system when tested as follows:

2.2 SUPPLEMENTAL MATERIALS

- A. Textured Top Coat: Type recommended or produced by manufacturer of seamless resinous flooring system, slip resistance for desired final finish.
- B. Joint Sealant: Type recommended or produced by resinous flooring manufacturer for type of service or joint conditioned indicated.
- C. Crack Isolation Membrane: Type recommended or produced by manufacturer of resinous flooring for conditions.
- D. Patching and Fill Material: Resinous product of or approved by resinous coating manufacturer for application indicated. Resinous based materials only. Cementitious or single component product are not expectable.

2.3 TROWELED COVE BASE

- A. Same physical properties as specified resinous mortar system.

2.4 BASE CAP STRIP

- A. Aluminum, Extruded: ASTM B221, Alloy 6063-T6.
- B. Shape for 1/8 inch (3.175 mm) depth of base material, "J" configuration.
- C. Finish:
 1. Finish exposed surfaces in accordance with NAAMM Metal Finishes Manual.
 2. Aluminum: NAAMM Amp 501:
 - a. Clear anodic coating, AA-C22A41 chemically etched medium matte, with Architectural Class 1, 0.7 mils (0.018 mm) or thicker.

PART 3 - EXECUTION

3.1 INSPECTION

- A. Examine the areas and conditions where monolithic resinous system with integral base is to be installed with the COTR.

3.2 PROJECT CONDITIONS

- A. Maintain temperature of rooms (air and surface) where work occurs, between 70 and 90 degrees F (21 and 32 degrees C) for at least 48 hours, before, during, and 24 hours after installation. Maintain temperature at least 70 degrees F (21 degrees C) during cure period.
- B. Maintain relative humidity less than 75 percent.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.

D. Maintain proper ventilation of the area during application and curing time period.

1. Comply with infection control measures of the VA Medical Center.

3.3 INSTALLATION REQUIREMENTS

A. The manufacturer's instructions for application and installation shall be reviewed with the COTR for the seamless resinous (urethane and epoxy mortar) flooring system with integral cove base.

B. Substrate shall be approved by manufacture technical representative.

3.4 PREPARATION

A. General: Prepare and clean substrates according to resinous flooring manufacturer's written instructions for substrate indicated. Provide clean, dry, and neutral Ph substrate for resinous flooring application.

B. Concrete Substrates: Provide sound concrete surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible with resinous flooring.

1. Prepare concrete substrates as follows:

a. Shot-blast surfaces with an apparatus that abrades the concrete surface, contains the dispensed shot within the apparatus, and recirculates the shot by vacuum pickup.

b. Comply with ASTM C 811 requirements, unless manufacturer's written instructions are more stringent.

2. Repair damaged and deteriorated concrete according to resinous flooring manufacturer's written recommendations.

3. Verify that concrete substrates are dry.

a. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. (1.36 kg of water/92.9 sq. m) in 24 hours.

b. MVT threshold for monolithic resinous flooring shall not exceed 3 lbs/1000 square feet (0.0001437 kPa) in a 24 hour period.

c. When MVT emission exceeds this limit, apply manufacturer's recommended vapor control primer or other corrective measures as recommended by manufacturer prior to application of flooring or membrane systems.

d. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity of 75-80 percent.

e. Provide a written report showing test placement and results.

4. Verify that concrete substrates have neutral Ph and that resinous flooring will adhere to them. Perform tests recommended by manufacturer. Proceed with application only after substrates pass

testing. Resin Installer accepts full responsibility for slab conditions once installation begins.

- C. Resinous Materials: Mix components and prepare materials according to resinous flooring manufacturer's written instructions.
- D. Use patching and fill material to fill holes and depressions in substrates according to manufacturer's written instructions.
- E. Treat control joints and other nonmoving substrate cracks to prevent cracks from reflecting through resinous flooring according to manufacturer's written recommendations. Allowances should be included for flooring manufacturer recommended joint fill material, and concrete crack treatment.
- F. Prepare wall to receive integral cove base:
 - 1. Verify wall material is acceptable for resinous flooring application, if not, install material (e.g. cement board) to receive base.
 - 2. Fill voids in wall surface to receive base, install undercoats (e.g. water proofing membrane, and/or crack isolation membrane) as recommended by resinous flooring manufacturer.
 - 3. Install base prior to flooring if required by resinous flooring manufacturer.
 - 4. Grind, cut or sand protrusions to receive base application.

3.5 APPLICATION

- A. **General:** Apply components of resinous flooring system according to manufacturer's written instructions to produce a uniform, monolithic wearing surface of thickness indicated.
 - 1. Coordinate application of components to provide optimum adhesion of resinous flooring system to substrate, and optimum intercoat adhesion.
 - 2. Cure resinous flooring components according to manufacturer's written instructions. Prevent contamination during application and curing processes.
 - 3. At substrate expansion and isolation joints, provide joint in resinous flooring to comply with resinous flooring manufacturer's written recommendations.
 - a. Apply joint sealant to comply with manufacturer's written recommendations.
- B. Apply Primer: over prepared substrate at manufacturer's recommended spreading rate for all areas to receive integrated cove base.
- C. Apply cove base: Trowel to wall surfaces at a 1 inch radius, before applying flooring. Apply according to manufacturer's written instructions and details including those for taping, mixing, priming,

and troweling, sanding, and top coating of cove base. Round internal and external corners.

- D. Apply Primer: over prepared substrate at manufacturer's recommended spreading rate.
- E. Trowel mortar base: Mix mortar material according to manufacturer's recommended procedures. Climatic and non-climatic resinous flooring systems may vary slightly on mode of application. Application should be based upon the following: Uniformly spread mortar over substrate using a specially designed screed box adjusted to manufacturer's recommended height. Metal trowel (hand or power) single mortar coat in thickness indicated for flooring system, grout to fill substrate voids. When cured, sand to remove trowel marks and roughness.
- F. Broadcast: Immediately broadcast quartz silica aggregate into the primer using manufacturer's spray caster. Strict adherence to manufacturer's installation procedures and coverage rates is imperative.
- G. Under Coat: Mix base material according to manufacturer's recommended procedures. Uniformly spread mixed material over previously primed substrate using manufacturer's installation tool. Roll material with strict adherence to manufacturer's installation procedures and coverage rates.
- H. Broadcast: Immediately broadcast vinyl flakes into the body coat. Strict adherence to manufacturer's installation procedures and coverage rates is imperative.
- I. First Sealer: Remove excess un-bonded flakes by lightly brushing and vacuuming the floor surface. Mix and apply sealer with strict adherence to manufacturer's installation procedures.
- J. Second Sealer: Lightly sand first sealer coat. Mix and apply second sealer coat with strict adherence to manufacturer's installation procedures.

3.6 TOLERANCE

- A. From line of plane: Maximum 1/8 inch (3.18 mm) in total distance of flooring and base. Broadcast resinous flooring system will contour substrate. Deviation and tolerance are subject to concrete tolerance.
- B. From radius of cove: Maximum of 1/8 inch (3.18 mm) plus or 1/16-inch (1.59 mm) minus.

3.7 CURING, PROTECTION AND CLEANING

- A. Cure resinous flooring materials in compliance with manufacturer's directions, taking care to prevent contamination during stages of application and prior to completion of curing process.
- B. Close area of application for a minimum of 24 hours.

- C. Protect resinous flooring materials from damage and wear during construction operation.
 - 1. Cover flooring with kraft type paper.
 - 2. Optional 6 mm (1/4 inch) thick hardboard, plywood, or particle board where area is in foot or vehicle traffic pattern, rolling or fixed scaffolding and overhead work occurs.
- D. Remove temporary covering and clean resinous flooring just prior to final inspection. Use cleaning materials and procedures recommended by resinous flooring manufacturer.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 09 68 00
CARPETING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Section specifies carpet, edge strips, adhesives, and other items required for complete installation.

1.2 RELATED WORK

- A. Color and texture of carpet and edge strip: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Resilient wall base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

1.3 QUALITY ASSURANCE

- A. Carpet installed by mechanics certified by the Floor Covering Installation Board.
- B. Certify and label the carpet that it has been tested and meets criteria of CRI IAQ Carpet Testing Program for indoor air quality.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Product Data:
 - 1. Manufacturer's catalog data and printed documentation stating physical characteristics, durability, resistance to fading and flame resistance characteristics for each type of carpet material and installation accessory.
 - 2. Manufacturer's printed installation instructions for the carpet, including preparation of installation substrate, seaming techniques and recommended adhesives and tapes.
 - 3. Manufacturer's certificate verifying carpet containing recycled materials include percentage of recycled materials as specified.
- C. Samples:
 - 1. Carpet: "Production Quality" samples 300 x 300 mm (12 x 12 inches) of carpets, showing quality, pattern and color specified in Drawings.
 - 2. Floor Edge Strip (Molding): 150 mm (6 inches) long of each color and type specified.
 - 3. Base Edge Strip (Molding): 150 mm (6 inches) long of each color specified.
- D. Shop Drawings: Installers layout plan showing seams and cuts for sheet carpet and carpet module.
- E. Maintenance Data: Carpet manufacturer's maintenance instructions describing recommended type of cleaning equipment and material, spotting and cleaning methods and cleaning cycles.

1.5 DELIVERY AND STORAGE

- A. Deliver carpet in manufacturer's original wrappings and packages clearly labeled with manufacturer's name, brand, name, size, dye lot number and related information.
- B. Deliver adhesives in containers clearly labeled with manufacturer's name, brand name, number, installation instructions, safety instructions and flash points.
- C. Store in a clean, dry, well-ventilated area, protected from damage and soiling. Maintain storage space at a temperature above 16 degrees C (60 degrees F) for 2 days prior to installation.

1.6 ENVIRONMENTAL REQUIREMENTS

- A. Areas in which carpeting is to be installed shall be maintained at a temperature above 16 degrees C (60 degrees F) for 2 days before installation, during installation and for 2 days after installation. A minimum temperature of 13 degrees C (55 degrees F) shall be maintained thereafter for the duration of the contract. Traffic or movement of furniture or equipment in carpeted area shall not be permitted for 24 hours after installation. Other work which would damage the carpet shall be completed prior to installation of carpet.

1.7 WARRANTY

- A. Carpet and installation subject to terms of "Warranty of Construction" FAR clause 52.246-21, except that warranty period is extended to two years.

1.8 APPLICABLE PUBLICATIONS

- A. Publication listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
ANSI/NSF 140-07Sustainable Carpet Assessment Standard
- C. American Association of Textile Chemists and Colorists (AATCC):
AATCC 16-04Colorfastness to Light
AATCC 129-05Colorfastness to Ozone in the Atmosphere under High Humidities
AATCC 134-06Electric Static Propensity of Carpets
AATCC 165-99Colorfastness to Crocking: Textile Floor Coverings-AATCC Crockmeter Method
- D. American Society for Testing and Materials (ASTM):
ASTM D1335-05Tuft Bind of Pile Yarn Floor Coverings
ASTM D3278-96 (R2004) ..Flash Point of Liquids by Small Scale Closed-Cup Apparatus

ASTM D5116-06Determinations of Organic Emissions from Indoor
Materials/Products

ASTM D5252-05Operation of the Hexapod Tumble Drum Tester

ASTM D5417-05Operation of the Vettermann Drum Tester

ASTM E648-06Critical Radiant Flux of Floor-Covering Systems
Using a Radiant Heat Energy Source

E. The Carpet and Rug Institute (CRI):

CRI 104-02Installation of Commercial Carpet

PART 2 - PRODUCTS

2.1 CARPET TILE (CPT1)

A. Basis-of-Design: Subject to compliance with requirements, provide the following or approved equal product.

1. Mannington Commercial, Pattern: New Possibilities II.

a) Color: as indicated on Drawings.

2. Pile Height: .100 inches (2.54 mm).

3. Pile Fiber: InVista Antron Lumena Type 6,6.

4. Pile Type: Patterned loop.

5. Backing: 100% synthetic Non-Aqueous Closed Cell Polymer.

2.2 CARPET TILE(CPT2)

A. Basis-of-Design: Subject to compliance with requirements, provide the following or approved equal product.

1. Mohawk commercial, Pattern: Character Lines Modular.

a) Color: as indicated on Drawings.

2. Pile Height: .154 inches (3.91 mm).

3. Pile Fiber: 100% Dura Color Premium Nylon with Antron Legacy.

4. Pile Type: Level Multi Colored Patterned loop.

5. Backing: EcoFlex ICT.

2.3 CARPET TILE (CPT3)

A. Basis-of-Design: Subject to compliance with requirements, provide the following or approved equal product.

1. Mannington Commercial, Pattern: Deep thoughts II.

a) Color: as indicated on Drawings.

2. Pile Height: .100 inches (2.54 mm).

3. Pile Fiber: InVista Antrom Lumena Type 6,6.

4. Pile Type: Patterned Loop.

5. Backing: 100% synthetic Non-Aqueous Closed Cell Polymer.

2.4 GENERAL PHYSICAL CHARACTERISTICS

A. Carpet free of visual blemishes, streaks, poorly dyed areas, fuzzing of pile yarn, spots or stains and other physical and manufacturing defects.

B. Manufacturers standard construction commercial carpet:

1. Modular Tile: 600 mm (24 inches) square tile.
- C. Appearance Retention Rating (ARR): Carpet shall be tested and have the minimum 3.5-4.0 Severe ARR when tested in accordance with either the ASTM D 5252 (Hexapod) or ASTM D 5417 (Vettermann) test methods using the number of cycles for short and long term tests as specified.
- D. Tuft Bind: Minimum force of 40 N (10 lb) required to pull a tuft or loop free from carpet backing. Test per ASTM D1335.
- E. Colorfastness to Crocking: Dry and wet crocking and water bleed, comply with AATCC 165 Color Transference Chart for colors, minimum class 4 rating.
- F. Colorfastness to Ozone: Comply with AATCC 129, minimum rating of 4 on the AATCC color transfer chart.
- G. Delamination Strength: Minimum of 440 N/m (2.5 lb/inch) between secondary backing.
- H. Flammability and Critical Radiant Flux Requirements:
 1. Test Carpet in accordance with ASTM E 648.
 2. Class I: Not less than 0.45 watts per square centimeter.
 3. Carpet in corridors, exits and Medical Facilities: Class I.
- I. Density: Average Pile Yarn Density (APYD):
 1. Corridors, lobbies, entrances, common areas or multipurpose rooms, open offices, waiting areas and dining areas: Minimum APYD 6000.
 2. Other areas: Minimum APYD 4000.
- J. VOC Limits: Meets SCAQMD Rule #1168.
- K. Shall meet platinum level of ANSI/NSF 140.
- L. Color, Texture, and Pattern: As specified in Drawings.

2.5 ADHESIVE AND CONCRETE PRIMER

- A. Waterproof, resistant to cleaning solutions, steam and water, nonflammable, complies with air-quality standards as specified. Adhesives flashpoint minimum 60 degrees C (140 degrees F), complies with ASTM D 3278.

2.6 EDGE STRIPS (MOLDING)

- A. As indicated on Drawings.

2.7 LEVELING COMPOUND (FOR CONCRETE FLOORS)

- A. Provide Portland cement bases polymer modifier with latex or polyvinyl acetate resin manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.
- B. Determine the type of underlayment selected for use by condition to be corrected.

PART 3 - EXECUTION**3.1 SURFACE PREPARATION**

- A. Examine surfaces on which carpeting is to be installed.
- B. Clean floor of oil, waxy films, paint, dust and deleterious substances that prevent adhesion, leave floor dry and cured, free of residue from curing or cleaning agents.
- C. Correct conditions which will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints.
- D. Fill cracks, joints depressions, and other irregularities in concrete with leveling compound.
 - 1. Do not use adhesive for filling or leveling purposes.
 - 2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
 - 3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joint lines.
- E. Test new concrete subfloor prior to adhesive application for moisture and surface alkalinity per CRI 104 Section 6.3.1 or per ASTM E1907.

3.2 CARPET INSTALLATION

- A. Do not install carpet until work of other trades including painting is complete and dry.
- B. Install in accordance with CRI 104 direct glue down installation.
 - 1. Relax carpet in accordance with Section 6.4.
 - 2. Comply with indoor air quality recommendations noted in Section 6.5.
 - 3. Maintain temperature in accordance with Section 15.3.
- C. Secure carpet to subfloor of spaces with adhesive applied as recommended by carpet manufacturer.
- D. Follow carpet manufacturer's recommendations for matching pattern and texture directions.
- E. Cut openings in carpet where required for installing equipment, pipes, outlets, and penetrations.
 - 1. Bind or seal cut edge of sheet carpet and replace flanges or plates.
 - 2. Use additional adhesive to secure carpets around pipes and other vertical projections.
- F. Carpet Modules:
 - 1. Install per CRI 104, Section 13, Adhesive Application.
 - 2. Lay carpet modules as indicated in Drawings.
 - 3. Install carpet modules so that cleaning methods and solutions do not cause dislocation of modules.
 - 4. Lay carpet modules uniformly to provide tight flush joints free from movement when subject to traffic.

3.3 EDGE STRIPS INSTALLATION

- A. Install edge strips over exposed carpet edges adjacent to uncarpeted finish flooring.
- B. Anchor metal strips to floor with suitable fasteners. Apply adhesive to edge strips, insert carpet into lip and press it down over carpet.
- C. Anchor vinyl edge strip to floor with adhesive apply adhesive to edge strip and insert carpet into lip and press lip down over carpet.

3.4 PROTECTION AND CLEANING

- A. Remove waste, fasteners and other cuttings from carpet floors.
- B. Vacuum carpet and provide suitable protection. Do not use polyethylene film.
- C. Do not permit traffic on carpeted surfaces for at least 48 hours after installation. Protect the carpet in accordance with CRI 104.
- D. Do not move furniture or equipment on unprotected carpeted surfaces.
- E. Just before final acceptance of work, remove protection and vacuum carpet clean.

3.5 SURPLUS MATERIAL

- A. Contractor is to provide one box of surplus field carpet to the VA. Carpet shall be of the same dye lot and run as field carpet used on project.

- - - E N D - - -

SECTION 09 72 16
VINYL-COATED FABRIC WALL COVERINGS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Section specifies vinyl coated fabric wallcovering and installation.

1.2 RELATED WORK

- A. Color, pattern, type, direction of hanging and areas to receive wallcovering: As indicated in Drawings.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
1. Each type and pattern as indicated in Drawings.
 2. Size: 8" x 10" (203 mm x 254 mm).
- C. Manufacturer's Certificates:
1. Compliance with CFFA W-101D.
 2. Wallcovering manufacturer's approval of adhesive.
- D. Manufacturer's Literature and Data:
1. Primer and adhesive.
 2. Installation instructions.
 3. Maintenance instructions, including recommended materials and methods for maintaining wallcovering with precautions in use of cleaning material.

1.4 QUALITY ASSURANCE

- A. Finish one complete space with each type (color and pattern) of wallcovering showing specified colors and patterns.
- B. Use approved sample spaces as a standard for work throughout the project.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Deliver in original unopened containers bearing the manufacturer's name, brand name, and product designation.
- B. Store in accordance with manufacturer's instructions.
- C. Handle to prevent damage to material.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Chemical Fabrics and Film Association, Inc., (CFFA):
2575-96(R2011)Vinyl Coated Fabric Wallcovering
- C. American Society for Testing and Materials (ASTM)

G21-09Determining Resistance of Synthetic Polymeric
Materials to Fungi

PART 2 - PRODUCTS

2.1 VINYL COATED FABRIC WALLCOVERING (WC1)

- A. Vinyl Wallcovering Standards: Provide mildew-resistant products complying with the following:
 - 1. FS CCC-W-408D and CFFA-QW-101D for Type II, medium-duty products.
 - 2. ASTM F793 for strippable wallcoverings that qualify as Category V, Type II, Commercial Serviceability products 3. Basis-of-Design: Subject to compliance with requirements, provide the following or approved equal products.
 - a. Trikes Tower Wallcovering with Recore.
 - 3. Total weight, excluding coatings: 20 oz./lyd.
 - 4. Width: 53/54" (1372 mm).
 - 5. Backing: 100% recycled non-woven polyester backing.
 - 6. Repeat: None.
 - 7. Colors, textures, and patterns: As indicated in Drawings.

2.2 ADHESIVE

- A. Use only water-based adhesive having volatile organic compounds not more than 50 g/l.
- B. Vermin and mildew resistant.

PART 3 - EXECUTION

3.1 JOB CONDITIONS

- A. Temperatures:
 - 1. Do not perform work until surfaces and materials have been maintained at minimum of 60 °F. for three days before work begins.
 - 2. Maintain minimum temperatures of 60 °F. until adhesives are dried or cured.
- B. Lighting:
 - 1. Do not proceed unless a minimum lighting level of 15 candlepower per square foot occurs.
 - 2. Measure light level at mid-height of wall.
- C. Ventilation:
 - 1. Provide uniform continuous ventilation in space.
 - 2. Ventilate for a time for not less than complete drying or curing of adhesive.
- D. Protect other surfaces from damage which may be caused by this work.
- E. Remove waste from building daily.

3.2 SURFACE CONDITION

- A. Inspect surfaces to receive wallcoverings to assure that:

1. Patches and repairs are completed.
2. Surface are clean, smooth and prime painted.
- B. Do not proceed until discovered defects have been corrected by other trades and surfaces are ready to receive wallcovering.
- C. Carefully remove electrical outlet and switch plates, mechanical diffusers, escutcheons, registers, surface hardware, fittings and fastenings, prior to starting work.
- D. Carefully store items for reinstallation.

3.3 APPLICATION OF ADHESIVE

- A. Mix and apply adhesives in accordance with manufacturer's directions.
- B. Prevent adhesive from getting on face of wallcovering.
- C. Apply adhesive to wallcovering back.

3.4 WALLCOVERING INSTALLATION

- A. Use wallcovering of same batch or run in an area. Use fabric rolls in consecutive numerical sequence of manufacture.
- B. Install material completely adhered, smooth, clean, without wrinkles, air pockets, gaps or overlaps.
- C. Extend wallcovering continuous behind non-built-in casework and other items which are close to but not bolted to or touching the walls.
- D. Install wallcovering before installation of resilient base. Extend wallcovering not more than 6 mm (1/4 inch) below top of resilient base.
- E. Install panels consecutively in order in which they are cut from the roll including filling spaces above or below windows, doors, or similar penetrations.
- F. Do not install horizontal seams.
- G. Except on match patterns, hang fabric by reversing alternate strips, except as recommended by the manufacturer.
- H. Cutting:
 1. Cut on a work table with a straight edge.
 2. Joints or seams that are not cut clean are unacceptable.
 3. Trim additional selvage to achieve a color and pattern match at seams. Overlapped seams are not allowed.
 4. Contractor is to double-cut all seams unless specified otherwise by wall paper manufacturer.
 5. If double cutting on the wall is necessary, place a three inch strip of Type I wallcovering under pasted edge.
 - a. Do not cut into wall surface.
 - b. After cutting, remove strip and excess adhesive from seam before proceeding to next seam.
 - c. Smooth down seam in adhesive for tight bond and joint.
- I. Trim strip-matched patterns, which are not factory pre-trimmed.

J. Inside Corners:

1. Wrap wallcovering around corner.
2. Do not seam within 50 mm (2 inches) of inside corners.
3. Double cut seam.

K. Outside Corners:

1. Wrap wallcovering around corner.
2. Do not seam within 150 mm (6 inches) of outside corners.
3. Double cut seam.

3.5 PATCHING

A. Replace surface damaged wallcovering in a space as specified for new work:

1. Replace full height of surface.
2. Replace from break in plane to break in plane when same batch or run is not used. Double cut seams.
3. Adjoining differential colors from separate batches or runs are not acceptable.

B. Correct loose or raised seams with adhesives to lay flat with tight bonded joint as specified for new work.

3.6 CLEANING AND INSTALLING TEMPORARY REMOVED ITEMS

- A. Remove adhesive from wallcovering as work proceeds.
- B. Remove adhesives where spilled, splashed or splattered on wallcoverings or adjacent surfaces in a manner not to damage surface from which it is removed.
- C. Reinstall previously removed electrical outlet and switch plates, mechanical diffusers, escutcheons, registers, surface hardware, fittings and fastenings.

3.7 SURPLUS MATERIAL

- A. Contractor is to provide one full roll of surplus wall coverings of each type used on the project to the VA. Wall covering shall be of the same dye lot and batch or run as that used on the project.

- - - E N D - - -

SECTION 09 77 50
FIBERGLASS REINFORCED PANELS (FRP)

PART 1 - GENERAL

1.1 SECTION INCLUDES

Prefinished FRP (Fiberglass Reinforced Plastic) wall panels for decorative and/or sanitary environments.

1.2 ENVIRONMENTAL CONDITIONS

Building should be fully enclosed prior to installation with sufficient heat (70°) and ventilation consistent with good working conditions for finish work.

1.3 DELIVERY AND STORAGE OF MATERIALS

Materials are to be factory packaged on strong pallets. All materials are to be stored lying flat, under cover and protected from the elements. Panels should be allowed to acclimate to room temperature (70°) for 48 hours prior to installation.

PART 2 - PRODUCTS

2.1 BASIS-OF-DESIGN

A. Manufacturer:

1. Marlite FRP panels shall be as provided by Marlite, 202 Harger Street, Dover, OH 44622, (330) 343-6621, or approved equal.

B. Materials

1. All Sanitary wall panels shall be:
 - a. Marlite® Brand FRP, or approved equal.

C. Accessories

1. All trim specified shall be extruded aluminum.
 - a. Extruded Aluminum Trim Profiles for .090" thick panels.
 1. F 550 SS Inside Corner
 2. F 561 SS Outside Corner
 3. F 565 SS Division
 4. F 570 SS Edge
2. Trim Finish
 - a. Extruded Aluminum to be Bright Anodized.

PART 3 - EXECUTION

3.1 PREPARATION

Panels must be applied over a smooth , solid, flat, clean subwall such as drywall or plywood.

3.2 CONDITIONING

Panels should be opened and allowed to acclimate for 48 hours prior to installation. Room temperature should be approximately 70° F.

3.3 INSTALLATION

- A. Install all panels in strict accordance with manufacturer's installation instructions.
- B. All moldings must provide for a minimum 1/8 inch expansion joint to insure proper installation.
- C. C-551 Marlite FRP Adhesive, or approved equal. A water- resistant, non-flammable adhesive, C-551 meets ASTM Specification C557.
- D C-375 Marlite Construction Adhesive, or approved equal. A strong, flexible, water-resistant , solvent based adhesive formulated for fast, easy application, C-375 meets ASTM Specification C557.

3.4 SEALANT

Marlite® Brand MS-251 White Silicone Sealant, or approved equal.

3.5 MAINTENANCE

Wipe down using a damp cloth and mild soap solution or cleaner. Refer to manufacturer's specific cleaning recommendations Do not use abrasive cleaners.

- - - E N D - - -

**SECTION 09 91 00
PAINTING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Section specifies field painting.
- B. Section specifies prime coats which, may be applied in shop under other sections.
- C. Painting includes shellacs, stains, varnishes, coatings specified, stripping or markers, and identity markings.
- D. Contractor(s) installing the herein-mentioned system(s) shall be responsible for all required identity markings and painting of their own work.

1.2 RELATED WORK

- A. Shop prime painting of steel and ferrous metals: Divisions 5, 8, 10, 11, 12, 13, and 14 sections.
- B. Contractor option: Prefinished flush doors with transparent finishes: Section, 08 14 00 WOOD DOORS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, PRODUCT DATA, SHOP DRAWINGS AND SAMPLES.
- B. Manufacturer's Literature and Data:
Before work is started, or sample panels are prepared, submit manufacturer's literature, indicating brand names, product type, color, gloss level, coating composition, Federal Specification Number or manufacturers name or product number where applicable, and certificates as specified.
- C. Sample Panels:
 - 1. After painters' materials have been approved and before work is started submit sample panels showing each type of finish sheen and color specified and indicated on Drawings. All paint color panels shall have each coat sprayed per manufacturers' required thickness.
 - 2. Panel to show painted color: 18 gage stainless steel Q-Panel, 74 mm by 127 mm (3 inch by 5 inch).
 - 3. Panel to show transparent finishes: Wood of same species and grain pattern as wood approved for use, 102 mm by 254 by 6 mm (4 inch by 10 inch face by 1/4 inch) thick minimum, and where both flat and edge grain will be exposed, 254 mm (10 inches) long by sufficient size, 51 by 51 mm (2 by 2 inch) minimum or actual wood member to show complete finish.

4. Attach labels to panel stating the following:
 - a. Federal Specification Number or manufacturers name and product number of paints used.
 - b. Product type and color.
 - c. Name of project.
 5. Strips showing not less than 25 mm (1 inch) wide strip of primer coat, 25 mm (1 inch) wide strip of body coat over primer coat, and 74 mm (3 inch) wide strip of finish coat over body and primer coats.
 6. The VA has established and retains Q-Panels of approved colors used at this facility. The contractor shall submit his Q-Panels to the VA to match approved color and finish sheen.
- D. Samples of identity markers if used.
- E. Manufacturers' Certificates indicating compliance with specified requirements:
1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.
 2. Epoxy coating.

1.4 DELIVERY, AND STORAGE

- A. Deliver materials to site in manufacturer's sealed container marked to show following:
1. Name of manufacturer
 2. Product type
 3. Batch number
 4. Instructions for use
 5. Safety precautions
 6. Material Safety Data Sheets
- B. In addition to manufacturer's label, provide a label legibly printed as following:
1. Federal Specification Number, where applicable, and name of material.
 2. Surface upon which material is to be applied.
 3. If paint or other coating, state coat types; prime, body or finish.
- C. Maintain space for storage, and handling of painting materials and equipment in a neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.
- D. Store materials at site at least 24 hours before using, at a temperature between 18 and 30 °K (65 and 85 °F).

1.5 MOCK-UP PANEL

- A. Before starting application of water paint mixtures, apply paint as specified to an area, not to exceed 9 m² (100 sf), selected by COTR.

- B. Finish and texture approved by COTR will be used as a standard of quality for remainder of work.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. AMERICAN CONFERENCE OF GOVERNMENTAL INDUSTRIAL HYGIENISTS (ACGIH):
 ACGIH TLV-BKLT-1992Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)
 ACGIH TLV-DOC(sixth Edition...Documentation of Threshold Limit Values and Biological Exposure Indices.
- C. Federal Specifications (Fed. Spec.):
 P-W-155CWax Floor, Water-Emulsion
 INT AMD 1
 TT-C-535B(2)Coating, Epoxy, Two Component, For Interior Use On Metal, Wood, Wallboard, Painted Surfaces, Concrete And Masonry
 TT-C-542ECoating, Polyurethane, Oil Free, Moisture Curing
 TT-C-1883ACoating, Clear, Fire Retardant, Two Component Polyurethane, Thermal Insulating (Intumescent)
 TT-E-487D(1)Enamel, Floor And Deck
 TT-E-489HEnamel, Alkyd, Gloss Low VOC Content
 TT-E-506KEnamel, Alkyd, Gloss, Tints And White (For Interior Use)
 TT-E-508CEnamel, Interior, Semi-gloss, Tints And White
 TT-E-545CPrimer, (Enamel, Undercoat Alkyd Odorless, Interior, Flat, Tints And White)
 TT-F-322DFiller, Two-Component Type, For Dents, Cracks, INT AMD 1Small-Holes And Blow-Holes
 TT-F-340CFiller, Wood, Plastic
 TT-F-1098DFiller Block, Solvent-Thinned, for Porous Surfaces (Concrete Block, Cinder Block, Stucco Etc.)
 TT-P-19DPaint Latex (Acrylic Emulsion, Exterior Wood And Masonry)
 TT-P025E(2)Primer, Coating, Exterior Undercoat For Wood, Ready-Mixed, White And Tints
 TT-P-26C(1)Paint, Interior, White, Tints And Black, Fire Retardant
 TT-P-28GPaint, Aluminum, Heat Resisting (1200 degrees F)

- TT-P-29JPaint, Latex
INT AMD 2
- TT-P-30E(1)Paint, Alkyd, Odorless, Interior, Flat, White
And Tints
- TT-P-38EPaint, Aluminum (Ready-mixed)
- TT-P-59E(1)Paint, Ready Mix, International Orange (Not For
Residential Use)
- TT-P-95C(1)Paint, Rubber, For Swimming Pools And Other
Concrete And Masonry Surfaces
- TT-P-96D(2)Paint, Latex-Base, For Exterior Surfaces (White
And Tints)
- TT-P-102EPaint, Oil (Alkyd Modified, Exterior, Low VOC)
INT AMD 1
- TT-P-641G(1)Primer Coating, Zinc Dust-Zinc Oxide (For
Galvanized Surfaces)
- TT-P-645BPrimer, Paint, Zinc-Molybdate, Alkyd Type
- TT-P-650DPrimer Coating, Latex Base, Interior, White (For
Gypsum Wallboard, or Plaster)
- TT-P-664DPrimer Coating, Alkyd, Corrosion-Inhibiting,
Lead And Chromate Free, VOC-Compliant
- TT-P-791BPutty, Pure-Linseed-Oil Type (For Wood-Sash-
Glazing)
- TT-P-1411APaint, Copolymer-Resin, Cementitious (For
Waterproofing Concrete and Masonry Walls)
- TT-P-1511BPaint, Latex (Gloss And Semi-gloss, Tints And
White) (For Interior Use)
- TT-P-2119Paint, Latex-Base, High Traffic Area, Flat And
Eggshell Finish, (Low Luster), (For Interior
Use)
- TT-S-176E(1)Sealer, Surface, Varnish Type, Floor, Wood And
Cork
- TT-S-179B(1)SSealer, Surface, Pigmented Oil, For Plaster And
Wallboard
- TT-S-711CSStain, Oil Type, Wood, Interior
- D. Commercial Item Description (CID):
- A-A-1272Plaster, Gypsum (Spackling Compound)
- A-A-1555Water Paint, Powder (Cementitious, White and
Colors)
- A-A-2210Filler, Wood Paste
- E. Western Wood Products Association (WWPA):
- Research Note No.312- Revised Jan 30, 1985 Painting Over Knots

F. Steel Structures Painting Council (SSPC):

- SP 1-89No. 1, Solvent Cleaning
- SP 2-89No. 2, Hand Tool Cleaning
- SP 3-89No. 3, Power Tool Cleaning

G. Military Specifications (Mil. Spec.):

- MIL-P-21035BPaint, High Zinc Dust Content, Galvanizing,
Repair

H. American National Standards Institute (ANSI):

- ANSI-A13.1-81Scheme for the Identification of Piping Systems

I. American Society for Testing and Materials (ASTM):

- D260-86.....Boiled Linseed Oil

PART 2 - PRODUCTS**2.1 MATERIALS**

- A. Where manufacturers' products are specified herein, products of other manufacturers that are considered equivalent to those specified may be used provided they are approved "equal" products.

- B. Paint Systems presently in use and approved at this facility are as follows:

1. Exterior Paint Systems for:

a. Masonry or Concrete Walls:

- 1) Primer Coat: "Sherwin Williams" Loxon® Alkali Resistant Masonry Primer, A24W300.
- 2) Body and Finish Coats: "Sherwin Williams" A-100® Exterior Latex Satin, A82 Series, 100% Acrylic. Finish (units @ 60°): 10-20.

b. Metal (Light to Moderate Industrial Exposure, i.e. doors, frames, trim, louvers, handrails, etc.):

1) Primer Coat:

- a) "XIM" Water Based Adhesion Promoting Exterior Primer/Sealer, U.M.A. (Over previously painted or factory primed surfaces).
- b) "Sherwin Williams" Kem Kromik® Universal Metal Primer, B50Z Series, Rust Inhibitive, low VOC. (Over bare ferrous metal only).

- 2) Body and Finish Coats: "Sherwin Williams" DTM Waterborne Acrylic Semi-Gloss Coating, B66W200 Series, 100% Acrylic.

c. Metal (High Performance Industrial Exposure, i.e. Electrical and Mechanical equipment, etc.):

1) Primer Coat:

- a) "XIM" Water Based Adhesion Promoting Exterior Primer/Sealer, U.M.A. (Over previously painted or factory primed surfaces).
- b) "Sherwin Williams" Kem Kromik® Universal Metal Primer, B50Z Series, Rust Inhibitive, low VOC. (Over bare ferrous metal only).

2) Body and Finish Coats: "Sherwin Williams" Corothane® II Polyurethane Satin, B65-200 Series, 2-Component, VOC Compliant, Aliphatic Acrylic Modified Polyurethane.

2. Interior Paint Systems for:

a. New Gypsum Board or Previously Painted Wall and Ceiling Surfaces (General Use Areas):

- 1) Primer Coat (When required for use by this section): "Sherwin Williams" PrepRite® ProBlock® Interior/Exterior Latex Primer/Sealer, B51W20.
- 2) Body and Finish Coats: "Sherwin Williams" Harmony™ Low Odor Interior Latex Semi-Gloss Enamel, B10W951, Vinyl Acrylic. Finish (units @ 60°): 35-45.

b. New Gypsum Board or Previously Painted Wall and Ceiling Surfaces (High Scrubbing and Chemical Exposed Areas - Rooms; 133, 134, 206A, 207A, 208A, 209A, 215A, 217A, 218A, 220A, 222, 223, 226, 227, 230B, 301, 302A, 303A, 304A, 308, 309A, 310A, 312A, 315A, 317A, 318, 321, 322A, 323A, 326A, 327A, 331, 332A, 335A, 337A, 338A, 339A, 340A, 341, 343, 344A, 345A, 346A, 352A):

- 1) Primer Coat (When required for use by this section): "Sherwin Williams" PrepRite® ProBlock® Interior/Exterior Latex Primer/Sealer, B51W20.
- 2) Body and Finish Coats: "Sherwin Williams" ProClassic® Waterborne Acrylic Semi-Gloss Enamel, B31W51. Finish (units @ 60°): 35-45.

c. Wood Trim Work (Painted):

- 1) Primer Coat: "Sherwin Williams" PrepRite® ProBlock® Interior/Exterior Latex Primer/Sealer, B51W20.
- 2) Body and Finish Coats: "Sherwin Williams" ProClassic® Waterborne Acrylic Semi-Gloss Enamel, B31W51. Finish (units @ 60°): 35-45.

- d. Wood Trim Work (Stained and Non-stained):
 - 1) Stain (When required for use by this section): Type and color required to match adjacent work.
 - 2) Body and Finish Coats: "Minwax" Polyacrylic Water Based Varnish, Satin Finish.
- e. Metal (General Purpose unless otherwise specified, i.e. doors, frames, trim, ceiling fan coil covers, TV brackets, handrails, furniture, lockers, wall and ceiling expansion joint covers, electrical panel covers, exposed piping, etc.):
 - 1) Primer Coat:
 - a) "XIM" Water Based Adhesion Promoting Exterior Primer/Sealer, U.M.A. (Over previously painted or factory primed surfaces).
 - b) "Sherwin Williams" Kem Kromik® Universal Metal Primer, B50Z Series, Rust Inhibitive, low VOC. (Over bare ferrous metal only).
 - 2) Body and Finish Coats: "Sherwin Williams" ProClassic® Waterborne Acrylic Semi-Gloss Enamel, B31W51. Finish (units @ 60°): 35-45.
- f. Metal (High Use Areas, i.e. floor grates, floor expansion joint plates, etc.):
 - 1) Primer Coat: "Sherwin Williams" Solvent Based Catalyzed Recoatable Epoxy Primer, B67 Series, 2-Component.
(Note: Contractor shall apply a test area on each different existing finish type and test for solvent attack after proper surface preparation work is completed. If no sign of attack after 24 hours allow one week before testing for adhesion).
 - 2) Body Coat: "Sherwin Williams" Tile Clad® II Solvent Based Epoxy Coating, B62 Series, 2-Component.
 - 3) Finish Coat: "Sherwin Williams" ArmorSeal® 700HS Clear Water Based Epoxy Floor Coating, B70 Series, 2-Component, (6H Pencil Hardness or Greater).
- g. New Masonry or Concrete Walls and Ceilings:
 - 1) Primer Coat: "Sherwin Williams" Loxon® Alkali Resistant Masonry Primer, A24W300.
 - 2) Body and Finish Coats: "Sherwin Williams" Harmony™ Low Odor Interior Latex Semi-Gloss Enamel, B10W951, Vinyl Acrylic. Finish (units @ 60°): 35-45.

h. Concrete Floors:

1) Sealer:

- a) H & C Concrete Masonry Waterproofing sealer or approved equal.

C. Additional product information:

1. Epoxy Coating: (EC) Fed. Spec. TT-C-535.
2. Polyurethane Varnish: (PV) Fed. Spec. TT-C-542, use Type II, Class A (Clear) for interior surfaces.
3. Low VOC Gloss Enamel: Fed. Spec. TT-E-489.
4. Enamel Undercoat and Primer: Fed. Spec. TT-E-545.
5. Metal Filler: Fed. Spec. TT-F-322, Type I or II or single component filler meeting the same requirements.
6. Plastic Wood: Fed. Spec. TT-F-340.
7. Concrete Masonry Unit Filler: Fed Spec. TT-F-1098.
8. Wood Oil Base Primer: Fed. Spec. TT-P-25.
9. Fire Retardant Paint (FR) Fed. Spec. TT-P-26 or Clear Fire Retardant Coating (FC) Fed. Spec. TT-P-1883.
10. Aluminum Paint (AP): Fed. Spec. TT-P-38.
11. International Orange: Fed. Spec. TT-P-59.
12. Exterior Oil: (EO) Fed. Spec. TT-P-102, Type II or III.
13. Zinc Dust Primer: Fed. Spec. TT-P-641, Type II, except use Type III for latex or rubber paint finish.
14. Zinc Molybdate Primer: Fed. Spec. TT-P-645.
15. Latex Primer: Fed. Spec. TT-P-650.
16. Ferrous Metal Primer: Fed. Spec. TT-P-664.
17. Putty: Fed. Spec. TT-P-791, Type II.
18. Cementitious Paint (CEP): TT-P-141. Type I for exterior use, Type II for interior use.
19. Latex Gloss (GL) and Semi-Gloss: (SG): Fed. Spec. TT-P-1511.
20. Latex Flat (LF) and Low Luster (LL): Fed. Spec. TT-P-2119.
21. Gypsum Board and Gypsum Plaster Sealer: Fed. Spec. TT-S-179.
22. Wood Stain: Fed. Spec. TT-S-711.
23. Spackling Compound: CID A-A-1272.
24. Water Paint: CID A-A-1555.
25. Filler Wood Paste: CID A-A-2210.
26. Knot Sealer: WWP Research Note 3.12, Formula WP-578 as follows.

Materials	<u>Parts By Weight</u>
Bakelite Varnish BKS - 2710, 60 percent solids	5.0
Polyvinyl butyl resin	0.5
Ethyl Alcohol 95 percent (completely denatured)	9.5

- 27. Liquid Acrylic Resin: Special formulation of acrylic polymers and modifiers compatible with water paint, CID A-A-1555, and designed for use as an additive for water paint mix increasing adhesion and mechanical properties.
- 28. Wood Sealer: Polyurethane varnish (PV) thinned with thinner recommended by manufacturer at rate of about one part of thinner to four parts of varnish.
- 29. Identity markers options:
 - a. Pressure sensitive vinyl markers.
 - b. Snap-on coil plastic markers

2.2 PAINT PROPERTIES

- A. Use ready-mixed (including colors), except two component polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Materials finely ground, uniform in consistency and readily dispersed to form a smooth and homogeneous fluid.
- C. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

2.3 REGULATORY REQUIREMENTS

- A. Paint materials shall conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
 - 1. Volatile Organic Compounds (VOC): VOC content of paint materials shall not exceed local, state or district requirements.
 - 2. Lead-Based Paint:
 - a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
 - b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
 - 3. Asbestos: Materials shall not contain asbestos.
 - 4. Chromate, Cadmium, Mercury, Silica: Materials shall not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or silica sand.
 - 5. Human Carcinogens: Materials shall not contain any of the ACGIH-BKLT and ACGIH-DOC confirmed or suspected human carcinogens.

PART 3 - EXECUTION**3.1 JOB CONDITIONS**

- A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.
 - 1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
 - 2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each day's work.
- B. Atmospheric and Surface Conditions:
 - 1. Do no exterior or interior painting in foggy, damp, or rainy weather. When building is completely enclosed, interior work may be painted.
 - 2. Paint exterior and interior surfaces when ambient temperature is between 10 and 32 degrees C (50 and 90 degrees F), except when otherwise designated in manufacturer's printed instructions. Maintain interior temperatures until paint dries hard.
 - 3. Do no exterior painting when it is windy and dusty.
 - 4. Do no painting in direct sunlight or on surfaces, which will soon be warmed by the sun.
 - 5. Apply only on clean, dry, and frost free surfaces except as follows:
 - a. Apply water thinner acrylic and cementitious paints to damp (not wet) surfaces where allowed by the manufacturer's printed instructions.
 - b. Dampened with a fine mist of water on hot dry days concrete and masonry surfaces to which water thinned acrylic and cementitious paints are applied to prevent excessive suction and to cool surface.
 - 6. Varnishing:
 - a. Apply in clean areas and in still air.
 - b. Before varnishing vacuum and dust area.
 - c. Immediately before varnishing wipe down surfaces with a tack rag.

3.2 SURFACE PREPARATION

- A. Method of surface preparation is optional, provided results of finish painting produce solid even color and texture specified with no overlays.
- B. General:
 - 1. Remove prefabricated items not to be painted such as lighting fixtures, cover plates, escutcheon plates, surface hardware and trim, fittings

and fastenings, mechanical diffusers and covers, and similar items for reinstallation after paint is dried.

2. Remove items for reinstallation and complete painting of such items and adjacent areas when item or adjacent surface is not accessible or finish is different.
3. See other sections of specifications for specified surface conditions and prime coat.
4. Clean surfaces for painting with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry.

C. Wood:

1. Sand to a smooth even surface and then dust off.
2. Sand surfaces showing raised grain smooth between each coat.
3. Wipe surface with a tack rag prior to applying finish.
4. Surface painted with an opaque finish:
 - a. Coat knots, sap and pitch streaks with knot sealer before applying paint.
 - b. Apply two coats of knot sealer over knots.
5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with plastic wood or putty compound. Use plastic wood for transparent finish, to match wood. Sand to make smooth and finish flush with adjacent surface.
6. Before applying finish coat, reapply plastic wood or putty compound if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.

D. Ferrous Metals:

1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter by use of solvents, emulsions, cleaning compounds, or by steam cleaning, as defined in SSPC-SP 1.
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 and SSPC-SP 3, except where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.
3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with metal filler compound. Finish flush with adjacent surfaces.
 - a. This includes flat head countersunk screws used for permanent anchors

- b. Do not fill screws of item intended for removal such as glazing beads.
- 4. Spot prime abraded and damaged areas in shop prime coat, which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
- 5. Spot prime abraded and damaged areas, which expose bare metal of factory, finished items with paint as recommended by manufacturer of item.
- E. Zinc-Coated (Galvanized) Metal, Zinc, Aluminum, Copper and Copper Alloys Surfaces Specified Painted:
 - 1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion, with toluene, xylene or similar solvents in accordance with SSPC-SP 1.
 - 2. Spot coat abraded and damaged areas of zinc-coating which expose base metal, using zinc rich paint MIL Spec MIL -P-21035, on hot-dip zinc-coated items and spot prime with zinc dust primer, Fed Spec. TT-P-641.
- F. Masonry, Concrete:
 - 1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.
 - 2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.
 - 3. Remove loose mortar in masonry work.
 - 4. Replace mortar and fill open joints, holes, cracks and depressions with new mortar specified in Section MORTAR AND GROUTS. Do not fill weep holes. Finish to match adjacent surface.
 - 5. Neutralize Concrete floors to be sealed by washing with a solution of 1.4 Kg (3 pounds) of zinc sulfate crystals to 3.8 L (1 gallon) of water, allow to dry three days and brush thoroughly free of crystals.
 - 6. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces as specified in CONCRETE Sections. Remove projections to level of adjacent surface by grinding or similar methods.
- G. Gypsum Plaster and Gypsum Board:
 - 1. Remove efflorescence, loose and chalking plaster or finishing materials.
 - 2. Remove dust, dirt, and other deterrents to paint adhesion.
 - 3. Fill holes, cracks, and other depressions with spackling compound CID-A-A-1555 finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

3.3 PAINT PREPARATION

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturers printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
- D. Mix two component and two-part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturers printed instructions unless specified otherwise.
- E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.4 APPLICATION

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
- B. Unless otherwise specified, apply paint in three coats; prime, body, and finish. When two coats applied to prime coat is the same, first coat applied over primer is body coat and second coat is finish coat.
- C. Apply each coat evenly and cover substrate completely.
- D. Allow not less than 24 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by COTR.
- E. Finish surfaces to show solid even color, free from runs, lumps, brushmarks, laps, holidays, or other defects.
- F. Apply by brush, roller or spray, except as otherwise specified.
- G. Do not spray paint in existing occupied buildings or spaces unless approved by COTR, except in spaces sealed from existing occupied spaces.
 - 1. Apply painting materials specifically required by manufacturer to be applied by spraying,
 - 2. In areas, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in WORK NOT PAINTED, motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.
- H. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

3.5 PRIME PAINTING

- A. After surface preparation prime surfaces before application of body and finish coats, except as otherwise specified.
- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
- C. Shop applied prime coats shall comply with requirements of this section.
- D. Additional field applied prime coats over factory applied prime coats are required and shall comply with requirements of this section.
- E. Prime rebates for stop and face glazing of wood, and for face glazing of steel.
- F. Apply prime coat in same manner as body and finish coats.
- G. Wood and Wood Particleboard:
 - 1. Use same kind of primer specified for exposed face surface.
 - a. Exterior wood: Wood oil base primer except where wood stain is scheduled.
 - b. Interior wood except for transparent finish: Enamel primer, thinned if recommended by manufacturer.
 - c. Transparent finishes as specified under Transparent Finishes Wood Except Floors.
 - 2. Apply two coats of primer or sealer to surfaces of wood doors, including top and bottom edges, which are cut for fitting or for other reason.
 - 3. Apply one coat of primer as soon as delivered to site to surfaces of unfinished woodwork, except concealed surfaces of shop fabricated or assembled millwork and surfaces specified to have varnish, stain or natural finish.
 - 4. Back prime and seal ends of exterior woodwork, and edges of exterior plywood specified to be finished.
 - 5. Apply fire retardant paint to wood for fire retardant finish.
- H. Metals except boilers, incinerator stacks, and engine exhaust pipes:
 - 1. Steel and iron: Ferrous metal primer. Use epoxy coating where finish of epoxy coating is specified.
 - 2. Zinc-coated steel and iron: Zinc dust primer.
 - 3. Aluminum scheduled to be painted: Zinc molybdate primer.
 - 4. Terne metal: Ferrous metal primer.
 - 5. Copper and copper alloys scheduled to be painted: Zinc molybdate primer.
 - 6. Machinery not factory finished: Enamel, Alkyd, Gloss Low VOC content.
 - 7. Asphalt coated metal: Aluminum paint.

8. Metal over 94 degrees C. (200 degrees F), Boilers, Incinerator Stacks, and Engine Exhaust Pipes: Heat Resistant Paint, 650 degrees C (1200 degrees F).

I. Gypsum Board and Hardboard:

1. Surfaces scheduled to have acrylic emulsion or latex emulsion finish: Use acrylic emulsion or latex emulsion respectively.
2. Surfaces scheduled to receive vinyl coated fabric wallcovering: Use enamel body coat and primer.
3. Use epoxy coating for surfaces scheduled to receive epoxy finish.

J. Gypsum Plaster and Veneer Plaster:

1. Surfaces scheduled to receive vinyl coated fabric wallcovering: Use enamel body coat and primer.
2. Pigmented sealer, except use latex emulsion for alkyd flat finish.
3. Surfaces scheduled to have acrylic emulsion or latex emulsion finish: Use acrylic emulsion or latex emulsion respectively.
4. Use epoxy coating for surfaces scheduled to receive epoxy coating finish.

K. Concrete Masonry Units except glazed or integrally colored and decorative units:

1. Concrete Masonry Unit Filler on interior surfaces.
2. Prime exterior surface as specified for exterior finishes.

L. Cement Plaster or stucco Concrete Masonry, Brick Masonry and Cement board Interior Surfaces of Ceilings and Walls:

1. Latex emulsion, except use two coats where substrate has aged less than six months for latex emulsion finish coat.
2. Use acrylic emulsion finish coats of cementitious paint or epoxy or water paint as scheduled.

M. Concrete Floors:

1. Concrete floor sealer.

3.6 EXTERIOR FINISHES

A. Apply following finish coats as specified.

B. Steel and Ferrous Metal.

1. Two coats, one body and one finish coat, on exposed surfaces, except on surfaces over 94 degrees C (200 degrees F).
2. One coat of heat resistant paint on surfaces over 94 degrees K (200 degrees F) and on surfaces of boiler stacks and engine exhaust pipes.

C. Machinery without factory finish except for primer: One coat Enamel, Alkyd, Gloss Low VOC content.

D. Cement Plaster, Concrete:

1. General:

- a. Where specified and/or shown on drawings.

- b. Mix as specified in manufacturer's printed directions.
 - c. Do not mix more paint at one time than can be used within four hours after mixing. Discard paint that has started to set.
 - d. Dampened warm surfaces above 24 degrees C (75 degrees F) with fine mist of water before application of paint. Do not leave free water on surface.
 - e. Cure paint with a fine mist of water as specified in manufacturer's printed instructions.
2. Use one of the following unless specified otherwise.
- a. Two coats, one body and one finish coat, of water paint mixed with additives specified (CEP).
 - 1) Water paint mixed with water, liquid acrylic resin and sand aggregate grades for application by plasterer's type spray gun.
 - a) Prepare paint powder for spraying by mixing with a liquid consisting of one part of liquid acrylic resin to three parts of water unless specified otherwise in manufacturer's printed instructions.
 - b) Spray body coat evenly distributed.
 - c) Float or brush out body spray coat before starting finish spray application to fill holes, pores, and imperfections.
 - d) Spray finish coat after body coat has set, and air and water bubbles have broken, double back over surface with an even spray application, or additional applications to provide a uniform texture and to match finish of mock-up panel.
 - b. Two coats, one body and one finish coat, of cementitious paint.

3.7 INTERIOR FINISHES

- A. Apply two coats of paint, one body and one finish coat by brush and roller, over prime coat on all surfaces, unless specified otherwise.
- B. Apply two coats of paint, one body and one finish coat by spray, over prime coat as follows:
 - 1. Electrical panel covers.
 - 2. Expansion joint covers, to be painted.
- C. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
- D. Wood:
 - 1. Sanding:
 - a. Use 220 grit sandpaper.
 - b. Sand Sealers and varnish between coats.
 - c. Sand enough to scarify surface to assure good adhesion of subsequent coats, to level roughly applied sealer and varnish, and to knock off "whiskers" of any raised grain as well as dust particles.

2. Sealers:
 - a. Apply sealers specified except sealer may be omitted where pigmented, penetrating, or wiping stains containing resins are used.
 - b. Allow manufacturer's recommended drying time before sanding, but not less than 24 hours or 36 hours in damp or muggy weather.
 - c. Sand as specified.
3. Transparent Finishes on Wood.
 - a. Natural Finish:
 - 1) One coat of sealer.
 - 2) Two coats of satin finish.
 - b. Stain Finish:
 - 1) One coat of stain.
 - 2) Use wood stain of type and color required to achieve finish specified. Do not use varnish type stains.
 - 3) One coat of sealer.
 - 4) Two coats of satin finish.

3.8 REFINISHING EXISTING PAINTED SURFACES

- A. Clean, patch and repair existing surfaces as specified under surface preparation.
- B. Remove and reinstall items as specified under surface preparation.
- C. Remove existing finishes or apply separation coats to prevent non-compatible coatings from having contact.
- D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime, body, and finish coats as specified for new work to repaired areas or replaced components.
- E. Apply body and finish coats over plane surface to nearest break in plane, such as corner, reveal, or frame.
- F. In existing rooms and areas where alterations occur, clean existing stained and natural finished wood retouch abraded surfaces and then give entire surface one coat of polyurethane varnish (PV).
- G. Apply paint or transparent finish as specified under Articles EXTERIOR FINISHED and INTERIOR FINISHES.
- H. Coat knots and pitch streaks showing through old finish with knot sealer before refinishing.
- I. Sand or dull glossy surfaces prior to painting.
- J. Sand existing coatings to a featheredge so that transition between new and existing finish will not show in finished work.

3.9 PAINT COLOR

- A. Color and gloss of finish coats is as specified in this section and on the drawings.

- B. For additional requirements regarding color see Articles, REFINISHING EXISTING PAINTED SURFACE and MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE.
- C. Coat Colors:
 - 1. Color of priming coat: Lighter than body coat.
 - 2. Color of body coat: Lighter than finish coat.
 - 3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.
- D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:
 - 1. Paint to match color of casework where casework has a paint finish.
 - 2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

3.10 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE

- A. Field painting of mechanical and electrical work, consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.
- B. In spaces not scheduled to be finish painted, paint as specified under paragraph G, colors.
- C. Paint various systems specified in Divisions 2, 15, and 16.
- D. Paint after tests have been completed.
- E. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more, unless otherwise noted.
- F. Omit field painting of items specified in Subparagraph, WORK NOT PAINTED.
- G. Color:
 - 1. Paint items having no color specified to match surrounding surfaces.
 - 2. Paint colors as specified except for following:
 - a. WhiteExterior unfinished surfaces of enameled plumbing fixtures. Insulation coverings on breeching and uptake inside boiler house, drums and drumheads, oil heaters, condensate tanks and condensate piping.
 - b. Gray.....Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces). Water and sewage treatment equipment and sewage ejection equipment.
 - c. Aluminum Color.....Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and

- door frames and fuel oil burning equipment. Steam generation system (bare piping, fittings, hangers, supports, valves, traps and miscellaneous ironwork in contact with pipe).
- d. Federal Safety Red.....Exposed fire protection piping hydrants, post indicators, electrical conduits containing fire alarm control wiring, and fire alarm equipment.
 - e. Federal Safety Orange.....Entire lengths of electrical conduits containing feeders 600 volts or more.
- H. Apply paint on properly prepared and primed surface as specified under Articles EXTERIOR FINISHES and INTERIOR FINISHES, unless otherwise specified:
- 1. Exterior Locations:
 - a. Paint vent and exhaust pipes, normal temperature, under 94 degrees K (200 degrees F), roof drains, fire hydrants, post indicators, yard hydrants, exposed piping, galvanized and zinc-copper alloy metal, and similar items.
 - b. Apply one coat of Heat Resistant paint, 650 degrees K (1200 degrees F) to incinerator stacks, boiler stacks, and engine generator exhaust.
 - 2. Interior Locations:
 - a. Paint the following items when exposed to view:
 - 1) Metal under 94 degrees K (200 degrees F) of items such as bare piping, fittings, hangers and supports.
 - 2) Equipment and systems such as hinged covers and frames for control cabinets and boxes, electric conduits, and panel boards.
 - 3) Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.
 - 4) Paint existing exposed equipment and systems such as heating, ventilating, air conditioning, plumbing equipment, exposed piping and conduits, and electrical panel board covers as shown on the drawings to be painted.
 - b. Paint electrical conduits containing cables rated 600 volts or more, two coats Federal Safety Orange in exposed and concealed spaces full length of conduit.
 - 3. Other exposed locations:
 - a. Metal surfaces, except aluminum, of cooling towers exposed to view, including connected pipes, rails, ladders: Two coats of aluminum paint.

- b. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating systems: Two coats of acrylic emulsion.

3.11 BUILDING AND STRUCTURAL WORK FIELD PAINTING

- A. Painting and finishing of interior and exterior work except as specified under Paragraph Work Not Painted.
 - 1. Painting and finishing of new and existing work including colors and gloss of finish selected is as specified and shown on the drawings
 - 2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
 - 3. Painting of ferrous metal and galvanized metal.
 - 4. Identity painting and safety painting.
- B. Building and Structural Work Not Painted:
 - 1. Prefinished items:
 - a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.
 - b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
 - 2. Finished surfaces:
 - a. Hardware except ferrous metal.
 - b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
 - c. Signs, fixtures, and other similar items integrally finished.
 - 3. Concealed surfaces:
 - a. Inside dumbwaiter, elevator and duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
 - b. Inside walls or other spaces behind access doors or panels.
 - c. Surfaces concealed behind permanently installed casework and equipment.
 - 4. Moving and operating parts:
 - a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
 - b. Tracks for overhead or coiling doors, shutters, and grilles.
 - 5. Labels:
 - a. Code required label, such as Underwriters Laboratories Inc., Inchcape Testing Services, Inc., or Factory Mutual Research Corporation.
 - b. Identification plates, instruction plates, performance rating, and nomenclature.

6. Galvanized metal:
 - a. Exterior chain link fence and gates, corrugated metal areaways, and gratings.
 - b. Gas Storage Racks.
 - c. Except where specifically specified to be painted.
7. Metal safety treads and nosings.
8. Gaskets.
9. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundation walls, and interior walls in pipe basements.
10. Face brick.
11. Structural steel encased in concrete, masonry, or other enclosure.
12. Structural steel to receive sprayed-on fire proofing.
13. Ceilings, walls, columns in interstitial spaces.
14. Ceilings, walls, and columns in pipe basements.

3.12 IDENTITY PAINTING SCHEDULE

- A. Identify designated service in accordance with ANSI A13.1, unless specified otherwise. Apply identity markings and painting as specified on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels.
 1. Legend may be identity marker options or stencil applied painted on.
 2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12,200 mm (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
 3. Locate legends clearly visible from operating position.
 4. Use arrow to indicate direction of flow.
 5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on drawings where asterisk appears for High, Medium, and Low Pressure designations as follows:
 - a. High Pressure - 414 Kpa (60 psi) and above
 - b. Medium Pressure - 104 to 413 Kpa (15 to 59 psi).
 - c. Low Pressure - 103 Kpa (14 psi) and below
 - d. Add Fuel oil grade numbers.

6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND ABBREVIATIONS
Blow-off	-	Yellow	Black	Blow-off
Boiler Feedwater	-	Yellow	Black	Blr.Feed
A/C Condenser	-	Green	White	A/C Cond. W.
Water Supply	-	Green	White	Sup.
Chilled Water	-	Green	White	Ch. W. Sup.
Supply	-	Green	White	Ch. W. Ret.
Chilled Water	-	Green	White	Ch. W. Ret.
Return	-	Yellow	Black	S. Air
Shop Compressed	-	Green	White	Air-Inst.
Air	-	Green	White	Cont.
Air-Instrument	-	Green	White	Drain
Controls	-	Green	White	Emg. Shower
Drain Line	-	Yellow	Black	H.P. Stm.____*
Emergency Shower	-	Yellow	Black	H.P. Ret.____*
High Pressure	-	Yellow	Black	M.P. Stm.____*
Steam	-	Yellow	Black	M.P. Ret.____*
High Pressure	-	Yellow	Black	L.P. Stm.____*
Condensate	-	Yellow	Black	L.P. Ret.____*
Return	-	Yellow	Black	H. Temp W.
Medium Pressure	-	Yellow	Black	Sup.
Steam	-	Yellow	Black	H. Temp W.
Medium Pressure	-	Yellow	Black	Ret.
Condensate	-	Yellow	Black	H. W. Htg.
Return	-	Yellow	Black	Sup.
Low Pressure	-	Yellow	Black	H. W. Htg.
Steam	-	Yellow	Black	Ret.
Low Pressure	-	Yellow	Black	Gravity Cond.
Condensate	-	Yellow	Black	Ret.
Return	-	Yellow	Black	Pumped Cond.
High Temperature	-	Yellow	Black	Ret.
Water Supply	-	Yellow	Black	Vac. Cond.
High Temperature	-	Yellow	Black	Ret.
Water Return	-	Yellow	Black	Fuel Oil-
Hot Water	-	Yellow	Black	Grade____*
Heating Supply	-	Yellow	Black	Sample
Hot Water	-	Yellow	Black	Chem.
Heating Return	-	Yellow	Black	Cont. B. D.
Gravity	-	Yellow	Black	Cond. - Pump
Condensate	-	Yellow	Black	
Return	-	Yellow	Black	
Pumped	-	Yellow	Black	
Condensate	-	Yellow	Black	
Return	-	Yellow	Black	
Vacuum	-	Yellow	Black	
Condensate	-	Yellow	Black	
Return	-	Yellow	Black	
Fuel Oil - Grade	-	Yellow	Black	
Boiler Water	-	Yellow	Black	
Sampling	-	Yellow	Black	
Chemical Feed	-	Yellow	Black	
Continuous Blow	-	Yellow	Black	
Down	-	Yellow	Black	
Condensate	-	Yellow	Black	
Pumped	-	Yellow	Black	
Pump	-	Yellow	Black	

Recirculating	-	Yellow	Black	Pump-Recirc.
Vent Line	-	Yellow	Black	Vent
Alkali	-	Yellow	Black	Alk
Bleach	-	Yellow	Black	Bleach
Detergent	-	Yellow	Black	Det.
Liquid Supply	-	Yellow	Black	Liq. Sup.
Reuse Water	-	Yellow	Black	Reuse Wtr.
Cold Water (Domestic)	White	Green	White	C. W. Dom.
Hot Water (Domestic)- Supply	White	Yellow	Black	H. W. Dom. H. W. Dom. Ret.
Return Tempered Water	White	Yellow	Black	Temp. Wtr.
Reagent Grade Water	-	Green	White	RG
Reverse Osmosis	-	Green	White	RO
Sanitary Waste	-	Green	White	San. Waste
Sanitary Vent	-	Green	White	San. Vent
Storm Drainage	-	Green	White	St. Drain
Pump Drainage	-	Green	White	Pump Drain.
Chemical Resistant Pipe- Waste	-	Yellow	Black	Acid Waste
Vent	-	Yellow	Black	Acid Vent
Atmospheric Vent	-	Green	White	ATV
Silver Recovery	-	Green	White	Sil. Rec.
Oral Evacuation	-	Green	White	Oral Evac.
Fuel Gas	-	Yellow	Black	Gas
Fire Protection Water-				
Sprinkler	Red	Red	White	Auto.- Sprinkler
Standpipe	Red	Red	White	Stand.
Sprinkler	Red	Red	White	Drain
Fire Protection Electrical-Box & Cover	Red	Red	White	Fire Alarm System

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6100 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Glass, 5000.

B. Fire and Smoke Partitions:

1. Identify partitions above ceilings on both sides of partitions except within shafts in letters not less than 64 mm (2 1/2 inches) high.
2. Stenciled message: "SMOKE PARTITION" or, "FIRE PARTITION" as applicable.
3. Locate not more than 6100 mm (20 feet) on center on corridor sides of partitions, and with a least one message per room on room side of partition.
4. Use semi-gloss paint of color that contrasts with color of substrate.

C. Identify columns in pipe basements and interstitial space:

1. Apply stenciled number and letters to correspond with grid numbering and lettering shown.
2. Paint numbers and letters 100 mm (4 inches) high, locate 450 mm (18 inches) below overhead structural slab.
3. Apply on four sides of interior columns and on inside face only of exterior wall columns.
4. Color:
 - a. Use black on concrete columns.
 - b. Use white or contrasting color on steel columns.

3.13 PROTECTION CLEAN UP, AND TOUCH-UP

- A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
- B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
- C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

SECTION 10 11 13
TACKBOARDS AND MARKERBOARDS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies tackboards (bulletin boards), markerboards and related items.
- B. Boards may be either factory or field assembled.

1.2 QUALITY ASSURANCE

- A. Boards shall be the products of one manufacturer.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Shop Drawings: Identifying all parts by name and material and showing design, construction, installation, anchorage and relation to adjacent construction.
- C. Manufacturer's Literature and Data:
 - 1. Tackboard.
 - 2. Markerboard.
- D. Samples:
 - 1. Markerboard writing surface, 300 by 300 mm (six by six inches), each color, mounted on backing.
 - 2. Tackboard, 300 mm x 300 mm (six inch x six inches), each color mounted on backing.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. National Association of Architectural Metal Manufacturers (NAAMM):
 - AMP 500 SeriesMetal Finishes Manual
 - AMP 501Finishes for Aluminum
- C. American National Standards (ANSI):
 - Z97.1-09Safety Glazing Materials Used in Buildings -
Safety Performance Specifications and Methods of
Test
- D. American Society for Testing and Materials (ASTM):
 - B221/B221M-08Aluminum and Aluminum Alloy Extruded Bars, Rods,
Wire, Shapes and Tubes
 - C1036-06Flat Glass
 - C1048-04Heat-Treated Flat Glass-Kind HS, Kind FT Coated
and Uncoated Glass
 - F104-03 (R2009)Nonmetallic Gasket Materials

E. Composite Panel Association (CPA):

A208.1-09Particleboard

A135.4-04Basic Hardboard

F. Porcelain Enamel Institute PEI

1001-11.....Architectural Porcelain Enamel

PART 2 - PRODUCTS**2.1 TACKBOARD AND MARKERBOARD**

- A. Tackboards shall consist of a 1/2" cork tack board, wood frame, grounds and other items specified and shown.
- B. Porcelain-Enamel Markerboards: balanced, high-pressure, factory laminated markerboards assembly of three-ply construction consisting of backing sheet, core material and 0.021 inch (0.53 mm) porcelain-enamel face with low gloss finish.

2.2 FABRICATION

A. Materials - Tackboards:

- 1. Wood
- 2. Cork: ASTM F104. Type II, mildew resistant, Class 2.

B. Materials - Markerboard:

- 1. Aluminum, extruded: ASTM B221.
- 2. Backing: Hardboard, AHBA A135.4 or particleboard, CPA A208.1.

C. Components - Tackboards:

- 1. Tackboard: Cork face, 12 mm (1/2-inch) thick factory laminated to a hardboard or particleboard backing.
- 2. Frames (Trim): Wood, depth and configuration as required to return to wall and engage clips.
- 3. Display Rail: Snap-on type, extruded aluminum, approximate face width one inch with 12 mm (1/2-inch) thick cork insert.
- 4. Grounds: Continuous zinc-coated (galvanized) steel or extruded aluminum members designed to support the tackboard.
- 5. Clips: Manufacturer's standard as required to support frame, mullions, and display rail.

D. Components - Markerboard:

- 1. Writing Surface: Factory assembly consisting of face sheet of 24 gauge sheet steel with porcelain enamel board texture finish conforming to PEI S-100, laminated to a hardboard or particleboard backing, 9 mm to 13 mm (3/8 to 1/2-inch) thick, and a 0.13 mm (0.005-inch) thick aluminum foil back sheet laminated to back-face.
- 2. Frames (Trim): Extruded aluminum, 1.5 mm (0.060-inch) thick, snap-on type, approximate face width 44 mm (1-3/4 inch), depth and configuration as required to return to wall and engage clips.

3. Trough: Extruded aluminum, 2.34 mm (0.092-inch) thick, not less than 75 mm (3-inch) projection from writing surface with grooved top surface, closed ends and return to wall surface at underside. Design to be snap-on type with concealed fasteners.
4. Grounds: Continuous zinc-coated (galvanized) steel or extruded aluminum members designed to support the board writing surface and clips for snap-on frames, and marker tray.
5. Clips: Manufacturer's standard as required to support frame, and trough.
- E. Boards 3660 mm (12 feet) or less in length shall be in one piece.
- F. Finish exposed aluminum surfaces as follows:
 1. AA 45 chemically etched medium matte, with clear anodic coating Class II Architectural, 0.4 mils thick (AA-M12C22A32).

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Install units in accordance with the manufacturer's installation instructions, use concealed fasteners.
- B. Inspect surfaces and related construction to receive units. Partitions shall have reinforcing to receive fasteners. Verify type and placement of reinforcement.
- C. Do not proceed with the installation until reinforcement is in place and surfaces are flat.
- D. Assemble units as specified by the manufacturer.

3.2 INSTALLATION OF TACKBOARDS AND MARKERBOARDS

- A. Mount board with adhesive and blocking pads spaced 16 inches on center each way.
- B. Grounds designed to receive clips for snap-on trim shall be continuous and be secured 300 mm (12 inches) on center. Space clips 300 mm (12 inches) on center.
- C. Miter trim at corners, conceal fasteners. Modify trim as required to conform to surrounding construction details.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 10 11 23
GLASS DOOR BULLETIN BOARDS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies glass door bulletin boards and related items.
- B. Boards may be either factory or field assembled.

1.2 QUALITY ASSURANCE

- A. Boards shall be the products of one manufacturer.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Shop Drawings: Identifying all parts by name and material and showing design, construction, installation, anchorage and relation to adjacent construction.
- C. Manufacturer's Literature and Data:
 - 1. Glass door bulletin board.
- D. Samples:
 - 1. Tackboard, 300 by 300 mm (six by six inches), each color, mounted on backing.
 - 2. Integrally colored anodized aluminum, 300 mm (six inch) length.
 - 3. Cork filled map rail, 300 mm (six inch) length.
 - 4. Each accessory (after approval, may be used in the work).

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. National Association of Architectural Metal Manufacturers (NAAMM):
 - AMP 500 SeriesMetal Finishes Manual
 - AMP 501Finishes for Aluminum
- C. American National Standards Institute(ANSI):
 - Z97.1-09Safety Glazing Materials Used in Buildings -
 Safety Performance Specifications and Methods of
 Test
- D. American Society for Testing and Materials (ASTM):
 - B221/B221M-08Aluminum and Aluminum Alloy Extruded Bars, Rods,
 Wire, Shapes and Tubes
 - C1036-06Flat Glass
 - C1048-04Heat-Treated Flat Glass-Kind HS, Kind FT Coated
 and Uncoated Glass
 - F104-03(R2009)Nonmetallic Gasket Materials

- E. Composite Panel Association (CPA):
 A208.1-09Particleboard
 A135.4-04Basic Hardboard

PART 2 - PRODUCTS

2.1 GLASS DOOR BULLETIN BOARD

- A. Glass door bulletin board shall consist of a tackboard, aluminum tubular frame, hinged aluminum framed glazed doors and other items specified and shown.

2.2 FABRICATION

A. Materials:

1. Aluminum, extruded: ASTM B221.
2. Cork: ASTM F104, Type II, mildew resistant, Class 2.
3. Tempered Glass: ASTM C1048, Clear Kind FT, Condition A, Type I, Class 1, Quality q3, 6 mm (1/4-inch) thick. Safety glass, ANSI Z97.1, labeled.
4. Backing: Hardboard, AHBA A135.4 or particleboard, CPA A208.1.

B. Components:

1. Tackboard: Cork face, 6 mm (1/4-inch) thick factory laminated to a hardboard or particleboard backing.
2. Frames (Trim): Extruded aluminum, 1.5 mm (0.060-inch) thick, snap-on type, approximate face width 44 mm (1-3/4 inch), depth and configuration as required to return to wall and engage clips.
3. Display Rail: Snap-on type, same materials as frames, approximate face width one inch with 6 mm (1/4-inch) thick cork insert.
4. Mullions: Snap-on type, same material and face width as frames, designed to finish flush with frame.
5. Grounds: Continuous zinc-coated (galvanized) steel or extruded aluminum members designed to support the tackboard and clips for snap-on frames, and map rail
6. Clips: Manufacturer's standard as required to support frame, mullions, and display rail,
7. Tubular Frame (For glass door bulletin board): Extruded aluminum, 2.34 mm (0.092 inches) thick; tubular or open back in section, with flanges for concealed attachment, designed to support door hardware and tackboard.

- C. Bulletin boards 3660 mm (12 feet) or less in length shall be in one piece. Larger units shall have one joint at center. Joints shall have metal spline, with faces in same plane and edges shall touch along entire length.

- D. Finish exposed aluminum surfaces as follows:

1. AA 45 chemically etched medium matte, with clear anodic coating Class II Architectural, 0.4 mils thick (AA-M12C22A32).

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Install units in accordance with the manufacturer's installation instructions, use concealed fasteners.
- B. Inspect surfaces and related construction to receive units. Partitions shall have reinforcing to receive fasteners. Verify type and placement of reinforcement.
- C. Do not proceed with the installation until reinforcement is in place and surfaces are flat.
- D. Assemble units as specified by the manufacturer.

3.2 INSTALLATION OF GLASS DOOR BULLETIN BOARDS

- A. Glass door bulletin board units shall be factory assembled, except tackboard may be either field mounted or shop mounted on frame.
- B. Mounting bolts or screws shall be oval head of stainless steel or chromium plated steel or brass. Space fasteners 500 mm (20 inches) on center, except not less than three fasteners each side, top and bottom. Heads of fasteners shall not show on the frame face.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 10 14 00**SIGNAGE****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This section specifies interior signage for room numbers, directional signs, and code required signs.

1.2 RELATED WORK

- A. Lighted EXIT signs for egress purposes are specified under Division 26, ELECTRICAL.

1.3 MANUFACTURER'S QUALIFICATIONS

- A. Sign manufacturer shall provide evidence that they regularly and presently manufacturer's signs similar to those specified in this section as one of their principal products.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Samples: Sign panels and frames, with letters and symbols, each type. Submit 2 sets of each type indicated below. One set of samples will be retained by COTR, other returned to Contractor.
1. Sign Panel:
 - a. Type E.3, min. size, 237 mm x 200 mm (9.5 inches x 8 inches), with letters.
 - b. Type F6x6, min. size, 150 mm x 150 mm (6 inches x 6 inches).
 2. Color samples of each color, 150 mm x 150 mm (6 inches x 6 inches). Show anticipated range of color and texture for each sign type/manufacturer.
 3. Sample of typeface, arrow and symbols in a typical full size layout, for each sign type/manufacturer.
- C. Manufacturer's Literature:
1. Showing the methods and procedures proposed for the concealed anchorage of the signage system to each surface type.
 2. Manufacturer's printed specifications, anchorage details, installation and maintenance instructions.
- D. Samples: Sign location plan and sign schedule, showing location, type and total number of signs required. Use same designations as indicated on signage schedule.
- E. Shop Drawings: Scaled for manufacture and fabrication of sign types. Identify materials, show joints, welds, anchorage, accessory items, mounting and finishes.

1.5 DELIVERY AND STORAGE

- A. Deliver materials to job in manufacturer's original sealed containers with brand name marked thereon. Protect materials from damage.
- B. Package to prevent damage or deterioration during shipment, handling, storage and installation. Maintain protective covering in place and in good repair until removal is necessary.
- C. Deliver signs only when the site and mounting services are ready for installation work to proceed.
- D. Store products in dry condition inside enclosed facilities.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM).
- C. Federal Specifications (Fed Spec):
 MIL-PRF-8184F.....Plastic Sheet, Acrylic, Modified.
 MIL-P-46144C.....Plastic Sheet, Polycarbonate

1.7 MINIMUM SIGN REQUIREMENTS

- A. Permanent Rooms and Spaces:
 - 1. Tactile and Braille Characters, raised minimum 0.625 mm (.025 in). Characters shall be accompanied by Grade 2 Braille.
 - 2. Type Styles: Characters shall be uppercase, Helvetica Bold, HBI102.
 - 3. Character Height: Minimum 16 mm (5/8 in) high, Maximum 50 mm (2 in).
 - 4. Symbols (Pictograms): Equivalent written description shall be placed directly below symbol, outside of symbol's background field.
 - 5. Finish and Contrast: Characters and background shall be eggshell, matte or other non-glare finish with adequate contrast with background.
 - 6. Mounting Location and Height: Mounted on wall adjacent to the latch side of the door and to avoid door swing and protruding objects, per Architectural Barriers Act (ABA).

PART 2 - PRODUCTS**2.1 GENERAL**

- A. Signs of type, size and design as specified.
- B. Signs complete with lettering, framing and related components for a complete installation.
- C. Provide graphics items as completed units produced by a single manufacturer for each sign type, including necessary mounting accessories, fittings and fastenings.
- D. Do not scale drawings for dimensions. Contractor to verify and be responsible for all dimensions and conditions shown by these drawings.

COTR to be notified of any discrepancy in drawing, in field directions or conditions, and/or of any changes required for all such construction details.

- E. The Sign Contractor, by commencing work of this section, assumes overall responsibility, as part of his warranty of work, to assure that assemblies, components and parts shown or required within the work of the section, comply with the Contract Documents. The Contractor shall further warrant: That all components, specified or required to satisfactorily complete the installation are compatible with each other and with conditions of installations.

2.2 PRODUCTS

- A. Interior Signage Basis-of-Design Product, 1st and 3rd floors: Fusion 29 (ARCH), as manufactured by Takeform Architectural Graphics, One Mahar Way, Medina, NY 14103, 1.800.528.1398, or approved equal.
- B. Interior Signage Basis of Design: (2nd Floor)
 - 1. 2/90 Sign System, fix sign series, Frangible Signage for Mental Health Occupancies, 5350 Corporate Grove Blvd. SE, Grand Rapids, MI 49512, 1.800.777.4310 or an approved equal.

2.3 SIGN STANDARDS

- A. Intent: It is the intent of these specifications to establish a sign standard for each portion of the project including but not limited to primary room identification, restrooms, conference rooms, and all code compliant signage.
- B. Topography:
 - 1. Type Style: Helvetica Bold, HB102. Copy shall be a true, clean, accurate reproduction of typeface specified. Upper and lower case or all caps as indicated in sign type Drawings and signage schedule. Letter spacing to be normal and interline spacing shall be set by manufacturer.
 - 2. Arrows, symbols, and logo art: To be provided in size, style, color, and spacing as indicated in sign schedule.
 - 3. Grade II Braille utilizing perfectly round, clear insertion beads
- C. Colors and Finishes, 1st & 3rd Floors:
 - 1. Face Material: Travertine LT3526.
 - 2. Backer Material: Acajou Mahogany 7008.
 - 3. Metal Accent: Natural.
 - 4. Raised Text Color: Espresso C0402.
 - 5. Insert Color/Graphic: White Paper.
 - 6. Insert Text Color: Black C0101.
 - 7. Finishes are to meet current ABA standards.
- D. Colors and Finishes, 2nd Floor:

1. Face Material: To be selected from manufacturer's full range of colors.
2. Backer Material: To be selected from manufacturer's full range of colors.
3. Raised Text Color: Black.
4. Insert Color/Graphic: White Paper.
5. Insert Text Color: Black.
6. Finishes are to meet current ABA standards.

2.4 INTERIOR SIGN TYPES - 1ST & 3RD FLOORS

A. General:

1. The signage shall incorporate a decorative laminate face with applied graphics including all tactile requirements in adherence to ABA specifications.
2. All signs shall have a matching appearance and be constructed utilizing the same manufacturing process to ensure a consistent look throughout.

B. Materials:

1. Sign face shall be 0.035" (nominal) standard grade, high pressure surface laminate. A painted sign face will not be acceptable.
2. The substrate shall be Green 209, a natural fiberwood product with SFI certification. The signs shall incorporate balanced construction, with the core sandwiched between laminates to prevent warping. An acrylic substrate will not be acceptable. Laminate on the sign face only, will also not be acceptable.
3. Tactile lettering shall be precision machined, raised 1/32", matte PETG and subsurface colored for scratch resistance.
4. Signs shall incorporate a metal accent bar. Bars shall be anodized with a brushed satin finish. Painted bars will not be acceptable.
5. Signs and backer edge shall be treated with a hot wax seal for moisture integrity.

C. Standard Colors:

1. Face/Background color shall be standard grade, high pressure laminate, all colors and finishes, as indicated.
2. Standard tactile colors shall match manufacturers ADA standard color selection, as indicated.

D. Construction:

1. The signage shall be capable of accepting paper or acetate inserts to allow changing and updating as required. Insert components shall have a 0.080" thickness non-glare acrylic window and shall be inlaid, flush to sign face for a smooth, seamless appearance.

2. The signage shall, with the exception of directories and directionals, be a uniform 8 1/2" width to facilitate inserts printed on standard width paper.
 3. The signage contractor shall install all signage inserts.
 4. Manufacturer shall provide a template containing layout, font, color, artwork and trim lines to allow Owner to produce inserts on laser or ink jet printer. The template shall be in Acrobat or Word format.
 5. The signage shall include modules allowing for inserts, notice holders, occupancy sliders, marker, magnetic and cork pin boards. All modules shall be flush to sign face for a smooth, seamless appearance.
 6. The laminates (front and back) shall be pressure laminated and precision machines together to a 90-degree angle. Edges shall be smooth, void of chips, burrs, sharp edges and marks.
 7. The signage shall utilize an acrylic sphere for grade II Braille inserted directly into a scratch resistant, high pressure laminate, sign face, Braille Dots are to be pressure fit in high tolerance drilled holes.
 8. Braille dots shall be half hemispherical domed and protruding a minimum of 0.025".
 9. The signage shall utilize a water based adhesive, the adhesive shall be non-hazardous and shall allow for flexing and deflection of the adhered components due to changes in temperature and moisture without bond failure.
 10. All signs shall be provided with appropriate mounting hardware. Hardware shall be finished and architectural in appearance and suitable for the mounting surface.
- E. Sign Schedule, 1st Floor:
1. Code and facility signage:
 - a. Sign Type D: Qty-1, Evacuation Map
 - b. Sign Type E-2: Qty-2, Restroom
 - (1-Text: Men's, w/Pictogram P3)
 - (1-Text: Women's, w/Pictogram P4)
 - c. Sign Type: E-3: Qty-2, Misc. Room ID
 - (Text: Housekeeping)
 - (Text: Storage)
 - d. Sign Type J: Qty-2, Conference Room, with vacant/in-use slider.
 - e. Sign Type: H: Qty-4, Room ID w/2.75" changeable insert.
- F. Sign Schedule, 3rd Floor:
1. Code and facility signage:
 - a. Sign Type D: Qty-5, Evacuation Map

- b. Sign Type E.2: Qty-3, Restroom
 - (2-Text: Staff Restroom, w/Pictogram P6)
 - (1-Text: Unisex, w/Pictogram P6)
- c. Sign Type: E.3: Qty-24, Misc. Room ID
 - (1-Text: Housekeeping)
 - (1-Text: Physician/Residents Office)
 - (1-Text: Nurse Station)
 - (1-Text: Consultation)
 - (1-Text: Report)
 - (2-Text: Linen)
 - (2-Text: Soiled)
 - (2-Text: Clean Supply)
 - (2-Text: Electrical)
 - (1-Text: Satellite Pharmacy)
 - (1-Text: Locker/Lounge)
 - (2-Text: O2)
 - (1-Text: Medication)
 - (2-Text: Nourishment)
 - (1-Text: Tub Room)
 - (2-Text: Comm Room)
 - (1-Text: Equipment Storage)
- d. Sign Type E: Qty-4, Misc. Room ID.
 - (Text: Stairs)
- e. Sign Type H: Qty-2, Room ID w/2.75" changeable insert.
- f. Sign Type F: Qty-22, Small Room ID, w/6-sliders, double sided.
Sliders text/color to be as follows:
 - 1) NOP and Fluid Restriction - 02 Park Blue.
 - 2) Fall Risk and movement Supervision - 05 Yellow.
 - 3) Swallow Precautions and Movement Supervision - 04 Orange.
 - 4) Contact Precautions and Droplet Precautions - 01 Red.
 - 5) Airborne Precautions and Special Precautions - 01 Red.
 - 6) No Venipuncture Right Arm and No Venipuncture Left Arm - 06 Purple.
- g. Final slider count, text and colors to be confirmed by VA.

2.5 INTERIOR SIGN TYPES - 2ND FLOOR

A. General:

- 1. The signage shall incorporate a decorative laminate face with applied graphics including all tactile requirements in adherence to ABA specifications.

2. All signs shall have a matching appearance and be constructed utilizing the same manufacturing process to ensure a consistent look throughout.

B. Materials:

1. High performance Cast PVC vinyl bonded with a profile film reverse cut by computer, and applied subsurface to clear, vacuum thermoformable PETG.

C. Standard Colors:

1. Face/Background color shall be standard grade, high pressure laminate, all colors and finishes, as indicated.
2. Standard tactile colors shall match manufacturers ADA standard color selection, as indicated.

D. Construction:

1. The signage shall be capable of accepting paper or acetate inserts to allow changing and updating as required. Insert components shall have a 0.080" thickness non-glare acrylic window and shall be inlayed, flush to sign face for a smooth, seamless appearance.
2. The signage shall, with the exception of directories and directionals, be a uniform 6" width to facilitate inserts printed on standard width paper.
3. The signage contractor shall install all signage inserts.
4. Manufacturer shall provide a template containing layout, font, color, artwork and trim lines to allow Owner to produce inserts on laser or ink jet printer. The template shall be in Acrobat or Word format.
5. The signage shall include modules allowing for inserts, notice holders, occupancy sliders, marker, magnetic and cork pin boards. All modules shall be flush to sign face for a smooth, seamless appearance.
6. The laminates (front and back) shall be pressure laminated and precision machines together to a 90-degree angle. Edges shall be smooth, void of chips, burrs, sharp edges and marks.
7. The signage shall utilize an acrylic sphere for grade II Braille inserted directly into a scratch resistant, high pressure laminate, sign face, Braille Dots are to be pressure fit in high tolerance drilled holes.
8. Braille dots shall be half hemispherical domed and protruding a minimum of 0.025".
9. The signage shall utilize a water based adhesive, the adhesive shall be non-hazardous and shall allow for flexing and deflection of the adhered components due to changes in temperature and moisture without bond failure.

10. All signs shall be provided with appropriate mounting hardware. Hardware shall be finished and architectural in appearance and suitable for the mounting surface.

E. Sign Schedule, 2nd Floor:

1. Code and facility signage:
 - a. Sign Type FPWH: Qty-1, Evacuation Map
 - b. Sign Type F8x8SYM: Qty-1, Restroom
(1-Text: Staff Restroom, w/Pictogram P6)
 - c. Sign Type: F6x6: Qty-25, Misc. Room ID
(1-Text: Nourishment)
(1-Text: Equipment Storage)
(1-Text: Dayroom)
(1-Text: Activity Room)
(1-Text: Interview)
(1-Text: Clean Linen)
(1-Text: Electrical)
(1-Text: Clean Supply)
(1-Text: Laundry)
(1-Text: Soiled)
(1-Text: Consultation)
(2-Text: Head Nurse Office)
(1-Text: Housekeeping)
(1-Text: Seclusion)
(1-Text: O2)
(1-Text: Patient Storage)
(2-Text: Comm Room)
(1-Text: Conference/Report)
(1-Text: Satellite Pharmacy)
(1-Text: Student Office)
(1-Text: Medication)
(1-Text: Staff Workroom)
(1-Text: Locker/Lounge)
 - d. Sign Type: F4x6: Qty-8, Room Number Only
 - e. Sign Type: F8x6SYM: Qty-3
 - f. Sign Type: H: Qty-3, Room ID w/3" changeable insert
 - g. Sign Type: FPW: Qty-1. Floor Informational Sign.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Protect products against damage during field handling and installation. Protect adjacent existing and newly placed construction, and finishes as necessary to prevent damage during installation. Paint and touch up any

exposed fasteners and connecting hardware to match color and finish of surrounding surface.

- B. Mount signs in proper alignment, level and plumb according to the sign location plan and the dimensions given on elevation and sign location drawings. Where otherwise not dimensioned, signs shall be installed where best suited to provide a consistent appearance throughout the project. When exact position, angle, height or location is in doubt, contact Resident Engineer for clarification.
- C. Contractor shall be responsible for all signs that are damaged, lost or stolen while materials are on the job site and up until the completion and final acceptance of the job.
- D. Remove or correct signs or installation work COTR determines as unsafe or as an unsafe condition.
- E. At completion of sign installation, clean exposed sign surfaces. Clean and repair any adjoining surfaces and landscaping that became soiled or damaged as a result of installation of signs.
- F. Locate signs as shown on the Sign Location Plans.
- G. Certain signs may be installed on glass. A blank glass back up is required to be placed on opposite side of glass exactly behind sign being installed. This blank glass back up is to be the same size as sign being installed.
- H. Contractor will be responsible for verifying that behind each sign location there are no utility lines that will be affected by installation of signs. Any damage during installation of signs to utilities will be the sole responsibility of the Contractor to correct and repair.
- I. Furnish inserts and anchoring devices which must be set in concrete or other material for installation of signs. Provide setting drawings, templates, instructions and directions for installation of anchorage devices which may involve other trades.
- J. Install signage on 2nd floor per manufacturer recommendations so signage cannot be removed from wall by patient. Additionally, seal any gap between signs and adjoining wall surface with non-removable sealant to avoid tampering and provide a ligature resistant installation.

- - - END - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 10 21 13
TOILET COMPARTMENTS**

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies metal toilet partitions.

1.2 RELATED WORK

- A. Grab bars and toilet tissue holders: Section 10 28 00, TOILET, BATH, AND LAUNDRY ACCESSORIES.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
 - 1. Samples for initial selection: Provide manufacturer's brochures with available colors.
 - 2. Samples for final selection: Provide a six-inch (150 mm) square metal panel with the selected color of baked enamel finish.
- C. Manufacturer's Literature and Data: Specified items indicating all hardware and fittings, material, finish, and latching.
- D. Shop Drawings: Construction details at 1/2 scale, showing installation details, anchoring and leveling devices.
- E. Manufacturer's certificate, attesting that zinc-coatings conform to specified requirements.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
FF-B-575CBolt, Hexagon and Square
- C. Code of Federal Regulations (CFR):
40 CFR 247Comprehensive Procurement Guidelines for
Products Containing Recovered Materials
- D. Commercial Item Descriptions (CID):
A-A-1925Shield, Expansion (Nail Anchors)
A-A-60003Partitions, Toilet, Complete

PART 2 - PRODUCTS

2.1 TOILET PARTITIONS:

- A. Conform to Fed. CID A-A-60003, except as modified herein.
- B. Fabricate to dimensions shown or specified.

C. Toilet Enclosures:

1. Type 1, Style A/C floor supported and overhead braced.
2. Reinforce panels shown to receive toilet tissue holders or grab bars.
3. Upper pivots and lower hinges adjustable to hold doors open 30 degrees.
4. Latching devices and hinges for handicap compartments shall comply with ADA requirements.
5. Keeper:
 - a. U-slot to engage bar of throw latch.
 - b. Combined with rubber bumper stop.
6. Wheelchair Toilets:
 - a. Upper pivots and lower hinges to hold out swinging doors in closed position.
 - b. Provide U-type doors pulls, approximately 100 mm (four inches) long on pull side.
7. Finish:
 - a. Finish 1 (baked enamel) on steel doors, pilasters, and enclosure panels.
 - b. Color of baked enamel finish: Selected from manufacturer's full line of standard colors.

2.2 FASTENERS

- A. Partition Fasteners: CID A-A-60003.
- B. Use expansion bolts, CID A-A-60003, for anchoring to solid masonry or concrete.
- C. Use toggle bolts, CID A-A-60003, for anchoring to hollow masonry or stud framed walls.
- D. Use steel bolts FS-B-575, for anchoring pilasters to overhead steel supports.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General:
 1. Install in rigid manner, straight, plumb and with all horizontal lines level.
 2. Conceal evidence of drilling, cutting and fitting in finish work.
 3. Use hex-bolts for through-bolting.
 4. Adjust hardware and leave in freely working order.
 5. Clean finished surfaces and leave free of imperfections.

B. Panels and Pilasters:

1. Support panels and pilaster abutting building walls near top and bottom by stirrup supports secured to partitions with through-bolts.
2. Secure stirrups to walls with two suitable anchoring devices for each stirrup.
3. Secure panels to faces of pilaster near top and bottom with stirrup supports, through-bolted to panels and machine screwed to each pilaster.
4. Secure edges of panels to edges of pilasters near top and bottom with "U" shaped brackets.
5. Where overhead braced, secure pilasters to building walls by headrails clamped on or set into top of each pilaster.
 - a. Secure clamps to pilasters with two through-bolts to each clamp.
 - b. When headrails are set into pilasters, through-bolt them to the pilasters.
 - c. Support headrails on wall flange fittings secured to building walls with minimum of two anchor bolts to each flange fitting.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 10 21 23
CUBICLE CURTAIN TRACKS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies cubicle curtain track (C.C.T.), shower curtain track, and shower curtains.

1.2 RELATED WORK

- A. Suspended Ceiling Systems: Section 09 51 00, ACOUSTICAL CEILINGS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
1. One 300 mm (12 inch) long piece of cubicle curtain track with carrier access and end stop.
 2. One curtain carrier.
 3. For each type of curtain material indicated.
 - a. Curtain Fabric: 304.8 mm (12-inch) square swatch. Mark top and face of material.
 - b. Mesh Top: Not less than 101.6 mm (4-inch).
- C. Manufacturer's Literature and Data:
1. Cubicle curtain track and each type of curtain fabric

1.4 DELIVERY, STORAGE AND HANDLING

- A. Deliver material in original package marked to identify the contents, brand name, and the name of the manufacturer or supplier.
- B. Store in dry and protected location. Store so as to not bend or warp the tracks.
- C. Do not open packages until contents are needed for installation, unless verification inspection is required.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
- B221-08Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes.
- B456-03(R2009)Electrodeposited Coatings for Copper Plus Nickel Plus Chromium and Nickel Plus Chromium
- C. The National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500 SeriesMetal Finishes Manual

PART 2 - PRODUCTS

2.1 CUBICLE CURTAIN TRACKS/SHOWER CURTAIN TRACKS

- A. Surface mounted (where indicated on the Drawings):
 - 1. Channel Tracks (Surface Mounted Type): Extruded aluminum, ASTM B221, alloy 6063, temper T5 or T6, channel shaped, with smooth inside raceway for curtain carriers.
- B. Recessed (In Mental Health and Behavioral areas and where indicated on the Drawings):
 - 1. Channel Track: Extruded aluminum, ASTM B221, alloy 6063, temper T5 or T6, channel shaped, with smooth inside raceway for curtain carriers.
- C. Curtain Carriers: Nylon or delrin carriers, with either nylon or delrin wheels on metal, delrin, or nylon axles. Equip each carrier with either stainless steel, chromium plated brass or steel hooks with swivel, or nickel chromium plated brass or stainless steel bead chain and hook assembly, or delrin carriers may have moulded on delrin hooks. Hook for bead chain may be the same material and finish as the bead chain or may be chromium plated steel. Provide 2.2 carriers for every 300 mm (onefoot) of each section of each track length, plus one additional carrier.
 - 1. Curtain Carriers in Mental Health and Behavioral areas: Nylon or delrin carrier with either nylon or delrin wheels on nylon or delrin axels. Equip each carrier with nylon or delrin hooks or Velcro tabs that will allow the curtain to collapse with less than 4 pounds (1.81 kg) of weight applied.
- D. End Stop Connectors, Ceiling Flanges and Other Accessories: Fabricate from the same material with the same finish as the tracks or from nylon.
- E. Fittings: Fabricate from the same material with the same finish as the tracks. Design fittings to be compatible with design of tracks and to safely transmit the track load.
- F. At end of each section of track, make provision for insertion and removal of carriers. Design to prevent accidental removal of carrier. Any operating mechanism shall be removable with common tools.

2.2 CUBICLE CURTAINS

- A. Fabrics are launderable to a temperature of not more than 160 deg F (71 deg C).
- B. Fabrics are inherently flame resistant and are identical to those that have passed NFPA 701 when tested by a testing and inspecting agency acceptable to authorities having jurisdiction.

2.3 VINYL SHOWER CURTAINS

- A. Construction: 1 3/8" triple thick top hem consisting of one ply of the curtain material, a 1 1/8" reinforcement header strip of closely woven mesh, covered by an 8 gauge clear strip of vinyl; SAFE-T-TOP™ to be sewn with double needle construction, 1 1/8" between stitching rows.
- B. Hem: Top hem to also have two-piece rustproof anodized aluminum grommets on 6" centers. No bottom hem, allowing for easy run-off of soap and water.
- C. Vinyl to be formulated with an anti-microbial to insure maximum mildew resistance for life of the shower curtain.
- D. Anti-static vinyl.

2.4 FABRIC SHOWER CURTAINS

- A. Construction: 1 3/8" triple thick top hem consisting of a double layer of curtain material, a 1 1/8" reinforcement header strip of closely woven mesh; SAFE T-TOP ™ to be sewn with double needle construction, 1 1/8" between stitching rows.
- B. Top hem: To also have reinforced sewn button holes on 6" centers.
- C. Side hem: Full length double thick turned 1/2" side hems locking the left and right sides of the curtain from top to bottom, eliminating raw edges.
- D. Bottom hem: Reverse double thick turned 1/2" bottom hem, eliminating raw bottom edge and allowing for easy run-off of soap and water.
- E. Polyester and nylon to be treated with durable water repellent finish to insure water and stain repellency.

2.5 FASTENERS

- A. Exposed Fasteners, Screws and Bolts: Stainless steel or chromium/nickel plated brass. Exposed fasteners for curtain tracks installed in Mental Health and Behavioral areas shall be tamper-proof screws.
- B. Concealed Fasteners, Screws and Bolts: Hot-dip galvanized (except in high moisture areas use stainless steel).
- C. Metal Clips: Anchor curtain tracks to exposed grid of lay-in acoustical tile ceilings, with concealed metal (butterfly) type or two piece snap locking type ceiling clip of high strength spring steel. When it is not possible to install the metal ceiling clip, the cubicle curtain track may be screwed to the ceiling grid.

2.6 FINISHES

- A. Aluminum: Chemically etched medium matte, with clear anodic coating, Class II.
- B. Chrome/Nickel Plating: Satin or polished finish as specified, ASTM B546, minimum thickness of chromium plate as follows:

1. 0.2 mil on copper alloys.
2. 0.4 mil on steel.

2.7 FABRICATION

- A. Weld and grind smooth joints of fabricated components.
- B. Form tracks and bends of lengths that will produce the minimum number of joints. Make track sections up to 4800 mm (16 feet) without joints. Form corner bend on a 300 mm (12 inch) radius.
- C. Provide steel anchor plates, supports, and anchors for securing components to building construction.
- D. Form flat surface without distortion.
- E. Shop assemble components and package complete with anchors and fittings.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install tracks after finish painting and ceiling finishing operations are complete.
 1. Coordinate with gypsum board ceiling installation at areas to receive recessed track.
- B. Install track level and hangers plumb and securely anchor to the ceiling to form a rigid installation.
- C. Anchor surface mounted curtain tracks directly to exposed grid of lay-in acoustical tile ceilings with suitable fasteners, spaced approximately 600 mm (24 inches) on center.
- D. Anchor concealed and surface mounted curtain tracks to gypsum board ceilings with a minimum of 3 mm (1/8-inch) diameter fastenings or concealed clips spaced not more than 900 mm (three feet) on center.
- E. Securely fasten end stop caps to prevent their being forced out by the striking weight of carriers.
- F. Remove damaged or defective components and replace with new components or repair to the original condition.
- G. Provide curtain carriers adequate for 152 mm (6-inch) spacing along full length of curtain plus an additional carrier.
- H. Hang curtains on each curtain track. Secure with curtain tieback.

3.2 ACCEPTANCE

- A. Track shall be installed neat, rigid, plumb, level and true, and securely anchored to the overhead construction.
- B. Carrier units shall operate smoothly and easily over the full range of travel.

- - - E N D - - -

SECTION 10 22 39
FOLDING PANEL PARTITIONS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Manually operated, acoustical panel partitions.

1.2 SUBMITTALS

A. Product Data: For each type of product. Mark literature to show product and accessories and options to be furnished

B. Shop Drawings: For operable panel partitions.

1. Include plans, elevations, sections, details, and attachments to other work.

2. Indicate stacking and operating clearances. Indicate location and installation requirements for hardware and track, blocking, and direction of travel.

C. Samples: For vinyl covering, 6-inch (152 mm) square.

D. Test reports: For sound resistant partitions.

1.3 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

1.4 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of operable panel partitions that fail in materials or workmanship within specified warranty period.

1. Warranty Period: Two years from date of Substantial Completion.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

A1008-10.....Steel, Sheet, Cold Rolled, Structural, High Strength
Carbon, Low Alloy with Improved Formability

E84-10.....Surface Burning Characteristics of Building
Materials

E90-09.....Laboratory measurement of Airborne Sound
Transmission Loss of Building Partitions and
Elements

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Seismic Performance: Operable panel partitions shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.
 - 1. The term "withstand" means "the partition panels will remain in place without separation of any parts from the system when subjected to the seismic forces specified."
- B. Acoustical Performance: Provide operable panel partitions tested by a qualified testing agency for the following acoustical properties according to test methods indicated:
 - 1. Sound-Transmission Requirements: Operable panel partition assembly tested for laboratory sound-transmission loss performance according to ASTM E 90, determined by ASTM E 413, and rated for not less than the STC indicated.
- C. Fire-Test-Response Characteristics: Provide panels with finishes complying with one of the following as determined by testing identical products by UL or another testing and inspecting agency acceptable to authorities having jurisdiction:
 - 1. Surface-Burning Characteristics: Comply with ASTM E 84 or UL 723; testing by a qualified testing agency.
 - a. Flame-Spread Index: 25 or less.
 - b. Smoke-Developed Index: 50 or less.
 - 2. Fire Growth Contribution: Complying with acceptance criteria of local code and authorities having jurisdiction when tested according to NFPA 265 Method B Protocol or NFPA 286.

2.2 OPERABLE ACOUSTICAL PANELS

- A. Operable Acoustical Panels: Partition system, including panels, seals, finish facing, suspension system, operators, and accessories.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Hufcor Series 632 or comparable product not limited to one of the following:
 - a. Advanced Equipment Corporation.
 - b. FolDoor.
 - c. KWIK-WALL Company.
 - d. Moderco Inc.
 - e. Modernfold, Inc.
 - f. Panelfold Inc.
- B. Panel Operation: Manually operated, paired panels.

- C. Panel Construction: As required to support panel from suspension components and with reinforcement for hardware attachment. Fabricate panels with tight hairline joints and concealed fasteners. Fabricate panels so finished in-place partition is rigid; level; plumb; aligned, with tight joints and uniform appearance; and free of bow, warp, twist, deformation, and surface and finish irregularities.
- D. Dimensions: Fabricate operable acoustical panel partitions to form an assembled system of dimensions indicated and verified by field measurements.
- E. STC: Not less than 45.
- F. Panel Materials:
 - 1. Steel Frame: Steel sheet, manufacturer's standard thickness.
 - 2. Steel Face/Liner Sheets: Tension-leveled steel sheet, manufacturer's standard thickness.
 - 3. Medium-Density Fiberboard: ANSI A208.2, made with binder containing no urea formaldehyde.
- G. Panel Closure: Manufacturer's standard.
- H. Hardware: Manufacturer's standard as required to operate operable panel partition and accessories; with decorative, protective finish.

2.3 SEALS

- A. General: Provide seals that produce operable panel partitions complying with performance requirements and the following:
 - 1. Seals made from materials and in profiles that minimize sound leakage.
 - 2. Seals fitting tight at contact surfaces and sealing continuously between adjacent panels and between operable panel partition perimeter and adjacent surfaces, when operable panel partition is extended and closed.
- B. Horizontal Bottom Seals: PVC-faced, mechanical, retractable, constant-force-contact seal exerting uniform constant pressure on floor when extended, ensuring horizontal and vertical sealing and resisting panel movement.
 - 1. Automatically Operated for Acoustical Panels: Extension and retraction of bottom seal automatically operated by movement of partition, with operating range not less than 2 inches (50 mm) between retracted seal and floor finish.

2.4 PANEL FINISH FACINGS

- A. General: Provide finish facings for panels that comply with indicated fire-test-response characteristics and that are factory applied to operable panel partitions with appropriate backing, using mildew-resistant nonstaining adhesive as recommended by facing manufacturer's written instructions.
 - 1. Color/Pattern: As selected by Architect from manufacturer's full range.
- B. Vinyl-Coated Fabric Wall Covering: Manufacturer's standard, mildew-resistant, washable, vinyl-coated fabric wall covering; complying with CFFA-W-101-D for type indicated; Class A.
- C. Cap-Trimmed Edges: Protective perimeter-edge trim with tight hairline joints concealing edges of panel and finish facing.
 - 1. Color: As selected by Architect from manufacturer's full range.

2.5 SUSPENSION SYSTEMS

- A. Tracks: Steel or aluminum with adjustable steel hanger rods for overhead support, designed for operation, size, and weight of operable panel partition indicated. Size track to support partition operation and storage without damage to suspension system, operable panel partitions, or adjacent construction. Limit track deflection to no more than 0.10 inch (2.54 mm) between bracket supports. Provide a continuous system of track sections and accessories to accommodate configuration and layout indicated for partition operation and storage.
- B. Carriers: Trolley system as required for configuration type, size, and weight of partition and for easy operation; with ball-bearing wheels.
 - 1. Wheels to be hardened steel ball bearings encased with molded polymer tires.

2.6 OPERATION

- A. Panels shall be manually moved from the storage area, positioned in the opening, and seals set.
- B. Automatic Floor Seals
 - 1. Horizontal seals shall be activated by pressing the edge of the panel into the edge of the adjacent panel or wall.
 - 2. Seal activation requires approximately 15 lbs (6.8 kg) of force per panel.
- C. Final Partition Closure
 - 1. Provide a pivot panel. Pivot panel is attached to the wall and permits access between adjacent rooms. Pivot panel is of the same

construction as basic panels but with a continuous contact multi-ply vinyl top and bottom seal. The end of the panel has full-height finger pull and vertical seal of multi-ply vinyl.

D. Stacking/Storing Panels

1. Panels to be exposed in the room when stacked/stored as indicated on the Drawings.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Comply with ASTM E 557 except as otherwise required by operable panel partition manufacturer's written installation instructions.
- B. Install operable panel partitions and accessories after other finishing operations, including painting, have been completed in area of partition installation.
- C. Broken, cracked, chipped, deformed, or unmatched panels are not acceptable.
- D. Broken, cracked, deformed, or unmatched gasketing or gasketing with gaps at butted ends is not acceptable.
- E. Light-Leakage Test: Illuminate one side of partition installation and observe vertical joints and top and bottom seals for voids. Adjust partitions for alignment and full closure of vertical joints and full closure along top and bottom seals.

3.2 ADJUSTING

- A. Verify that panels, gaskets, and seals operate smoothly.
- B. Verify that safety devices are properly functioning.

3.3 DEMONSTRATION

- A. Train Owner's maintenance personnel to adjust, operate, and maintain operable panels partition.

- - -END- - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 10 25 13
PATIENT BED SERVICE WALLS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation and connection of the patient wall systems both horizontal and vertical. Patient wall systems are also referred to as prefabricated bedside patient units or PBPUs.

1.2 RELATED WORK

- A. Section 22 62 00, VACUUM SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES AND Section 22 63 00, GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES: Requirements for air, oxygen and vacuum outlets in the patient wall units.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.
- C. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Raceways and outlet boxes for wiring.
- D. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- E. Section 26 27 26, WIRING DEVICES: Wiring devices to be installed in the patient wall units.
- F. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground currents.
- G. Section 26 51 00, INTERIOR LIGHTING: Lighting fixture requirements when installed in or connected to the patient wall units.
- H. Section 27 52 23, NURSE CALL/CODE BLUE SYSTEMS: Nurse Call and Code One requirements for installation in the patient wall units.

1.3 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Shop Drawings:
 - 1. Sufficient information, clearly presented, shall be included to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, dimensions, mounting details, front view, side view, equipment and device arrangement, wiring diagrams, material, and connection diagrams.
 - 3. Determine final layout of each style of patient wall system at this stage. Provide configuration drawings showing all possible device

(nurse call, medical gases, electrical receptacles and switches, etc.) locations to the Resident Engineer. The Resident Engineer will provide by return of submittal the desired configuration of each style of patient wall system. Limit the number and type of devices allowed for each style of unit to the number and type of devices specified for that style below.

C. Manuals: Two weeks prior to the final inspection, deliver four copies of the following to the Resident Engineer.

1. Complete maintenance and operating manuals including wiring diagrams, technical data sheets, and information for ordering replacement parts:

- a. Include complete "As installed" diagrams which indicate all items of equipment, their interconnecting wiring and interconnecting piping.
- b. Include complete diagrams of the internal wiring for each of the items of equipment, including "As installed" revisions of the diagrams.
- c. Identify terminals on the wiring diagrams to facilitate installation, maintenance and operation.

D. Certifications: Two weeks prior to the final inspection, deliver four copies of the following certifications to the Resident Engineer:

1. Certification by the manufacturer that the equipment conforms to the requirements of the drawings and specifications.
2. Certification by the Contractor that the equipment has been properly installed, adjusted, and tested in accordance with the manufacturer's recommendations.

1.4 APPLICABLE PUBLICATIONS:

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in text by the basic designation only.
- B. National Fire Protection Association (NFPA):
 - 70-11National Electrical Code (NEC)
 - 99-12Health Care Facilities
- C. Underwriters Laboratories, Inc. (UL):
 - UL listed in product category SECTIONS AND UNITS (QQXX). This standard used to investigate listed products in this category is NFPA 70 (NEC).

PART 2 - PRODUCTS

2.1 PATIENT WALL SYSTEMS

- A. Shall be UL listed.

- B. Shall consist of a structural framework, panels and equipment console units, factory assembled into a single unit to house all permanent bedside services including but not necessarily limited to fixtures, grounding jacks, power outlets, telephone outlet, nurses call patient station, medical gas outlet(s) and other fittings or devices.
- C. Shall conform to the following:
 - 1. Applicable requirements in NFPA 70 (NEC) and NFPA 99.
 - 2. Assembly and all components shall be UL listed or labeled.
- D. Coordinate the mounting space provisions for the nurse call equipment with Section 27 52 23, NURSE CALL/CODE BLUE SYSTEMS.
- E. Compressed Air, Oxygen and Vacuum System Equipment: Furnish, install and test the equipment in accordance with the drawings and Section 22 62 00, VACUUM SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES and Section 22 63 00, GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES.
 - 1. Fixed medical gas outlets are permanently installed in one location and may not be moved without special tools and shutting off the gas involved.

Medical gas outlets will be pre-manifolded with Type L medical copper tubing. All tubings and fittings prior to manifolding will be cleaned, rinsed and dried in accordance with NFPA 99. All joints will be made with a silver brazing alloy with a melting point of at least 1000 degrees. Tubing ends will be securely capped and properly identified. To prevent galvanic corrosion, all copper tubing will be protected from contact with dissimilar metals.

The brand and keying style of medical gas outlet will be determined during the submittal process. Final medical gas connections to the hospital shall be made by others per NFPA, NEC and state and local codes.
- F. Electrical receptacles and switches shall comply with the requirements in Section 26 27 26, WIRING DEVICES; grounding in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS; and internal wiring in Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).
- G. Style:

Single bed patient unit consisting of a factory-prefabricated assembly with gas, power and data outlets as below. All electrical devices shall be wired in accordance with the schematic diagram shown on the drawings.

 - a. Provide oxygen gas outlets: Quantity to be specified.
 - b. Provide air outlets: Quantity to be specified.
 - c. Provide vacuum outlets: Quantity to be specified.

- d. Provide emergency power outlets: Quantity to be specified. Each to be a NEMA 20R single receptacle non-illuminated red with stainless steel or anodized aluminum cover plates engraved "EMERGENCY POWER" and the circuit number from the integral panelboard feeding the receptacle with minimum 6 mm (1/4 inch) red filled letters.
 - e. Provide normal power outlets: Quantity to be specified. Each to be a NEMA 20R single white receptacle. One of them is for the bed motor. Each receptacle shall have a stainless steel or an anodized aluminum cover plate.
 - f. Provide Nurse Call of the type shown on the drawings.
 - g. Provide a Tele-cart jack only where shown on the drawings.
 - h. Provide an auxiliary light (6 to 7 watts) with hood and switch. Both shall be mounted on a stainless steel or an anodized aluminum face plate installed in a single gang box.
 - i. Provide a switch for the overhead/exam light.
 - j. Provide a patient, wall mounted, bed light fixture. Refer to Section 26 51 00, INTERIOR LIGHTING where shown on the drawings.
- H. The units shall have the following features:
- 1. Basic structural framework shall be constructed of heavy gage extruded aluminum or minimum 1.6 mm (16 gauge) cold-rolled steel, designed to be a self-supporting unit for in-wall or close wall mounting.
 - 2. Fire retarding core material surfaced with a high pressure plastic laminated facing sheet (Renolit).
 - 3. Provide surface-mounted units with enclosing back panels. In-wall units obviously need not have back panels. Attach side and back panels [sheet steel, a minimum of 1.6 mm (0.060 inch)] or equivalent strength aluminum side and back panels, with flush screws to permit close wall mounting. Finish side panels to match or compliment the front panels.
 - 4. Mount patient service components in a finish fascia.
 - a. Match finish, either anodized aluminum or stainless steel of all fascia and device face plates.
 - b. Provide smooth external surfaces having a finished appearance. Maintain adequate spacing of device plates and similar items to eliminate crevices and facilitate cleaning.
 - 6. Provide patient services as indicated in paragraphs above, the schematic wiring diagram shown on drawings, and as follows:
 - a. Electrical components: Factory assembled and prewired to a sectionalized junction box at the top of the unit in accordance with circuiting and switching arrangements shown on the drawings.

Factory assembled prewiring may be stranded in sizes AWG #10 and #12. Provide an equipotential ground bus with lugs suitable for connecting AWG #14 to AWG #6 conductors with a minimum of 48 screw-type terminals, unless otherwise shown.

- b. Receptacles: Single Hospital Grade NEMA 5-20R, unless otherwise specified.
- c. Provide medical gas components compatible with those installed elsewhere in the project that are factory assembled, manifolded and pre-piped, using medical grade copper pipe, to single point connections of each service at the top of the units.
- d. Provide nurse call services consisting of provisions for adequate space and matching face plates for the equipment and empty conduit to the sectionalized junction box at the top of the unit.
- e. Provide internal power and signal wiring in separate EMT, flexible metal conduits or approved raceway. Separate normal power circuits from emergency power circuits. Also, provide adequate supports for conduits and piping within the structural frame.
- f. Telephone outlets/jacks: Plug-in type as approved by the VAMC.
- g. Except for anodized aluminum and galvanized or stainless steel surfaces, clean and paint all other metal surfaces at the factory with primer and not less than two coats of baked enamel.

PART 3 - EXECUTION

3.1 INSTALLATION:

- A. Installation shall be in accordance with NFPA 70 (NEC), NFPA 99, and as shown on the drawings.
- B. Compressed Air, Oxygen and Vacuum System Equipment:
 - 1. Install and test the equipment and piping system in accordance with the drawings and Section 22 62 00, VACUUM SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES and Section 22 63 00, GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES.
 - 2. Install and make connections as required for a complete and operational patient wall system for each unit.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 10 26 00
WALL AND DOOR PROTECTION**

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies wall guards (crash rails or bumper guards), handrail/wall guard combinations, corner guards, chair rail and high impact wall covering.

1.2 RELATED WORK

- A. Armor plates and kick plates not specified in this section: Section 08 71 00, DOOR HARDWARE.
- B. Color and texture of aluminum and resilient material: As indicated in Drawings.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Show locations design and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Handrail/Wall Guard Combinations.
 - 2. Wall Guards.
 - 3. Corner Guards.
 - 4. Chair rail.
 - 5. High Impact Wall covering.
- D. Test Report: Showing that resilient material complies with specified fire and safety code requirements.

1.4 DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers marked with the name and brand, or trademark of the manufacturer.
- B. Protect from damage from handling and construction operations before, during and after installation.
- C. Store in a dry environment of approximately 21° C (70 degrees F) for at least 48 hours prior to installation.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A167-99(R2009)Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
 - B221-08Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

- D256-06Impact Resistance of Plastics
- D635-06Rate of Burning and/or Extent and Time of
Burning of Self-Supporting Plastics in a
Horizontal Position
- E84-09Surface Burning Characteristics of Building
Materials
- C. The National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06Metal Finishes Manual
- D. National Fire Protection Association (NFPA):
80-10Standard for Fire Doors and Windows
- E. Society of American Automotive Engineers (SAE):
J 1545-05Instrumental Color Difference Measurement for
Exterior Finishes.
- F. Underwriters Laboratories Inc. (UL):
Annual IssueBuilding Materials Directory

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Aluminum Extruded: ASTM B221, Alloy 6063, Temper T5 or T6. Aluminum alloy used for colored anodizing coating shall be as required to produce specified color.
- B. Resilient Material:
1. Extruded and injection molded acrylic vinyl or extruded polyvinyl chloride meeting following requirements:
 - a. Minimum impact resistance of 1197 ps (25 ft lbs per sq.ft) when tested in accordance with ASTM D256 (Izod impact, ft.lbs. per inch notch).
 - b. Class 1 fire rating when tested in accordance with ASTM E84, having a maximum flame spread of 25 and a smoke developed rating of 450 or less.
 - c. Rated self extinguishing when tested in accordance with ASTM D635.
 - d. Material shall be labeled and tested by Underwriters Laboratories or other approved independent testing laboratory.
 - e. Integral color with all colored components matched in accordance with SAE J 1545 to within plus or minus 1.0 on the CIE-LCH scales.
 - f. Same finish on exposed surfaces.

2.2 CORNER GUARDS

- A. Resilient, Shock-Absorbing Corner Guards: Flush mounted and Surface mounted type of 25.4 mm (1 inch radius) formed to profile shown.
1. Snap-on corner guard formed from resilient material, minimum 2 mm (0.078-inch) thick, free floating on a continuous 1.6 mm (0.063-inch) thick extruded aluminum retainer. Design retainer used for flush

mounted type to act as a stop for adjacent wall finish material. Provide appropriate mounting hardware, cushions and base plates as required.

2. Provide factory fabricated end closure caps at top and bottom of surface mounted corner guards.
3. Flush mounted corner guards installed on any fire rated wall shall maintain the fire rating of the wall. Provide fire test of proposed corner guard system to verify compliance.
 - a. Where insulating materials are an integral part of the corner guard system, the insulating materials shall be provided by the manufacturer of the corner guard system.
 - b. All exposed metal in fire rated assemblies shall have a paintable finish.

2.3 WALL GUARDS AND HANDRAILS

A. Resilient Wall Guards and Handrails:

1. Handrail/Wall Guard Combination: Snap-on covers of resilient material, minimum 2 mm (0.078-inch) thick, shall be free-floated on a continuous, extruded aluminum retainer, minimum 1.8 mm (0.072-inch) thick, anchored to wall at maximum 760 mm (30 inches) on center.
2. Wall Guards (Crash Rails): Snap-on covers of resilient material, minimum 2.8 mm (0.110-inch) thick, shall be free-floated over 50 mm (two-inch) wide aluminum retainer clips, minimum 2.3 mm (0.090-inch) thick, anchored to wall at maximum 600 mm (24 inches) on center, supporting a continuous aluminum retainer, minimum 1.6 mm (0.062-inch) thick; or, shall be free-floated over a continuous extruded aluminum retainer, minimum 2.3 (0.090-inch) thick anchored to wall at maximum 600 mm (24 inches) on center.
3. Provide handrails and wall guards (crash rails) with prefabricated and closure caps, inside and outside corners, concealed splices, cushions, mounting hardware and other accessories as required. End caps and corners shall be field adjustable to assure close alignment with handrails and wall guards (crash rails). Screw or bolt closure caps to aluminum retainer.

2.4 CHAIR RAIL

- A. Fabricate from vinyl acrylic or polyvinyl chloride resilient material minimum 1.8 mm (.070 inch) thick designed specifically for indoor use.
- B. Continuous aluminum retainer minimum 1.5 mm (.060 inch) thickness.
- C. Fabricate aluminum retainer; fasten vinyl cover with self-tapping screws.

2.5 HIGH IMPACT WALL COVERING

- A. Fabricate from vinyl acrylic or polyvinyl chloride resilient material minimum 6mm (0.06 inch) thick designed specially for interior use.
- B. Coordinate with door guard rail protection material and supplier for proper fit, installation and color.
- C. Provide adhesive as recommended by the wall covering manufacturer.

2.6 FASTENERS AND ANCHORS

- A. Provide fasteners and anchors as required for each specific type of installation.
- B. Where type, size, spacing or method of fastening is not shown or specified, submit shop drawings showing proposed installation details.

2.7 FINISH

- A. In accordance with NAAMM AMP 500 series.
- B. Aluminum:
 - 1. Concealed aluminum: Mill finish as fabricated, uniform in color and free from surface blemishes.
- C. Resilient Material: Embossed texture and color in accordance with SAE J 1545 and as specified in Section 09 06 00, SCHEDULE FOR FINISHES.

PART 3 - INSTALLATION**3.1 RESILIENT CORNER GUARDS**

Install corner guards on walls in accordance with manufacturer's instructions.

3.2 RESILIENT HANDRAIL AND RESILIENT WALL GUARDS (CRASH RAIL)

Secure guards to walls with mounting brackets and fasteners in accordance with manufacturer's details and instructions.

3.3 CHAIR RAIL

- A. Secure chair rail to walls with fasteners in accordance with manufacturer's details and instructions.

3.4 HIGH IMPACT WALL COVERING

- A. Surfaces to receive protection shall be clean, smooth and free of obstructions.
- B. Apply with adhesive in controlled environment according to manufacture's recommendations.

- - - E N D - - -

SECTION 10 28 00
TOILET, BATH, AND LAUNDRY ACCESSORIES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies manufactured items usually used in dressing rooms, toilets, baths, locker rooms and at sinks in related spaces.
- B. Items Specified (Items designated 'OF CI' or 'V.C' are owner furnished and contractor installed, all other items are contractor furnished and contractor installed):
 - 1. Paper towel dispenser (V.C.).
 - 2. Recessed paper towel dispenser.
 - 3. Toilet paper dispenser (V.C.).
 - 4. Toilet paper dispenser-Safety.
 - 5. Grab bars.
 - 6. Grab bars-Safety.
 - 7. Grab bars-fold up.
 - 8. Robe Hook.
 - 9. Mirror.
 - 10. Mirror-Safety.
 - 11. Medicine box.
 - 12. Soap Dispenser (V.C.).
 - 13. Soap Dispenser-Safety.
 - 14. Shelf.
 - 15. Shelf with mop and broom holders.
 - 16. Baby changing station (V.C.).
 - 17. Seat cover dispenser (V.C.).
 - 18. Fold-up shower seat.
 - 19. Surface mounted sanitary napkin dispenser (V.C.).
 - 20. Semi-recessed sanitary napkin dispenser (V.C.).
 - 21. Sanitary napkin disposal (V.C.).
 - 22. Refer to drawings for other V.C. items that are not specified in this section.

1.2 RELATED WORK

- A. Reference A8 series drawings and A10 series drawings for additional information.
- B. Coordinate with drawings for information on backing in walls for mounting accessories.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings; Include the following:
 - 1. Metal framed mirrors, showing shelf where required, fillers, and design and installation of units when installed on ceramic tile wainscots and offset surfaces.
 - 2. Grab bars, showing design and each different type of anchorage.
 - 3. Medicine boxes showing design and installation.
 - 4. Show material and finish, size of members, and details of construction, installation and anchorage of mop racks and shelves.
- C. Manufacturer's Literature and Data:
 - 1. All accessories specified that are to be contractor provided.
 - 2. Show type of material, gages or metal thickness in inches, finishes, and when required, capacity of accessories.
 - 3. Provide product information for tamper resistant screws to be used in Mental Health and Behavioral Units where fasteners will be exposed.

1.4 QUALITY ASSURANCE

- A. Each product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.
- B. Each accessory type shall be the same and be made by the same manufacturer.
- C. Each accessory shall be assembled to the greatest extent possible before delivery to the site.
- D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

1.5 PACKAGING AND DELIVERY

- A. Pack accessories individually to protect finish.
- B. Deliver accessories to the project only when installation work in rooms is ready to receive them.
- C. Deliver inserts and rough-in frames to site at appropriate time for building-in.
- D. Deliver products to site in sealed packages of containers; labeled for identification with manufacturer's name, brand, and contents.

1.6 STORAGE

- A. Store products in weathertight and dry storage facility.

- B. Protect from damage from handling, weather and construction operations before, during and after installation in accordance with manufacturer's instructions.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
- A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip.
 - A176-99(R2009).....Stainless and Heat-Resisting Chromium Steel Plate, Sheet, and Strip
 - A269-10.....Seamless and Welded Austenitic Stainless Steel Tubing for General Service
 - A312/A312M-09.....Seamless and Welded Austenitic Stainless Steel Pipes
 - A653/A653M-10.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
 - B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
 - B456-03(R2009).....Electrodeposited Coatings of Copper Plus Nickel Plus Chromium and Nickel Plus Chromium
 - C1036-06.....Flat Glass
 - C1048-04.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass
 - D635-10.....Rate of Burning and/or Extent and Time of Burning of Self Supporting Plastics in a Horizontal Position
 - F446-85(R2009).....Consumer Safety Specification for Grab Bars and Accessories Installed in the Bathing Area.
 - D3453-07.....Flexible Cellular Materials - Urethane for Furniture and Automotive Cushioning, Bedding, and Similar Applications
 - D3690-02(R2009).....Vinyl-Coated and Urethane-Coated Upholstery Fabrics
- C. The National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500 Series.....Metal Finishes Manual
- D. American Welding Society (AWS):

D10.4-86 (R2000).....Welding Austenitic Chromium-Nickel Stainless
Steel Piping and Tubing

E. Federal Specifications (Fed. Specs.):

A-A-3002.....Mirrors, Glass

FF-S-107C (2).....Screw, Tapping and Drive

FF-S-107C.....Screw, Tapping and Drive.

WW-P-541E(1).....Plumbing Fixtures (Accessories, Land Use) Detail
Specification

PART 2 - PRODUCTS

2.1 MATERIALS

A. Aluminum: ASTM B221, alloy 6063-T5 and alloy 6463-T5.

B. Stainless Steel:

1. Plate or sheet: ASTM A167, Type 302, 304, or 304L, except ASTM A176 where Type 430 is specified, 0.0299-inch thick unless otherwise specified.

2. Tube: ASTM A269, Alloy Type 302, 304, or 304L.

C. Stainless Steel Tubing: ASTM A269, Grade 304 or 304L, seamless or welded.

D. Stainless Steel Pipe: ASTM A312; Grade TP 304 or TP 304L.

E. Steel Sheet: ASTM A653, zinc-coated (galvanized) coating designation G90.

F. Glass:

1. ASTM C1036, Type 1, Class 1, Quality q2, for mirrors, and for mirror doors in medicine cabinets.

2. ASTM C1036, Type 1 Class 1 Quality q3, for shelves in medicine cabinets.

3. ASTM C1048, Kind FT, Condition A, Type 1, Class 1 (use in Mental Health and Behavior Nursing Unit Psychiatric Patient Areas and Security Examination Rooms where mirrors and glass are specified).

G. Foam Rubber: ASTM D3453, Grade BD, Type 2.

H. Vinyl Covering: ASTM D3690, Vinyl coated fabric, Class A.

I. Plywood: PS1, Grade CD.

2.2 FASTENERS

A. Exposed fasteners in Mental Health and Behavioral Units shall be tamper resistant screws.

B. Exposed Fasteners: Stainless steel or chromium plated brass, finish to match adjacent surface.

C. Concealed Fasteners: Steel, hot-dip galvanized (except in high moisture areas such as showers or bath tubs use stainless steel).

D. Toggle Bolts: For use in hollow masonry or frame construction.

- E. Hex bolts: For through bolting on thin panels.
- F. Expansion Shields: Lead or plastic as recommended by accessory manufacturer for component and substrate for use in solid masonry or concrete.
- G. Screws:
 - 1. ASME B18.6.4.
 - 2. Fed Spec. FF-S-107, Stainless steel Type A.
- H. Adhesive: As recommended by manufacturer for products to be joined.

2.3 FINISH

- A. In accordance with NAAMM AMP 500 series.
- B. Anodized Aluminum:
 - 1. AA-C22A41 Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.7-mil thick.
- C. AA-M32 Mechanical finish, medium satin.
 - 1. Chromium Plating: ASTM B456, satin or bright as specified, Service Condition No. SC2.
 - 2. Stainless Steel: NAAMM AMP 503, finish number 4.
 - 3. Ferrous Metal:
 - a. Shop Prime: Clean, pretreat and apply one coat of primer and bake.
 - b. Finish: Over primer apply two coats of alkyd or phenolic resin enamel, and bake.
 - 4. Nylon Coated Steel: Nylon coating powder formulated for a fluidized bonding process to steel to provide a hard smooth, medium gloss finish, not less than 0.3 mm (0.012-inch) thick, rated as self-extinguishing when tested in accordance with ASTM D635.

2.4 FABRICATION - GENERAL

- A. Welding, AWS D10.4.
- B. Grind dress, and finish welded joints to match finish of adjacent surface.
- C. Form exposed surfaces from one sheet of stock, free of joints.
- D. Provide steel anchors and components required for secure installation.
- E. Form flat surfaces without distortion. Keep exposed surfaces free from scratches and dents. Reinforce doors to prevent warp or twist.
- F. Isolate aluminum from dissimilar metals and from contact with building materials as required to prevent electrolysis and corrosion.
- G. Hot-dip galvanized steel, except stainless steel, anchors and fastening devices.
- H. Shop assemble accessories and package with all components, anchors, fittings, fasteners and keys.
- I. Key items alike.

J. Provide templates and rough-in measurements as required.

K. Round and deburr edges of sheets to remove sharp edges.

2.5 PAPER TOWEL DISPENSERS - V.C. PRODUCTS ARE ANTICIPATED TO BE AS FOLLOWS:

A. Surface mounted type and recessed type as indicated on drawings.

2.6 TOILET TISSUE DISPENSERS - V.C. PRODUCTS ARE ANTICIPATED TO BE AS FOLLOWS:

A. Double roll surface mounted type.

B. Mount on continuous backplate.

C. Removable spindle ABS plastic or chrome plated plastic.

D. Wood rollers are not acceptable.

2.7 GRAB BARS

A. Fed. Spec WW-P-541/8B, Type IV, bars, surface mounted, Class 2, grab bars and ASTM F446. Lengths and configurations as indicated on the drawings.

B. Fabricate of either stainless steel or nylon coated steel, except use only one type throughout the project:

1. Stainless steel: Grab bars, flanges, mounting plates, supports, screws, bolts, and exposed nuts and washers.

2. Nylon Coated Steel: Grab bars and flanges complete with mounting plates and fasteners. Color to be selected by Architect from manufacturer's full range of available colors.

C. Concealed mount, except at swing-up grab bars and on metal toilet partitions.

D. Bars:

1. Fabricate from 38 mm (1-1/2 inch) outside diameter tubing.

a. Stainless steel, minimum 1.2 mm (0.0478 inch) thick.

b. Nylon coated bars, minimum 1.5 mm (0.0598 inch) thick.

2. Fabricate in one continuous piece with ends turned toward walls, except swing up and where grab bars are shown continuous around three sides of showers, bars may be fabricated in two sections, with concealed slip joint between.

3. Continuous weld intermediate support to the grab bar.

4. Swing up bars manually operated. Designed to prevent bar from falling when in raised position.

5. Provide anti-suicide grab bars where safety grab bars are indicated. Grab bar to include closure plate between the rail and the mounting surface that precludes the draping or wrapping of items around the bar.

E. Flange for Concealed Mounting:

1. Minimum of 2.65 mm (0.1046 inch) thick, approximately 75 mm (3 inch) diameter by 13 mm (1/2 inch) deep, with provisions for not less than three set screws for securing flange to back plate.
2. Insert grab bar through center of the flange and continuously weld perimeter of grab bar flush to back side of flange.

F. Flange for Exposed Mounting:

1. Minimum 5 mm (3/16 inch) thick, approximately 75 mm (3 inch) diameter.
2. Insert grab bar through flange and continuously weld perimeter of grab bar flush to backside of flange.
3. Where mounted on metal toilet partitions, provide three equally spaced, countersunk holes, sized to accommodate 5 mm (3/16 inch) diameter bolts.

G. In lieu of providing flange for concealed mounting, and back plate as specified, grab rail may be secured by being welded to a back plate and be covered with flange.

H. Back Plates:

1. Minimum 2.65 mm (0.1046 inch) thick metal.
2. Fabricate in one piece, approximately 6 mm (1/4 inch) deep, with diameter sized to fit flange. Provide slotted holes to accommodate anchor bolts.
3. Furnish spreaders, through bolt fasteners, and cap nuts, where grab bars are mounted on metal toilet partitions.

2.8 CLOTHES HOOKS-ROBE

- A. Fabricate hook units either of chromium plated brass with a satin finish, or stainless steel, using 6 mm (1/4 inch) minimum thick stock, with edges and corners rounded smooth to the thickness of the metal, or 3 mm (1/8 inch) minimum radius.
- B. Fabricate each unit as a double hook on a single shaft, integral with or permanently fastened to the wall flange, provided with concealed fastenings.

2.9 METAL FRAMED MIRRORS

- A. Fed. Spec. A-A-3002 metal frame; chromium finished steel or stainless steel, type 302 or 304. Sizes as indicated on drawings.
- B. Mirror Glass for standard mirrors:
 1. Minimum 6 mm (1/4 inch) thick.
 2. Set mirror in a protective vinyl glazing tape.
- C. Mirror Glass for safety mirrors:
 1. Reflective polycarbonate.
- D. Frames for standard and safety mirrors:

1. Channel or angle shaped section with face of frame not less than 9 mm (3/8 inch) wide. Fabricate with square corners.
2. Use either 0.9 mm (0.0359 inch) thick stainless steel, chrome finished steel, or extruded aluminum, with clear anodized finish 0.4 mils thick.
3. Filler:
 - a. Where mirrors are mounted on walls having ceramic tile wainscots not flush with wall above, provide fillers at void between back of mirror and wall surface.
 - b. Fabricate fillers from same material and finish as the mirror frame, contoured to conceal the void behind the mirror at sides and top.

E. Back Plate for standard and safety mirrors:

1. Fabricate backplate for concealed wall hanging of either zinc-coated, or cadmium plated 0.9 mm (0.036 inch) thick sheet steel, die cut to fit face of mirror frame, and furnish with theft resistant concealed wall fastenings.
2. Use set screw type theft resistant concealed fastening system for mounting mirrors.

F. Mounting Bracket for standard and safety mirrors:

1. Designed to support mirror tight to wall.
2. Designed to retain mirror with concealed set screw fastenings.

2.10 MEDICINE BOX

A. Fed. Spec. WW-P-541/8B, Type III Medicine cabinets. Cabinet to be single recessed chart station with medical storage.

1. Basis-of-Design product: Raspberry Med 2008-5. Provide the basis-of-design product or an approved equivalent product.
2. Cabinet Body: Fabricate from either 0.9 mm (0.036 inch) thick sheet steel, with baked enamel finish, or 0.9 mm (0.036 inch) thick stainless steel. Form body in one piece, without seams, and with rounded inside corners.

B. Hinged Door Type:

1. Medicine box to be hinged door type, with top and bottom hinges. Bottom hinged panel to tilt out and form a flat surface to support a laptop computer. Top hinged panel to provide lockable medicine storage cover. Entire contents of cabinet are concealed when doors are closed.

C. Light:

1. Medicine box to have manufacturer's standard integral light fixture. Fixture automatically turns on when panel doors are opened.

2.11 SOAP DISPENSER - V.C. PRODUCTS ARE ANTICIPATED TO BE AS FOLLOWS:

- A. Standard Soap Dispenser:
 - 1. Stainless steel, surface mounted.
- B. Description:
 - 1. Liquid soap dispenser with integral finger/hand pump with adjustable needle valve to allow dispensing of two milliliters of liquid with each depression of the pump.
 - 2. Unit shall not be adversely affected by liquid soap, aseptic detergent, or hexachlorophene solutions.

2.12 SHELF

- A. 24-inch (610 mm) long x 4-inch (102 mm) deep, 18-gauge (1.2 mm) stainless steel. Provide with 3/4 inch (19 mm) return edge; front edge is hemmed for safety.
- B. Screw or weld brackets to shelves.

2.13 SHELF WITH MOP AND BROOM HOLDERS

- A. 44-inch (1118 mm) long x 8-inch (205 mm) deep shelf, fabricated from 18-gauge (1.2 mm) stainless steel.
- B. Shelf assembly to include 5 hooks manufactured from 16-gauge stainless steel.
- C. Shelf assembly to include 4 mop/broom handle holders. Holders to be spring activated rubber cams on plated steel retainers to hold a handle with a diameter between 1/2-inch (13 mm) and 1 1/4-inch (32 mm).

2.14 BABY CHANGING STATION - V.C. PRODUCTS ARE ANTICIPATED TO BE AS FOLLOWS:

- A. Surface mounted type.
- B. 18 gauge 6A stainless steel exterior/molded high density grey polyethylene with Microban antimicrobial interior.
- C. Concealed hinge and pneumatic cylinder.
- D. ADA accessible.
- E. Nylon safety secure strap and bag hook.
- F. Liner dispenser.

2.15 SEAT COVER DISPENSER - V.C. PRODUCTS ARE ANTICIPATED TO BE AS FOLLOWS:

- A. Surface mounted toilet seat cover dispenser fabricated of 20 gauge stainless steel.
 - 1. Capacity: Dispenses a minimum of 250 seat covers.
 - 2. Approximate size: 11-inch (280 mm) tall x 15 3/4- inch (400 mm) wide x 2 3/8-inch (60 mm) deep.

2.16 FOLD-UP SHOWER SEAT

- A. constructed from a stainless steel frame and 5/16-inch (8 mm) thick solid phenolic top.
- B. Self locking mechanism.

- C. Size: 18-inch (457 mm) wide, 15 13/16-inch (405 mm) projection.
- D. Mount 17-inch to 19-inch (432 mm to 483 mm) to top of seat off of floor.
- E. 450 pound (204 kg) normal/1000 pound (454 kg) bariatric capacity.

2.17 SURFACE MOUNTED SANITARY NAPKIN DISPENSER - V.C. PRODUCT IS ANTICIPATED TO BE AS FOLLOWS:

- A. Size: Approximately 12-inch (305 mm) wide by 26-inch (660 mm) tall.
- B. Description: Stainless steel on all exposed surfaces. Adjustable flange surface mounts the unit. Push button operation; less than 5 pounds (2.3 kg) of force, no grasping, pinching, or twisting of the wrist. Easy access product tray. Single coin slots for jam-resistant operation. Accepts one or two quarters. Easy 25¢ to 50¢ field coin conversion. Push-button coin return cancels product description. Returned coins or wrong coins (1¢, 5¢, 10¢) by-pass the mechanism and drop into product tray. Empty product indicator blocks coin slot. Easy product loading; no weights. Holds 30 tampons, 20 napkins. Two tumbler locks keyed like other toilet room accessories. Separately keyed coin box lock for management access.

2.18 SEMI-RECESSED SANITARY NAPKIN DISPENSER- V.C. PRODUCT IS ANTICIPATED TO BE AS FOLLOWS:

- A. Size: Approximately 14-inch (356 mm) wide by 28-inch (711 mm) tall.
- B. Description: Stainless steel on all exposed surfaces. Flat door design with 90 degree return. Equipped with stainless steel skirt for recessing in walls. Push button operation; less than 5 pounds (2.3 kg) of force, no grasping, pinching, or twisting of the wrist. Easy access product tray. Single coin slots for jam-resistant operation. Accepts one or two quarters. Easy 25¢ to 50¢ field coin conversion. Push-button coin return cancels product description. Returned coins or wrong coins (1¢, 5¢, 10¢) by-pass the mechanism and drop into product tray. Empty product indicator blocks coin slot. Easy product loading; no weights. Holds 30 tampons, 20 napkins. Two tumbler locks keyed like other toilet room accessories. Separately keyed coin box lock for management access.

2.19 SANITARY NAPKIN DISPOSAL- V.C. PRODUCT IS ANTICIPATED TO BE AS FOLLOWS:

- A. Approximate size: 11-inch (279 mm) wide x 15-inch (381 mm) tall.
- B. Mounting: As indicated on drawings.
- C. Stainless steel door. Door has tumbler lock. Self-closing panel covers disposal opening. Removable, leak-proof, 1.2 gallon (4.6 liter) plastic receptacle.

2.20 PAPER TOWEL DISPENSER RECESSED

- A. Stainless steel recessed.
- B. Basis-of-Design: Bradley Model 2441.

2.21 TOILET PAPER DISPENSER - SAFETY

- A. Impact resistant solid surface Corian.
- B. Dowels: Flexible, breakaway polyethylene foam rubber.
- C. Roll capacity: One.
- D. Color to be selected by architect.
- E. Basis-of-Design: SecuringHospitals.com; Safe Support Impact Resistant TP. Holder 817-S15.

2.22 SOAP DISPENSER - SAFETY

- A. Impact resistant solid surface Corian,
- B. Sloped top.
- C. Locking: Cylinder piston lock.
- D. Color to be selected by architect.
- E. Basis-of-Design: SecuringHospitals.com; Safe Support Impact Resistant Soap Dispenser 816-S12.

PART 3 - EXECUTION**3.1 PREPARATION**

- A. Before starting work notify COTR in writing of any conflicts detrimental to installation or operation of units.
- B. Verify with the COTR the exact location of accessories.

3.2 INSTALLATION

- A. Set work accurately, in alignment and where shown. Items shall be plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Toggle bolt to steel anchorage plates in frame partitions or hollow masonry. Expansion bolt to concrete or solid masonry.
- C. Install accessories in accordance with the manufacturer's printed instructions and ASTM F446.
- D. Install accessories plumb and level and securely anchor to substrate.
- E. Install accessories in a manner that will permit the accessory to function as designed and allow for servicing as required without hampering or hindering the performance of other devices.
- F. Position and install dispensers, and other devices in countertops, clear of drawers, permitting ample clearance below countertop between devices, and ready access for maintenance as needed.

- G. Align mirrors, dispensers and other accessories even and level, when installed in battery.
- H. Install accessories to prevent striking by other moving, items or interference with accessibility.
- I. Install all accessories in Mental Health and Behavioral Units with tamper resistant screws that are flush mounted so that they will not support a rope or material for hanging.

3.3 CLEANING

- A. After installation, clean as recommended by the manufacturer and protect from damage until completion of the project.

- - - E N D - - -

SECTION 104413
FIRE EXTINGUISHER CABINETS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section covers recessed fire extinguisher cabinets and fire extinguishers.

1.2 SUBMITTALS

- A. Submit in accordance with Section 013323, SAMPLES AND SHOP DRAWINGS.
- B. Manufacturer's Literature and Data: Fire extinguisher cabinet including installation instruction and rough opening required.

PART 2 - PRODUCTS

2.1 FIRE EXTINGUISHER CABINET

- A. Semi-recessed type with 64mm (2½ inch) radius rolled edge, Cosmopolitan Series 1037V17 by J.L. Industries with Cosmic 10E extinguisher. Install semi-recessed cabinet and associated extinguisher where indicated on the drawings.
- B. Fully-recessed type with 9 mm (3/8 inch) flat trim, Cosmopolitan Series 1035V17 by J.L. Industries with Cosmic 10E extinguisher. Install fully-recessed cabinet and associated extinguisher where indicated on the drawings.

2.2 FABRICATION

- A. Form body of cabinet from 0.9 mm (0.0359 inch) thick sheet steel.
- B. Fabricate door and trim number 304 stainless steel all face joints fully welded and ground smooth.
 - 1. Glaze doors with 6 mm (1/4 inch) thick fully tempered float glass complying with ASTM C 1048, Condition A, Type 1, Quality g3, kind FT, Class 1 (clear).
 - 2. Design doors to open 180 degrees.
 - 3. Provide continuous hinge, flush cup pull (ADA compliant), and adjustable roller catch.
 - 4. Identify fire extinguisher in cabinet with FIRE EXTINGUISHER lettering applied to door. Lettering to be vertical, Red.
- C. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. J.L. Industries
 - 2. Larsen's Manufacturing Co.
 - 3. Potter-Roemer, Inc.
 - 4. Or approved equal

2.3 FIRE EXTINGUISHER

- A. General: Provide fire extinguisher in each cabinet shown on drawings.

- B. Multipurpose Dry Chemical Type: UL-rated 4A:60B:C, 10-lb nominal capacity, in enameled steel container.

2.4 FINISH

- A. Finish interior of cabinet body with baked-on semi-gloss white enamel.
- B. Finish door and trim with manufacturer's standard number 304 stainless steel, with number 4 satin finish.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install fire extinguisher cabinets in prepared openings and secure in accordance with manufacturer's instructions.
- B. Install cabinet so that bottom of cabinet is 991 mm (39 inches) above finished floor.

- - - E N D - - -

SECTION 10 51 23

PLASTIC-LAMINATE-CLAD LOCKERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes plastic-laminate-clad wood lockers.

1.2 ACTION SUBMITTALS

- A. Product data.
- B. Shop Drawings: For plastic-laminate-clad wood lockers. Include plans, elevations, sections, details, attachments to other work, and locker identification system and numbering sequence.
- C. Samples: For each exposed finish.

1.3 INFORMATIONAL SUBMITTALS

- A. Sample warranty.

1.4 CLOSEOUT SUBMITTALS

- A. Maintenance data.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver master and control keys to Owner by registered mail or overnight package service.

1.6 FIELD CONDITIONS

- A. Environmental Limitations: Do not deliver or install lockers until building is enclosed, wet work is complete, and HVAC system is operating and maintaining temperature at occupancy levels during the remainder of the construction period.

1.7 COORDINATION

- A. Coordinate sizes and locations of concealed wood support bases.
 - 1. Requirements are specified in Section 061000 "Rough Carpentry."

1.8 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of lockers that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period: Three years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Accessibility Requirements: For lockers indicated to be accessible, comply with applicable provisions in the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines and ICC A117.1.

2.2 PLASTIC-LAMINATE-CLAD WOOD LOCKERS

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Ideal 1000 Series plastic laminated lockers by Ideal Products, Inc. or comparable product by one of the following:
1. Classic Woodworking, LLC.
 2. Club Resource Group.
 3. Famous Lockers.
 4. Hollman, Inc.
 5. Legacy Lockers.
 6. List Industries Inc.
 7. Treeforms.
- B. Construction Style: Flush overlay.
1. Reveal Dimension: 1/2 inch (13 mm).
- C. Locker Body: Fabricated from particleboard-core panels covered on both sides with thermoset decorative overlay.
1. Side, Top, and Bottom Panels: Manufacturer's standard 3/4 or 5/8 inch (19 or 16 mm) thick.
 2. Back Panel: Manufacturer's standard 1/2 or 3/8 inch (13 or 9.5 mm) thick.
 3. Exposed Panel Edges: Vinyl T-molding.
- D. Plastic-Laminate-Clad Wood Doors: High-pressure decorative laminate, Grade VGS, over both sides of particleboard core.
1. Thickness: Manufacturer's standard 3/4 or 5/8 inch (19 or 16 mm) thick.
 2. Panel Edges: Vinyl T-molding.
- E. End Panels: Match style, material, construction, and finish of plastic-laminate-clad wood doors.
- F. Shelves: Fabricated from particleboard-core panels covered on both sides with thermoset decorative overlay; fixed.
1. Thickness: 3/4 inch (19 mm).
 2. Exposed Edges: Thermoset decorative overlay to match panels.
- G. Corners and Filler Panels: 3/4-inch- (19-mm-) thick panels. Match style, material, construction, and finish of plastic-laminate-clad wood doors.
- H. Continuously Sloping Tops: Plastic-laminate-clad, 3/4-inch (19 mm) thick panel that matches door faces for installation over lockers with separate flat tops. Fabricate tops in lengths as long as practical,

without visible fasteners at splice locations. Provide fasteners, supports and closures, as follows:

1. Closures: Vertical-end type.

I. Plastic-Laminate Colors, Patterns, and Finishes:

1. As selected by Architect from plastic-laminate manufacturer's full range of colors.

2.3 MATERIALS

A. Composite Wood: Provide materials that comply with requirements of referenced quality standard for each type of woodwork and quality grade specified unless otherwise indicated.

1. Particleboard: ANSI A208.1, Grade M-2-Exterior Glue.

2. Thermoset Decorative Panels: Particleboard or medium-density fiberboard finished with thermally fused, melamine-impregnated decorative paper and complying with requirements of NEMA LD 3, Grade VGL, for Test Methods 3.3, 3.4, 3.6, 3.8, and 3.10.

B. High-Pressure Decorative Laminate: NEMA LD 3, grades as follows:

1. Horizontal Surface: Grade HGS.

2. Vertical Surfaces: Grade VGS.

C. Furring, Blocking, Shims, and Hanging Strips: Softwood or hardwood lumber, kiln dried to less than 15 percent moisture content.

D. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage. Provide metal expansion sleeves or expansion bolts for post-installed anchors. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.

E. Wood Support Base: 2-by-4-inch nominal-size (51-by-102-mm, actual-size) lumber treated with manufacturer's standard preservative-treatment, pressure process.

2.4 HARDWARE

A. General: Provide manufacturer's standard locker hardware complying with the requirements in this Section.

B. Cylinder Locks: Built-in, flush cam locks with five-pin tumbler keyway, keyed separately and master keyed. Furnish two change keys for each lock and two master keys.

1. Key Type: Flat Grooved, with minimum 2-by-2.68-inch (51-by-68.3-mm) key head for accessible lockers.

C. Butt Hinges: 2-3/4-inch (70-mm), five-knuckle steel hinges; back mounted.

1. Provide two hinges for doors 36 inches (910 mm) high and less.
 2. Provide three hinges for doors more than 36 inches (910 mm) high.
- D. Wire Pulls: Back mounted; 4 inches (102 mm) long, 5/16 inch (8 mm) in diameter.
- E. Accessible Handle: Metal, fixed, graspable lever handle and rose trim; surface mounted.
- F. Hooks: Manufacturer's standard, ball-pointed aluminum or steel; finished to match other locker hardware. Attach hooks with at least two fasteners.
1. Provide one double-prong ceiling hook and two single-prong wall hooks for each compartment of double-tier lockers.
- G. Exposed Hardware Finishes: Black enamel finish unless otherwise indicated.

2.5 ACCESSORIES

- A. Number Plates: 1-1/4-inch- (32-mm-) diameter, etched, embossed, or stamped, satin aluminum plates with black numbers and letters at least 3/8 inch (10 mm) high. Identify lockers in sequence indicated on Drawings.

2.6 FABRICATION

- A. Fabricate components square, rigid, without warp, and with finished faces flat and free of scratches and chips. Accurately factory machine components for attachments. Make joints tight and true.
- B. Accessible Lockers: Fabricate as follows:
1. Locate bottom shelf no lower than 15 inches (381 mm) above the floor.
 2. Where hooks, coat rods, or additional shelves are provided, locate no higher than 48 inches (1219 mm) above the floor.
- C. Complete fabrication, including assembly, finishing, and hardware application, to maximum extent possible, before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.
- D. Shop cut openings, to maximum extent possible, to receive hardware, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install wood support base.
- B. Install lockers level, plumb, and true; use concealed shims.
- C. Connect groups of lockers together with manufacturer's standard fasteners, through predrilled holes, with no exposed fasteners on face frames. Fit lockers accurately together to form flush, tight, hairline joints.
- D. Install lockers without distortion so doors fit openings properly and are accurately aligned. Adjust hardware to center doors in openings, providing unencumbered operation. Complete installation of hardware and accessory items as indicated.
 - 1. Installation Tolerance: No more than 1/8 inch in 96-inch (3 mm in 2400-mm) sag, bow, or other variation from a straight line.
Shim as required with concealed shims.
- E. Locker Anchorage: Fasten lockers through wood locker base, at ends, and not more than 36 inches (910 mm) o.c. with No. 8 flush-head wood screws sized for 1-inch (25-mm) penetration into wood base.
- F. Locker Anchorage: Fasten wood lockers through back, near top and bottom, at ends with No. 8 flush-head wood screws sized for 1-inch (25-mm) penetration into wood framing, blocking, or furring and spaced not more than 16 inches (400 mm) o.c.
- G. Scribe and cut corner and filler panels to fit adjoining work using fasteners concealed where practical. Repair damaged finish at cuts.
- H. Attach sloping-top units to lockers, with end panels covering exposed ends.
- I. Install number plates after lockers are in place.

- - -END - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 11 73 00
CEILING MOUNTED PATIENT LIFT SYSTEM

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Ceiling Mounted Patient Lift Systems for the transfer of physically challenged patients are specified in this section.
- B. Included in this scope of work is the salvage and reuse of existing patient lift components with the new lifts. Coordinate with Drawings for existing components to be reused. Verify that new components are compatible with existing Arjo Huntleigh lift systems.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS: Requirements for pre-test of equipment.
- B. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic requirements for non-structural equipment.
- C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General Electrical Requirements and items, which are common to sections of Division 26.

1.3 QUALITY ASSURANCE

- A. Certification for compliance is required for Ceiling Mounted Patient Lift Systems. Certifications shall be provided by an independent third party who will conduct testing to ensure that the ceiling lift and charging system are safe and in compliance with ISO 10535 & UL 60601-1

1.4 SUBMITTALS

- A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Certificates of Compliance
- C. Manufacturer's Literature and Data:
 - 1. Lifting Capacity
 - 2. Lifting Speed
 - 3. Horizontal Displacement Speeds
 - 4. Horizontal Axis Motor
 - 5. Vertical Axis Motor
 - 6. Emergency Brake
 - 7. Emergency Lowering Device
 - 8. Emergency Stopping Device
 - 9. Electronic Soft-Start and Soft-Stop Motor Control
 - 10. Current Limiter for Circuit Protection
 - 11. Low Battery Disconnect System
 - 12. Strap Length

13. All equipment anchors and supports. Submittals shall include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations and behavior problems (e.g., vibration, thermal expansion,) associated with equipment or piping so that the proposed installation can be properly reviewed.

- D. Individual Room layouts showing location of lift system installation shall be approved before proceeding with installation of lifts.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are listed in the text by the basic designation only.
- B. International Organization for Standardization (IOS):
10535-06Hoist for the Transfer of Disabled Persons-
Requirements and Test Methods
- C. Underwriters Laboratories (UL):
60601-1Medical Electrical Equipment: General
Requirements for Safety
94-2006UL Standards for Safety Test for Flammability of
Plastic Materials for Parts in Devices and
Appliances-Fifth Edition
- D. International Electromagnetic Commission (IEC):
801-2(1991)Electromagnetic Compatibility for Industrial-
Process Measurement and Control Equipment-Part
2: Electromagnetic Discharge Requirements

PART 2 - PRODUCTS

2.1 CEILING TRACK SYSTEM

- A. The Ceiling Track shall be made from high strength extruded aluminum T66081-T5 at a thickness of 3/16" (4.8mm). Provide anchor supports at a minimum 3 per linear foot at ceiling substrate. The ceiling track shall be finished with baked enamel paint.
- B. The ceiling track shall be compatible with the lift units.

2.2 LIFT UNIT

- A. The Lift Unit shall be constructed of a steel frame system (2205lbs / 1000kg tested) driven by a gear reduced high torque motor
- B. The Lift system shall have the following features.
1. Lifting capacity:
 - a. 600 lbs (272 kg) for standard lift unit.
 - b. 1000 lbs (454 kg) for bariatric lift unit.
 2. Electronic soft-start and soft-stop motor control.
 3. Emergency lowering device.

4. Emergency stopping device.
5. Current limiter for circuit protection in case of overload.
6. Safety device that stops the motor to lift when batteries are low.
7. Minimum lifting speed: 1.6in/s (3.5cm) in full capacity.
8. Horizontal displacement speed: 5.9in/s (150mm/s).
9. Horizontal axis motor: 24VDC at 62 watts and vertical axis motor at 110 watts.
10. Emergency brake (in case of mechanical failure).
11. Strap length up to 90in (2.3m) tested for 2998lbs (1360kg).
12. Cab: VO plastic-fire retardant, UL 94.

2.3 MOTORS

- A. Vertical Movement-DC Motor
 1. Type: Class A, fully enclosed, permanent magnet.
 2. Rating: 24Vdc, 1.1A, 110W, 4000RPM, 0.3N-m.
 3. Mounting: Secured to chassis.
- B. Horizontal Movement-DC Motor
 1. Type: Fully enclosed, permanent magnet, integral reducer.
 2. Rating: 24Vdc, 1.8A, 62W, 260RPM, 1.0N-m.
 3. Mounting: Secured to chassis.

2.4 BATTERIES

- A. The life cycle (number of charging cycles) for batteries shall be in compliance with IEC 801-2.
- B. Provide rechargeable batteries with up to 50 transfers with its maximum load of 600 lbs (272 kg).

2.5 CHARGER

- A. Charger Input: 100-240 Vac, 50/60 Hz.
- B. Charger Output: 27 Vdc, 1 A max.
- C. Supplemental to the charger provide a clip on charging station with indicator lights.

2.6 STRAPS AND SLING

- A. The straps shall be made of threaded nylon. The straps shall ensure the patient's safety by preventing the patient from falling out of the sling.
- B. The sling shall be made from a polyester/nylon net material that is pliable, breathable and easy to use. The sling shall cradle the body of the patient.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Install ceiling mounted patient lift system as per manufacturer's instruction and under the supervision of manufacturer's qualified representative and as shown on drawings.
- B. If the distance in between the suspended ceiling and anchors is more than 18" consult with manufacturer to determine if lateral braces will be required.

3.2 INSTRUCTION AND PERSONNEL TRAINING

- A. Training shall be provided for the required personnel to educate them on proper operation and maintenance for the lift system equipment.

3.3 TEST

- A. Conduct performance test, in the presence of the COTR and a manufacturer's field representative, to show that the patient lift system equipment and control devices operate properly and in accordance with design and specification requirements.

- - - E N D - - -

SECTION 12 24 00
WINDOW SHADES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Cloth shades are specified in this section. Window shades shall be furnished complete, including brackets, fittings and hardware.

1.2 RELATED WORK

- A. Color of shade cloth (including tapes and cords): As indicated in Drawings.

1.3 QUALITY CONTROL

- A. Manufacturer's Qualification:
 - 1. Manufacturer shall provide evidence that the manufacture of blinds are a major product, and that the blinds have performed satisfactorily on similar installations.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
 - 1. Shade cloth, each type, 600 mm (24 inch) square, including cord and ring, showing color, finish and texture.
- C. Manufacturer's literature and data; showing details of construction and hardware for:
 - Cloth and window shades

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced to in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
 - AA-V-00200BVenetian Blinds, Shade, Roller, Window, Roller, Slat, Cord, and Accessories
- C. American Society for Testing and Materials (ASTM):
 - A167-99(R2009)Stainless and heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip
 - B221/B221M-08Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
 - D635-10Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastics in a Horizontal Position
 - D648-07Deflection Temperature of Plastics Under Flexural Load in the Edgewise Position

D1784-08Rigid Poly (Vinyl Chloride) (PVC) Compounds and
Chlorinated Poly (Vinyl Chloride) (CPVC)
Compounds

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Shade Cloth: Translucent 8200 series, room side.
- B. Black-out Shade: Opaque, against window.
- C. Staples (For Cloth Window Shades): Nonferrous metal or zinc-coated steel.
- D. Stainless Steel: ASTM A167
- E. Extruded Aluminum: ASTM B221/B221M.

2.2 FASTENINGS

- A. Zinc-coated or cadmium plated metal, aluminum or stainless steel fastenings of proper length and type. Except as otherwise specified, fastenings for use with various structural materials shall be as follows:

Type of Fastening	Structural Material
Wood screw	Wood
Tap screw	Metal
Case-hardened, self-tapping screw	Sheet Metal
Screw or bolt in expansion shields	Solid masonry
Toggle bolts	Hollow blocks, wallboard and plaster

2.3 FABRICATION

- A. Fabricate cloth shades to fit measurements of finished openings obtained at site.
- B. Cloth Window Shades: Rolling type, constructed of shade cloth mounted on rollers. Shade cloth shall have plain sides, and with hem at bottom to accommodate wood slat. Separate shades are required for each individual sash within opening. Length of shades shall exceed height of window approximately 300 mm (12 inches) measured from head to sill, in addition to material required to make-up hem:
 - 1. Provide rollers with spindles, nylon bearings, tempered steel springs, and all other related accessories required for positive action. Provide rollers of diameter recommended by shade manufacturer. Staple shade cloth to wood rollers to prevent wrinkling or folding, and on line parallel to axis of rollers so that shade

- will hang plumb. Space staples not over 90 mm (3-1/2 inches) on centers. Use of tacks is prohibited.
2. Eyelets shall have clear openings large enough to accommodate cords. Edges of eyelets shall not cut into cloth when set.
 3. Cords shall be of sufficient length to permit shades to be drawn to bottom of opening with ends looped and held with cord rings. Attach cords to hems through metal eyelets in center of slats in bottom hems.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Cloth Window Shades: Mount window shades on end of face brackets, set on metal gussets, or casing of windows as required. Provide extension face brackets where necessary at mullions.
1. Locate rollers in level position as high as practicable at heads of windows to prevent infiltration of light over rollers.
 2. Where extension brackets are necessary, on mullions or elsewhere, for alignment of shades, provide metal lugs, and rigidly anchor lugs and brackets.
 3. Place brackets and rollers so that shades will not interfere with window and screen hardware.
 4. Shade installation methods not specifically described, are subject to approval of COTR.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 13 05 41
SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. Provide seismic restraint in accordance with the requirements of this section in order to maintain the integrity of nonstructural components of the building so that they remain safe and functional in case of seismic event.
- B. Definitions: Non-structural building components are components or systems that are not part of the building's structural system whether inside or outside, above or below grade. Non-structural components of buildings include:
 - 1. Architectural Elements: Facades that are not part of the structural system and its shear resistant elements; cornices and other architectural projections and parapets that do not function structurally; glazing; nonbearing partitions; suspended ceilings; cabinets; bookshelves; medical equipment; and storage racks.
 - 2. Electrical Elements: Power and lighting systems; switchgear and switchboards; transfer switches; motor control centers; motor generators; selector and controller panels; fire protection and alarm systems; special life support systems; and telephone and communication systems.
 - 3. Mechanical Elements: Heating, ventilating, and air-conditioning systems; medical gas systems; plumbing systems; sprinkler systems; pneumatic systems; boiler equipment and components.
 - 4. Transportation Elements: Mechanical, electrical and structural elements for transport systems, i.e., elevators and dumbwaiters, including hoisting equipment and counterweights.

1.2 RELATED WORK:

- A. Coordinate with all other project disciplines.

1.3 QUALITY CONTROL:

- A. Shop-Drawing Preparation:
 - 1. Have seismic-force-restraint shop drawings and calculations prepared by a professional structural engineer experienced in the area of seismic force restraints. The professional structural engineer shall be registered in the state where the project is located.
 - 2. Submit design tables and information used for the design-force levels, stamped and signed by a professional structural engineer registered in the State where project is located.
- B. Coordination:

1. Do not install seismic restraints until seismic restraint submittals are approved by the COTR.
2. Coordinate and install trapezes or other multi-pipe hanger systems prior to pipe installation.

C. Seismic Certification:

In structures assigned to IBC Seismic Design Category C, D, E, or F, permanent equipment and components are to have Special Seismic Certification in accordance with requirements of section 13.2.2 of ASCE 7 except for equipment that are considered rugged as listed in section 2.2 OSHPD code application notice CAN No. 2-1708A.5, and shall comply with section 13.2.6 of ASCE 7.

1.4 SUBMITTALS:

- A. Submit a coordinated set of equipment anchorage drawings prior to installation including:
 1. Description, layout, and location of items to be anchored or braced with anchorage or brace points noted and dimensioned.
 2. Details of anchorage or bracing at large scale with all members, parts brackets shown, together with all connections, bolts, welds etc. clearly identified and specified.
 3. Numerical value of design seismic brace loads.
 4. For expansion bolts, include design load and capacity if different from those specified.
- B. Submit prior to installation, a coordinated set of bracing drawings for seismic protection of piping, with data identifying the various support-to-structure connections and seismic bracing structural connections, include:
 1. Single-line piping diagrams on a floor-by-floor basis. Show all suspended piping for a given floor on the same plain.
 2. Type of pipe (Copper, steel, cast iron, insulated, non-insulated, etc.).
 3. Pipe contents.
 4. Structural framing.
 5. Location of all gravity load pipe supports and spacing requirements.
 6. Numerical value of gravity load reactions.
 7. Location of all seismic bracing.
 8. Numerical value of applied seismic brace loads.
 9. Type of connection (Vertical support, vertical support with seismic brace etc.).
 10. Seismic brace reaction type (tension or compression): Details illustrating all support and bracing components, methods of connections, and specific anchors to be used.

- C. Submit prior to installation, bracing drawings for seismic protection of suspended ductwork and suspended electrical and communication cables, include:
 - 1. Details illustrating all support and bracing components, methods of connection, and specific anchors to be used.
 - 2. Numerical value of applied gravity and seismic loads and seismic loads acting on support and bracing components.
 - 3. Maximum spacing of hangers and bracing.
 - 4. Seal of registered structural engineer responsible for design.
- D. Submit design calculations prepared and sealed by the registered structural engineer specified above in paragraph 1.3A.
- E. Submit for concrete anchors, the appropriate ICBC evaluation reports, OSHPD pre-approvals, or lab test reports verifying compliance with OSHPD Interpretation of Regulations 28-6.

1.5 APPLICABLE PUBLICATIONS:

- A. The Publications listed below (including amendments, addenda revisions, supplements and errata) form a part of this specification to the extent referenced. The publications are referenced in text by basic designation only.
- B. American Concrete Institute (ACI):
 - 355.2-07Qualification for Post-Installed Mechanical Anchors in Concrete and Commentary
- C. American Institute of Steel Construction (AISC): Thirteenth Edition
- D. American Society for Testing and Materials (ASTM):
 - A36/A36M-08Standard Specification for Carbon Structural Steel
 - A53/A53M-10Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
 - A307-10Standard Specification for Carbon Steel Bolts and Studs; 60,000 PSI Tensile Strength.
 - A325-10Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength
 - A325M-09Standard Specification for High-Strength Bolts for Structural Steel Joints [Metric]
 - A490-10Standard Specification for Heat-Treated Steel Structural Bolts, 150 ksi Minimum Tensile Strength
 - A490M-10Standard Specification for High-Strength Steel Bolts, Classes 10.9 and 10.9.3, for Structural Steel Joints [Metric]

- A500/A500M-10Standard Specification for Cold-Formed Welded
and Seamless Carbon Steel Structural Tubing in
Rounds and Shapes
- A501-07Specification for Hot-Formed Welded and Seamless
Carbon Steel Structural Tubing
- A615/A615M-09Standard Specification for Deformed and Plain
Billet-Steel Bars for Concrete Reinforcement
- A992/A992M-06Standard Specification for Steel for Structural
Shapes for Use in Building Framing
- A996/A996M-09Standard Specification for Rail-Steel and Axel-
Steel Deformed Bars for Concrete
Reinforcement
- E488-96(R2003)Standard Test Method for Strength of Anchors in
Concrete and Masonry Element
- E. American Society of Civil Engineers (ASCE 7) Latest Edition.
- F. International Building Code (IBC) Latest Edition
- G. VA Seismic Design Requirements, H-18-8, February 2011
- H. National Uniform Seismic Installation Guidelines (NUSIG)
- I. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA): Seismic Restraint Manual - Guidelines for Mechanical Systems,
1998 Edition and Addendum

1.6 REGULATORY REQUIREMENT:

- A. IBC 2009.
- B. Exceptions: The seismic restraint of the following items may be omitted:
1. Equipment weighing less than 400 pounds, which is supported directly on the floor or roof.
 2. Equipment weighing less than 20 pounds, which is suspended from the roof or floor or hung from a wall.
 3. Gas and medical piping less than 2 ½ inches inside diameter.
 4. Piping in boiler plants and equipment rooms less than 1 ¼ inches inside diameter.
 5. All other piping less than 2 1/2 inches inside diameter, except for automatic fire suppression systems.
 6. All piping suspended by individual hangers, 12 inches or less in length from the top of pipe to the bottom of the support for the hanger.
 7. All electrical conduits, less than 2 ½ inches inside diameter.
 8. All rectangular air handling ducts less than six square feet in cross sectional area.
 9. All round air handling ducts less than 28 inches in diameter.

10. All ducts suspended by hangers 12 inches or less in length from the top of the duct to the bottom of support for the hanger.

PART 2 - PRODUCTS

2.1 STEEL:

- A. Structural Steel: ASTM A36, A36M or A992.
- B. Structural Tubing: ASTM A500, Grade B.
- C. Structural Tubing: ASTM A501.
- D. Steel Pipe: ASTM A53/A53M, Grade B.
- E. Bolts & Nuts: ASTM A307, A325, A325M, A490 or A490M.

2.2 CAST-IN-PLACE CONCRETE:

- A. Concrete: 28 day strength, $f'c = 25$ MPa (3,000 psi).
- B. Reinforcing Steel: ASTM A615/615M or ASTM A996/A996M deformed.

PART 3 - EXECUTION

3.1 CONSTRUCTION, GENERAL:

- A. Provide equipment supports and anchoring devices to withstand the seismic design forces, so that when seismic design forces are applied, the equipment cannot displace, overturn, or become inoperable.
- B. Provide anchorages in conformance with recommendations of the equipment manufacturer and as shown on approved shop drawings and calculations.
- C. Construct seismic restraints and anchorage to allow for thermal expansion.
- D. Testing Before Final Inspection:
 1. Test 10-percent of anchors in masonry and concrete per ASTM E488, and ACI 355.2 to determine that they meet the required load capacity. If any anchor fails to meet the required load, test the next 20 consecutive anchors, which are required to have zero failure, before resuming the 10-percent testing frequency.
 2. Before scheduling Final Inspection, submit a report on this testing indicating the number and location of testing, and what anchor-loads were obtained.

3.2 EQUIPMENT RESTRAINT AND BRACING:

- A. See drawings for equipment to be restrained or braced.

3.3 MECHANICAL DUCTWORK AND PIPING; BOILER PLANT STACKS AND BREACHING; ELECTRICAL BUSWAYS, CONDUITS, AND CABLE TRAYS; AND TELECOMMUNICATION WIRES AND CABLE TRAYS

- A. Support and brace mechanical ductwork and piping; electrical busways, conduits and cable trays; and telecommunication wires and cable trays including boiler plant stacks and breeching to resist directional forces (lateral, longitudinal and vertical).
- B. Brace duct and breeching branches with a minimum of 1 brace per branch.
- C. Provide supports and anchoring so that, upon application of seismic forces, piping remains fully connected as operable systems which will not displace sufficiently to damage adjacent or connecting equipment, or building members.
- D. Seismic Restraint of Piping:
 - 1. Design criteria:
 - a. Piping resiliently supported: Restrain to support 120-percent of the weight of the systems and components and contents.
 - b. Piping not resiliently supported: Restrain to support 60-percent of the weight of the system components and contents.
 - 2. Provide seismic restraints according to one of the following options:
- E. Piping Connections: Provide flexible connections where pipes connect to equipment. Make the connections capable of accommodating relative differential movements between the pipe and equipment under conditions of earthquake shaking.

3.4 PARTITIONS

- A. In buildings with flexible structural frames, anchor partitions to only structural element, such as a floor slab, and separate such partition by a physical gap from all other structural elements.
- B. Properly anchor masonry walls to the structure for restraint, so as to carry lateral loads imposed due to earthquake along with their own weight and other lateral forces.

3.5 CEILINGS AND LIGHTING FIXTURES

- A. At regular intervals, laterally brace suspended ceilings against lateral and vertical movements, and provide with a physical separation at the walls.
- B. Independently support and laterally brace all lighting fixtures. Refer to applicable portion of lighting specification, Section 26 51 00, INTERIOR LIGHTING.

3.6 FACADES AND GLAZING

- A. Do not install concrete masonry unit filler walls in a manner that can restrain the lateral deflection of the building frame. Provide a gap with adequately sized resilient filler to separate the structural frame from the non-structural filler wall.
- B. Tie brick veneers to a separate wall that is independent of the steel frame as shown on construction drawings to ensure strength against applicable seismic forces at the project location.
- C. Install attachments to structure for all façade materials as shown on construction drawings to ensure strength against applicable seismic forces at the project location.

3.7 STORAGE RACKS, CABINETS, AND BOOKCASES

- A. Install storage racks to withstand earthquake forces and anchored to the floor or laterally braced from the top to the structural elements.
- B. Anchor medical supply cabinets to the floor or walls and equip them with properly engaged, lockable latches.
- C. Anchor filing cabinets that are more than 2 drawers high to the floor or walls, and equip all drawers with properly engaged, lockable latches.
- D. Anchor bookcases that are more than 30 inches high to the floor or walls, and equip any doors with properly engaged, lockable latches.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 14 24 00
HYDRAULIC ELEVATORS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the engineering, furnishing, and installation of the complete electric hydraulic elevator system as described herein and as indicated on the contract drawings.
- B. Items listed in the singular apply to each and every elevator in this specification except where noted.
- C. Service Elevators shall be oil hydraulic type with microprocessor based control; single car selective collective automatic operation and power operated two speed side opening car and hoistway doors. Elevators shall have Class "A" loading.

1.2 RELATED WORK

- A. Section 01 33 23 SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in GENERAL CONDITIONS.
- B. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-rated construction.
- C. SECTION 09 06 00, SCHEDULE FOR FINISHES: As a master format for construction projects, to identify interior and exterior material finishes for type, texture, patterns, color and placement.
- D. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Requirements for seismic restraint of non-structural components.
- E. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section.
- F. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low Voltage power and lighting wiring.
- G. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- H. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for cables and wiring.
- I. Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY: Requirements for installing the over-current protective devices to ensure proper equipment and personnel protection.
- J. Section 26 22 00, LOW-VOLTAGE TRANSFORMERS: Low voltage transformers.
- K. Section 26 24 16, PANELBOARDS: Low voltage panelboards.

- L. Section 26 43 13, TRANSIENT-VOLTAGE SURGE SUPPRESSION: Surge suppressors installed in panelboards.
- M. Section 26 51 00, INTERIOR LIGHTING: Fixture and ballast type for interior lighting.
- N. VA Barrier Free Design Handbook (H-18-13)

1.3 QUALIFICATIONS

- A. Approval by the Contracting Officer is required for products or services of proposed manufacturers, suppliers and installers and shall be contingent upon submission by Contractor of a certificate stating the following:
 - 1. Elevator contractor is currently and regularly engaged in the installation of elevator equipment as one of his principal products.
 - 2. Elevator contractor shall have three years of successful experience, trained supervisory personnel, and facilities to install elevator equipment specified herein.
 - 3. The installers shall be Certified Elevator Mechanics with technical qualifications of at least five years of successful experience and Apprentices actively pursuing certified mechanic status.
Certificates are required for all workers employed in this capacity.
 - 4. Elevator contractor shall submit a list of two or more prior hospital installations where all the elevator equipment he proposes to furnish for this project functioned satisfactorily to serve varying hospital traffic and material handling demands. Provide a list of hospitals that have the equipment in operation for two years preceding the date of this specification. Provide the names and addresses of the Medical Centers and the names and telephone numbers of the Medical Center Administrators.
- B. Approval of Elevator Contractor's equipment will be contingent upon their identifying an elevator maintenance service provider that shall render services within one hour of receipt of notification, together with certification that the quantity and quality of replacement parts stock is sufficient to warranty continued operation of the elevator installation.
- C. Approval will not be given to elevator contractors and manufacturers who have established on prior projects, either government, municipal, or commercial, a record for unsatisfactory elevator installations, have failed to complete awarded contracts within the contract period, and does not have the requisite record of satisfactorily performing elevator installations of similar type and magnitude.
- D. All hydraulic elevators shall be the product of the same manufacturer.

- E. The Contractor shall provide and install only those types of safety devices that have been subjected to tests witnessed and certified by an independent professional testing laboratory that is not a subsidiary of the firm that manufactures supplies or installs the equipment.
- F. Welding at the project site shall be made by welders and welding operators who have previously qualified by test as prescribed in American Welding Society Publications AWS D1.1 to perform the type of work required. VAMC shall require welding certificates be submitted for all workers employed in this capacity. A welding or hot work permit is required for each day and shall be obtained from the COTR of safety department. Request permit one day in advance.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification. Elevator installation shall meet the requirements of the latest editions published and adopted by the United States Department of Veterans Affairs on the date contract is signed.
- B. Federal Specifications (Fed. Spec.):
 - J-C-30BCable and Wire, Electrical (Power, Fixed Installation)
 - W-C-596FConnector, Plug, Electrical; Connector, Receptacle, Electrical
 - W-F-406EFittings for Cable, Power, Electrical and Conduit, Metal, Flexible
 - HH-I-558CInsulation, Blankets, Thermal (Mineral Fiber, Industrial Type)
 - W-F-408EFittings for Conduit, Metal, Rigid (Thick- Wall and Thin-wall (EMT) Type)
 - RR-W-410Wire Rope and Strand
 - TT-E-489JEnamel, Alkyd, Gloss, Low VOC Content
 - QQ-S-766Steel, Stainless and Heat Resisting, Alloys, Plate, Sheet and Strip
- C. International Building Code (IBC)
- D. American Society of Mechanical Engineers (ASME):
 - A17.1Safety Code for Elevators and Escalators
 - A17.2Inspectors Manual for Electric Elevators and Escalators

- E. National Fire Protection Association:
 - NFPA 13.....Standard for the Installation of Sprinkler Systems
 - NFPA 70.....National Electrical Code (NEC)
 - NFPA 72.....National Fire Alarm and Signaling Code
 - NFPA 101.....Life Safety Code
 - NFPA 252.....Fire Test of Door Assemblies
- F. American Society for Testing and Materials (ASTM):
 - A1008/A1008M-09Steel, Sheet, Cold Rolled, Carbon, Structural,
High-Strength Low-Alloy and High Strength Low-
Alloy with Improved Formability
 - E1042-02Acoustically Absorptive Materials Applied by
Trowel or Spray
- G. Manufacturer's Standardization Society of the Valve and Fittings
Industry (MSS):
 - SP-58Pipe Hangers and Supports
- H. Society of Automotive Engineers, Inc. (SAE)
 - J517-91Hydraulic Hose, Standard
- I. Gages:
 - For Sheet and Plate: U.S. Standard (USS)
 - For Wires: American Wire Gauge (AWG)
- J. American Welding Society (AWS):
 - D1.1Structured Welding Code - Steel
- K. National Electrical Manufacturers Association (NEMA):
 - LD-3High-Pressure Decorative Laminates
- L. Underwriter's Laboratories (UL):
 - 486ASafety Wire Connectors for Copper Conductors
 - 797Safety Electrical Metallic Tubing
- M. Institute of Electrical and Electronic Engineers (IEEE)
- N. Regulatory Standards:
 - Uniform Federal Accessibility Standards
 - Americans with Disabilities Act

1.5 SUBMITTALS

- A. Submit in accordance with Specification Section 01 33 23, SHOP
DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Before execution of work, furnish information to evidence full
compliance with contract requirements for proposed items. Such
information shall include, as required: Manufacturer's Name, Trade
Names, Model or Catalog Number, Nameplate Data (size, capacity, and
rating) and corresponding specification reference (Federal or project
specification number and paragraph). All submitted drawings and related
elevator material shall be forwarded to the Contracting Officer.

C. Shop Drawings:

1. Complete scaled and dimensioned layout in plan and section view showing the arrangement of equipment and all details of each and every elevator unit specified including:
 - a. Complete layout showing location of storage tank/pump assembly, controller, piping layout, outside diameter of cylinder/plunger assembly, size of car platform, car frame members, and support assembly. Both new and existing to remain.
 - b. Car, guide rails, brackets, buffers, and other components located in hoistway. Both new and existing to remain.
 - c. Rail bracket spacing and maximum vertical forces on guide rails in accordance with ASME A17.1 Section 2.23 and Section 8.4.8 for Seismic Risk Zone 2 or greater. Both new and existing to remain.
 - d. Reactions at points of supports and buffer impact loads.
 - e. Weights of principal parts. Both new and existing to remain.
 - f. Top and bottom clearances and over travel of the car.
 - g. Location of shunt trip circuit breaker, switchboard panel, light switch, and feeder extension points in the machine room.
2. Drawings of hoistway entrances and doors showing details of construction and method of fastening to the structural members of the building.
 - a. Sill details including sill support.

D. Samples:

1. One each of stainless steel, 75 mm x 125 mm (3 in. x 5 in.).
2. One each of baked enamel, 75 mm x 125 mm (3 in. x 5 in.).
3. One each of color vinyl floor tile.
4. One each of protection pads, 75 mm x 125 mm (3 in. x 5 in.) if used.
5. One each car and hoistway Braille plate sample.
6. One each car and hall button sample.
7. One each car and hall lantern/position indicator sample.
8. One each wall and ceiling material finish sample.
9. One each car lighting sample.
10. No other samples of materials specified shall be submitted unless specifically requested after submission of manufacturer's name. If additional samples are furnished pursuant to request, adjustment in contract price and time will be made as provided in Section 00 72 00, GENERAL CONDITIONS.

- E. Name of manufacturer, type or style designation, and applicable data of the following equipment shall be shown on the elevator layouts:
1. Storage tank/pump assembly.
 2. Pump and motor, HP and RPM rating, Voltage, Starting and Full Load Ampere, Number of phases, and Gallons per minute.
 3. Controller
 4. Starters and Overload Current Protection Devices.
 5. Car Safety Device; Rupture Valve and Manual Shut Off Valves.
 6. Electric Door Operator; HP rating and RPM of motor.
 7. Hoistway Door Interlocks.
 8. Car Buffers; maximum and minimum rated load, maximum rated striking speed and stroke.
 9. Cab Ventilation Unit; HP rating and CFM rating.
- F. Complete construction drawings of elevator car enclosure, showing dimensioned details of construction, fastenings to platform, car lighting, ventilation, ceiling framing, top exits, and location of car equipment.
- G. Complete dimensioned detail of vibration isolating foundations for storage tank/pump assembly.
- H. Dimensioned drawings showing details of:
1. All signal and operating fixtures.
 2. Car slide guides/roller guides.
 3. Hoistway door tracks, hangers, and sills.
 4. Door operator, infrared curtain units.
- I. Cuts or drawings showing details of controllers and supervisory panels.
- J. Furnish certificates as required under: Paragraph "QUALIFICATIONS".

1.6 WIRING DIAGRAMS

- A. Provide three complete sets of field wiring and straight line wiring diagrams showing all electrical circuits in the hoistway, machine room and fixtures. Install one set coated with an approved plastic sealer and mounted in the elevator machine room as directed by the COTR.
- B. In the event field modifications are necessary during installation, diagrams shall be revised to include all corrections made prior to and during the final inspection. Corrected diagrams shall be delivered to the COTR within 30 days of final acceptance.

- C. Provide the following information relating to the specific type of microprocessor controls installed:
1. Owner's information manual, containing job specific data on major components, maintenance, and adjustment.
 2. System logic description.
 3. Complete wiring diagrams needed for field troubleshooting, adjustment, repair and replacement of components. Diagrams shall be base diagrams, containing all changes and additions made to the equipment during the design and construction period.
 4. Changes made during the warranty period shall be noted on the drawings in adequate time to have the finalized drawings reproduced for mounting in the machine room no later than six months prior to the expiration of the warranty period.

1.7 ADDITIONAL EQUIPMENT

- A. Additional equipment required to operate the specified equipment manufactured and supplied for this installation shall be furnished and installed by the contractor. The cost of the equipment shall be included in the base bid.
- B. Special equipment not required by specification, which would improve the operation, may be installed in conjunction with the specified equipment by the contractor at his option at no additional cost to the Government, provided prior approval is obtained from the Contracting Officer's Technical Representative.

1.8 TOOL CABINET

- A. Provide a metal parts/tool cabinet, having two shelves and hinged doors. Cabinet size shall be 1220 mm (48 in.) high, 762 mm (30 in.) wide, and 457 mm (18 in.) deep.

1.9 PERFORMANCE STANDARDS

- A. The elevators shall be capable of meeting the highest standards of the industry and specifically the following:
 1. Contract speed is high speed in either direction of travel with rated capacity load in the elevator. Speed variation under all load conditions, regardless of direction of travel, shall not vary more than five (5) percent.
 2. The controlled rate of change of acceleration and retardation of the car shall not exceed 0.1G per second and the maximum acceleration and retardation shall not exceed 0.2G per second.

3. Starting, stopping, and leveling shall be smooth and comfortable without appreciable steps of acceleration and deceleration.
- B. The door operator shall open the car door and hoistway door simultaneously at 2.5-feet per second and close at 1-foot per second.
- C. Pressure: Fluid system components shall be designed and factory tested for 500 psi operating pressure.
- D. Floor level stopping accuracy shall be within 3 mm (1/8 in.) above or below the floor, regardless of load condition.
- E. Noise and Vibration Isolation: All elevator equipment including their supports and fastenings to the building, shall be mechanically and electrically isolated from the building structure to minimize objectionable noise and vibration transmission to car, building structure, or adjacent occupied areas of building.
- F. Sound Isolation: Noise level relating to elevator equipment operation in machine room shall not exceed 80 dBA. All dBA readings shall be taken three (3) feet off the floor and three (3) feet from equipment.
- G. Airborne Noise: Measured noise level of elevator equipment during operation shall not exceed 50 dBA in elevator lobbies and 60 dBA inside car under any condition including door operation and car ventilation exhaust blower on its highest speed.

1.10 WARRANTY

- A. Submit all labor and materials furnished in connection with elevator system and installation to terms of "Warranty of Construction" articles of FAR clause 52.246-21. The one year Warranty shall commence after final inspection, completion of performance test, and upon full acceptance of the installation and shall concur with the guarantee period of service.
- B. During warranty period if a device is not functioning properly or in accordance with specification requirements, or if in the opinion of the Contracting Officer's Technical Representative, excessive maintenance and attention must be employed to keep device operational, device shall be removed and a new device meeting all requirements shall be installed as part of work until satisfactory operation of installation is obtained. Period of warranty shall start anew for such parts from date of completion of each new installation performed, in accordance with foregoing requirements.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Where stainless steel is specified, it shall be corrosion resisting steel complying with Fed. Spec. QQ-S-766, Class 302 or 304, Condition A with Number 4 finish on exposed surfaces. Stainless steel shall have the grain of belting in the direction of the longest dimension and surfaces shall be smooth and without waves. During installation all stainless steel surfaces shall be protected with a suitable material.
- B. Where cold rolled steel is specified, it shall be low-carbon steel rolled to stretcher leveled standard flatness, complying with ASTM A109.

2.2 MANUFACTURED PRODUCTS

- A. Materials, devices and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items. Items not meeting this requirement, but meet technical specifications which can be established through reliable test reports or physical examination of representative samples, will be considered.
- B. When two or more devices of the same class of materials or equipment are required, these units shall be products of one manufacturer.
- C. Manufacturers of equipment assemblies which include components made by others shall assume complete responsibility for the final assembled unit.
 - 1. Individual components of assembled units shall be products of the same manufacturers.
 - 2. Parts which are alike shall be the product of a single manufacturer.
 - 3. Components shall be compatible with each other and with the total assembly for the intended service.
- D. Motor nameplates shall state manufacturers' name, rated horsepower, speed, volts, amperes and other characteristics required by NEMA Standards and shall be securely attached to the item of equipment in a conspicuous location.
- E. The elevator equipment, including controllers, door operators, and supervisory system shall be non-proprietary, the product of manufacturers of established reputation, provided such items are capably engineered and produced under coordinated specifications to ensure compatibility with the total operating system. Mixing of manufactures related to a single system or group of components shall be identified in the submittals.

- F. Where key operated switches are furnished in conjunction with any component of this elevator installation, furnish four (4) keys for each individual switch or lock. Provide different key tumblers for different switch and lock functions. Each and every key shall have a tag bearing a stamped or etched legend identifying its purpose. Barrel key switches are not acceptable, except where required by code.
- G. If the elevator equipment to be installed is not known to the COTR, the Contractor shall submit drawings in triplicate for approval to the COTR, Contracting Officer, and VA CFM Elevator Engineer showing all details and demonstrate that the equipment to be installed is in strict accordance with the specifications.

2.3 CAPACITY, SIZE, SPEED, AND TRAVEL

- A. Each direct-plunger elevator shall have the capacity to lift the live load, including the weight of entire car and plunger, at the speed specified in the following schedule:

ELEVATOR SCHEDULE	
Elevator Number	Building 7 #1
Overall Platform Size	4'-8" wide x 8'-3" deep
Rated Load - kg(lb)	4000 lb
Contract Speed - m/s(fpm)	150 FPM
Total Travel - m/s(fpm)	46'-8"
Number of Stops	4 stops
Number of Openings	4 openings
Entrance Type & Size	2 speed side slide / 40" x 84"
Plunger Size	6 1/2"

2.4 POWER SUPPLY

- A. For power supply in each machine room see Specification 260521, ELECTRICAL SPECIFICATION and Electrical drawings.
- B. It shall be the electrical contractor's responsibility to supply the labor and materials for the installation of the following:
1. Feeders from the power source indicated on the drawings to each elevator controller.
 2. Shunt Trip Circuit Breaker for each controller shall be located inside machine room at the strike side of the machine room door and lockable in the "Off" position.
 3. Provide Surge Suppressors to protect the elevator equipment.

- C. Power for auxiliary operation of elevator as specified shall be available from auxiliary power generator, including wiring connection to the elevator control system.

2.5 CONDUIT AND WIREWAY

- A. Unless otherwise specified or approved, install electrical conductors, except traveling cable connections to the car, in rigid zinc-coated steel or aluminum conduit, electrical metallic tubing or metal wireways. Rigid conduit smaller than 3/4 inch or electrical metallic tubing smaller than 1/2 inch electrical trade size shall not be used. All raceways completely embedded in concrete slabs, walls, or floor fill shall be rigid steel conduit. Wireway (duct) shall be used in the hoistway and to the controller and between similar apparatus in the elevator machine room. Fully protect self-supporting connections, where approved, from abrasion or other mechanical injury. Flexible metal conduit not less than 3/8 inch electrical trade size may be used, not exceeding 18 inches in length unsupported, for short connections between risers and limit switches, interlocks, and for other applications permitted by NEC.
- B. All conduit terminating in steel cabinets, junction boxes, wireways, switch boxes, outlet boxes and similar locations shall have approved insulation bushings. Install a steel lock nut under the bushings if they are constructed completely of insulating materials. Protect the conductors at ends of conduits not terminating in steel cabinets or boxes by terminal fittings having an insulated opening for the conductors.
- C. Rigid conduit and EMT fittings using set screws or indentations as a means of attachment shall not be used. All fittings shall be steel or malleable iron.
- D. Connect motors or other items subject to movement, vibration or removal to the conduit or EMT systems with flexible, steel conduits.

2.6 CONDUCTORS

- A. Unless otherwise specified, conductors, excluding the traveling cables, shall be stranded or solid coated annealed copper in accordance with Federal Specification J-C-30B for Type RHW or THW. Where 16 and 18 AWG are permitted by NEC, single conductors or multiple conductor cables in accordance with Federal Specification J-C-580 for Type TF may be used provided the insulation of single conductor cable and outer jacket of multiple conductor cable is flame retardant and moisture resistant.

Multiple conductor cable shall have color or number coding for each conductor. Conductors for control boards shall be in accordance with NEC. Joints or splices are not permitted in wiring except at outlets. Tap connectors may be used in wireways provided they meet all UL requirements.

- B. Provide all necessary conduit and wiring between machine room and hoistway.
- C. All wiring must test free from short circuits or ground faults. Insulation resistance between individual external conductors and between conductors and ground shall be a minimum of one megohm.
- D. Where size of conductors is not given, voltage and amperes shall not exceed limits prescribed by NEC.
- E. Provide equipment grounding. Ground the conduits, supports, controller enclosure, motor, platform and car frame, and all other non-current conducting metal enclosures for electrical equipment in accordance with NEC. The ground wires shall be copper, green insulated and sized as required by NEC. Bond the grounding wires to all junction boxes, cabinets, and wire raceways.
- F. Terminal connections for all conductors used for external wiring between various items of elevator equipment shall be solderless pressure wire connectors in accordance with Federal Specification W-S-610. The Elevator Contractor may, at his option, make these terminal connections on 10 gauge or smaller conductors with approved terminal eyelets set on the conductor with a special setting tool, or with an approved pressure type terminal block. Terminal blocks using pierce-through serrated washers are not acceptable.

2.7 TRAVELING CABLES

- A. All conductors to the car shall consist of flexible traveling cables conforming to the requirements of NEC. Traveling cables shall run from the junction box on the car directly to the controller. Junction boxes on the car shall be equipped with terminal blocks. Terminal blocks having pressure wire connectors of the clamp type that meet UL 486A requirements for stranded wire may be used in lieu of terminal eyelet connections. Terminal blocks shall have permanent indelible identifying numbers for each connection. Cables shall be securely anchored to avoid strain on individual terminal connections. Flame and moisture resistant outer covering must remain intact between junction boxes. Abrupt bending, twisting and distortion of the cables shall not be permitted.

- B. Provide spare conductors equal to 10 percent of the total number of conductors furnished, but not less than 5 spare conductors in each traveling cable.
- C. Provide shielded wires for the auto dial telephone system within the traveling cable. Add 5 pair shielded wires for card reader, 2 RG-6/U coaxial CCTV cables, and 2 pair 14 gauge wires for CCTV power as needed.
- D. If traveling cables come into contact with the hoistway or elevator due to sway or change in position, provide shields or pads to the elevator and hoistway to prevent damage to the traveling cables.
- E. Hardware cloth wide may be installed from the hoistway suspension point downward to the elevator pit to prevent traveling cables from rubbing or chafing. Hardware cloth shall be securely fastened and tensioned to prevent buckling. Hardware cloth is not required when traveling cable is hung against a flat wall.

2.8 CONTROLLER AND SUPERVISORY PANEL

- A. UL/CSA Labeled Controller: Mount all assemblies, power supplies, chassis switches, and relays on a self-supporting steel frame. Completely enclose the equipment and provide a mean to control the temperature. Solid state components shall be designed to operate between 32 to 104 degrees Fahrenheit, humidity non-condensing up to 85 percent.
- B. All controller switches and relays shall have contacts of design and material to insure maximum conductivity, long life and reliable operation without overheating or excessive wear, and shall provide a wiping action to prevent sticking due to fusion. Switches carrying highly inductive currents shall be provided with arc shields or suppressors.
- C. Where time delay relays are used in the circuits, they shall be of acceptable design, adjustable, reliable, and consistent such as condenser timing or electronic timing circuits.
- D. Properly identify each device on all panels by name, letter, or standard symbol which shall be neatly stencil painted or decaled in an indelible and legible manner. Identification markings shall be coordinated with identical markings used on wiring diagrams. The ampere rating shall be marked adjacent to all fuse holders. All spare conductors to controller and supervisory panel shall be neatly formed, laced, and identified.

2.9 MICROPROCESSOR CONTROL SYSTEM

- A. Provide a microprocessor based system with absolute position/speed feedback encoded tape and electronic motor starter to control the pump motor and signal functions in accordance with these specifications. Across the line and wye-delta starters are not acceptable. Complete details of the components and printed circuit boards, together with a complete operational description, shall be submitted for approval.
 - 1. All controllers shall be non-proprietary.
 - 2. Proprietary tools shall not be necessary for adjusting, maintenance, repair, and testing of equipment.
 - 3. Controller manufacturer shall provide factory training, engineering and technical support, including all manuals and wiring diagrams to the VA Medical Center's designated Elevator Maintenance Service Provider.
 - 4. Replacement parts shall be shipped overnight within 48 hours of an order being received.
- B. All controller assemblies shall provide smooth, step-less acceleration and deceleration of the elevator, automatically and irrespective of the load in the car. All control equipment shall be enclosed in a metal cabinet with lockable, hinged door(s) and shall be provided with a means of ventilation. All non-conducting metal parts in the machine room shall be grounded in accordance with NEC. Cabinet shall be securely attached to the building structure.
- C. Circuit boards for the control of each and every elevator system; dispatching, signals, door operation and special operation shall be installed in a NEMA Type 1 General Purpose Enclosure. Circuit boards shall be moisture resistant, non-corrosive, non-conductive, fabricated of non-combustible material and adequate thickness to support the components mounted thereon. Mounting racks shall be spaced to prevent accidental contact between individual circuit boards and modules.
- D. Modules shall be of the type that plug into pre-wired mounting racks. Field wiring or alteration shall not be necessary in order to replace defective modules.
- E. Each device, module and fuse (with volt and ampere rating) shall be identified by name, letter or standard symbol in an approved indelible and legible manner on the device or panel. Coordinate identification markings with identical markings on wiring diagrams.

- F. The electrical connections between the printed circuit boards (modules) and the circuit connectors incorporated in the mounting racks shall be made through individual tabs which shall be an integral part of each module. The tabs shall be nickel-gold plated or other approved metal of equal electrical characteristics. Modules shall be keyed or notched to prevent insertion of the modules in the inverted position.
- G. Light emitting diodes (LED) shall be for visual monitoring of individual modules.
- H. Components shall have interlocking circuits to assure fail-safe operation and to prevent elevator movement should a component malfunction.
- I. Method of wire wrapping from point to point with connections on the mounting racks shall be submitted for approval.
- J. Field wiring changes required during construction shall be made only to the mounting rack connection points and not to the individual module circuitry or components. If it is necessary to alter individual modules they shall be returned to the factory where design changes shall be made and module design records changed so correct replacement units will be available.
- K. All logic symbols and circuitry designations shall be in accordance with ASME and NEC Standards.
- L. Solid state components shall be designed to operate within a temperature range of 32 to 104 degrees Fahrenheit, humidity non-condensing up to 85 percent.
- M. Wiring connections for operating circuits and for external control circuits shall be brought to terminal blocks mounted in an accessible location within the controller cabinet. Terminal blocks using pierce through serrated washers shall not be used.

2.10A AUXILIARY POWER OPERATION

- A. The control system for Elevators shall provide for the operation of the car per elevator bank on auxiliary power upon failure of the normal power supply.
- B. Auxiliary power supply, its starting means, transfer switch for transfer of elevator supply from normal to auxiliary power, two pair of conductors in a conduit from an auxiliary contact on the transfer switch (open or close contacts as required by Controller Manufacturer) to terminals in the group elevator controller and other related work shall be provided by the Electrical Contractor.

- C. Auxiliary equipment on elevator controllers, wiring between associated elevator controllers and wiring between elevator controllers and remote selector panel as required to permit the elevators to operate as detailed, shall be provided by the Elevator Contractor.
- D. Upon loss of normal power supply there shall be a delay before transferring to auxiliary power of 10 seconds minimum to 45 seconds maximum, the delay shall be accomplished through an adjustable timing device.

2.10B EMERGENCY RESCUE OPERATION

- A. Provide a power source to send the elevator to the lowest landing by activating the down valves. After the elevator has leveled at the lowest landing, provide power to open the car and hoistway doors automatically. After a predetermined time the car and hoistway doors shall close. Power shall stay applied to the door open button so the doors can be opened from the inside of the elevator. The elevator shall remain shut down at the bottom landing until normal power is restored. Install a sign on the controller indicating that the power is applied to the down valve and door operator during loss of normal power.

2.11 SINGLE CAR SELECTIVE COLLECTIVE AUTOMATIC OPERATION

- A. Provide single car selective collective automatic operation for service elevators.
- B. Operate car without attendant from push buttons inside the car and located at each floor adjacent to the elevator entrance. When car is available, automatically start car and dispatch it to the floor corresponding to registered car or hall call. Once car starts, it shall respond to registered calls in direction of travel in the order floors are reached. Do not reverse car directions until all car calls have been answered or until all hall calls ahead of car and corresponding to direction of car travel have been answered. Slow car and stop automatically at floors corresponding to registered calls, in the order in which they are approached in either direction of travel. As slowdown is initiated, automatically cancel the hall call and car call. Hold car at arrival floor an adjustable time interval to allow passenger transfer. Illuminate appropriate push button to indicate call registration. Extinguish light when call is answered.

- C. When all calls in the system have been satisfied, the elevator shall shut down at the last landing served with the car and hoistway doors closed. Registration of a call at the landing where the car is parked shall automatically open the car and hoistway doors. Provide a predetermined time delay to permit passengers entering the parked car to register the call of their choice and establish direction of travel before the system can respond to landing calls registered to the same time above or below the parked car.
- D. Auxiliary Landing Call Operation: In the event of corridor call button circuit failure, elevators are to service each floor in both directions in a predetermined pattern without registration of a call within the elevator. Provide an illuminated signal in the controller to indicate that emergency dispatch operation is in effect. Restoration of the landing call button system shall cause normal operation to resume.
- E. Car lights and fan in the elevator shall not shut off when elevator is idle. Arrange circuits so that power to lights and outlets on top and bottom of car shall not be interrupted.

2.12 FIREFIGHTERS' SERVICE

- A. Provide Firefighters' Service as per ASME A17.1 Section 2.27.
- B. Smoke Detectors:
 - 1. Smoke detection devices that are designated for actuation of Elevator Phase I "FIRE SERVICE" response in each elevator lobby, top of hoistway, and machine room shall be provided by others.
 - a. Elevator lobby smoke detectors shall activate only the elevators sharing the corresponding or common lobby.
 - b. Top of hoistway smoke detectors shall activate fire recall and the top of hoistway motorized vent.
 - c. Elevator or group of elevators serving separate isolated areas of the same floor shall have an independent smoke detection system.
 - d. Machine room smoke detectors shall activate fire recall for each and every elevator with equipment located in that machine room.
 - e. Hoistway ventilation, provided by others, located at the top of hoistway for elevators that penetrate more than three floors and meets the requirements of ASME A17.1 Section 2.1.4 and IBC Section 3004. The vent shall stay closed under power. When the top of hoistway smoke detector is activated, the power is removed from the vent and the vent shall open. When the smoke detector is reset, the vent shall close by power.

2.13 MEDICAL EMERGENCY SERVICE

- A. Provisions shall be made for calling elevator on "Medical Emergency" operating independently from the dispatch signals and landing call signals. Provide a two-position, key-operated, momentary contact, spring return switch at all floors.
- B. Install key switch in the floor landing push button fixture above the push buttons.
- C. Landing key switches shall be momentary pressure-spring return to "OFF" position. Provide a call registered light indicator adjacent to key switch. The landing key switch and the "Medical Emergency" key switch in the car shall not be operable by keys used for any other purpose in the hospital.
- D. When switch is activated at any floor, the call register light indicator shall illuminate at that floor only, and the elevator supervisory control system shall instantly select the nearest available elevator in service to respond to the medical emergency call. Immediately upon selection, all car calls within that car shall be cancelled. Transfer any landing calls which had previously been assigned that car to another car. If the selected car is traveling away from the medical emergency call, it shall slow down and stop at the nearest floor, maintain closed doors, reverse direction and proceed nonstop to the medical emergency call floor. If the selected car is traveling toward the medical emergency call floor, it shall proceed to that floor nonstop. If at the time of selection it is slowing down for a stop, the car shall stop, maintain doors closed, and start immediately toward the medical emergency floor.
- E. Arriving at the medical emergency floor, the car shall remain with doors open for 30 seconds. After this interval has expired and the car has not been placed on medical emergency operation from within the car, the car shall automatically return to normal service.
 - 1. Locate a "Medical Emergency" key switch in the upper section of each main car operating panel for selecting medical emergency service. Activation of the key switch will allow the car to accept a car call for any floor, close doors, and proceed nonstop to the floor desired. The return of the key switch to normal position will restore the car to normal service. The key shall be removable only in the off position.

- F. Any car in the group which is in group service may be selected. Additional medical emergency calls, as they are registered in the system, shall cause additional cars to respond as described below, always on the basis of one medical emergency call per car.
- G. Provide an LED illuminated indicator light next to the Medical Emergency key switch the same size as the Fire Service indicator. In the center of the rear cab panel provide a back lighted "MEDICAL EMERGENCY" LED illuminated display that shall flash on and off continuously when the car is assigned to this operation and until it is restored to normal service. "MEDICAL EMERGENCY" indicator shall be a photographic negative type 1830 mm (72 in.) to center above the floor, 152 mm (6 in.) wide X 76 mm (3 in.) high, with 12 mm (1/2 in.) high letters legible only when illuminated.
- H. All of the key switches in the "Medical Emergency" system for each and every elevator shall operate from the same key. The medical emergency call service key shall not operate any other key switch in the elevator system, nor shall any other key required by the elevator system be able to operate the medical emergency call service switches.
- I. Should all the cars be operating on "Independent Service", the medical emergency service indicator lights in the car operating panel and rear wall shall be illuminated, buzzer shall sound, and the "Audio Voice" system shall direct the attendant to return the car to automatic operation.
- J. Should all the cars be out of service and unable to answer medical emergency calls, the call register light shall not illuminate.
- K. Each switch faceplate shall have legible indelible legends engraved or etched to indicate its identity and positions. All letters in faceplates shall be 6 mm (1/4 in.) high, filled with black paint.
- L. When Phase I fire recall is activated it shall over-ride elevators on medical emergency service and return them to the main or alternate fire service recall floor. When the fire emergency floor has been identified the attendants may complete their medical emergency run on Phase II firefighters' operation if life safety is not affected.
- M. Provide four (4) keys for each "Medical Emergency" key cylinder furnished.

2.14 SEISMIC REQUIREMENTS

- A. Meet the requirements of ASME A17.1 Section 8.4, Elevator Safety Requirements for Seismic Risk Zone 2 or greater and VA Seismic Design Manual H-18-8.
- B. Support and maintain pump unit, controller, rails, rail brackets, conduit, buffers, piping, scavenger pumps and jack unit assembly in place as to effectively prevent any part from sliding, rotating or overturning or jumping under conditions imposed by seismic forces not less than that required to produce an acceleration of gravity horizontally and 1/2 gravity vertically acting simultaneously. Design the total system to continue operation without interruption under specified seismic acceleration, as outlined in H-18-8.
- C. Support all vertical conduits and duct systems within the hoistway at points above the center of gravity of riser. Provide lateral guides at regular intervals.
- D. Provide hydraulic equipment mounted on vibration isolators with seismic restraints.
- E. Bolt pump unit and controller to the floor and provide sway braces at top. Secure all electrical components within the panels to the panel frame. Fit doors and hinged panels with positive locking latches.
- F. Provide car enclosure ceiling panels and fluorescent tubes with latching devices that shall restrain the panels and fluorescent tubes. Devices shall be readily removable for cleaning or replacing panels and re-lamping.
- G. Submittals are required for all equipment anchors, supports, restraints and detectors. Submittals shall include weight, dimensions, center of gravity, standard connections, calculations, manufacturer's recommendations, behavior problems (vibration, thermal, expansion, etc.,) so that design can be properly reviewed.

2.15 PUMP UNIT ASSEMBLY

- A. Completely integrate the pump unit for the control of the elevator and self-contain in a unit fabricated of structural steel. The unit shall consist of a hydraulic fluid pump driven by an induction motor together with oil control valves, piping, etc. Enclose unit on four open sides of the power unit frame with not less than 16 gauge steel removable panel sections. Provide a minimum 50 mm (2 in.) air space between the top of the panels and bottom of tank. Line panels on the interior side with one-inch rigid acoustical insulation board.

- B. Control valves shall be electronically controlled. Hydraulic fluid flow shall be controlled to insure speed variation of not more than five (5) percent under all load conditions.
- C. Hydraulic system working pressure shall not exceed 500 psi under any load condition.
- D. Pump shall be positive displacement, rotary screw type, specifically designed for hydraulic elevator service, having a steady discharge without pulsation to give smooth and quiet operation. Pump output shall be capable of lifting elevator car with rated capacity, with a speed variation of no more than five (5) percent between no load and full load. Pump shall operate under flooded suction in an accurately machined case with the clearance required to assure maximum efficiency. Hydraulic fluid by-pass shall discharge directly into storage tank.
- E. Motor shall be squirrel-cage, drip proof, ball bearing, and induction type, with a synchronous speed not in excess of 1800 RPM. Design motor specifically for elevator service, not to exceed nameplate full load current by more than 10% and be continuously rated 120 starts per hour without exceeding a rise of 40 degrees C. Include closed transition SCR soft start.
- F. Connect motor and pump with multiple V-belt. Size belts and sheaves for duty involved and design to prevent any metallic contact between motor and pump shaft. Provide isolation units of rubber in shear to prevent transmission of pump and motor vibration to the building. Install expanded metal sheave guard that can be easily removed for servicing and inspection.
- G. Hydraulic equipment may be installed within the oil storage tank if applicable for elevator size, speed, and duty rating.

2.16 HYDRAULIC SYSTEM

- A. Construct the storage tank of sheet steel, welded construction, and a steel cover with suitable means for filling, a minimum one-inch protected vent opening, an overflow connection, and a valve drain connection. Tank shall act as a storage tank only, and sized to pass through machine room door as shown on drawings. Provide marked gauge to monitor hydraulic fluid level. Tank shall be of capacity to hold volume of hydraulic fluid required to lift elevator to top terminal landing, plus a reserve of not less than ten gallons. Provide a baffle in the bottom of the tank to prevent entry of any sediment or foreign particles into hydraulic system. Baffle shall also minimize aeration of

hydraulic fluid. Permissible minimum hydraulic fluid level shall be clearly indicated. Hydraulic fluid shall be of good grade to assure free flow when cool, and have minimum flash point of 400 degrees F. Provide initial supply of hydraulic fluid for operation of elevator.

1. Thermostatically control the viscosity of the hydraulic fluid with thermal cooling unit and temperature thermostat to maintain the fluid temperature in the reservoir, pump and valves at a constant operating viscosity.
 2. Provide a data plate on the tank framing indicating the characteristics of the hydraulic fluid used.
- B. Furnish and install connections between the storage tank, pump, muffler, operating valves, and cylinder complete with necessary valves, pipe supports, and fittings. All connections between the discharge side of the pump, check valve, muffler, cylinder, lowering valves shall be of schedule 40 steel with threaded, flanged, or welded mechanical couplings. Size of pipe and couplings between cylinder and pumping unit shall be such that fluid pressure loss is limited to 10 percent.
- C. Do not subject valves, piping, and fittings to working pressure greater than those recommended by the manufacturer.
- D. Support all horizontal piping. Place hangers or supports within 305 mm (12 in.) on each side of every change of direction of pipe line and space supports not over 3.0 meters (10 ft) apart. Secure vertical runs properly with iron clamps at sufficiently close intervals to carry weight of pipe and contents. Provide supports under pipe to floor.
1. Provide all piping from machine room to hoistway, including necessary supports or hangers. If remote piping is underground or in damp inaccessible areas, install hydraulic piping thru PVC sleeve pipe.
- E. Install pipe sleeves where pipes pass through walls or floors. Set sleeves during construction. After installation of piping, equip the sleeves with snug fitting inner liner of either glass or mineral wool insulation.
- F. Install blowout-proof, non-hammering, oil-hydraulic muffler in the hydraulic fluid supply pressure line near power unit in machine room. Design muffler to reduce to a minimum any pulsation or noises that may be transmitted through the hydraulic fluid into the hoistway.

- G. Arrange control valves to operate so hydraulic fluid flow will be controlled in positive and gradual manner to insure smooth starting and stopping of elevator.
- H. Provide safety check valve between cylinder and pump connection which will hold elevator with specified load at any point when pump stops or pressure drops below minimum operating levels.
- I. Provide an automatic shut-off valve in the oil supply line at the cylinder inlet. Weld pipe protruding from cylinder at inlet and thread to receive shut-off valve. Activate the automatic shut-off valve when there is more than a ten percent increase in high speed in the down direction. When activated, this device shall immediately stop the descent of the elevator, and hold the elevator until it is lowered by use of the manual lowering feature of the valve. Arrange the manual lowering feature of the automatic shut-off valve to limit the maximum descending speed of the elevator to 15 fpm. The exposed adjustments of the automatic shut-off valve shall have their means of adjustment sealed after being set to their correct position.
- J. Provide external tank shut-off valve to isolate hydraulic fluid during maintenance operations.
- K. Provide all pump relief and other auxiliary valves to comply with the requirements of the ASME A17.1 Section 3.19 and to insure smooth, safe, and satisfactory operation of elevator.
- L. Furnish and adjust by-pass and relief valve in accordance with ASME A17.1 Rule 3.19.4.2.
- M. Install check valve to hold the elevator car with rated load at any point when the pump stops.
- N. Provide shut-off valves in the pit near the cylinder and in the machine room capable of withstanding 150 percent of design operating pressure. Each manual valve shall have an attached handle.
- O. Conveniently locate the manual lowering valve, easily accessible, and properly identified with a red arrow and not concealed within the storage tank. Mark the operating handle in red.
- P. Provide a low oil control feature which shall shut off the motor and pump and return the elevator to the lowest landing. Upon reaching the lowest landing, doors will open automatically allowing passengers to leave the car. Then doors shall close. All control buttons, except the door open button, shall be made ineffective.

- Q. Provide oil-tight drip pan for assembled pumping unit, including storage tank. Pan shall be not less than 16 gauge sheet steel, with one-inch sides.
- R. The entire hydraulic system, including muffler, shall be tested to withstand a pressure equal to twice the calculated working pressure.
 - 1. Submit certification that test has been performed.

2.17 HYDRAULIC PLUNGER ASSEMBLY

- A. Existing Hydraulic Plunger Assembly to be retained.

2.18 CAR BUFFERS

- A. Existing Car Buffers to be retained.

2.19 CAR GUIDES

- A. Existing car guides and roller guides to be retained.

2.20 GUIDE RAILS, SUPPORTS, & FASTENINGS

- A. Existing Guide Rails, Supports and Fastenings to be retained.

2.21 NORMAL AND FINAL TERMINAL STOPPING DEVICES

- A. Normal and final terminal stopping devices shall conform to ASME A17.1 Section 2.25.
- B. Mount terminal slowdown switches and direction limit switches on the elevator or in hoistway to reduce speed and bring car to an automatic stop at the terminal landings.
 - 1. Switches shall function with any load up to and including 100 percent of rated elevator capacity at any speed obtained in normal operation.
 - 2. Switches, when opened, shall permit operation of elevator in reverse direction of travel.
- C. Mount final terminal stopping switches in the hoistway.
 - 1. Switches shall be positively opened should the car travel beyond the terminal direction limit switches.
 - 2. Switches shall be independent of other stopping devices.
 - 3. Switches, when opened, shall remove power from pump motor and control valves preventing operation of car in either direction.
- D. After final stopping switches have been adjusted, through bolt switches to guide rail.

2.22 CROSSHEAD DATA PLATE AND CODE DATA PLATE

- A. Permanently attach a non-corrosive metal Data Plate to car crosshead. Data plate shall bear information required by ASME A17.1 Section 2.16.3 and 2.20.2.1.

- B. Permanently attach a Code Data Plate, in plain view, to the controller, ASME A17.1 Section 8.9.

2.23 WORKMAN'S LIGHTS AND OUTLETS

- A. Provide duplex GFCI protected type receptacles and lamp, with guards on top of elevator car and beneath platform.
- B. The receptacles shall be in accordance with Fed. Spec. W-C-596 for Type D7, 2-pole, 3-wire grounded type rated for 15 amperes and 125 volts.

2.24 TOP-OF-CAR OPERATING DEVICE

- A. Provide a cartop operating device that meets the requirements of ASME A17.1 Section 2.26.
- B. The device shall be activated by a toggle switch mounted in the device. The switch shall be clearly marked "INSPECTION" and "NORMAL" on the faceplate, with 6 mm (1/4 in.) letters.
- C. Movement of the elevator shall be accomplished by the continuous pressure on a direction button and a safety button.
- D. Provide an emergency stop toggle type switch.
- E. Provide permanent identification for the operation of all components in the device.
- F. The device shall be permanently attached to the elevator crosshead on the side of the elevator nearest to the hoistway doors used for accessing the top of the car.

2.25 CAR LEVELING DEVICE

- A. Car shall be equipped with a two-way leveling device to automatically bring the car to within 3 mm (1/8 in.) of exact level with the landing for which a stop is initiated regardless of load in car or direction.
- B. If the car stops short or travels beyond the floor, the leveling device, within its zone shall automatically correct this condition and maintain the car within 3 mm (1/8 in.) of level with the floor landing regardless of the load carried.
- C. Provide encoded steel tape, steel tape with magnets or steel vanes with magnetic switches. Submit design for approval.

2.26 EMERGENCY STOP SWITCHES

- A. Provide an emergency stop switch for each top-of-car device, pit, machine spaces, service panel and firefighters' control panel inside the elevator. Mount stop switches in the pit adjacent to pit access door, at top of the pit ladder 1220 mm (48 in.) above the bottom landing sill and 1220 mm (48 in.) above the pit floor adjacent to the pit ladder.
- B. Each stop switch shall be red in color and shall have "STOP" and "RUN" positions legibly and indelibly identified.

2.27 MAIN CAR OPERATING PANEL

- A. Locate the main car operating panel in the car enclosure on the front return panel for passenger/service elevators and the front of the side wall for freight elevators. The top floor car call push button shall not be more than 1220 mm (48 in.) above the finished floor. Car call push buttons and indicator lights shall be round with a minimum diameter of 25 mm (1 in.), LED white light illuminated.
- B. One piece front faceplate, with edges beveled 15 degrees, shall have the firefighters' service panel recessed into the upper section and the service operation panel recessed into the lower section, fitted with hinged doors. Doors shall have concealed hinges, be in the same front plane as the faceplate and fitted with cylinder type key operated locks. Secure the faceplate with stainless steel tamperproof screws.
- C. All terminology on the main car operating panel shall be raised or engraved. Use 6 mm (1/4 in.) letters to identify all devices in upper section of the main car operating panel. The handicapped markings with contrasting background shall be recessed .030 inch in the faceplate, square or rectangular in shape, with the finished face of the 12 mm (1/2 in.) numerals and markings flush with the faceplates. Surface mounted plates are not acceptable.
- D. The upper section shall contain the following items in order listed from top to bottom:
 1. Engrave elevator number, 25 mm (1 in.) high with black paint for contrast.
 2. Engrave capacity plate information with black paint for contrast with freight loading class and number of passengers allowed.
 3. Emergency car lighting system consisting of a rechargeable battery, charger, controls, and LED illuminated light fixture. The system shall automatically provide emergency light in the car upon failure or interruption of the normal car lighting service, and function irrespective of the position of the light control switch in the car. The system shall be capable of maintaining a minimum illumination of 1.0 foot-candle when measured 1220 mm (48 in.) above the car floor and approximately 305 mm (12 in.) in front of the car operating panel, for not less than four (4) hours.
 4. LED illuminated digital car position indicator with direction arrows. Digital display floor numbers and direction arrows shall be a minimum of 50mm (2 in.) high.

5. Firefighters' Emergency Operation Panel shall conform to the requirements of ASME A17.1 Section 2.27. Firefighters' Panel shall be 1676 mm (66 in.) minimum to 1830 mm (72 in.) maximum to the top of the panel above finished floor.
6. Firefighters' Emergency Indicator Light shall be round with a minimum diameter of 25 mm (1 in.).
7. Medical Emergency switch marked "MEDICAL EMERGENCY" with two positions labeled "ON" and "OFF" and Medical Emergency Indicator Light located next to the key switch shall be round with a minimum diameter of 25 mm (1 in.). Instruction for Medical Emergency operation shall be engraved below the key switch and light.
8. Independent Service switch, see Section 2.30 for detailed description.
9. Provide a Door Hold button on the faceplate next to the independent service key switch. It shall have "DOOR HOLD" indelibly marked on the button. Button shall light when activated. When activated, the door shall stay open for a maximum of one minute. To override door hold timer, push a car call button or door close button. Door Hold button is not ADA required and Braille is not needed.
10. Complete set of round car call push buttons, minimum diameter of 25 mm (1 in.), and LED white light illuminated, corresponding to the floors served. Car call buttons shall be legibly and indelibly identified by a floor number and/or letter not less than 12mm (1/2 in.) high in the face of the call button. Stack buttons in a single vertical column for low rise buildings up to six floors with front openings only.
11. Door Open and Door Close buttons shall be located below the car call buttons. They shall have "OPEN" and "CLOSE" legibly and indelibly identified by letters in the face of the respective button. The Door Open button shall be located closest to the door jamb as required by ADA.
12. Red Emergency Alarm button that shall be located below the car operating buttons. Mount the emergency alarm button not lower than 890 mm (35 in.) above the finished floor. It shall be connected to audible signaling devices as required by A17.1 Rule 2.27.1.2. Provide audible signaling devices including the necessary wiring.
13. Emergency Help push button shall activate two way communications by Auto Dial telephone system as required by ASME A17.1 Rule

- 2.27.1.1.3. Help button shall be LED white light illuminated and flash when call is acknowledged. Legibly and indelibly label the button "HELP" in the face of the button with 12 mm (1/2 in.) high letters.
14. Provide a corresponding Braille plate on the left side of each button. The handicapped markings with contrasting background shall be recessed .030 inch in the faceplate, square or rectangular in shape, with the finished face of the 12 mm (1/2 in.) numerals and markings flush with the faceplates. Surface mounted plates are not acceptable.
- E. The service operation panel, in the lower section shall contain the following items:
1. Light switch labeled "LIGHTS" for controlling interior car lighting with its two positions marked "ON" and "OFF".
 2. Inspection switch that will disconnect normal operation and activate hoistway access switches at terminal landings. Switch shall be labeled "INSPECTION" with its two positions marked "ON" and "OFF".
 3. Three position switch labeled "FAN" with its positions marked "HIGH", "LOW" and "OFF" for controlling car ventilating blower.
 4. Two position, spring return, toggle switch or push button to test the emergency light and alarm device. It shall be labeled "TEST EMERGENCY LIGHT AND ALARM".
 5. Two position emergency stop switch, when operated, shall interrupt power supply and stop the elevator independently of regular operating devices. Emergency stop switch shall be marked "PULL TO STOP" and "PUSH TO RUN".

2.28 INDEPENDENT SERVICE

- A. Provide a legibly and indelibly labeled "INDEPENDENT SERVICE", two-position key operated switch on the face of the main car operating panel that shall have its positions marked "ON" and "OFF". When the switch is in the "ON" position, the car shall respond only to calls registered on its car dispatch buttons and shall bypass all calls registered on landing push buttons. The car shall start when a car call is registered, car call button or door close button is pressed, car and hoistway doors are closed, and interlock circuits are made. When switch is returned to "OFF" position, normal service shall be resumed.

2.29 CAR POSITION INDICATOR

- A. Provide an alpha-numeric digital car position indicator in the main car operating panel, consisting of numerals and arrows not less than 50 mm (2 in.) high, to indicate position of car and direction of car travel. Locate position indicator at the top of the main car operating panel, illuminated by light emitting diodes.

2.30 AUDIO VOICE SYSTEM

- A. Provide digitized audio voice system activated by stopping at a floor. Audio voice shall announce floor designations, direction of travel, and special announcements. The voice announcement system shall be a natural sounding human voice that receives messages and shall comply with ADA requirements for audible car position indicators. The voice announcer shall have two separate volume controls, one for the floor designations and direction of travel, and another for special announcements. The voice announcer shall have a full range loud speaker, located on top of the cab. The audio voice unit shall contain the number of ports necessary to accommodate the number of floors, direction messages, and special announcements. Install voice announcer per manufacturer's recommendations and instructions. The voice announcer units shall be the product of a manufacturer of established reputation. Provide manufacturer literature and list of voice messages.
 - 1. Fire Service Message
 - 2. Medical Emergency Service Message
 - 3. "Please do not block doors."
 - 4. Provide special messages as directed by COTR.

2.31 AUTO DIAL TELEPHONE SYSTEM

- A. Furnish and install a complete ADA compliant intercommunication system.
- B. Provide a two-way communication device in the car with automatic dialing, tracking and recall features with shielded wiring to car controller in machine room. Provide dialer with automatic rollover capability with minimum two numbers.
- C. "HELP" button shall illuminate and flash when call is acknowledged. Button shall match floor push button design.
- D. Provide "HELP" button tactile symbol engraved signage and Braille adjacent to button mounted integral with car operating panels.
- E. The auto dial system shall be located in the auxiliary car operating panel. The speaker and unit shall be mounted on the backside of the perforated stainless steel plate cover.

- F. Each elevator shall have an individual phone number.
- G. If the operator ends the call, the phone shall be able to redial immediately.

2.32 CORRIDOR OPERATING DEVICE FACEPLATES

- A. Fabricate faceplates for elevator operating and signal devices from not less than 3 mm (1/8 in.) thick flat stainless steel with all edges beveled 15 degrees. Install all faceplates flush with surface on which they are mounted.
- B. Corridor push button faceplates shall be at least 127 mm (5 in.) wide by 305 mm (12 in.) high. The centerline of the landing push buttons shall be 1067 mm (42 in.) above the corridor floor.
- C. Elevator Corridor Call Station Pictograph shall be engraved in the faceplate.
- D. Fasten all car and corridor operating device and signal device faceplates with stainless steel tamperproof screws.
- E. Design corridor push button faceplates so that pressure on push buttons shall be independent of pressure on push button contacts.
- F. Engraved legends in faceplates shall have lettering 6 mm (1/4 in.) high filled with black paint.
- G. Provide a corresponding Braille plate on the left side of each button. The handicapped markings with contrasting background shall be recessed .030 inch in the faceplate, square or rectangular in shape, with the finished face of the 12 mm (1/2 in.) numerals and markings flush with the faceplates. Surface mounted plates are not acceptable.

2.33 CORRIDOR OPERATING DEVICES

- A. Provide one riser of landing call buttons located as shown on contract drawings.
- B. Fixtures for intermediate landings shall contain "UP" and "DOWN" buttons. Fixtures for terminal landings shall contain a single "UP" or "DOWN" button.
- C. Each button shall contain an integral registration LED white light which shall illuminate upon registration of a call and shall extinguish when that call is answered.
- D. The direction of each button shall be legibly and indelibly identified by arrows not less than 12 mm (1/2 in.) high in the face of each button.

- E. Two or more risers of landing call buttons, if specified, shall be cross-connected so that either "UP" or "DOWN" buttons at a floor shall be capable of registering a call to that floor for the entire elevator group. Registration of a landing call shall illuminate "UP" or "DOWN" buttons simultaneously, and upon satisfaction of that call, both buttons shall be extinguished simultaneously.
- F. Landing push buttons shall not re-open the doors while the car and hoistway doors are closing at that floor, the call shall be registered for the next available elevator. Calls registered shall be canceled if closing doors are re-opened by means of "DOOR OPEN" button or infrared curtain unit.

2.34 CORRIDOR LANTERN/POSITION INDICATOR

- A. Provide each car with combination corridor lantern/position indicator digital display mounted over the hoistway entrances at each and every floor. Provide each terminal landing with "UP" or "DOWN", minimum 64 mm (2 1/2 in.) high digital arrow lanterns and each intermediate landing with "UP" and "DOWN" digital arrow lanterns. Each lens shall be LED illuminated of proper intensity, so shielded to illuminate individual lens only. The lenses in each lantern shall be illuminated green to indicate "UP" travel and red to indicate "DOWN" travel. Lanterns shall signal in advance of car arrival at the landing indicating the direction of travel whether or not corridor button has been operated at that floor. Hall calls shall receive immediate assignment to individual cars and hall lantern shall sound and illuminate. Corridor lanterns shall not be illuminated when a car passes a floor without stopping. Each lantern shall be equipped with a clearly audible electronic chime which shall sound once for "UPWARD" bound car and twice for "DOWNWARD" bound car. Audible signal shall not sound when a car passes the floor without stopping. Provide adjustable sound level on audible signal. Car riding lanterns are not acceptable.
- B. Provide alpha-numeric digital position indicators directly over hoistway landing entranceways between the arrival lanterns at each and every floor. Indicator faceplate shall be stainless steel. Numerals shall be not less than 50 mm (2 in.) high with direction arrows. Cover plates shall be readily removable for re-lamping. The appropriate direction arrow shall be illuminated during entire travel of car in corresponding direction.

- C. Provide LED illumination in each compartment to indicate the position and direction the car is traveling by illuminating the proper alpha-numeric symbol. When the car is standing at a landing without direction established, arrows shall not be illuminated.

2.35 HOISTWAY ACCESS SWITCHES

- A. Provide hoistway access switches for elevator at top terminal landing to permit access to top of car, and at bottom terminal landing to permit access to pit. Elevators with side slide doors, mount the access key switch 1830 mm (6 ft) above the corridor floor in the wall next to the strike jamb. Exposed portions of each access switch or its faceplate shall have legible, indelible legends to indicate "UP", "DOWN", and "OFF" positions. Submit design and location of access switches for approval. Each access switch shall be a constant pressure cylinder type lock having not less than five pins or five stainless steel disc combination with key removable only when switch is in the "OFF" position. Lock shall not be operable by any other key which will operate any other lock or device used for any other purpose in the VA Medical Center. When the car is moved down from the top terminal landing, limit the zone of travel to a distance not greater than the top of the crosshead level with the top floor.
- B. Provide emergency access for all hoistway entrances, keyways for passenger and service elevators and locked door release system (key access) for freight elevators.

2.36 HOISTWAY ENTRANCES: PASSENGER/SERVICE ELEVATORS

- A. Provide entrances of metal construction using cold rolled steel. Door frames shall be constructed of stainless steel. Complete entrances with sills, hanger supports, hangers, tracks, angle struts, unit frames, door panels, fascia plates, toe guards, hardware, bumpers, sight guards, and wall anchors.
- B. Provide one piece extruded aluminum sills with non-slip wearing surface, grooved for door guides and recessed for fascia plates. Sills shall have overall height of not less than 19 mm (3/4 in.) set true, straight, and level, with hoistway edges plumb over each other, and top surfaces flush with finished floor. Grout the sills full length after installation.
- C. Construct hanger supports of not less than 4.5 mm (3/16 in.) thick steel plate, and bolted to strut angles.

- D. Structural steel angles 127 mm x 127 mm x 13 mm (5 in. x 5 in. x 1/2 in.) shall extend from top of sill to bottom of floor beam above, and shall be securely fastened at maximum 457 mm (18 in.) on center and at each end with two bolts.
- E. Provide jambs and head soffits, of not less than 14-gauge stainless steel, for entrances. Jambs and head soffits shall be bolted or welded construction, and provided with three anchors each side. Side jambs shall be curved type. Radius of curvature shall be 89 mm (3 1/2 in.). Head jamb shall be square type, and shall overhang corridor face of side jambs by 6 mm (1/4 in.). Rigidly fasten jambs and head soffits to building structure. Provide jambs with protective covering. After installation, protect jambs and head soffits to prevent damage to finish during construction. Solidly grout jambs.
- F. Provide 14-gauge sheet steel fascia plates in hoistway to extend vertically from head of hanger support housing to sill above. Plates shall be the same width as the door opening of elevator and adequately reinforced to prevent waves and buckles. Below bottom terminal landing and over upper terminal landing provide shear guards beveled back to and fastened to the wall.
- G. Provide hoistway entrance with flush two speed side slide hoistway doors for Elevators. Door panels shall be not less than 16-gauge stainless steel, flush type construction, and not less than 32 mm (1 1/4 in.) thick. Wrap stainless steel around the leading and trailing edges of the door panel. Top and bottom of door panels shall have continuous stiffener channels welded in place. Reinforcement of the door panels shall be approximately 1.0 mm (0.04 in.) in thickness and of the hat section type. At bottom of each and every panel, provide two removable laminated phenolic gibs or other approved material guides and a separate fire gib. Reinforce each door panel for hangers, interlock mechanism, drive assembly, and closer. One door panel for each entrance shall bear a BOCA label, Underwriters' label, or in lieu of this, labels from other accredited test laboratories may be furnished provided they are based on fire test reports and factory inspection procedures acceptable to the COTR. Fasten sight guard of 14-gauge stainless steel, extending full height of panel, to leading edge of fast speed panel of two-speed doors.
- H. Provide hangers for hoistway door panels and provide relating devices to transmit motion from one door panel to the other. Fasten the hangers

to the door sections. Provide reinforcements at the point of attachment. The hanger shall have provisions for vertical and lateral adjustments. Hang doors on two-point suspension hangers having sealed ball-bearing sheaves not less than 76 mm (3 in.) in diameter, with rubber or non-metallic sound-reducing tires mounted on malleable iron or steel brackets. The hanger sheaves shall operate at a relatively low rotational speed, and shall roll on a high-carbon, cold-rolled or drawn steel track shaped to permit free movement of sheaves without regard to vertical adjustment of sheave, bracket or housing. Beneath the track and each hanger sheave, provide a hardened steel up-thrust roller capable of withstanding a vertical thrust equal to the carrying capacity of adjacent upper sheave. The up-thrust shall have fine vertical adjustments, and the face of the roller shaped so as to permit free movement of the hanger sheave. The up-thrust roller shall have ball or roller bearings. Provide the hanger sheaves with steel fire stops to prevent disengagement from tracks.

- I. Do not use hangers that are constructed integrally with the door panels.
- J. Provide raised numerals on cast, rear mounted plates for all openings. Numerals shall be a minimum of 50 mm (2 in.) high, located on each side of entrance frame, with centerline of 1524 mm (5 ft) above the landing sill. The number plates shall contain Braille.
- K. Provide unique car number on every elevator entrance at designated main fire service floor level, minimum 76 mm (3 in.) in height.

2.37 ELECTRIC INTERLOCKS

- A. Equip each hoistway door with an interlock, functioning as hoistway unit system, to prevent operation of car until all hoistway doors are locked in closed position. Hoistway door interlocks shall not be accepted unless they meet the requirements of ASME A17.1 Section 2.12.
- B. Equip car doors with electric contact that prevents operation of car until doors are closed unless car is operating in leveling zone or hoistway access switch is used. Locate door contact to prevent its being tampered with from inside of car. Car door contact shall not be accepted unless it meets the requirements of ASME A17.1 Section 2.12.

- C. Wiring installed from the hoistway riser to each door interlock shall be NEC type SF-2, or equivalent.
 - 1. Type SF-2 cable terminations in the interlock housing shall be sleeved with glass braid fillers or equivalent.
- D. Provide devices, either mechanical or electrical, that shall prevent operation of the elevator in event of damaged or defective door equipment that has permitted an independent car or hoistway door panel to remain in the "unclosed" and "unlocked" position.

2.38 CAR FRAME: PASSENGER/SERVICE ELEVATORS

- A. Car frame shall conform to the requirements of ASME A17.1 Section 2.15, constructed of steel plates and structural shapes securely riveted, bolted, or welded together. Iron casting shall not be permitted. The entire assembly shall be rugged construction, and amply braced to withstand unequal loading of platform. Car frame members shall be constructed to relieve the car enclosure of all strains. Balance car front to back and side to side. Provide balancing weights and frames, properly located, to achieve the required true balance.
- B. Provide a bonding wire between frame and plunger.
- C. The intent is to get the largest possible cab and door openings in the existing hoistway.

2.40 CAR PLATFORM: PASSENGER/SERVICE ELEVATORS

- A. Construct the car platform to comply with all the requirements of ASME A17.1 Section 2.15.5. The platform shall be designed to withstand the forces developed under the loading conditions specified. Provide car entrances with extruded nickel silver sill or better with machined or extruded guide grooves. Cover underside and all exposed edges of wood filled platform with sheet metal of not less than 27-gauge, with all exposed joints and edges folded under. Fire resistant paint is not acceptable. Platform shall have flexible composition flooring not less than 3 mm (1/8 in.) thick. For color, see Section 09 06 00, SCHEDULE FOR FINISHES. Adhesive material shall be type recommended by manufacturer of flooring. Lay flooring flush with threshold plate and base.
- B. Provide a platform guard (toe guard) that meets the requirements of ASME A17.1 Section 2.15.9, of not less than 12-gauge sheet-steel on the entrance side, extend 76 mm (3 in.) beyond each side of entrance jamb. Securely brace platform guard to car platform, and bevel bottom edge at a 60-75 degree angle from horizontal. Install platform in the hoistway,

so that the clearance between front edge and landing threshold shall not exceed 32 mm (1 1/4 in.).

- C. Isolate the platform from the car frame by approved rubber pads or other equally effective means.
- D. Provide adjustable diagonal brace rods to hold platform firmly within car suspension frame.
- E. Provide a bonding wire between frame and platform.
- F. The intent is to get the largest possible cab and door openings in the existing hoistway.

2.41 CAR ENCLOSURE: PASSENGER/SERVICE ELEVATORS

- A. Car enclosure shall have a dome height inside the cab of 2440 mm (8 ft).
- B. Securely fasten car enclosure to platform by through bolts located at intervals of not more than 457 mm (18 in.) running through an angle at the base of panels to underside of platform. Provide 6 mm (1/4 in.) bolts with nuts and lock washers.
- C. Car enclosure base shall be of 14-gauge stainless steel, 152 mm (6 in.) high. Provide straight type base at front return sides. Vertical face of base at sides and rear shall be flush with, or recessed behind the wainscot directly above the base. There shall be no exposed fastenings in base. Provide natural ventilation openings divided equally between the bottom and top of the car enclosure that shall provide a minimum 3.5 percent of the inside car floor area.
- D. Construct canopy of not less than 12-gauge steel.
- E. Car top railings shall meet the requirements of ASME A17.1 Rules 2.14.1.7 and 2.10.2.
- F. Front return wall panel, entrance columns, rear corner columns, entrance head-jamb and transom shall be 14-gauge stainless steel full height of car. Side and rear walls from top of base to top of panel shall be constructed of 14-gauge cold rolled steel. Side and rear walls up to 1220 mm (48 in.) above finished floor shall be covered with stainless steel. Side and rear walls from 1220 (48 in.) to the ceiling shall be covered with high pressure plastic laminate. Apply directly to the cab walls or to 13 mm (1/2 in.) plywood/particle board that meets requirements of ASTM E 84, UL 723, or CAN/ULC-S102.2, whichever is applicable. Submit a method of fastening plywood/particle board to steel walls. It shall be flush with the face of the bottom section of the stainless steel. Plastic laminate shall comply with Federal Specification L-P-508, Style Type 1, and Class 1. Color is specified in Section 09 06 00, SCHEDULE FOR FINISHES, Interior shall be flush panel

construction with angles welded on exterior to insure adequate rigidity. Coat exterior of panels with mastic sound insulation material approximately 2.5 mm (3/32 in.) thick followed by a prime coat of paint. Mastic material shall conform to ASTM E1042.

1. Smooth and flush all joints with no ragged or broken edges. Plastic laminate shall comply with NEMA LD-3, textured finish, general purpose type, grade designation GP 50, and 0.050 in. thickness, except with a minimum wear resistance of 1200 cycles, and backer sheet, grade designation BK 20, and 0.020 in. thickness.
- G. Provide a hinged top emergency exit cover. Exit shall be unobstructed when open and shall have mechanical stops on the cover. Provide a code approved exit switch to prevent operation of the elevator when the emergency exit is open.
- H. Provide duplex, GFCI protected type receptacle in car. Locate flush-mounted receptacle on the centerline of the main car operating panel, 150 mm (6 in.) above the car floor.
- I. Lighting for passenger elevators:
1. Provide aluminum hanging ceiling frame. Construct frame of 1/8 in. x 1 1/2 in. x 1 1/2 in. "T" and "L" sections, divide ceiling into six panels.
 2. Provide fluorescent or LED illuminated car light fixtures above the ceiling panels. See Specification 265100, Interior Lighting for fixture and ballast type. Maintain a minimum light level of 50-foot candles at 914 mm (36 in.) above the finished floor.
- J. Lighting for service elevators:
1. Provide car lighting with indirect fluorescent or LED lamps mounted in lighting coves along each side of the cab ceiling, front to back. See Specification 265100, Interior Lighting for fixture and ballast type. Maintain a minimum light level of 50-foot candles at 914 mm (36 in.) above the finished floor.
 2. Equip the lighting cove with asymmetrical reflectors having specular ALZAK (or equal) finish. Maintain a minimum light level of 50-foot candles 914 mm (36 in.) above finished floor at the car operating panels.
 3. Enclose the entire vertical space between the light trough outer edge and the cab canopy with approved opaque white or clear lumicite sheeting. Install the lumicite sheeting so that it is removable for cleaning and re-lamping.

- K. Provide a blower unit arranged to exhaust through an opening in the canopy. Provide a stainless or chrome plated fan grill around the opening. Provide 2-speed fan, capable of rated free delivery air displacement of approximately 380 and 700 cfm at respective speeds. Mount fan on top of car with rubber isolation to prevent transmission of vibration to car structure. Provide screening over intake and exhaust end of blower. Provide a 3-position switch to control the unit in service panel.
- L. Provide car enclosure with two sets of stainless steel handrails.
 - 1. 75 mm (3 in.) wide x 9 mm (3/8 in.) thick flatstock located with centerlines 750 mm and 1050 mm (30 in. and 42 in.) above the car floor.
 - 2. Locate handrails approximately 38 mm (1 1/2 in.) from cab wall. Install handrails on two sides. Curve ends of handrails to walls. Conceal all handrail fastenings. Handrails shall be removable from inside the car enclosure.
- M. Provide car entrance with two-speed side opening horizontal sliding car doors, of same type as hoistway doors for Elevator. Construct door panels to be flush hollow metal construction, not less than 32 mm (1 1/4 in.) thick, consisting of one continuous piece 16-gauge stainless steel on car side face, leading and trailing edges. Separate two plates by a sound-deadening material, and reinforce by steel shapes welded to the plates at frequent intervals. Reinforce panels as required for installation of hangers, power-operating and door-opening devices. Hang doors on two-point suspension hangers having sealed ball-bearing sheaves not less than 76 mm (3 in.) in diameter, with rubber or non-metallic sound-reducing tires. Equip hangers with adjustable ball-bearing rollers to take upward thrust of panels. Upthrust rollers shall be capable of being locked in position after adjustment to a maximum of .38 mm (1/64 in.) clearance. Provide two laminated phenolic gibs on each door panel. Gibs shall be replaceable without removal of door panel. Provide door drive assembly, restrictor, gate switch, header, track, arms, and all related door hardware.
- O. The intent is to get the largest possible cab and door openings in the existing hoistway.

2.42 POWER DOOR OPERATORS: PASSENGER/SERVICE ELEVATORS

- A. Provide a high-speed heavy duty door operator to automatically open the car and hoistway doors simultaneously when the car is level with the

floor, and automatically close the doors simultaneously at the expiration of the door-open time. Provide solid-state door control with closed loop circuitry to constantly monitor and automatically adjust door operation based upon velocity, position, and motor current. Motor shall be of the high-internal resistance type, capable of withstanding high currents resulting from stall without damage to the motor. The door operator shall be capable of opening a car door and hoistway door simultaneously, at a speed of .762 m (2.5 ft) per second. The closing speed of the doors shall be .3 m (1 ft) per second. A reversal of direction of the doors from the closing to opening operation, whether initiated by obstruction of the infrared curtain or the door "OPEN" button, shall be accomplished within 38 mm (1.5 in.) maximum of door movement. Emphasis is placed on obtaining quiet interlock and door operation; smooth, fast, dynamic braking for door reversals, stopping of the door reversal, and stopping of the doors at extremes of travel. Construct all levers and drive arms operating the doors, of heavy steel members, and all pivot points shall have ball or roller bearings. Auxiliary automatic door closers required under ASME A17.1 Section 2.11.3 shall be torsion spring type.

- B. Design the door operator so that in case of interruption or failure of the electric power from any cause, it shall permit emergency manual operation of the car door and hoistway door from within the car, only in the door zone. Out of door zone, doors are restricted to 100 mm (4 in.) opening.
 - 1. It shall not be possible for the doors to open by power unless the elevator is within the leveling zone.
 - 2. Provide infrared curtain unit. The device shall cause the car and hoistway doors to reverse automatically to the fully-open position should the unit be actuated while the doors are closing. Unit shall function at all times when the doors are not closed, irrespective of all other operating features. The leading edge of the unit shall have an approved black finish.
- C. Should the doors be prevented from closing for more than a predetermined adjustable interval of 20 to 60 seconds by operation of the curtain unit, the doors shall stay open, the audio voice message and a buzzer located on the car shall sound only on automatic operation. **Do not provide door nudging.**

1. If an obstruction of the doors should not activate the photo-electric door control device and prevent the doors from closing for more than a predetermined adjustable interval of 15 to 30 seconds, the doors shall reverse to the fully open position and remain open until the "Door Close" button re-establishes the closing cycle.
- D. Provide door "OPEN" and "CLOSE" buttons. When the door "OPEN" button is pressed and held, the doors, if in the open position, shall remain open and if the doors are closing, they shall stop, reverse and re-open. Momentary pressure of the door "CLOSE" button shall initiate the closing of the doors prior to the expiration of the normal door open time.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine work of other trades on which the work of this Section depends. Report defects to the COTR in writing which may affect the work of this trade or equipment operation dimensions from site for preparation of shop drawings.
- B. Ensure that shafts and openings for moving equipment are plumb, level and in line, and that pit is to proper depth, waterproofed and drained with necessary access doors, ladder and guard.
- C. Ensure that machine room is properly illuminated, heated and ventilated, and equipment, foundations, beams correctly located complete with floor and access stairs and door.
- D. Before fabrication, take necessary job site measurements, and verify where work is governed by other trades. Check measurement of space for equipment, and means of access for installation and operation. Obtain dimensions from site for preparation of shop drawings.
- E. Ensure the following preparatory work, provided under other sections of the specification has been provided. If the Elevator Contractor requires changes in size or location of trolley beams, or their supports, trap doors, etc., to accomplish their work, he must make arrangements, subject to approval of the Contracting officer and include cost in their bid. Where applicable, locate controller near and visible to its respective hydraulic pump unit. Work required prior to the completion of the elevator installation:
 1. Supply of electric feeder wires to the terminals of the elevator control panel, including circuit breaker.
 2. Provide light and GFCI outlets in the elevator pit and machine room.

3. Furnish electric power for testing and adjusting elevator equipment.
 4. Furnish circuit breaker panel in machine room for car and hoistway lights and receptacles.
 5. Supply power for cab lighting and ventilation from an emergency power panel specified in Division 26, ELECTRICAL.
 6. Machine room enclosed and protected from moisture, with self-closing, self-locking door and access stairs.
 7. Provide fire extinguisher in machine room.
- F. Supply for installation, inserts, anchors, bearing plates, brackets, supports and bracing including all setting templates and diagrams for placement.

3.2 SPACE CONDITIONS

- A. Attention is called to overhead clearance, pit clearances, overall space in machine room, and construction conditions at building site in connection with elevator work. Addition or revision of space requirements, or construction changes that may be required for the complete installation of the elevators must be arranged for and obtained by the Contractor, subject to approval by COTR. Include cost of changes in bid that become a part of the contract. Provide proper, code legal installation of equipment, including all construction, accessories and devices in connecting with elevator, mechanical and electrical work specified.
- B. Where concrete beams, floor slabs or other building construction protrude more than 50 mm (2 in.) into hoistway; bevel all top surfaces of projections to an angle of 75 degrees with the horizontal.

3.3 INSTALLATION

- A. Perform work with competent Certified Elevator Mechanics and Apprentices skilled in this work and under the direct supervision of the Elevator Contractor's experienced foreman.
- B. Set hoistway entrances in alignment with car openings, and true with plumb sill lines.
- C. Erect hoistway sills, headers and frames prior to erection of rough walls and doors. Erect fascias and toe guards after rough walls are finished.
- D. Install machinery, guides, controls, car and all equipment and accessories in accordance with manufacturer's instructions, applicable codes and standards.

- E. Isolate and dampen machine vibration with properly sized sound-reducing anti-vibration pads.
- F. Grout sills and hoistway entrance frames.

3.4 ARRANGEMENT OF EQUIPMENT

- A. Clearance around elevator, mechanical and electrical equipment shall comply with applicable provisions of NEC. Arrange equipment in machine room so that major equipment components can be removed for repair or replacement without dismantling or removing other equipment in the same machine room. Locate controller near and visible to its respective hydraulic pump unit.

3.5 WORKMANSHIP AND PROTECTION

- A. Installations shall be performed by Certified Elevator Mechanics and Apprentices to best possible industry standards. Details of the installation shall be mechanically and electrically correct. Materials and equipment shall be new and without imperfections.
- B. Recesses, cutouts, slots, holes, patching, grouting, refinishing to accommodate installation of equipment shall be included in the Contractor's work. All new holes in concrete shall be core drilled.
- C. Structural members shall not be cut or altered. Work in place that is damaged or defaced shall be restored equal to original condition.
- D. Finished work shall be straight, plumb, level, and square with smooth surfaces and lines. All machinery and equipment shall be protected against dirt, water, or mechanical injury. At final completion, all work shall be thoroughly cleaned and delivered in perfect unblemished condition.
- E. Sleeves for conduit and other small holes shall project 50 mm (2 in.) above concrete slabs.
- F. Exposed gears, sprockets, and sheaves shall be guarded from accidental contact in accordance with ASME A17.1 Section 2.10.

3.6 CLEANING

- A. Clean machine room and equipment.
- B. Perform hoistway clean down.
- C. Prior to final acceptance, remove protective covering from finished or ornamental surfaces. Clean and polish surfaces with regard to type of material.

3.7 PAINTING AND FINISHING

- A. Hydraulic pump assembly shall be factory painted with manufacturer's standard finish and color.

- B. Controllers, car frames and platforms, beams, rails and buffers, except their machined surfaces, cams, brackets and all other uncoated ferrous metal items shall be painted one factory priming coat or approved equal.
- C. Upon completion of installation and prior to final inspection, all equipment shall be thoroughly cleaned of grease, oil, cement, plaster and other debris. All equipment, except that otherwise specified as to architectural finish, shall then be given two coats of paint of approved color, conforming to manufacturer's standard.
- D. Stencil or apply decal floor designations not less than 100 mm (4 in.) high on hoistway doors, fascias or walls within door restrictor areas as required by ASME A17.1 Rule 2.29.2. The color of paint used shall contrast with the color of the surfaces to which it is applied.
- E. Elevator pump units, controllers, main line shunt trip circuit breakers, bolster channels, and cross heads of cars shall be identified by 100 mm (4 in.) high numerals and letters located as directed. Numerals shall contrast with surrounding color and shall be stenciled or decaled.
- F. Hoistway Entrances of Passenger, and Service Elevators:
 - 1. Door panels shall be parkerized or given equivalent rust resistant treatment and a factory finish of one coat of baked-on primer and one factory finish coat of baked-on enamel.
 - 2. Fascia plates, top and bottom shear guards, dust covers, hanger covers, and other metalwork, including built-in or hidden work and structural metal, (except stainless steel entrance frames and surfaces to receive baked enamel finish) shall be given one approved prime coat in the shop, and one field coat of paint of approved color.
- G. Elevator Cabs for Passenger and Service Elevators:
 - 1. Interior and exterior steel surfaces shall be parkerized or given equivalent rust resistant treatment before finish is applied.
 - 2. Interior steel surfaces shall be factory finished with one coat of baked on enamel or proxylin lacquer. For color, see Section 09 06 00, SCHEDULE FOR FINISHES.
 - 3. Give exterior faces of car doors one finish coat of paint of medium gray color.

3.8 PRE-TESTS AND TESTS

- A. Pre-test the elevators and related equipment in the presence of the COTR or his authorized representative for proper operation before requesting final inspection. Conduct final inspection at other than normal working hours, if required by COTR.
 - 1. Procedure outlined in the Inspectors Manual for Hydraulic Elevators, ASME A17.2 shall apply.
 - a. Final test shall be conducted in the presence of and witnessed by an ASME QEI-1 Certified Elevator Inspector.
 - b. Government shall furnish electric power including necessary current for starting, testing, and operating machinery of each elevator.
 - 2. Contractor shall furnish the following test instruments and materials on-site and at the designated time of inspection: properly marked test weights, oil pressure gauge, voltmeter, amp probe, thermometers, direct reading tachometer, megohm meter, vibration meter, sound meter, light meter, stop watch, and a means of two-way communication.
 - 3. If during the inspection process the Inspector determines the need, the following instruments shall be available within a four-hour period: Megohm meter, vibration meter, sound meter, and a light meter.
- B. Inspection of workmanship, equipment furnished, and installation for compliance with specification.
- C. Full-Load Run Test: Elevators shall be tested for a period of one hour continuous run with full contract load in the car. The test run shall consist of the elevator stopping at all floors, in either direction of travel, for not less than five or more than ten seconds per floor.
- D. Speed Test: The actual speed of the elevator shall be determined in both directions of travel with full contract load and no load in the elevator. Speed shall be determined by certified tachometer. The actual measured speed of the elevator with all loads in either direction shall be within five (5) percent of specified rated speed. Full speed runs shall be quiet and free from vibration and sway.
- E. Temperature Rise Test: The temperature rise of the pump motor shall be determined during the full load test run. Temperatures shall be measured by the use of thermometers. Under these conditions, the temperature rise of the equipment shall not exceed 50 degrees

Centigrade above ambient temperature. Test shall start when all machine room equipment is within 5 degrees Centigrade of the ambient temperature. Other tests for heat runs on motors shall be performed as prescribed by the Institute of Electrical and Electronic Engineers.

- F. Car Leveling Test: Elevator car leveling devices shall be tested for accuracy of leveling at all floors with no load in car and with contract load in car in both directions of travel. Accuracy of floor level shall be within plus or minus 3 mm (1/8 in.) of level with any landing floor for which the stop has been initiated regardless of load in car or direction of travel. The car leveling device shall automatically correct over travel as well as under travel and shall maintain the car floor within plus or minus 3 mm (1/8 in.) of level with the landing floor regardless of change in load.
- G. Insulation Resistance Test: The elevator's complete wiring system shall be free from short circuits and ground faults and the insulation resistance of the system shall be determined by use of megohm meter, at the discretion of the Elevator Inspector conducting the test.
- H. Safety Devices Tests: Safety devices shall be tested as required by ASME A17.1 Section 8.10.
- I. Overload Devices: Test all overload current protection devices in the system at final inspection.
- J. Limit Stops:
 - 1. The position of the car when stopped by each of the normal limit stops with no load and with contract load in the car shall be accurately measured.
 - 2. Final position of the elevator relative to the terminal landings shall be determined when the elevator has been stopped by the final limits. The lower limit stop shall be made with contract load in the elevator. Elevator shall be operated at inspection speed for both tests. Normal limit stopping devices shall be inoperative for the tests.
- K. Working Pressure: Verify working pressure of the hydraulic system by pressure gauge placed in the system line. Take readings with no load and full load in car.
- L. Test automatic shut-off valve for proper operation.
- M. Setting of Car Door Contacts: The position of the car door at which the elevator may be started shall be measured. The distance from full closure shall not exceed that required by ASME A17.1. The test shall be

made with the hoistway doors closed or the hoistway door contact inoperative.

- N. Setting of Interlocks: The position of the hoistway door at which the elevator may be started shall be measured and shall not exceed ASME A17.1 requirements.
- O. Operating and Signal System: The elevator shall be operated by the operating devices provided and the operation signals and automatic floor leveling shall function in accordance with requirements specified. Starting, stopping and leveling shall be smooth and comfortable without appreciable steps of acceleration or deceleration.
- P. Performance of the Elevator supervisory system shall be witnessed and approved by the representative of the COTR.
- Q. Evidence of malfunction in any tested system or parts of equipment that occurs during the testing shall be corrected, repaired, or replaced at no additional cost to the Government, and the test repeated.
- R. If equipment fails test requirements and a re-inspection is required, the Contractor shall be responsible for the cost of re-inspection; salaries, transportation expenses, and per-diem expenses incurred by the representative of the COTR.

3.9 INSTRUCTION OF VA PERSONNEL

- A. Provide competent instruction to VA personnel regarding the operation of equipment and accessories installed under this contract, for a period equal to one eight hour work day. Instruction shall commence after completion of all work and at the time and place directed by the COTR.
- B. Written instructions in triplicate relative to care, adjustments and operation of all equipment and accessories shall be furnished and delivered to the COTR in independently bound folders. DVD recordings will also be acceptable. Written instructions shall include correct and legible wiring diagrams, nomenclature sheet of all electrical apparatus including location of each device, complete and comprehensive sequence of operation, complete replacement parts list with descriptive literature, and identification and diagrammatic cuts of equipment and parts. Information shall also include electrical operation characteristics of all circuits, relays, timers, and electronic devices, as well as R.P.M. values and related characteristics for all rotating equipment.

- C. Provide supplementary instruction for any new equipment that may become necessary because of changes, modifications or replacement of equipment or operation under requirements of paragraph entitled "Warranty of Construction".

3.10 INSPECTIONS AND SERVICE: GUARANTEE PERIOD OF SERVICE

- A. Furnish complete inspection and maintenance service on entire elevator installation for a period of one (1) year after completion and acceptance of all the elevators in this specification by the COTR. This maintenance service shall run concurrently with the warranty. Maintenance work shall be performed by Certified Elevator Mechanic and Apprentices employed and supervised by the company that is providing guaranteed period of service on the elevator equipment specified herein.
- B. This contract will cover full maintenance including emergency call back service, inspections and servicing the elevators listed in the schedule of elevator. The Elevator Contractor shall be required to perform the following:
 1. Bi-weekly systematic examination of equipment.
 2. During each maintenance visit the Elevator Contractor shall clean, lubricate, adjust, repair and replace all parts as necessary to keep the equipment in first class condition and proper working order.
 3. Furnishing all lubricant, cleaning materials, parts and tools necessary to perform the work required. Lubricants shall be only those products recommended by the manufacturer of the equipment.
 4. As required, motors, controllers, selectors, leveling devices, operating devices, switches on cars and in hoistways, hoistway doors and car doors or gate operating device, interlock contacts, guide shoes, guide rails, car door sills, hangers for doors, car doors or gates, and signal system shall be cleaned, lubricated and adjusted.
 5. Guide rails and bottom of platforms shall be cleaned every three months. Car tops and machine room floors shall be cleaned monthly. Accumulated rubbish shall be removed from the pits monthly. A general cleaning of the entire installation including all machine room equipment and hoistway equipment shall be accomplished quarterly. Cleaning supplies and vacuum cleaner shall be furnished by the Contractor.
 6. Maintain the performance standards set forth in this specification.

7. The operational system shall be maintained to the standards specified hereinafter including any changes or adjustments required to meet varying conditions of hospital occupancy.
 8. Maintain smooth starting and stopping and accurate leveling at all times.
- C. Maintenance service shall not include the performance of work required as a result of improper use, accidents, and negligence for which the Elevator Contractor is not directly responsible.
 - D. Provide 24 hour emergency call-back service that shall consist of promptly responding to calls within two hours for emergency service should a shutdown or emergency develop between regular examinations. Overtime emergency call-back service shall be limited to minor adjustments and repairs required to protect the immediate safety of the equipment and persons in and about the elevator.
 - E. Service and emergency personnel shall report to the COTR or his authorized representative upon arrival at the hospital and again upon completion of the required work. A copy of the work ticket containing a complete description of the work performed shall be given to the COTR.
 - F. The Elevator Contractor shall maintain a log book in the machine room. The log shall list the date and time of all bi-weekly examinations and all trouble calls. Each trouble call shall be fully described including the nature of the call, necessary correction performed or parts replaced.
 - G. Written "Maintenance Control Program" shall be in place to maintain the equipment in compliance with ASME A17.1 Section 8.6.

- - - E N D - - -

SECTION 14 58 00
PNEUMATIC TUBE SYSTEM

PART 1 - GENERAL:

1.1 RELATED DOCUMENTS:

- A. Division 1 General Requirements.
- B. Division 16 Electrical

1.2 DESCRIPTION OF WORK:

- A. Furnish all engineering, materials and labor for a complete computer controlled pneumatic tube distribution system, hereinafter referred to as the "System". The manufacturer hereinafter referred to as the "Contractor".
- B. All work shall be completed in a workmanlike manner, complete in all respects, including all items specified herein and as may be necessary for the satisfactory installation and operation of the specified system.
- C. The types and locations of the stations in this specification shall be as indicated on the drawings and shall be in strict accordance with the standards established by the Contractor.
- D. System shall be an extension of existing Pneumatic Tube System installed in Building 85 as part of previous project, refer to Mechanical Riser Diagram PT-100 attached at the back of this specification section for scoping clarification.
- E. The Contractor shall work with the General Contractor and all trades to ensure coordination for System right-of-way.

1.3 QUALITY ASSURANCE:

- A. The Contractor shall regularly and presently manufacture, install and warrant the computer controlled material distribution equipment as specified herein as one of their principle products. The equipment furnished shall be the product of the Contractor and shall be installed by skilled mechanics under direct employment and supervision of the Contractor. No third party substitutions shall be involved in design, layout, installation, warranty efforts or service offerings. The Contractor shall have a quality assurance program in place, demonstrable to the Owner.
- B. The Contractor shall be totally responsible for the manufacture, installation and guarantee of the specified System.

- C. The Contractor shall maintain a training facility that shall include the specified equipment installed and operational for comprehensive hands-on maintenance instruction of Owner maintenance personnel. The training facility shall be separate from the Contractor's manufacturing or development areas to prevent interruptions during the training process.
- D. The Contractor shall have a service branch within 1000 miles of the installation, and shall provide service within 24 hours of a call.
- E. The Contractor shall maintain a 24 hour, 7 day per week toll-free phone number for contacting maintenance personnel who are factory trained in the specified System. Response shall be 3 hours or less.
- F. All electrical equipment shall be listed with Underwriter's Laboratory (UL) and all field wiring shall be in conformance with NEC requirements and local codes. UL listing shall be for all assemblies and components of assemblies. UL listing must be current prior to bid.
- G. The Contractor shall submit with bid a separate list of 10 hospitals presently using a system equivalent to that specified for transporting blood specimens and other laboratory specimens to include:
 - 1. Blood specimens for chemistry and hematology analysis,
 - 2. Arterial blood for blood gas analysis,
 - 3. Blood products for transfusion,
 - 4. Urine specimens for routine analysis and culture,
 - 5. Cerebral spinal fluid,
 - 6. Tissues for biopsy, and
 - 7. Other body fluids.
- H. The Contractor shall submit with bid at least one (1) laboratory study verifying that the equivalent system is a soft delivery system which maintains the integrity of sensitive laboratory test parameters to include:
 - 1. LDH,
 - 2. Hemoglobin,
 - 3. Potassium, and
 - 4. Coagulation Studies (PT, PTT).
- I. Submit with bid a list of ten (10) hospitals sending controlled substances.

1.4 WORK INCLUDED IN THIS SECTION:

- A. The Contractor shall furnish and install all motor starters with properly sized thermal overload protection in each phase at the blower packages.
- B. The Contractor shall provide and install all low voltage control wiring and connections necessary for the proper operation of the System.

1.5 SUBMITTALS:

- A. Shop drawings which show tube routings on architectural floor plans, tubing riser diagram, electrical riser diagram, right-of-way, methods of suspending and anchoring tubing, station details, equipment locations and detailed dimensions of all major components. Tube routings shall be shown on owner-supplied architectural floor plan backgrounds in AutoCAD release 13.0 or higher.
- B. Contractor's marked literature showing illustrations, data and description of system to be furnished.
- C. Single User Software License form with submittal for signing by the Owner and Contractor.

1.6 WARRANTY:

- A. The Contractor shall guarantee all components to be free from defects in material and workmanship, under normal use, for a period of 12 months.
- B. Defective material shall be repaired or replaced at the discretion of the Contractor, free of charge.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION:

- A. The System shall be a computer controlled TransLogic TL 2900 pneumatic tube materials distribution system consisting of tubing, stations, transfer units, blower packages, carriers and a control center.
- B. The System shall be configured of groups of stations (zones) connected together by interzone tubes. Each station shall be connected to the System by a single tube to a transfer unit.
- C. Each zone shall include a blower and function independently.
- D. The dispatching, routing, and storage of carriers shall be directed by the system control center to provide automatic unattended transmission of carriers between any two stations.
- E. The System shall provide shortest route vacuum-pressure travel. Transactions within a zone shall turn around at the nearest transfer unit common to the origin and destination stations.

- F. To dispatch a carrier from a station, the operator shall place the latched carrier in the dispatcher, select the destination address and press the "Send" push-button at the station.
- G. Systems with more than one zone shall allow multiple carriers to be in transit simultaneously. The System shall allow all station dispatchers to be loaded simultaneously, destinations to be selected and all transactions processed automatically until the System is clear.
- H. The System shall consist of 2 stations as an extension of an existing zone.
- I. The System shall provide for a minimum capacity of 996 units on 32 zones without the need to modify or replace existing equipment. Additions shall require no modifications to existing equipment.
- J. The modular design of the System components shall permit changes in the number of stations and/or zones as Owner requirements change.
- K. The System shall provide automatic empty carrier redistribution. The System shall enable operators to dispatch excess empty carriers to carrier-deficient stations which shall be automatically identified and selected by the System. The need shall be determined by the ratio of carriers assigned to carriers present taking into account carriers in transit to the station, carriers queued for dispatch to the station and carriers queued for dispatch from the station.
- L. Individual stations or zones shall be able to be shut down without affecting the remainder of System.
- M. Destinations which are unavailable (non-existing, full, out-of-service) shall be rejected at the origination station. Prior to dispatch the route to the destination station shall be checked twice to ensure that all sections of the System involved in the transaction are operating properly.
- N. A transaction to a station that becomes unavailable after dispatch shall be rerouted to the origin station.
- O. Transactions in process or pending when any part of the System is signed off shall deliver to their destinations. Any new requests to send shall be rejected.

- P. If a power failure occurs, the system will continue to process carriers under UPS power for 10 seconds until generator starts and an advisory will be posted at the SCC. If UPS voltage drops below a programmable threshold, a second message will be posted at the SCC monitor and the system will automatically switch to Quick-off. All in-transit carriers will be processed to their destinations and all pending transactions will be cancelled.
- Q. If power fails at a blower, transfer unit or station, the controls will identify that device as unavailable voiding all transactions which involve the affected device.
- R. Each station shall be able to be individually assigned up to ten scheduled events per day including; on/off times, send and receive priorities, carrier forwarding on/off and quantity of assigned carriers.
- S. Station sending and receiving and System priorities shall ensure that carriers are processed to their destinations in the shortest time.
- T. Closed loop control shall verify via feedback loops that a command to a System component is properly executed before the next segment of the transaction is initiated.
- U. A 115 VAC duplex receptacle and device on/off switch shall be provided at each station, transfer unit, and blower package.
- V. The destinations available at each station shall be individually configurable at the system control center.
- W. Stations shall be able to be individually scheduled to be able to dispatch but not receive carriers.
- X. Each station, transfer unit, exchanger and blower shall include diagnostic capability at the unit.

2.2 EQUIPMENT:

- A. Line material:
 - 1. Tubing shall be 6" outside diameter, 16 gauge, cold rolled, electric welded steel, flash removed, degreased and hot dip galvanized.
 - 2. Bends shall be formed of same material on a center line radius as recommended by manufacturer. The cross-section shall be free from wrinkles and distortions. No expanded bends shall be allowed in the System.
 - 3. All cut ends shall be square, deburred and mandreled round.

4. Solid steel slip sleeves or split steel gasketed bolted sleeves shall be used for tubing joints. Split sleeves shall be used at all connections of serviceable equipment. All sleeves shall be of the same gage as the tubing.
 5. Slip joints shall be sealed with a suitable airtight compound.
 6. Tubing shall be supported with suitable hangers and supports as follows:
 - a. Minimum every ten (10) feet of straight tubing,
 - b. At every floor of vertical runs,
 - c. At each end of each bend,
 - d. At equipment connections, and
 - e. At the center of the bend radius with sway bracing.
 7. Hangers shall be pre-threaded, zinc plated rod attached to the building structure. Tube clamps or channels fastened to the rod shall support the tubing.
- B. Transfer Units:
1. Transfer units enable a transmission tube connection from one tube to any one of several tubes, providing the tubing network for routing carriers between stations.
 2. Transfer units shall be installed with split sleeves and sway braced against motion.
 3. Transfer units shall be located to allow for complete and clear access to service mechanical and electrical components.
 4. The offset through the transfer unit shall be gradual using a curved tube section.
 5. All transfer units component position sensing and carrier sensing shall be by non-contact sensors.
 6. All visible metal surfaces shall be factory painted with an electrostatically applied, baked-on, powder coat epoxy.
 7. Transfer units shall be provided as required in 1 to 2 ports, 1 to 4 ports and 1 to 6 ports.
- C. Blower packages;
1. Blower units shall be modular factory assembled complete with integral vibration isolators, screen cleanout boxes and air shifting valves as required.
 2. Blowers shall be located to allow complete and clear access to service mechanical and electrical components.
 3. Zone blower packages:
 - a. One zone blower package shall be provided per zone.
 - b. Zone blowers shall be the regenerative type.

- c. Zone blower packages shall be designed to be mounted above ceilings or on floors.
- d. Zone blower packages located above ceilings where the sound level three feet below the ceiling must be less than 65 dB(A) shall be sound deadened with sound insulation and intake and exhaust mufflers.
- e. Zone blowers shall be sized to provide vacuum and pressure in the tubing network to maintain nominal carrier speed of 20 fps.
- f. For energy conservation blowers shall automatically shut down during low use periods.
- g. Air tubing shall be 4" outside diameter of the same material as transmission tubing. Air tubing shall be of the same material as transmission tubing. Tubing shall be complete with all necessary tees, elbows and fittings.
- h. All component position sensing shall be by non-contact switches.
- i. All visible metal surfaces shall be factory painted with an electrostatically applied, baked-on, powder coat epoxy.

D. Stations:

- 1. Stations shall consist of dispatch equipment, receive equipment and electrical controls enclosed in a sheet metal housing.
- 2. Stations shall be up send, down receive.
- 3. All mechanical and electrical components shall be front accessible and removable for repair or replacement.
- 4. Electronic control units shall be solid state plug-in type for fast replacement and shall be interchangeable with units in other stations.
- 5. All component position sensing and carrier sensing shall be by non-contact sensors.
- 6. All visible metal surfaces shall be factory painted with an electrostatically applied, baked-on, powder coat epoxy. Bright metal finish parts shall be stainless steel, brushed aluminum or chrome plated.
- 7. The dispatcher shall hold one carrier at a time.
- 8. The receiver shall be independent of the dispatcher.
- 9. The dispatcher shall enable a carrier to be staged for dispatch while a carrier is incoming to a station.

10. When station's receiver becomes full that station's receive and dispatch functions shall be disabled. A message on the station display and at the system control center shall indicate the full condition. The condition shall automatically reset upon carrier removal from receiver.
11. Stations shall provide air-cushioned carrier arrival at the receive slidegate.
12. Multiple address capability:
 - a. Multiple addresses enable a station to be shared by several departments. Each station shall have the capability for up to six discrete addresses.
 - b. Each address shall correspond to a remote personal indicator (RPI). An RPI is a recessed, wall mounted visual and audible signal device with reset switch, located remote from the station.
 - c. Carriers received via the automatic carrier redistribution feature shall not activate RPI's.
13. Remote carrier arrival indicator
 - a. A remote indicator shall alert personnel at a location remote from the station that a carrier has arrived. The indicator shall include a visual indicator, audible signal and reset switch. The switch shall extinguish the light and silence the audible signal.
14. Each station shall be equipped with one modular operator control panel per dispatcher.
 - a. The I.Q. operator control panel shall include:
 - 1) A membrane keypad for destination and special function selection.
 - 2) A liquid crystal display panel (LCD) with up to 8 lines of 40 characters each for message display. The LCD panel shall display:
 - a) The last six destination selections.
 - b) Help menu selections.
 - c) A directory of stations.
 - d) Special functions.
 - e) Operator feedback information.
 - 3) "Up" and "Down" arrow keys for scrolling through the LCD displays.
 - 4) A "Send/Enter" key to activate the dispatch after destination selection or to enter data for special functions.

- 5) A "Cancel/Clear" key to allow for transaction cancellation or clearing of the display during special function activation.
- 6) An "Empty Send" key for surplus carrier redistribution.
- 7) A "Call Carrier" key to have the next redistributed carrier directed to this station.
- 8) A "Track Carrier" key to track a transaction.
- 9) Up to six LED's for RPI visual indication..
- 10) Twelve programmable keys all of which can be used for one button addressing of high traffic stations or up to six of which can be used for resetting RPI's.
 - a) Keys shall be individually programmable per station.
 - b) The RPI audible signal can be rest at the RPI. The station and RPI LED's are reset at the station.
- 11) A "Returned Carrier" LED to signal that a transaction was unable to be completed and the carrier was returned to its origin station.
- 12) A "Menu" key for selecting special functions.
 - a) Stat Transaction
 - b) Secure Transaction
 - c) Assign Carriers Present
 - d) Traffic Forwarding
 - e) Emergency Shutdown
 - f) Incoming Carrier Query
 - g) Station On/Off
 - h) Carrier Inventory Adjustment
 - i) Station Diagnostics
 - j) Audible Carrier Arrival
 - k) Audible Surplus Carriers
 - l) Audible Full Station
 - m) PIN Secure Transaction.
- 13) A directory of station addresses.
- 14) Instructions for operating the station and special functions.
- 15) Discrete rejection messages to indicate:
 - a) Dispatching station off
 - b) Dispatching station not in service

- c) Selection full - try later
 - d) Selection does not exist
 - e) Selection scheduled off
 - f) Selection signed off
 - g) Selection not in service
 - h) Selection is secured
 - i) Selection not permitted
 - 16) LCD message capability for the following conditions:
 - a) A carrier is incoming to the station.
 - b) The station carrier count exceeds its assigned number, return surplus carriers.
 - c) The station is full, remove carriers from receiver.
 - d) The station is not receiving carriers, traffic is forwarded to another station.
- E. Recessed Single dispatcher stations:
- 1. Single dispatcher stations shall include one dispatch chamber and an integral receive bin. The receive bin shall provide open storage nominally for seven carriers.
 - 2. The station shall be designed to be wall recessed enabling all non-operator accessible equipment to be concealed behind walls. A trim frame shall be provided to conceal the joint between the wall and the station housing.
 - 3. To minimize damage, stations shall be installed in two phases; a housing in the initial stages of construction, and a mechanical/electrical finish kit after construction work in the area is substantially complete.
- F. Carriers and liners:
- 1. Sealed carriers:
 - a. Provide 9 sealed carriers as follows.
 - 1) Clear molded plastic.
 - 2) Full access side opening.
 - 3) Bi-directional.
 - 4) Replaceable wear bands which also serve as the hinges.
 - 5) Easy open positive closure latches.
 - 6) Compression gasket which seals the carrier halves when closed.
 - 7) Capable of carrying: specimens, medications, x-ray film, 1,000 ml IV bags filled up to 100 cc's.

- 8) Clear inside dimensions: 4-1/2" diameter by 15-5/8" length.
- 2. Provide 9 full carrier liners for cushioning small items.
- G. Low voltage control cable:
 - 1. Cable for System low voltage controls shall be plenum rated with minimum 22 gauge conductors. Cable shall be strapped to the transmission tubing at minimum 10' intervals.
- H. System control center (SCC):
 - 1. The system control center shall consist of a computer, monitor, keyboard, uninterruptible power supply, printer and software is existing in Building 85.

PART 3 - Execution:

3.1 INSTALLATION:

- A. The System and components shall be assembled and installed in strict accordance with contract documents, applicable codes and regulations, approved shop drawings, and Contractor's recommendations.
- B. The System and components shall be anchored and fastened to building construction as required for a stable, secure installation. All exposed parts of the System and finish components shall be closely fit and joined to provide a neat uniform appearance.

3.2 SYSTEM TESTING AND ACCEPTANCE:

- A. Prior to a formal System performance test, the Contractor shall perform preliminary tests, verifying all components are in fully operational condition for carrier dispatch and receive between all possible station combinations.
- B. The Contractor shall provide written notification to the Architect/Engineer thirty (30) days in advance of the scheduled System performance test. The Contractor shall provide all personnel, equipment and instruments required for such examination.
- C. In the presence of the Architect and Owner, the Contractor shall perform all operational tests, inspecting System components and verifying that the equipment is installed and operating in proper condition, according to the intent of the contract.
- D. The Owner's representative shall sign a written statement indicating that the System has been turned over and accepted by the Owner.

3.3 INSTRUCTIONS:


- A. Operator training

1. The Contractor shall train the Owner's training staff on-site in the use and operation of the System. Training shall be provided for one person per station with a minimum of ten.
 2. The training shall include:
 - a. A commercially prepared video tape describing the System and its capabilities and potential benefits.
 - b. Assistance in developing the protocol policies for the Owner's use of the System.
 - c. Review of information and standards regarding regulations of OSHA, NACCLS, CDC, etc. for transport of hazardous materials in the System.
 - d. Containment and immobilization of items transported in the System.
 - e. Review of common System alarms and their correction.
 - f. Use and functions of the System.
 - g. Package of training materials for the Owner's trainers to use.
 - h. A decontamination/infection control procedure and a cleanout kit with procedures for cleaning liquid spills in the System.
- B. Maintenance training
1. Maintenance personnel as assigned by the Owner shall be trained on the job site in the proper maintenance and trouble shooting of the System.
 2. The Owner shall assign at least two (2) persons to accompany Contractor start-up technicians during final System checkout procedures.
 3. A minimum four day training course shall be included at the Contractor's training facility for one person in the repair and maintenance of the System. Cost of transportation, room and board shall be provided by the Owner.
- C. The Contractor shall provide operating and maintenance information in the following formats.
1. One (1) read-only CD ROM.
 2. One (1) paper copy manual.
 3. Included in the CD and manual shall be;
 - a. System components and part descriptions,
 - b. Starting and stopping procedures,
 - c. General operating instructions,
 - d. Specific maintenance and troubleshooting instructions,


- e. Recommended service schedules for adjustment, lubrication and inspection.
 - f. Recommended spare parts inventory.
- D. The Contractor shall provide as-built shop drawings on AutoCAD release 14.0 for instruction and future reference by the Owner. If Owner-supplied architectural electronic backgrounds are not available in the design phase, three (3) sets of paper copies may be substituted.

3.4 EXCEPTIONS:


- A. Exceptions to the specification shall be clearly identified in a separate proposal section entitled, "Exceptions to Specifications".

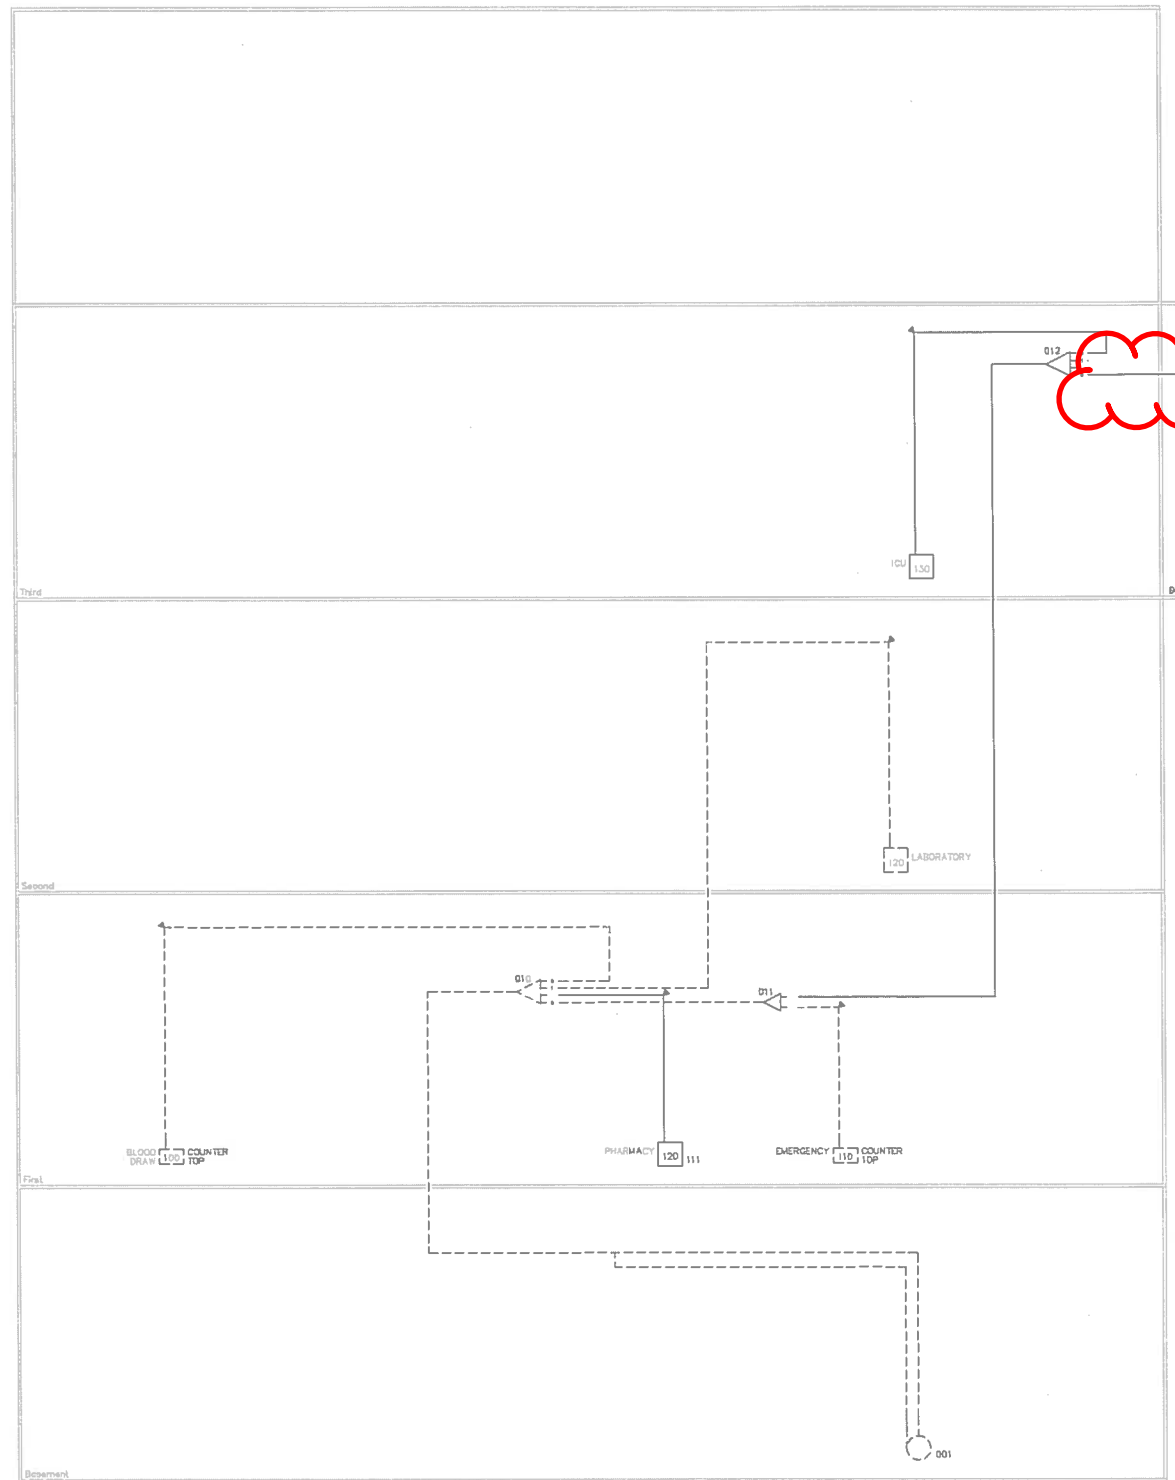

BLDG 85

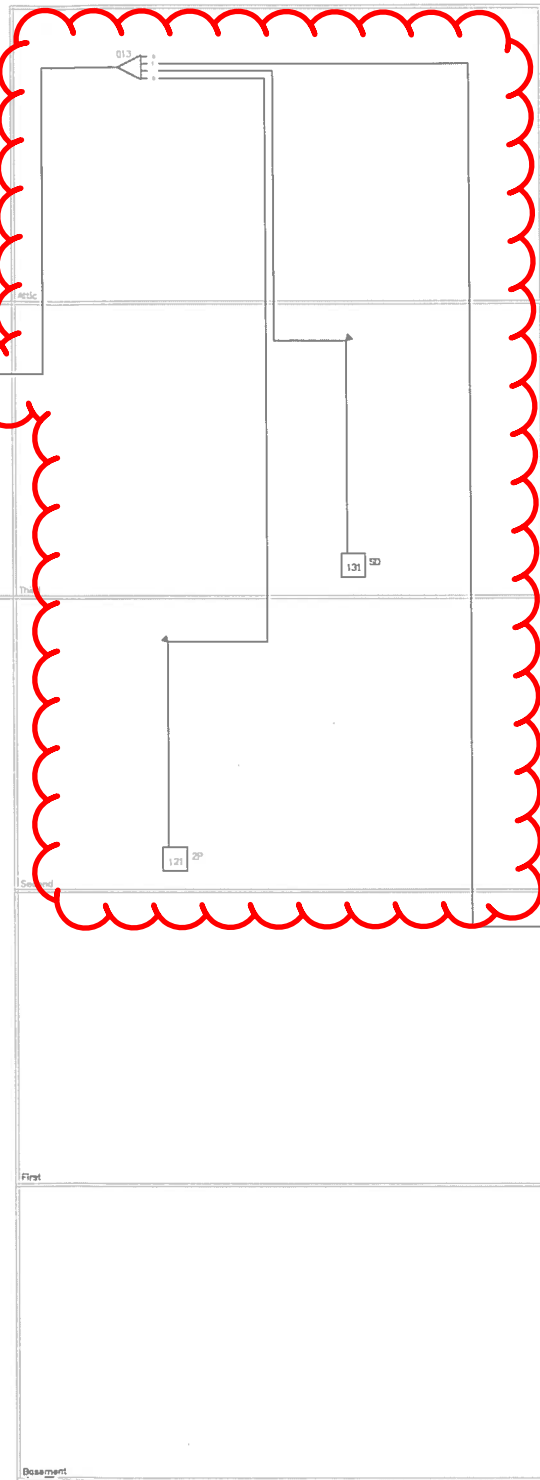




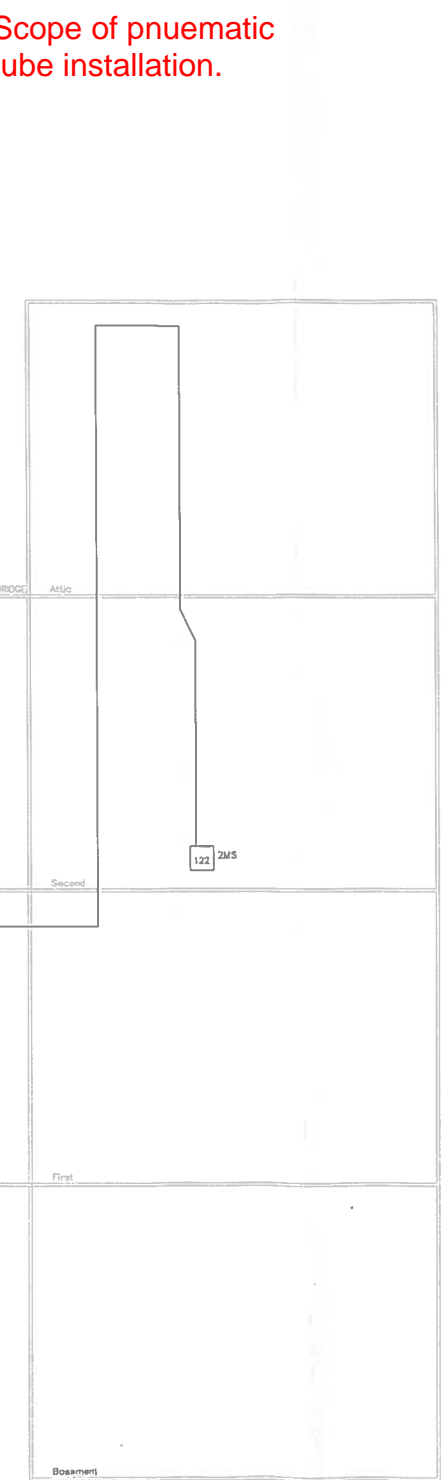



BLDG 67



BLDG 27

Scope of pneumatic tube installation.

LEGEND:

-  RECESSED STATION
-  COUNTER TOP STATION
-  4-OUT TRANSFER UNIT
-  P.R.V. BEND
-  BLOWER
-  CONTROL CENTER
-  ZONE CONTROL CABINET
LOCATE WITHIN 3 FEET OF
CONTROL CENTER

02-02-2010		1	AS-BUILT PER FITTER MARK-UPS		DP
swisslog TRANSLOGIC					
<small>As instruments of service, all designs, ideas, and information herein on these drawings are and shall remain the property of Swisslog - Translogic. No part thereof shall be copied, retransmitted, or used in any way without the express written permission of Swisslog - Translogic. These drawings are provided for informational purposes only and are not to be used for any other purpose without the express written permission of Swisslog - Translogic.</small>					
BOISE VA MEDICAL CENTER BOISE, IDAHO CTS-630 TL2007					
MECHANICAL RISER DIAGRAM					
OFFICE	DENVER	DR.	RS	DATE	
DATE	7/25/11	11WF128		PT-1.00	
SCALE	NONE				

SECTION 21 05 11
COMMON WORK RESULTS FOR FIRE SUPPRESSION

PART 1 - GENERAL

1.1 DESCRIPTION

- A. The requirements of this Section apply to all sections of Division 21.
- B. Definitions:
 - 1. Exposed: Piping and equipment exposed to view in finished rooms.
 - 2. Option or optional: Contractor's choice of an alternate material or method.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Building Components for Attachment of Hangers: Section 05 31 00, STEEL DECKING or Section 05 36 00, COMPOSITE METAL DECKING.
- D. Section 05 50 00, METAL FABRICATIONS.
- E. Section 07 84 00, FIRESTOPPING.
- F. Flashing for Wall and Roof Penetrations: Section 07 60 00, FLASHING AND SHEET METAL.
- G. Section 07 92 00, JOINT SEALANTS.
- H. Section 09 91 00, PAINTING.
- I. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS
- J. Section 09 51 00, ACOUSTICAL CEILINGS.

1.3 QUALITY ASSURANCE

- A. Products Criteria:
 - 1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years. See other specification sections for any exceptions.
 - 2. Equipment Service: Products shall be supported by a service organization which maintains a complete inventory of repair parts and is located reasonably close to the site.
 - 3. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be products of one manufacturer.
 - 4. Assembled Units: Manufacturers of equipment assemblies, which use components made by others, assume complete responsibility for the final assembled product.
 - 5. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on

- equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
6. Asbestos products or equipment or materials containing asbestos shall not be used.
- B. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the Resident Engineer prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.
- C. Guaranty: In GENERAL CONDITIONS.
- D. Supports for sprinkler piping shall be in conformance with NFPA 13.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data: Submit under the pertinent section rather than under this section.
1. Equipment and materials identification.
 2. Fire-stopping materials.
 3. Hangers, inserts, supports and bracing.
 4. Wall, floor, and ceiling plates.
- C. Coordination Drawings: Provide detailed layout drawings of all piping systems. Provide details of the following.
1. Interstitial space.
 2. Hangers, inserts, supports, and bracing.
 3. Pipe sleeves.
 4. Equipment penetrations of floors, walls, ceilings, or roofs.
- D. Maintenance Data and Operating Instructions:
1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
 2. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
- A36/A36M-2001Carbon Structural Steel

A575-96Steel Bars, Carbon, Merchant Quality, M-Grades R
(2002)

E84-2003Standard Test Method for Burning Characteristics
of Building Materials

E119-2000Standard Test Method for Fire Tests of Building
Construction and Materials

C. National Fire Protection Association (NFPA):

90A-96Installation of Air Conditioning and Ventilating
Systems

101-97Life Safety Code

PART 2 - PRODUCTS

2.1 NOT USED

2.2 EQUIPMENT AND MATERIALS IDENTIFICATION

- A. Use symbols, nomenclature and equipment numbers specified, shown on the drawings and shown in the maintenance manuals. Refer to Section 09 51 00 for access identification markers and Section 09 91 00 for identity markings and painting of systems to be accomplished by mechanical contractors.

2.3 FIRESTOPPING

Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping.

2.4 GALVANIZED REPAIR COMPOUND

Mil. Spec. DOD-P-21035B, paint form.

2.5 PIPE PENETRATIONS

- A. Install sleeves during construction for other than blocked out floor openings for risers in mechanical bays.
- B. To prevent accidental liquid spills from passing to a lower level, provide the following:
1. For sleeves: Extend sleeve 25 mm (one inch) above finished floor and provide sealant for watertight joint.
 2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
 3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.
- C. Penetrations are not allowed through beams or ribs, but may be installed in concrete beam flanges. Any deviation from this requirement must receive prior approval of Resident Engineer.
- D. Sheet Metal, Plastic, or Moisture-resistant Fiber Sleeves: Provide for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.

- E. Cast Iron or Zinc Coated Pipe Sleeves: Provide for pipe passing through exterior walls below grade. Make space between sleeve and pipe watertight with a modular or link rubber seal. Seal shall be applied at both ends of sleeve.
- F. Galvanized Steel or an alternate Black Iron Pipe with asphalt coating Sleeves: Provide for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. Provide sleeve for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, connect sleeve with floor plate.
- G. Brass Pipe Sleeves: Provide for pipe passing through quarry tile, terrazzo or ceramic tile floors. Connect sleeve with floor plate.
- H. Sleeves are not required for wall hydrants for fire department connections or in drywall construction.
- I. Sleeve Clearance: Sleeve through floors, walls, partitions, and beam flanges shall be one inch greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.
- J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

2.6 TOOLS AND LUBRICANTS

- A. Furnish, and turn over to the Resident Engineer, special tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.
- B. Tool Containers: Hardwood or metal, permanently identified for intended service and mounted, or located, where directed by the Resident Engineer.

2.7 WALL, FLOOR AND CEILING PLATES

- A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.
- B. Thickness: Not less than 2.4 mm (3/32-inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025-inch) for up to 80 mm (3-inch pipe), 0.89 mm (0.035-inch) for larger pipe.
- C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Use also where insulation ends on exposed water supply pipe drop from overhead. Provide a

watertight joint in spaces where brass or steel pipe sleeves are specified.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Coordinate location of piping, sleeves, inserts, hangers, and equipment. Locate piping, sleeves, inserts, hangers, and equipment clear of windows, doors, openings, light outlets, and other services and utilities. Follow manufacturer's published recommendations for installation methods not otherwise specified.
- B. Protection and Cleaning:
 - 1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the Resident Engineer. Damaged or defective items in the opinion of the Resident Engineer, shall be replaced.
 - 2. Close pipe openings with caps or plugs during installation. Tightly cover and protect equipment against dirt, water chemical, or mechanical injury. At completion of all work thoroughly clean exposed materials and equipment.
- C. Install gages, valves, and other devices with due regard for ease in reading or operating and maintaining said devices. Locate and position gages to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.
- D. Work in Existing Building:
 - 1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
 - 2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will least interfere with normal operation of the facility.
 - 3. Cut required openings through existing masonry and reinforced concrete using diamond core drills. Use of pneumatic hammer type drills, impact type electric drills, and hand or manual hammer type drills, will be permitted only with approval of the Resident Engineer. Locate openings that will least effect structural slabs, columns, ribs or beams. Refer to the Resident Engineer for determination of proper design for openings through structural sections and opening layouts approval, prior to cutting or drilling

into structure. After Resident Engineer's approval, carefully cut opening through construction no larger than absolutely necessary for the required installation.

4. Interruption of Service: There shall be no interruption of the existing sprinkler protection, water, electric, or fire alarm services without prior permission of the Contracting Officer. Contractor shall develop an interim fire protection program where interruptions involve in occupied spaces. Request in writing at least one week prior to the planned interruption.

E. Switchgear Drip Protection: Every effort shall be made to eliminate the installation of pipe above electrical and telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints.

F. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost to the Government.
2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

G. Note for Fire Sprinkler Drawings/Specifications

1. Whenever existing fire sprinkler piping is removed, the fire sprinkler contractor is to analyze the piping for obstructions and provide written obstruction documentation in accordance with NFPA requirements to the VA.

3.2 OPERATING AND PERFORMANCE TESTS

- A. Prior to the final inspection, perform required tests as specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TESTS and submit the test reports and records to the Resident Engineer.
- B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.
- C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then make performance tests for heating systems and for cooling systems respectively during first actual seasonal use of respective systems following completion of work.

3.3 INSTRUCTIONS TO VA PERSONNEL

Provide in accordance with Article, INSTRUCTIONS, of Section 01 00 00,
GENERAL REQUIREMENTS.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 21 13 13
WET-PIPE SPRINKLER SYSTEMS

PART 1 - GENERAL

1.1 SCOPE OF WORK

- A. Design, installation and testing shall be in accordance with NFPA 13 except for specified exceptions.
- B. The design and installation of a hydraulically calculated automatic wet system complete and ready for operation to provide fire sprinkler protection of all portions of the expansion to Building 67.
- C. Modification of the existing sprinkler system protecting existing portion of Building as required to accommodate remodel conditions and provide complete fire sprinkler protection per NFPA 13 throughout the building.

1.2 RELATED WORK

- A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Section 07 84 00, FIRESTOPPING, Treatment of penetrations through rated enclosures.
- C. Section 09 91 00, PAINTING.
- D. Section 21 05 11 COMMON WORK RESULTS FOR FIRE SUPPRESSION

1.3 QUALITY ASSURANCE

- A. Installer Reliability: The installer shall possess a valid State of Idaho fire sprinkler contractor's license. The installer shall have been actively and successfully engaged in the installation of commercial automatic sprinkler systems for the past ten years.
- B. Materials and Equipment: All equipment and devices shall be of a make and type listed by UL and approved by FM, or other nationally recognized testing laboratory for the specific purpose for which it is used. All materials, devices, and equipment shall be approved by the VA.
- C. Submittals: Submit as one package in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Prepare detailed working drawings that are signed by a NICET Level III or Level IV Sprinkler Technician or stamped by a Registered Professional Engineer practicing in the field of Fire Protection Engineering. As Government review is for technical adequacy only, the installer remains responsible for correcting any conflicts with other trades and building construction that arise during installation. Partial submittals will not be accepted. Material submittals shall be approved prior to the purchase or delivery to the job site. Suitably bind submittals in notebooks or binders and

provide index referencing the appropriate specification section.

Submittals shall include, but not be limited to, the following:

1. Qualifications:
 - a. Provide a copy of the installing contractor's license.
 - b. Provide a copy of the NICET certification for the NICET Level III or Level IV Sprinkler Technician who prepared and signed the detailed working drawings unless the drawings are stamped by a Registered Professional Engineer practicing in the field of Fire Protection Engineering.
2. Drawings: Submit detailed 1:100 (1/8 inch) scale (minimum) working drawings conforming to NFPA 13. Include a site plan showing the piping to the water supply test location. Follow VA CAD Standards.
3. Manufacturers Data Sheets:
 - a. Provide for materials and equipment proposed for use on the system. Include listing information and installation instructions in data sheets. Where data sheet describes items in addition to that item being submitted, clearly identify proposed item on the sheet.
4. Calculation Sheets: Submit hydraulic calculation sheets in tabular form conforming to the requirements and recommendations of NFPA 13.
5. Final Document Submittals: Provide as-built drawings, testing and maintenance instructions in accordance with the requirements in Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
Submittals shall include, but not be limited to, the following:
 - a. One complete set of reproducible as-built drawings showing the installed system. Submit as-built drawings on disk with AutoCAD V.13 CAD files conforming to VA CAD Standards.
 - b. Complete, simple, understandable, step-by-step, testing instructions giving recommended and required testing frequency of all equipment, methods for testing all equipment, and a complete trouble shooting manual. Provide maintenance instructions on replacing any components of the system including internal parts, periodic cleaning and adjustment of the equipment and components with information as to the address and telephone number of both the manufacturer and the local supplier of each item.
 - c. Material and Testing Certificate: Upon completion of the sprinkler system installation or any partial section of the system, including testing and flushing, provide a copy of a completed Material and Testing Certificate as indicated in NFPA 13.
 - d. Certificates shall document all parts of the installation.

- e. Instruction Manual: Provide one copy of the instruction manual covering the system in a flexible protective cover and mount in an accessible location adjacent to the riser.
- D. Design Basis Information: Provide design, materials, equipment, installation, inspection, and testing of the automatic sprinkler system in accordance with the requirements of NFPA 13. Recommendations in appendices shall be treated as requirements.
- 1. Perform hydraulic calculations in accordance with NFPA 13 utilizing the Area/Density method. Do not restrict design area reductions permitted for using quick response sprinklers throughout by the required use of standard response sprinklers in the areas identified in this section.
 - 2. Sprinkler Protection: To determining spacing and sizing, apply the following coverage classifications:
 - a. Light Hazard Occupancies: Patient care, treatment, and customary access areas.
 - b. Ordinary Hazard Group 1 Occupancies: Utility/Crawl Space, Shell Space.
 - c. Request clarification from the Government for any hazard classification not identified.
 - 3. Hydraulic Calculations: Calculated demand including hose stream requirements shall fall no less than 10 percent below the available water supply curve.
 - 4. Water Supply:

The Fire Protection subcontractor shall perform a fire hydrant flow test in accordance with NFPA 291 after award of the contract but before beginning design of the fire sprinkler system. Apply appropriate reduction factors to account for seasonal variations. Schedule all flow tests with VA personnel. Submit a copy of the flow test report to the project engineer.
 - 5. Hydraulic calculations for the fire sprinkler system shall extend to the point of connection to the nearest circulating water supply main. The following pressures and flow may be used for planning/estimated purposes:

Static Pressure: 65 psi
Residual Pressure: 42 psi
Flow: 830 gpm

6. Zoning:

- a. Existing fire sprinkler zones to remain. Extend existing fire sprinkler zones as indicated below to provide fire sprinkler protection of building expansion:
 - 1) Ground Floor - Connect to existing 3" cross main above south corridor (CG5) to supply fire sprinkler expansion into Utility/Crawl Space.
 - 2) First Floor - Connect to existing 2" feed main in Stair Lobby 132 to supply fire sprinkler expansion into Shell Space 132.
 - 3) Second Floor - Connect to existing 2" feed main at floor control valve assembly in Stair (ST21) to supply fire sprinkler expansion into Second Floor building expansion.
 - 4) Third Floor - Connect to existing 1-1/2" branch line above Tub Room 331 to supply fire sprinkler expansion into third floor building expansion. Tie into existing zones as indicated in Paragraph 1.3-D-6-a.
- b. Provide pipe support and seismic protection in accordance with NFPA 13.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. National Fire Protection Association (NFPA):
 - 13-2010Installation of Sprinkler Systems
 - 101-2012Safety to Life from Fire in Buildings and Structures (Life Safety Code)
 - 170-2012Fire Safety Symbols
- C. Underwriters Laboratories, Inc. (UL):
 - Fire Protection Equipment Directory - 2012
- D. Factory Mutual Engineering Corporation (FM):
 - Approval Guide - 2012
- E. Uniform Building Code - 2009

PART 2 PRODUCTS

2.1 PIPING & FITTINGS

- A. Sprinkler systems in accordance with NFPA 13.

2.2 VALVES

- A. Valves in accordance with NFPA 13.
- B. Existing valves to remain.

2.3 FIRE DEPARTMENT SIAMESE CONNECTION

- A. Existing fire department connection to remain.

2.4 SPRINKLERS

- A. All sprinklers shall be FM approved. Provide quick response sprinklers in all areas, except where specifically prohibited by their listing or approval.
- B. Temperature Ratings: In accordance with NFPA 13.

2.5 SPRINKLER CABINET

- A. Restock existing fire sprinkler cabinet with the required number of sprinkler heads of all ratings and types (new and existing) installed in the building, and a sprinkler wrench for each system. Sprinkler heads shall be installed in center of tile or center to center.

2.6 IDENTIFICATION SIGNS/HYDRAULIC PLACARDS

- A. Plastic, steel or aluminum signs with white lettering on a red background with holes for easy attachment. Enter pertinent data for each system on the hydraulic placard.

2.7 SWITCHES:

- A. Existing switches to remain.

2.8 WATER MOTOR GONG

- A. Existing exterior water flow alarms to remain.

2.9 GAUGES

- A. Existing pressure gauges to remain.

2.10 PIPE HANGERS AND SUPPORTS

- A. Supports, hangers, etc., of an approved pattern placement to conform to NFPA 13. System piping shall be substantially supported to the building structure. The installation of hangers and supports shall adhere to the requirements set forth in NFPA 13, Standard for Installation of Sprinkler Systems. Materials used in the installation or construction of hangers and supports shall be listed and approved for such application. Hangers or supports not specifically listed for service shall be designed and bear the seal of a professional engineer.

2.11 WALL, FLOOR AND CEILING PLATES

- A. Provide chrome plated steel escutcheon plates for exposed piping passing through walls, floors or ceilings.

2.12 ANTIFREEZE SOLUTION

- Not used

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Installation shall be accomplished by the licensed contractor. Provide a qualified technician, experienced in the installation and operation of the type of system being installed, to supervise the installation and testing of the system.
- B. Installation of Piping: Accurately cut pipe to measurements established by the installer and work into place without springing or forcing. In any situation where bending of the pipe is required, use a standard pipe-bending template. Install concealed piping in spaces that have finished ceilings. Where ceiling mounted equipment exists, such as in operating and radiology rooms, install sprinklers so as not to obstruct the movement or operation of the equipment. Sidewall heads may need to be utilized. Locate piping in stairways as near to the ceiling as possible to prevent tampering by unauthorized personnel, and to provide a minimum headroom clearance of 2250 mm (seven feet six inches). To prevent an obstruction to egress, provide piping clearances in accordance with NFPA 101.
- C. Welding: Conform to the requirements and recommendations of NFPA 13.
- D. Drains: Pipe drains to discharge at safe points outside of the building or to sight cones attached to drains of adequate size to readily carry the full flow from each drain under maximum pressure. Do not provide a direct drain connection to sewer system or discharge into sinks. Install drips and drains where necessary and required by NFPA 13.
- E. Affix cutout disks, which are created by cutting holes in the walls of pipe for flow switches and non-threaded pipe connections to the respective waterflow switch or pipe connection near to the pipe from where they were cut.
- F. Sleeves: Provide for pipes passing through masonry or concrete. Provide space between the pipe and the sleeve in accordance with NFPA 13. Seal this space with a UL Listed through penetration fire stop material in accordance with Section 07 84 00, FIRESTOPPING. Where core drilling is used in lieu of sleeves, also seal space. Seal penetrations of walls, floors and ceilings of other types of construction, in accordance with Section 07 84 00, FIRESTOPPING.
- G. Firestopping shall comply with Section 07 84 00, FIRESTOPPING.
- H. Repairs: Repair damage to the building or equipment resulting from the installation of the sprinkler system by the installer at no additional expense to the Government.

- I. Interruption of Service: There shall be no interruption of the existing sprinkler protection, water, electric, or fire alarm services without prior permission of the Contracting Officer. Contractor shall develop an interim fire protection program where interruptions involve in occupied spaces. Request in writing at least one week prior to the planned interruption.

3.2 INSPECTION AND TEST

- A. Preliminary Testing: Flush newly installed systems prior to performing hydrostatic tests in order to remove any debris which may have been left as well as ensuring piping is unobstructed. Hydrostatically test all newly installed piping as specified in NFPA 13, in the presence of the Contracting Officers Technical Representative (COTR) or his designated representative.
- B. Final Inspection and Testing: Subject system to tests in accordance with NFPA 13, and when all necessary corrections have been accomplished, advise COTR/Resident Engineer to schedule a final inspection and test. Connection to the fire alarm system shall have been in service for at least ten days prior to the final inspection, with adjustments made to prevent false alarms. Furnish all instruments, labor and materials required for the tests and provide the services of the installation foreman or other competent representative of the installer to perform the tests. Correct deficiencies and retest system as necessary, prior to the final acceptance. Include the operation of all features of the systems under normal operations in test.

3.3 INSTRUCTIONS

- A. Furnish the services of a competent instructor for not less than two hours for instructing personnel in the operation and maintenance of the system, on the dates requested by the COTR/Resident Engineer.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 22 05 11
COMMON WORK RESULTS FOR PLUMBING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. The requirements of this Section shall apply to all sections of Division 22.
- B. Definitions:
 - 1. Exposed: Piping and equipment exposed to view in finished rooms.
 - 2. Option or optional: Contractor's choice of an alternate material or method.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.
- D. Section 31 20 00, EARTH MOVING: Excavation and Backfill.
- E. Section 03 30 00, CAST-IN-PLACE CONCRETE: Concrete and Grout.
- F. Section 05 31 00, STEEL DECKING.
- G. Section 05 50 00, METAL FABRICATIONS.
- H. Section 07 84 00, FIRESTOPPING.
- I. Section 07 60 00, FLASHING AND SHEET METAL: Flashing for Wall and Roof Penetrations.
- J. Section 07 92 00, JOINT SEALANTS.
- K. Section 09 51 00, ACOUSTICAL CEILINGS.
- L. Section 09 91 00, PAINTING.
- M. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- N. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.
- O. Section 23 09 23, DIRECT DIGITAL CONTROLS FOR HVAC.
- P. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS
- Q. Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT.
- R. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.

1.3 QUALITY ASSURANCE

- A. Products Criteria:
 - 1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology

and basic design that has a proven satisfactory service record of at least three years.

2. Equipment Service: There shall be permanent service organizations, authorized and trained by manufacturers of the equipment supplied, located within 160 km (100 miles) of the project. These organizations shall come to the site and provide acceptable service to restore operations within four hours of receipt of notification by phone, e-mail or fax in event of an emergency, such as the shut-down of equipment; or within 24 hours in a non-emergency. Names, mail and e-mail addresses and phone numbers of service organizations providing service under these conditions for (as applicable to the project): pumps, critical instrumentation, computer workstation and programming shall be submitted for project record and inserted into the operations and maintenance manual.
3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
4. The products and execution of work specified in Division 22 shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments enforced by the local code official shall be enforced, if required by local authorities such as the natural gas supplier. If the local codes are more stringent, then the local code shall apply. Any conflicts shall be brought to the attention of the Resident Engineer (RE)/Contracting Officers Technical Representative (COTR).
5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be products of one manufacturer.
6. Assembled Units: Manufacturers of equipment assemblies, which use components made by others, assume complete responsibility for the final assembled product.
7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
8. Asbestos products or equipment or materials containing asbestos shall not be used.

- B. Welding: Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME "Boiler and Pressure Vessel Code", Section IX, "Welding and Brazing Qualifications".
 2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
 3. Certify that each welder has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
 4. All welds shall be stamped according to the provisions of the American Welding Society.
- C. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the Resident Engineer prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.
- D. Execution (Installation, Construction) Quality:
1. All items shall be applied and installed in accordance with manufacturer's written instructions. Conflicts between the manufacturer's instructions and the contract drawings and specifications shall be referred to the RE/COTR for resolution. Written hard copies or computer files of manufacturer's installation instructions shall be provided to the RE/COTR at least two weeks prior to commencing installation of any item.
 2. Complete layout drawings shall be required by Paragraph, SUBMITTALS. Construction work shall not start on any system until the layout drawings have been approved.
- E. Guaranty: Warranty of Construction, FAR clause 52.246-21.
- F. Plumbing Systems: IPC, International Plumbing Code.

1.4 SUBMITTALS

- A. Submittals shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 11, COMMON WORK RESULTS FOR PLUMBING", with applicable paragraph identification.
- C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements.
- D. If equipment is submitted which differs in arrangement from that shown, provide drawings that show the rearrangement of all associated systems. Approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.
- E. Prior to submitting shop drawings for approval, contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed drawings and specifications, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.
- F. Upon request by Government, lists of previous installations for selected items of equipment shall be provided. Contact persons who will serve as references, with telephone numbers and e-mail addresses shall be submitted with the references.
- G. Manufacturer's Literature and Data: Manufacturer's literature shall be submitted under the pertinent section rather than under this section.
 - 1. Electric motor data and variable speed drive data shall be submitted with the driven equipment.
 - 2. Equipment and materials identification.
 - 3. Fire stopping materials.
 - 4. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
 - 5. Wall, floor, and ceiling plates.
- H. Coordination Drawings: Complete consolidated and coordinated layout drawings shall be submitted for all new systems, and for existing systems that are in the same areas. The drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to one foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show the proposed location and adequate clearance for all equipment, piping, pumps, valves and other items. All valves, trap primer valves, water hammer arrestors,

strainers, and equipment requiring service shall be provided with an access door sized for the complete removal of plumbing device, component, or equipment. Equipment foundations shall not be installed until equipment or piping until layout drawings have been approved. Detailed layout drawings shall be provided for all piping systems. In addition, details of the following shall be provided.

1. Mechanical equipment rooms.
2. Interstitial space.
3. Hangers, inserts, supports, and bracing.
4. Pipe sleeves.
5. Equipment penetrations of floors, walls, ceilings, or roofs.

I. Maintenance Data and Operating Instructions:

1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
2. Listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment shall be provided.
3. The listing shall include belts for equipment: Belt manufacturer, model number, size and style, and distinguished whether of multiple belt sets.

1.5 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage.
2. Damaged equipment shall be replaced with an identical unit as determined and directed by the RE/COTR. Such replacement shall be at no additional cost to the Government.
3. Interiors of new equipment and piping systems shall be protected against entry of foreign matter. Both inside and outside shall be cleaned before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.

B. Cleanliness of Piping and Equipment Systems:

1. Care shall be exercised in the storage and handling of equipment and piping material to be incorporated in the work. Debris arising from cutting, threading and welding of piping shall be removed.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. The interior of all tanks shall be cleaned prior to delivery and beneficial use by the Government. All piping shall be tested in accordance with the specifications and the International Plumbing Code (IPC), latest edition. All filters, strainers, fixture faucets shall be flushed of debris prior to final acceptance.
4. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below shall form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
Boiler and Pressure Vessel Code (BPVC):
SEC IX-2007Boiler and Pressure Vessel Code; Section IX,
Welding and Brazing Qualifications.
- C. American Society for Testing and Materials (ASTM):
A36/A36M-2008Standard Specification for Carbon Structural
Steel
A575-96 (R 2007)Standard Specification for Steel Bars, Carbon,
Merchant Quality, M-Grades R (2002)
E84-2005Standard Test Method for Surface Burning
Characteristics of Building Materials
E119-2008aStandard Test Methods for Fire Tests of
Building Construction and Materials
- D. Manufacturers Standardization Society (MSS) of the Valve and Fittings Industry, Inc:
SP-58-02Pipe Hangers and Supports-Materials, Design and
Manufacture
SP 69-2003 (R 2004)Pipe Hangers and Supports-Selection and
Application
- E. National Electrical Manufacturers Association (NEMA):
MG1-2003, Rev. 1-2007 ..Motors and Generators
- F. International Code Council, (ICC):

IBC-06, (R 2007)International Building Code

IPC-06, (R 2007)International Plumbing Code

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

- A. STANDARDIZATION OF COMPONENTS SHALL BE MAXIMIZED TO REDUCE SPARE PART requirements.
- B. Manufacturers of equipment assemblies that include components made by others shall assume complete responsibility for final assembled unit.
 - 1. All components of an assembled unit need not be products of same manufacturer.
 - 2. Constituent parts that are alike shall be products of a single manufacturer.
 - 3. Components shall be compatible with each other and with the total assembly for intended service.
 - 4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.
- C. Components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a name plate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.
- D. Major items of equipment, which serve the same function, shall be the same make and model

2.2 COMPATIBILITY OF RELATED EQUIPMENT

- A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational system that conforms to contract requirements.

2.3 SAFETY GUARDS

- A. Pump shafts and couplings shall be fully guarded by a sheet steel guard, covering coupling and shaft but not bearings. Material shall be minimum 16-gage sheet steel; ends shall be braked and drilled and attached to pump base with minimum of four 6 mm (1/4-inch) bolts. Reinforce guard as necessary to prevent side play forcing guard onto couplings.
- B. All Equipment shall have moving parts protected from personal injury.

2.4 LIFTING ATTACHMENTS

Equipment shall be provided with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.5 ELECTRIC MOTORS, MOTOR CONTROL, CONTROL WIRING

- A. All material and equipment furnished and installation methods shall conform to the requirements of Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT; Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS; and, Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). All electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems shall be provided. Premium efficient motors shall be provided. Unless otherwise specified for a particular application, electric motors shall have the following requirements.
- B. Special Requirements:
 1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the requirements of NFPA 70 without additional time or cost to the Government.
 2. Assemblies of motors, starters, and controls and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.
 3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
 - a. Wiring material located where temperatures can exceed 71° C (160° F) shall be stranded copper with Teflon FEP insulation with jacket. This includes wiring on the boilers.
 - b. Other wiring at boilers and to control panels shall be NFPA 70 designation THWN.
 - c. Shielded conductors or wiring in separate conduits for all instrumentation and control systems shall be provided where recommended by manufacturer of equipment.
 4. Motor sizes shall be selected so that the motors do not operate into the service factor at maximum required loads on the driven equipment. Motors on pumps shall be sized for non-overloading at all points on the pump performance curves.

5. Motors utilized with variable frequency drives shall be rated "inverter-ready" per NEMA Standard, MG1, Part 31.4.4.2.

- C. Motor Efficiency and Power Factor: All motors, when specified as "high efficiency or Premium Efficiency" by the project specifications on driven equipment, shall conform to efficiency and power factor requirements in Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT, with no consideration of annual service hours. Motor manufacturers generally define these efficiency requirements as "NEMA premium efficient" and the requirements generally exceed those of the Energy Policy Act of 1992 (EPACT). Motors not specified as "high efficiency or premium efficient" shall comply with EPACT.
- D. Single-phase Motors: Capacitor-start type for hard starting applications. Motors for centrifugal fans and pumps may be split phase or permanent split capacitor (PSC).
- E. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type. Each two-speed motor shall have two separate windings. A time delay (20 seconds minimum) relay shall be provided for switching from high to low speed.
- F. Rating: Rating shall be continuous duty at 100 percent capacity in an ambient temperature of 40° C (104° F); minimum horsepower as shown on drawings; maximum horsepower in normal operation shall not exceed nameplate rating without service factor.
- G. Insulation Resistance: Not less than one-half meg-ohm between stator conductors and frame shall be measured at the time of final inspection.

2.6 VARIABLE SPEED MOTOR CONTROLLERS

- A. Refer to Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS and Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS for specifications.
- B. The combination of controller and motor shall be provided by the respective pump manufacturer, and shall be rated for 100 percent output performance. Multiple units of the same class of equipment, i.e. pumps, shall be product of a single manufacturer.
- C. Motors shall be premium efficient type, "inverter duty", and be approved by the motor controller manufacturer. The controller-motor combination shall be guaranteed to provide full motor nameplate horsepower in variable frequency operation. Both driving and driven motor/fan sheaves shall be fixed pitch.
- D. Controller shall not add any current or voltage transients to the input AC power distribution system, DDC controls, sensitive medical

equipment, etc., nor shall be affected from other devices on the AC power system.

2.7 EQUIPMENT AND MATERIALS IDENTIFICATION

- A. Use symbols, nomenclature and equipment numbers specified, shown on the drawings, and shown in the maintenance manuals. Refer to Section 09 51 00 for access identification markers and Section 09 91 00 for identity markings and painting of systems to be accomplished by Mechanical Contractors.
- B. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 48 mm (3/16-inch) high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING shall be permanently fastened to the equipment. Unit components such as water heaters, tanks, coils, filters, fans, etc. shall be identified.
- C. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 48 mm (3/16-inch) high riveted or bolted to the equipment.
- D. Control Items: All temperature, pressure, and controllers shall be labeled and the component's function identified. Identify and label each item as they appear on the control diagrams.
- E. Valve Tags and Lists:
 - 1. Plumbing: All valves shall be provided with valve tags and listed on a valve list (Fixture stops not included).
 - 2. Valve tags: Engraved black filled numbers and letters not less than 13 mm (1/2-inch) high for number designation, and not less than 6.4 mm (1/4-inch) for service designation on 19 gage, 38 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
 - 3. Valve lists: Valve lists shall be created using a word processing program and printed on plastic coated cards. The plastic coated valve list card(s), sized 216 mm (8-1/2 inches) by 280 mm (11 inches) shall show valve tag number, valve function and area of control for each service or system. The valve list shall be in a punched 3-ring binder notebook. A copy of the valve list shall be mounted in picture frames for mounting to a wall.
 - 4. A detailed plan for each floor of the building indicating the location and valve number for each valve shall be provided. Each

valve location shall be identified with a color coded sticker or thumb tack in ceiling.

2.8 FIRE STOPPING

- A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION, for pipe insulation.

2.9 GALVANIZED REPAIR COMPOUND

- A. Mil. Spec. DOD-P-21035B, paint.

2.10 PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

- A. In lieu of the paragraph which follows, suspended equipment support and restraints may be designed and installed in accordance with the International Building Code (IBC), latest edition, and SECTION 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS. Submittals based on the International Building Code (IBC), latest edition, SECTION 13 05 41 requirements, or the following paragraphs of this Section shall be stamped and signed by a professional engineer registered in a state where the project is located. The Support system of suspended equipment over 227 kg (500 pounds) shall be submitted for approval of the Resident Engineer in all cases. See these specifications for lateral force design requirements.
- B. Type Numbers Specified: MSS SP-58. For selection and application refer to MSS SP-69. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting.
- C. For Attachment to Concrete Construction:
 - 1. Concrete insert: Type 18, MSS SP-58.
 - 2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 102 mm (4 inches) thick when approved by the Resident Engineer for each job condition.
 - 3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 102 mm (4 inches) thick when approved by the Resident Engineer for each job condition.
- D. For Attachment to Steel Construction: MSS SP-58.
 - 1. Welded attachment: Type 22.
 - 2. Beam clamps: Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23 mm (7/8-inch) outside diameter.
- E. Attachment to Metal Pan or Deck: As required for materials specified in Section 05 31 00, STEEL DECKING.

- F. For Attachment to Wood Construction: Wood screws or lag bolts.
- G. Hanger Rods: Hot-rolled steel, ASTM A36 or A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 38 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.
- H. Multiple (Trapeze) Hangers: Galvanized, cold formed, lipped steel channel horizontal member, not less than 41 mm by 41 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (No. 12 gage), designed to accept special spring held, hardened steel nuts. Trapeze hangers are not permitted for steam supply and condensate piping.
 - 1. Allowable hanger load: Manufacturers rating less 91kg (200 pounds).
 - 2. Guide individual pipes on the horizontal member of every other trapeze hanger with 6 mm (1/4-inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 13 mm (1/2-inch) galvanized steel bands, or insulated calcium silicate shield for insulated piping at each hanger.
- I. Pipe Hangers and Supports: (MSS SP-58), use hangers sized to encircle insulation on insulated piping. Refer to Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or insulated calcium silicate shields. Provide Type 40 insulation shield or insulated calcium silicate shield at all other types of supports and hangers including those for insulated piping.
 - 1. General Types (MSS SP-58):
 - a. Standard clevis hanger: Type 1; provide locknut.
 - b. Riser clamps: Type 8.
 - c. Wall brackets: Types 31, 32 or 33.
 - d. Roller supports: Type 41, 43, 44 and 46.
 - e. Saddle support: Type 36, 37 or 38.
 - f. Turnbuckle: Types 13 or 15.
 - g. U-bolt clamp: Type 24.
 - h. Copper Tube:
 - 1) Hangers, clamps and other support material in contact with tubing shall be painted with copper colored epoxy paint, plastic coated or taped with isolation tape to prevent electrolysis.

- 2) For vertical runs use epoxy painted or plastic coated riser clamps.
- 3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
- 4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.
- i. Supports for plastic or glass piping: As recommended by the pipe manufacturer with black rubber tape extending one inch beyond steel support or clamp. Spring Supports (Expansion and contraction of vertical piping):
 - 1) Movement up to 20 mm (3/4-inch): Type 51 or 52 variable spring unit with integral turn buckle and load indicator.
 - 2) Movement more than 20 mm (3/4-inch): Type 54 or 55 constant support unit with integral adjusting nut, turn buckle and travel position indicator.
- j. Spring hangers are required on all plumbing system pumps one horsepower and greater.
2. Plumbing Piping (Other Than General Types):
 - a. Horizontal piping: Type 1, 5, 7, 9, and 10.
 - b. Chrome plated piping: Chrome plated supports.
 - c. Hangers and supports in pipe chase: Prefabricated system ABS self-extinguishing material, not subject to electrolytic action, to hold piping, prevent vibration and compensate for all static and operational conditions.
 - d. Blocking, stays and bracing: Angle iron or preformed metal channel shapes, 1.3 mm (18 gage) minimum.
- J. Pre-insulated Calcium Silicate Shields:
 1. Provide 360 degree water resistant high density 965 kPa (140 psi) compressive strength calcium silicate shields encased in galvanized metal.
 2. Pre-insulated calcium silicate shields to be installed at the point of support during erection.
 3. Shield thickness shall match the pipe insulation.
 4. The type of shield is selected by the temperature of the pipe, the load it must carry, and the type of support it will be used with.
 - a. Shields for supporting cold water shall have insulation that extends a minimum of one inch past the sheet metal.

- b. The insulated calcium silicate shield shall support the maximum allowable water filled span as indicated in MSS-SP 69. To support the load, the shields shall have one or more of the following features: structural inserts 4138 kPa (600 psi) compressive strength, an extra bottom metal shield, or formed structural steel (ASTM A36) wear plates welded to the bottom sheet metal jacket.
- 5. Shields may be used on steel clevis hanger type supports, roller supports or flat surfaces.
- K. Seismic Restraint of Piping: Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

2.11 PIPE PENETRATIONS

- A. Pipe penetration sleeves shall be installed for all pipe other than rectangular blocked out floor openings for risers in mechanical bays.
- B. Pipe penetration sleeve materials shall comply with all fire stopping requirements for each penetration.
- C. To prevent accidental liquid spills from passing to a lower level, provide the following:
 - 1. For sleeves: Extend sleeve 25 mm (1 inch) above finished floor and provide sealant for watertight joint.
 - 2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
 - 3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.
- C. Penetrations are not allowed through beams or ribs, but may be installed in concrete beam flanges. Any deviation from these requirements must receive prior approval of Resident Engineer.
- D. Sheet metal, plastic, or moisture resistant fiber sleeves shall be provided for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.
- E. Cast iron or zinc coated pipe sleeves shall be provided for pipe passing through exterior walls below grade. The space between the sleeve and pipe shall be made watertight with a modular or link rubber seal. The link seal shall be applied at both ends of the sleeve.
- F. Galvanized steel or an alternate black iron pipe with asphalt coating sleeves shall be for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. A galvanized steel Sleeve

shall be provided for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, sleeves shall be connected with a floor plate.

- G. Brass Pipe Sleeves shall be provided for pipe passing through quarry tile, terrazzo or ceramic tile floors. The sleeve shall be connected with a floor plate.
- H. Sleeve clearance through floors, walls, partitions, and beam flanges shall be 25 mm (1 inch) greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation plus 25 mm (1 inch) in diameter. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.
- I. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

2.12 TOOLS AND LUBRICANTS

- A. Furnish, and turn over to the Resident Engineer, special tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.
- B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.
- C. Tool Containers: metal, permanently identified for intended service and mounted, or located, where directed by the Resident Engineer.
- D. Lubricants: A minimum of 0.95 L (1 quart) of oil, and 0.45 kg (1 pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

2.13 WALL, FLOOR AND CEILING PLATES

- A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.
- B. Thickness: Not less than 2.4 mm (3/32-inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025-inch) for up to 80 mm (3 inch) pipe, 0.89 mm (0.035-inch) for larger pipe.
- C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Wall plates shall be used where insulation ends on exposed water supply pipe drop from overhead.

A watertight joint shall be provided in spaces where brass or steel pipe sleeves are specified.

2.14 ASBESTOS

Materials containing asbestos are not permitted.

PART 3 - EXECUTION

3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

- A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions shall be coordinated with the work of all trades. Piping, sleeves, inserts, hangers, and equipment shall be located clear of windows, doors, openings, light outlets, and other services and utilities. Equipment layout drawings shall be prepared to coordinate proper location and personnel access of all facilities. The drawings shall be submitted for review.

Manufacturer's published recommendations shall be followed for installation methods not otherwise specified.

- B. Operating Personnel Access and Observation Provisions: All equipment and systems shall be arranged to provide clear view and easy access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to: all equipment items, valves, filters, strainers, transmitters, sensors, control devices. All gages and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Maintenance and operating space and access provisions that are shown on the drawings shall not be changed nor reduced.
- C. Structural systems necessary for pipe and equipment support shall be coordinated to permit proper installation.
- D. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.
- E. Cutting Holes:
 - 1. Holes through concrete and masonry shall be cut by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill will not be allowed, except as permitted by RE/COTR where working area space is limited.
 - 2. Holes shall be located to avoid interference with structural members such as beams or grade beams. Holes shall be laid out in advance and drilling done only after approval by RE/COTR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to RE/COTR for approval.

3. Waterproof membrane shall not be penetrated. Pipe floor penetration block outs shall be provided outside the extents of the waterproof membrane.
- F. Interconnection of Instrumentation or Control Devices: Generally, electrical and pneumatic interconnections are not shown but must be provided.
- G. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other service are not shown but must be provided.
- H. Protection and Cleaning:
1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the Resident Engineer. Damaged or defective items in the opinion of the Resident Engineer, shall be replaced.
 2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Pipe openings, equipment, and plumbing fixtures shall be tightly covered against dirt or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.
- I. Concrete and Grout: Concrete and shrink compensating grout 25 MPa (3000 psi) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE. shall be used for all pad or floor mounted equipment. Gages, thermometers, valves and other devices shall be installed with due regard for ease in reading or operating and maintaining said devices. Thermometers and gages shall be located and positioned to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.
- J. Interconnection of Controls and Instruments: Electrical interconnection is generally not shown but shall be provided. This includes interconnections of sensors, transmitters, transducers, control devices, control and instrumentation panels, instruments and computer workstations. Comply with NFPA-70.

- K. Many plumbing systems interface with the HVAC control system. See the HVAC control points list and section 23 09 23 DIRECT DIGITAL CONTROLS FOR HVAC
- L. Work in Existing Building:
 - 1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
 - 2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will cause the least interfere with normal operation of the facility.
- M. Work in Animal Research Areas: Seal all pipe penetrations with silicone sealant to prevent entrance of insects.
- N. Work in bathrooms, restrooms, housekeeping closets: All pipe penetrations behind escutcheons shall be sealed with plumbers putty.
- O. Switchgear Drip Protection: Every effort shall be made to eliminate the installation of pipe above electrical and telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints.
- P. Inaccessible Equipment:
 - 1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost to the Government.
 - 2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as electrical conduit, motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

3.2 TEMPORARY PIPING AND EQUIPMENT

- A. Continuity of operation of existing facilities may require temporary installation or relocation of equipment and piping. Temporary equipment or pipe installation or relocation shall be provided to maintain continuity of operation of existing facilities.
- B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain, operate without excessive stress, and shall be insulated where injury

can occur to personnel by contact with operating facilities. The requirements of Para. 3.1 shall apply.

- C. Temporary facilities and piping shall be completely removed and any openings in structures sealed. Necessary blind flanges and caps shall be provided to seal open piping remaining in service.

3.3 RIGGING

- A. Openings in building structures shall be planned to accommodate design scheme.
- B. Alternative methods of equipment delivery may be offered and will be considered by Government under specified restrictions of phasing and service requirements as well as structural integrity of the building.
- C. All openings in the building shall be closed when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.
- D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility.
- E. Contractor shall check all clearances, weight limitations and shall provide a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.
- F. Rigging plan and methods shall be referred to RE/COTR for evaluation prior to actual work.

3.4 PIPE AND EQUIPMENT SUPPORTS

- A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Holes shall be drilled or burned in structural steel ONLY with the prior written approval of the Resident Engineer.
- B. The use of chain pipe supports, wire or strap hangers; wood for blocking, stays and bracing, or hangers suspended from piping above shall not be permitted. Rusty products shall be replaced.
- C. Hanger rods shall be used that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. A minimum of 15 mm (1/2-inch) clearance between pipe or piping covering and adjacent work shall be provided.

D. For horizontal and vertical plumbing pipe supports, refer to the International Plumbing Code (IPC), latest edition, and these specifications.

E. Overhead Supports:

1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
3. Tubing and capillary systems shall be supported in channel troughs.

F. Floor Supports:

1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Concrete bases and structural systems shall be anchored and doweled to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
2. Bases and supports shall not be located and installed until equipment mounted thereon has been approved. Bases shall be sized to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Structural drawings shall be reviewed for additional requirements. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.
3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves, anchored to the bases. Fill the annular space between sleeves and bolts with a grout material to permit alignment and realignment.
4. For seismic anchoring, refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.5 LUBRICATION

- A. All equipment and devices requiring lubrication shall be lubricated prior to initial operation. All devices and equipment shall be field checked for proper lubrication.
- B. All devices and equipment shall be equipped with required lubrication fittings. A minimum of one liter (one quart) of oil and 0.5 kg (one pound) of grease of manufacturer's recommended grade and type for each different application shall be provided. All materials shall be delivered to RE/COTR in unopened containers that are properly identified as to application.

- C. A separate grease gun with attachments for applicable fittings shall be provided for each type of grease applied.
- D. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.
- E. All lubrication points shall be extended to one side of the equipment.

3.6 PLUMBING SYSTEMS DEMOLITION

- A. Rigging access, other than indicated on the drawings, shall be provided after approval for structural integrity by the RE/COTR. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, approved protection from dust and debris shall be provided at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.
- B. In an operating plant, cleanliness and safety shall be maintained. The plant shall be kept in an operating condition. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Work shall be confined to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Dust and debris shall not be permitted to accumulate in the area to the detriment of plant operation. All flame cutting shall be performed to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. All work shall be performed in accordance with recognized fire protection standards. Inspections will be made by personnel of the VA Medical Center, and the Contractor shall follow all directives of the RE or COTR with regard to rigging, safety, fire safety, and maintenance of operations.
- C. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work shall be completely removed from Government property. This includes all concrete equipment pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings shall be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.

- D. All valves including gate, globe, ball, butterfly and check, all pressure gages and thermometers with wells shall remain Government property and shall be removed and delivered to RE/COTR and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these plans and specifications. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate.

3.7 CLEANING AND PAINTING

- A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.
- B. In addition, the following special conditions apply:
1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the specific tasks. All rust shall be removed prior to painting and from surfaces to remain unpainted. Scratches, scuffs, and abrasions shall be repaired prior to applying prime and finish coats.
 2. The following Material And Equipment shall NOT be painted::
 - a. Motors, controllers, control switches, and safety switches.
 - b. Control and interlock devices.
 - c. Regulators.
 - d. Pressure reducing valves.
 - e. Control valves and thermostatic elements.
 - f. Lubrication devices and grease fittings.
 - g. Copper, brass, aluminum, stainless steel and bronze surfaces.
 - h. Valve stems and rotating shafts.
 - i. Pressure gages and thermometers.
 - j. Glass.
 - k. Name plates.
 3. Control and instrument panels shall be cleaned and damaged surfaces repaired. Touch-up painting shall be made with matching paint obtained from manufacturer or computer matched.
 4. Pumps, motors, steel and cast iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same color as utilized by the pump manufacturer
 5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats.

6. The final result shall be a smooth, even-colored, even-textured factory finish on all items. The entire piece of equipment shall be repainted, if necessary, to achieve this.

3.8 IDENTIFICATION SIGNS

- A. Laminated plastic signs, with engraved lettering not less than 5 mm (3/16-inch) high, shall be provided that designates equipment function, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.
- B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, performance shall be placed on factory built equipment.
- C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

3.9 STARTUP AND TEMPORARY OPERATION

- A. Start up of equipment shall be performed as described in the equipment specifications. Vibration within specified tolerance shall be verified prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.10 OPERATING AND PERFORMANCE TESTS

- A. Prior to the final inspection, all required tests shall be performed as specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TESTS and submit the test reports and records to the Resident Engineer.
- B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.
- C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then make performance tests such systems respectively during first actual seasonal use of respective systems following completion of work.

3.11 OPERATION AND MAINTENANCE MANUALS

- A. Provide four bound copies. The Operations and maintenance manuals shall be delivered to RE/COTR not less than 30 days prior to completion of a phase or final inspection.

- B. All new and temporary equipment and all elements of each assembly shall be included.
- C. Data sheet on each device listing model, size, capacity, pressure, speed, horsepower, impeller size, and other information shall be included.
- D. Manufacturer's installation, maintenance, repair, and operation instructions for each device shall be included. Assembly drawings and parts lists shall also be included. A summary of operating precautions and reasons for precautions shall be included in the Operations and Maintenance Manual.
- E. Lubrication instructions, type and quantity of lubricant shall be included.
- F. Schematic diagrams and wiring diagrams of all control systems corrected to include all field modifications shall be included.
- G. Set points of all interlock devices shall be listed.
- H. Trouble-shooting guide for the control system troubleshooting guide shall be inserted into the Operations and Maintenance Manual.
- I. The combustion control system sequence of operation corrected with submittal review comments shall be inserted into the Operations and Maintenance Manual.
- J. Emergency procedures.

3.12 INSTRUCTIONS TO VA PERSONNEL

Instructions shall be provided in accordance with Article,
INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.

- - - E N D - - -

SECTION 22 05 19**METERS AND GAGES FOR PLUMBING PIPING****PART 1 - GENERAL****1.1 DESCRIPTION**

This section describes the requirements for water meters and pressure gages.

1.2 RELATED WORK

Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Water Meter.
 - 2. Pressure Gages.
 - 3. BACnet communication protocol
 - 4. Product certificates for each type of meter and gauge
- C. Operations and Maintenance manual shall include:
 - 1. System Description
 - 2. Major assembly block diagrams
 - 3. Troubleshooting and preventive maintenance guidelines
 - 4. Spare parts information.
- D. Shop Drawings shall include the following:
 - 1. One line, wiring and terminal diagrams including terminals identified, protocol or communication modules, and Ethernet connections.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute (ANSI):
 - American Society of Mechanical Engineers (ASME): (Copyrighted Society)
 - B40.1-05Gauges-Pressure Indicating Dial Type-Elastic
- C. American Water Works Association (AWWA):
 - C700-07 (R 2003)Standard for Cold Water Meters, Displacement Type, Bronze Main Case
 - C701-07Cold Water Meters-Turbine Type, for Customer Service AWWA/ ANSI

C702-01Cold water meters - Compound Type

D. International Code Council (ICC):

IPC-06(2007 Supplement) International Plumbing Code

1.5 AS-BUILT DOCUMENTATION

- A. The electronic documentation and copies of the Operations and Maintenance Manual, approved submittals, shop drawings, and other closeout documentation shall be prepared by a computer software program complying with Section 508 of the Rehabilitation Act of 1973, as amended (29 U.S.C 794d). The manufacturer or vendor of the software used to prepare the electronic documentation shall have a Voluntary Product Accessibility Template made available for review and included as part of the Operations and Maintenance Manual or closeout documentation. All available accessibility functions listed in the Voluntary Accessibility Template shall be enabled in the prepared electronic files. As Adobe Acrobat is a common industry format for such documentation, following the document, "Creating Accessible Adobe PDF files, A Guide for Document Authors" that is maintained and made available by Adobe free of charge is recommended."
- B. Four sets of manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.
- C. Four sets of operation and maintenance data updated to include submittal review comments shall be inserted into a three ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices such as damper and door closure interlocks shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

PART 2 - PRODUCTS

2.1 DISPLACEMENT WATER METER

- A. For pipe sizes under 50 mm (2 inches), the water meter shall be displacement type, full size nutating disc, magnetic drive, sealed register, and fully conform to AWWA C700. Peak domestic flow shall be

2.2 L/S (34 gpm). The meter register shall indicate flow in liters (U.S. gallons).

- B. The water meter shall be rated for use at temperatures ranging from -40° C (-40° F) and +70° C (158° F) and operate at a working pressure of 1034 kPa (150-psig).
- C. The meter case, bottom caps, and register box lids shall be constructed from cast bronze.

2.2 WATER METER STRAINER

- A. All meters sizes 50 mm or DN50 (2 inches) and above, shall be fitted with a bronze inlet strainer with top access. The strainer shall conform to AWWA 702.

2.3 WATER METER PROGRAMMING

- A. All meters 50 mm or DN50 (2 inches) and above shall be programmable with software supplied by the meter manufacturer.
- B. The software shall have a Microsoft based interface and operate on the latest Windows operating system. The software shall allow the user to configure the meter, troubleshoot the meter, query and display meter parameters, and configure data and stored values.
- C. The meter firmware shall be upgradeable through one of the communication ports without removing the unit from service.
- D. the meter shall include output for analog 4-20 milliamp signals and binary output.
- E. The meter shall have two dry contact relays outputs for alarm or control functions.

2.4 WATER METER COMMUNICATION PROTOCOL

- A. The meter shall use a native BACnet Ethernet communication protocol supporting MSTP. The communications shall be protected against surges induced on its communications channels.

2.5 PRESSURE GAGES FOR WATER AND SEWAGE USAGE

- A. ANSI B40.1 all metal case 114 mm (4-1/2 inches) diameter, bottom connected throughout, graduated as required for service, and identity labeled. Range shall be 0 to 1375 kPa (0 to 200 psi) gauge.
- B. The pressure element assembly shall be bourdon tube. The mechanical movement shall be lined to pressure element and connected to pointer.
- C. The dial shall be non-reflective aluminum with permanently etched scale markings graduated in kPa and psi.
- D. The pointer shall be dark colored metal.
- E. The window shall be glass.

- F. The ring shall be brass or stainless steel.
- G. The accuracy shall be grade A, plus or minus 1 percent of middle half of scale range.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Direct mounted pressure gages shall be installed in piping tees with pressure gage located on pipe at the most readable position.
- B. Valves and snubbers shall be installed in piping for each pressure gage.
- C. Test plugs shall be installed on the inlet and outlet pipes all heat exchangers or water heaters serving more than one plumbing fixture.
- D. Pressure gages shall be installed where indicated on the drawings and at the following locations:
 - 1. Building water service entrance into building
 - 2. Inlet and outlet of each pressure reducing valve
 - 3. Suction and discharge of each domestic water pump or re-circulating hot water return pump.
- E. Water meter installation shall conform to AWWA C700, AWWA C701, and AWWA C702. Electrical installations shall conform to IEEE C2, NFPA 70 (National Electric Code), and to the requirements specified herein. New materials shall be provided.
- F. Each water meter shall communicate with the building energy management and control system and report daily water consumption and peak daily flow rate.

3.2 FIELD QUALITY CONTROL

- A. The meter assembly shall be visually inspected and operationally tested. The correct multiplier placement on the face of the meter shall be verified.

3.3 TRAINING

- A. A training course shall be provided to the medical center on meter configuration and maintenance. Training manuals shall be supplied for all attendee with four additional copies supplied. The training course shall cover meter configuration, troubleshooting, and diagnostic procedures.

- - - E N D - - -

SECTION 22 05 23
GENERAL-DUTY VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section describes the requirements for general-duty valves for domestic water and sewer systems.

1.2 RELATED WORK

- A. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
1. Valves.
 2. Backflow Preventers.
 3. Pressure Reducing Valves.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):A536-84(R 2004)
Standard Specification for Ductile Iron Castings
- C. American Society of Sanitary Engineering (ASSE)
ASSE 1003-01 (R 2003) ..Performance Requirements for Water Pressure Reducing Valves
ASSE 1012-02Backflow Preventer with Intermediate Atmospheric Vent
ASSE 1013-05Reduced Pressure Principle Backflow Preventers and Reduced Pressure Fire Protection Principle Backflow Preventers
- D. International Code Council (ICC)
IPC-06 (R 2007)International Plumbing Code
- E. Manufacturers Standardization Society of the Valve and Fittings Industry, Inc. (MSS):
SP-25-98Standard Marking System for Valves, Fittings, Flanges and Unions
SP-67-02a (R 2004) Butterfly Valve of the Single flange Type (Lug Wafer)
SP-70-06Cast Iron Gate Valves, Flanged and Threaded Ends.

SP-72-99Ball Valves With Flanged or Butt Welding For
General Purpose

SP-80-03Bronze Gate, Globe, Angle and Check Valves.

SP-110-96Ball Valve Threaded, Socket Welding, Solder
Joint, Grooved and Flared Ends

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Valves shall be prepared for shipping as follows:
 - 1. Protect internal parts against rust and corrosion.
 - 2. Protect threads, flange faces, grooves, and weld ends.
 - 3. Set angle, gate, and globe valves closed to prevent rattling.
 - 4. Set ball and plug valves open to minimize exposure of functional surfaces
 - 5. Set butterfly valves closed or slightly open.
 - 6. Block check valves in either closed or open position.
- B. Valves shall be prepared for storage as follows:
 - 1. Maintain valve end protection.
 - 2. Store valves indoors and maintain at higher than ambient dew point temperature.
- C. A sling shall be used for large valves. The sling shall be rigged to avoid damage to exposed parts. Hand wheels or stems shall not be used as lifting or rigging points.

PART 2 - PRODUCTS

2.1 VALVES

- A. Asbestos packing and gaskets are prohibited.
- B. Bronze valves shall be made with dezincification resistant materials. Bronze valves made with copper alloy (brass) containing more than 15 percent zinc shall not be permitted.
- C. Valves in insulated piping shall have 50 mm or DN50 (2 inch) stem extensions and extended handles of non-thermal conductive material that allows operating the valve without breaking the vapor seal or disturbing the insulation. Memory stops shall be fully adjustable after insulation is applied.
- D. Exposed Valves over 65 mm or DN65 (2-1/2 inches) installed at an elevation over 3.6 meters (12 feet) shall have a chain-wheel attachment to valve hand-wheel, stem, or other actuator.

E. Ball valves, pressure regulating valves, gate valves, globe valves, and plug valves used to supply potable water shall meet the requirements of NSF 61.

F. Shut-off:

1. Cold, Hot and Re-circulating Hot Water:

a. 50 mm or DN50 (2 inches) and smaller: Ball, MSS SP-72, SP-110, Ball valve shall be full port three piece or two piece with a union design with adjustable stem package. Threaded stem designs are not allowed. The ball valve shall have a SWP rating of 1035 kPa (150 psig) and a CWP rating of 4140 kPa (600 psig). The body material shall be Bronze ASTM B584, Alloy C844. The ends shall be solder,

b. Less than 100 mm DN100 (4 inches): Butterfly shall have an iron body with EPDM seal and aluminum bronze disc. The butterfly valve shall meet MSS SP-67, type I standard. The butterfly valve shall have a SWP rating of 1380 kPa (200 psig). The valve design shall be lug type suitable for bidirectional dead-end service at rated pressure. The body material shall meet ASTM A 536, ductile iron.

c. 100 mm (DN100) (4 inches) and larger:

1) Class 125, OS&Y, Cast Iron Gate Valve. The gate valve shall meet MSS-SP-70 type I standard. The gate valve shall have a CWP rating of 1380 kPa (200 psig). The valve materials shall meet ASTM A 126, grey iron with bolted bonnet, flanged ends, bronze trim, and solid wedge disc. The gate valve shall be gear operated for sizes under 200 mms or DN200 (8 inches) and crank operated for sizes 200 mms or DN200 (8 inches) and above

2) Single flange, ductile iron butterfly valves: The single flanged butterfly valve shall meet the MSS SP-67 standard. The butterfly valve shall have a CWP rating of 1380 kPa (200 psig). The butterfly valve shall be lug type, suitable for bidirectional dead-end service at rated pressure without use of downstream flange. The body material shall comply with ASTM A536 ductile iron. The seat shall be EPDM with stainless steel disc and stem.

3) Grooved end, ductile iron butterfly valves. The grooved butterfly valve shall meet the MSS SP-67 standard. The grooved butterfly valve shall have a CWP rating of 1380 kPa

(200 psig). The valve materials shall be polyamide coated ductile iron conforming to ASTM A536 with two piece stainless steel stem, EPDM encapsulated ductile iron disc, and EPDM seal. The butterfly valve shall be gear operated

2. Reagent Grade Water: Valves for reagent grade, reverse osmosis, or deionized water service shall be ball type of same material as used for pipe.

G. Balancing:

1. Hot Water Re-circulating, 80 mm or DN80 (3 inches) and smaller manual balancing valve shall be of bronze body, brass ball construction with glass and carbon filled TFE seat rings and designed for positive shutoff. The manual balancing valve shall have differential pressure read-out ports across the valve seat area. The read out ports shall be fitting with internal EPT inserts and check valves. The valve body shall have 8 mm or DN8 NPT ($\frac{1}{4}$ " NPT) tapped drain and purge port. The valves shall have memory stops that allow the valve to close for service and then reopened to set point without disturbing the balance position. All valves shall have calibrated nameplates to assure specific valve settings.
2. Larger than 80 mm or DN80 (3 inches): Manual balancing valves shall be of heavy duty cast iron flanged construction with 862 kPa (125 psi) flange connections. The flanged manual balancing valves shall have either a brass ball with glass and carbon filled TFE seal rings or fitted with a bronze seat, replaceable bronze disc with EPDM seal insert and stainless steel stem. The design pressure shall be 1207 kPa (175) at 121 deg C (250 deg F).

H. Check:

1. Check valves less than 80 mm or DN80 (3 inches) and smaller) shall be class 125, bronze swing check valves with non metallic Buna-N disc. The check valve shall meet MSS SP-80 Type 4 standard. The check valve shall have a CWP rating of 1380 kPa (200 psig). The check valve shall have a Y pattern horizontal body design with bronze body material conforming to ASTM B 62, solder joints, and PTFE or TFE disc.
2. Larger than 100 mm or DN100 (4 inches and larger):
 - a. Check valves shall be class 125, iron swing check valve with lever and weight closure control. The check valve shall meet MSS SP-71 Type I standard. The check valve shall have a CWP rating

of 1380 kPa (200 psig). The check valve shall have a clear or full waterway body design with gray iron body material conforming to ASTM A 126, bolted bonnet, flanged ends, bronze trim.

- b. All check valves on the discharge side of submersible sump pumps shall have factory installed exterior level and weight with sufficient weight to prevent the check valve from hammering against the seat when the sump pump stops.

I. Globe:

1. 80 mm or DN80 (3 inches) or smaller: Class 150, bronze globe valve with non metallic disc. The globe valve shall meet MSS SP-80, Type 2 standard. The globe valve shall have a CWP rating of 2070 kPa (300 psig). The valve material shall be bronze with integral seal and union ring bonnet conforming to ASTM B 62 with solder ends, copper-silicon bronze stem, TPF E or TFE disc, malleable iron hand wheel.
2. Larger than 80 mm or DN80 (3 inches): Similar to above, except with cast iron body and bronze trim, class 125, iron globe valve. The globe valve shall meet MSS SP-85, Type 1 standard. The globe valve shall have a CWP rating of 1380 kPa (200 psig). The valve material shall be gray iron with bolted bonnet conforming to ASTM A 126 with flanged ends, bronze trim, malleable iron handwheel.

2.2 WATER PRESSURE REDUCING VALVE AND CONNECTIONS

- A. 80 mm or DN80 (3 inches) or smaller: The pressure reducing valve shall consist of a bronze body and bell housing, a separate access cover for the plunger, and a bolt to adjust the downstream pressure. The bronze bell housing and access cap shall be threaded to the body and shall not require the use of ferrous screws. The assembly shall be of the balanced piston design and shall reduce pressure in both flow and no flow conditions. The assembly shall be accessible for maintenance without having to remove the body from the line.
- B. 100 mm or DN100 (4 inches) and larger: The pressure reducing valve shall consist of a flanged cast iron body and rated to 1378-kPa (200-psig). The valve shall have a large Hycar diaphragm for sensitive response.
- C. The regulator shall have a tap for pressure gauge.
- D. The regulator shall have a temperature rating of 100° C (210° F) for hot water or hot water return service. Pressure regulators shall have accurate pressure regulation to 6.9-kPa (+/- 1 psig).

- E. Setting: Entering water pressure, discharge pressure, capacity, size, and related measurements shall be as shown on the drawings.
- F. Connections Valves and Strainers: shut off valves shall be installed on each side of reducing valve and a bypass line equal in size to the regulator inlet pipe shall be installed with a normally closed globe valve. A strainer shall be installed on inlet side of, and same size as pressure reducing valve. A pressure gage shall be installed on the low pressure side of the line.

2.3 BACKFLOW PREVENTERS

- A. A backflow prevention assembly shall be installed at any point in the plumbing system where the potable water supply comes in contact with a potential source of contamination. The backflow prevention assembly shall be ASSE 1013 listed and certified.
- B. Reduced pressure backflow preventers shall be installed in the following applications.
 - 1. Deionizers.
 - 2. Sterilizers.
 - 3. Stills.
 - 4. Dialysis, Deionized or Reverse Osmosis Water Systems.
 - 5. Water make up to heating systems, cooling tower, chilled water system, generators, and similar equipment consuming water.
 - 6. Water service entrance from loop system.
 - 7. Dental Equipment
 - 8. Power washer
 - 9. Atmospheric Vacuum Breaker: ASSE 1001
 - a. Hose bibs and sinks w/threaded outlets.
 - b. Disposers.
 - c. Showers (telephone type).
 - d. Hydrotherapy units.
 - e. Autopsy, on each hot and cold water outlet at each table or sink.
 - f. All kitchen equipment, if not protected by air gap.
 - g. Ventilating hoods with wash down system.
 - h. Film processor.
 - i. Detergent system
 - j. Dental equipment
 - k. Fume hoods
 - l. Glassware washers

- C. The reduced pressure principle backflow prevention assembly shall be ASSE listed 1013 with full port OS&Y gate valves and an integral relief monitor switch. The main body and access cover shall be epoxy coated duct iron conforming to ASTM A536 grade 4. The seat ring and check valve shall be Noryl (NSF listed). The stem shall be stainless steel conforming to ASTM A276. The seat disc elastomer shall be EPDM. The checks and the relief valve shall be accessible for maintenance without removing the device from the line. An epoxy coated wye type strainer with flanged connections shall be installed on the inlet.
- D. The atmospheric vacuum breaker shall be ASSE listed 1001. The main body shall be either cast bronze. All internal polymers shall be NSF listed. The seat disc elastomer shall be silicone. The device shall be accessible for maintenance without removing the device from the service line. The installation shall not be in a concealed or inaccessible location or where the venting of water from the device during normal operation is deemed objectionable.
- E. The double check detector backflow prevention assembly shall be ASSE listed 1048 and supply with full port OS&Y gate valves. The main body and access cover shall be epoxy coated ductile iron conforming to ASTM A536 grade. The seat ring and check valve shall be Noryl (NSF listed). The stem shall be stainless steel conforming to ASTM A 276. The seat disc elastomers shall be EPDM. The first and second check valve shall be accessible for maintenance without removing the device from the line.

2.4 CHAINWHEELS

- A. Valve chain wheel assembly with sprocket rim brackets and chain shall be constructed according to the following:
 - 1. Brackets: type, number, size, and fasteners required to mount actuator on valve.
 - 2. Attachment: For connection to ball valve stem.
 - 3. Sprocket rim with chain guides: Ductile or cast iron of type and size required for valve with zinc coating.
 - 4. Chain: Hot dipped galvanized steel of size required to fit sprocket rim.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Valve interior shall be examined for cleanliness, freedom from foreign matter, and corrosion. Special packing materials shall be removed,

such as blocks, used to prevent disc movement during shipping and handling.

- B. Valves shall be operated in positions from fully open to fully closed. Guides and seats shall be examined and made accessible by such operations.
- C. Threads on valve and mating pipe shall be examined for form and cleanliness.
- D. Mating flange faces shall be examined for conditions that might cause leakage. Bolting shall be checked for proper size, length, and material. Gaskets shall be verified for proper size and that its material composition is suitable for service and free from defects and damage.
- E. Do not attempt to repair defective valves; replace with new valves.

3.2 VALVE INSTALLATION

- A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.
- B. Valves shall be located for easy access and shall be provide with separate support. Valves shall be accessible with access doors when installed inside partitions or above hard ceilings.
- C. Valves shall be installed in horizontal piping with stem at or above center of pipe
- D. Valves shall be installed in a position to allow full stem movement.
- E. Install chain wheels on operators for ball valves NPS 100 mm or DN100 (4 inches) and larger and more than 2400 mm (12 feet) above floor. Chains shall be extended to 1500 mm 3600 mm (60 inches) above finished floor.
- F. Check valves shall be installed for proper direction of flow and as follows:
 - 1. Swing Check Valves: In horizontal position with hinge pin level.

3.3 ADJUSTING

- A. Valve packing shall be adjusted or replaced after piping systems have been tested and put into service but before final adjusting and balancing. Replace valves shall be replaced if persistent leaking occurs.

- - E N D - - -

SECTION 22 05 33
HEAT TRACING FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

This section describes the requirement for supplying, installing, and testing of the electric heat tracing system of the plumbing piping.

1.2 RELATED WORK

- A. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- B. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION: Pipe Insulation.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. The following product data shall be submitted:
 - 1. Rated capacity
 - 2. Length of cable
 - 3. Cable spacing
 - 4. Electrical power requirements
- C. The shop drawings shall include plans, sections, details, wiring diagrams, and attachments to other work. The wiring diagrams shall include power, signal, and control wiring.
- D. Field quality control test reports shall be submitted.
- E. Operation and Maintenance data shall be included.

1.4 QUALITY ASSURANCE

- A. Manufacturer Qualifications:
 - 1. Ten years experience in design, engineering, manufacture and support of specified system and components.
- B. Product Requirements:
 - 1. Pipe or tank tracing cable assembly shall be factory assembled, immersed in water for a minimum of 12 hours, and then tested for insulation resistance, high potential breakdown and continuity before leaving the factory.
 - 2. Factory Mutual approved constant wattage cable.
 - 3. UL Listed, thermostat and contactor panel.
 - 4. UL Listed Control/Monitor Panel

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. International Code Council, (ICC):
IPC-06, (R 2007)International Plumbing Code
- C. The Institute of Electrical and Electronic Engineers (IEEE):
IEEE 515.1, (R 2007) ...Recommended Practice for the Testing, Design, Installation, and Maintenance of Electrical Resistance Heat Tracing for Commercial Applications

1.6 AS-BUILT DOCUMENTATION

- A. The electronic documentation and copies of the Operations and Maintenance Manual, approved submittals, shop drawings, and other closeout documentation shall be prepared by a computer software program complying with Section 508 of the Rehabilitation Act of 1973, as amended (29 U.S.C 794d). The manufacturer or vendor of the software used to prepare the electronic documentation shall have a Voluntary Product Accessibility Template made available for review and included as part of the Operations and Maintenance Manual or closeout documentation. All available accessibility functions listed in the Voluntary Accessibility Template shall be enabled in the prepared electronic files. As Adobe Acrobat is a common industry format for such documentation, following the document, "Creating Accessible Adobe PDF files, A Guide for Document Authors" that is maintained and made available by Adobe free of charge is recommended."
- B. Four sets of manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.
- C. Four sets of operation and maintenance data updated to include submittal review comments shall be inserted into a three ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices such as damper and door closure interlocks shall be included. A List of recommended spare parts (manufacturer,

model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

PART 2 - PRODUCTS

2.1 PLASTIC INSULATED SERIES RESISTANCE HEATING CABLES

- A. The plastic insulated series resistance heating cables shall comply with IEEE 515.1.
- B. The heating element shall be a single or dual strained resistor wire. Terminations shall be made with waterproof, factory assembled non heating leads with connectors at both ends.
- C. The Electrical insulated jacket shall be a minimum 0.10 millimeter (4.0 mil) Kapton with silicone jacket or Tefzel. The cable cover shall be aluminum braid and silicone or Hylar outer jacket.
- D. The maximum operating temperature shall be 150°C (300°F).

2.2 SELF REGULATING PARALLEL RESISTANCE HEATING CABLES

- A. The heating element shall be a pair of parallel No. 16 AWG tinned stranded copper bus wires embedded in cross linked conductive polymer core, which varies heat output in response to temperature along its length. Cables shall be terminated with waterproof, factory assembled non heating leads with connects at one and seal the opposite end watertight. The cable shall be capable of crossing over itself without overheating.
- B. The electrical insulating jacket shall be flame retardant polyolefin.
- C. The cable cover shall be stainless steel braid, and polyolefin outer jacket with UV inhibitor.
- D. The maximum power on operating temperature shall be 65°C (150°F).
- E. The maximum power off exposure temperature shall be 85°C (185°F)

2.3 CONSTANT WATTAGE RESISTANCE HEATING CABLES

- A. The heating element shall be a pair of parallel No. 12 AWG, tinned stranded copper bus wires with single stranded resistor wire connected between bus wires. The heating element shall be terminated with waterproof, factory assembled non-heating leads with connectors at one end, and seal the opposite end watertight.
- B. The electrical insulating jacket shall be flame retardant fluoropolymer.
- C. The cable cover shall be stainless steel braid and polyolefin outer jacket with UV inhibitor.
- D. The maximum operating temperature shall be 200°C (392°F).

2.4 CONTROLS

- A. Pipe mounting thermostats for Freeze protection shall have be a remote bulb unit with adjustable temperature range from minus 1 to 10°C (30 to 50°F). The thermostat shall be snap action, open-on-rise, single pole switch with minimum current rating adequate for the connected cable. The thermostat shall be remote bulb on capillary, resistance temperature device, or thermistor for direct sensing of pipe wall temperature. The control enclosure shall be corrosion resistant and waterproof.
- B. The precipitation and temperature sensor for snow melting on roofs and in gutters shall be automatic control with manual on, automatic, and standby/reset switches. The precipitation and temperature sensors shall sense the surface conditions of roof and/or gutters and shall be programmed to energize the cable as follows:
 - 1. Temperature span between 1 to 7°C (34 to 44°F)
 - 2. Adjustable delay off span between 30 and 90 minutes.
 - 3. Following a two minute delay, the cables shall be energized if ambient temperature is below set-point and precipitation is detected.
 - 4. The cables shall be de-energized upon detection of a dry surface plus a time delay of 15 minutes.
- C. The enclosure shall be corrosion resistant and waterproof suitable for outdoor mounted.
- D. A minimum 30 amp contactor shall be provided to indicate operational status, on/off control, and for interface with central energy management and control system.
- E. A programmable timer for domestic hot water temperature maintenance shall have the following features:
 - 1. micro-processor based
 - 2. capable of four separate operation schedules
 - 3. On/off/Auto switch
 - 4. A 365 day calendar with 20 programmable holidays.
 - 5. Relays with contacts to indicate operational status, on/off status, and to interface with the central energy management and control system.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Electric heating cable shall be installed for the following applications:
 - 1. Snow and ice melting on roofs, in gutters, roof drain bodies, and roof drain leaders.
 - 2. Freeze protection of plumbing piping.
- B. Electric heating cable shall be installed across expansion, construction, and control joints according to the manufacturer's recommendations using cable protection conduit and slack cable to allow for movement without damage to cable.
- C. The installation of electric heating cable for snow and ice melting on roofs, gutters, and roof drain leaders shall be provided with clips furnished by the manufacturer that is compatible.
- D. Electric heating cable for pipe freeze protection shall be installed according to the following:
 - 1. Electric heating cables shall be installed after piping has been tested and before insulation is installed.
 - 2. Electric heat cables shall be installed according to IEEE 515.1
 - 3. Insulation shall be installed or applied over piping with electric cables
 - 4. Warning tape shall be installed on pipe insulation where piping is equipped with electric heating cables.
- E. Electric heating cable for domestic hot water temperature maintenance shall be installed according to the following:
 - 1. Electric heating cables shall be installed after piping has been tested and before insulation is installed.
 - 2. Insulation shall be installed or applied over piping with electric cables
 - 3. Warning tape shall be installed on pipe insulation where piping is equipped with electric heating cables.
- F. Field adjustable switches and circuit breaker trip ranges shall be set.
- G. Heating cables including leads shall be protected from damage.
- H. Equipment shall be grounded according to Division 26.
- I. Wiring shall be connected according to Division 26.

3.2 TESTS

- A. Tests shall be performed after cable installation but before the application of coverings such as insulation, wall or ceiling

construction, or concrete. The cables shall be tested for electrical continuity and insulation integrity before energizing. The cables shall be tested to verify rating and power input. The cables shall be energized and voltage and current measured simultaneously. Test repeatedly after repairing heating cables with new products.

- - - E N D - - -

**SECTION 22 07 11
PLUMBING INSULATION**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Field applied insulation for thermal efficiency and condensation control for
 - 1. Plumbing piping and equipment.
- B. Definitions
 - 1. ASJ: All service jacket, white finish facing or jacket.
 - 2. Air conditioned space: Space having air temperature and/or humidity controlled by mechanical equipment.
 - 3. Cold: Equipment or piping handling media at design temperature of 16 degrees C (60 degrees F) or below.
 - 4. Concealed: Piping above ceilings and in chases, interstitial space, and pipe spaces.
 - 5. Exposed: Piping and equipment exposed to view in finished areas including mechanical equipment rooms or exposed to outdoor weather. Shafts, chases, interstitial spaces, unfinished attics, crawl spaces and pipe basements are not considered finished areas.
 - 6. FSK: Foil-scrim-kraft facing.
 - 7. Hot: Plumbing equipment or piping handling media above 41 degrees C (105 degrees F).
 - 8. Density: kg/m^3 - kilograms per cubic meter (Pcf - pounds per cubic foot).
 - 9. Thermal conductance: Heat flow rate through materials.
 - a. Flat surface: Watts per square meter (BTU per hour per square foot).
 - b. Pipe or Cylinder: Watts per square meter (BTU per hour per linear foot).
 - 10. Thermal Conductivity (k): Watt per meter, per degree C (BTU per inch thickness, per hour, per square foot, per degree F temperature difference).
 - 11. Vapor Retarder (Vapor Barrier): A material which retards the transmission (migration) of water vapor. Performance of the vapor retarder is rated in terms of permeance (perms). For the purpose of this specification, vapor retarders shall have a maximum published permeance of 0.1 perms and vapor barriers shall have a maximum published permeance of 0.001 perms.

- 12. R: Pump recirculation.
- 13. CW: Cold water.
- 14. SW: Soft water.
- 15. HW: Hot water.
- 16. PVDC: Polyvinylidene chloride vapor retarder jacketing, white.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Mineral fiber and bond breaker behind sealant.
- B. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: General mechanical requirements and items, which are common to more than one section of Division 22.
- C. Section 22 05 19, METERS AND GAGES FOR PLUMBING PIPING and Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING: Hot and cold water piping.

1.3 QUALITY ASSURANCE

- A. Refer to article QUALITY ASSURANCE, in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

- B. Criteria:

- 1. Comply with NFPA 90A, particularly paragraphs 4.3.3.1 through 4.3.3.6, 4.3.10.2.6, and 5.4.6.4, parts of which are quoted as follows:

4.3.3.1 Pipe insulation and coverings, vapor retarder facings, adhesives, fasteners, tapes, unless otherwise provided for in 4.3.3.1.12 or 4.3.3.1.2, shall have, in the form in which they are used, a maximum flame spread index of 25 without evidence of continued progressive combustion and a maximum smoke developed index of 50 when tested in accordance with NFPA 255, *Standard Method of Test of Surface Burning Characteristics of Building Materials*.

4.3.3.1.1 Where these products are to be applied with adhesives, they shall be tested with such adhesives applied, or the adhesives used shall have a maximum flame spread index of 25 and a maximum smoke developed index of 50 when in the final dry state. (See 4.2.4.2.)

4.3.3.3 Pipe insulation and coverings shall not flame, glow, smolder, or smoke when tested in accordance with a similar test for pipe covering, ASTM C 411, Standard Test Method for Hot-Surface Performance of High-Temperature Thermal Insulation, at the temperature to which they are exposed in service.

4.3.3.3.1 In no case shall the test temperature be below 121°C (250°F).

4.3.10.2.6.3 Nonferrous fire sprinkler piping shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread

distance of 1.5 m (5 ft) or less when tested in accordance with UL 1887, Standard for Safety Fire Test of Plastic Sprinkler Pipe for Visible Flame and Smoke Characteristics.

4.3.10.2.6.7 Smoke detectors shall not be required to meet the provisions of this section.

2. Test methods: ASTM E84, UL 723, or NFPA 255.

3. Specified k factors are at 24 degrees C (75 degrees F) mean temperature unless stated otherwise. Where optional thermal insulation material is used, select thickness to provide thermal conductance no greater than that for the specified material. For pipe, use insulation manufacturer's published heat flow tables. For domestic hot water supply and return, run out insulation and condensation control insulation, no thickness adjustment need be made.

4. All materials shall be compatible and suitable for service temperature, and shall not contribute to corrosion or otherwise attack surface to which applied in either the wet or dry state.

C. Every package or standard container of insulation or accessories delivered to the job site for use must have a manufacturer's stamp or label giving the name of the manufacturer and description of the material.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings:

1. All information, clearly presented, shall be included to determine compliance with drawings and specifications and ASTM, federal and military specifications.

a. Insulation materials: Specify each type used and state surface burning characteristics.

b. Insulation facings and jackets: Each type used.

c. Insulation accessory materials: Each type used.

d. Manufacturer's installation and fitting fabrication instructions for flexible unicellular insulation.

e. Make reference to applicable specification paragraph numbers for coordination.

1.5 STORAGE AND HANDLING OF MATERIAL

Store materials in clean and dry environment, pipe covering jackets shall be clean and unmarred. Place adhesives in original containers.

Maintain ambient temperatures and conditions as required by printed instructions of manufacturers of adhesives, mastics and finishing cements.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. Federal Specifications (Fed. Spec.):
 - L-P-535E (2)-91Plastic Sheet (Sheeting): Plastic Strip; Poly (Vinyl Chloride) and Poly (Vinyl Chloride - Vinyl Acetate), Rigid.
- C. Military Specifications (Mil. Spec.):
 - MIL-A-3316C (2)-90Adhesives, Fire-Resistant, Thermal Insulation
 - MIL-A-24179A (1)-87Adhesive, Flexible Unicellular-Plastic Thermal Insulation
 - MIL-C-19565C (1)-88Coating Compounds, Thermal Insulation, Fire-and Water-Resistant, Vapor-Barrier
 - MIL-C-20079H-87Cloth, Glass; Tape, Textile Glass; and Thread, Glass and Wire-Reinforced Glass
- D. American Society for Testing and Materials (ASTM):
 - A167-04Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
 - B209-07Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
 - C411-05Standard test method for Hot-Surface Performance of High-Temperature Thermal Insulation
 - C449-07Standard Specification for Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement
 - C533-09Standard Specification for Calcium Silicate Block and Pipe Thermal Insulation
 - C534-08Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form
 - C547-07Standard Specification for Mineral Fiber pipe Insulation

- C552-07Standard Specification for Cellular Glass
Thermal Insulation
- C553-08Standard Specification for Mineral Fiber
Blanket Thermal Insulation for Commercial and
Industrial Applications
- C585-09Standard Practice for Inner and Outer Diameters
of Rigid Thermal Insulation for Nominal Sizes
of Pipe and Tubing (NPS System) R (1998)
- C612-10Standard Specification for Mineral Fiber Block
and Board Thermal Insulation
- C1126-10Standard Specification for Faced or Unfaced
Rigid Cellular Phenolic Thermal Insulation
- C1136-10Standard Specification for Flexible, Low
Permeance Vapor Retarders for Thermal
Insulation
- D1668-97a (2006)Standard Specification for Glass Fabrics (Woven
and Treated) for Roofing and Waterproofing
- E84-10Standard Test Method for Surface Burning
Characteristics of Building
Materials
- E119-09CStandard Test Method for Fire Tests of Building
Construction and Materials
- E136-09 bStandard Test Methods for Behavior of Materials
in a Vertical Tube Furnace at 750 degrees C
(1380 F)
- E. National Fire Protection Association (NFPA):
- 101-09Life Safety Code
- 251-06Standard methods of Tests of Fire Endurance of
Building Construction Materials
- 255-06Standard Method of tests of Surface Burning
Characteristics of Building Materials
- F. Underwriters Laboratories, Inc (UL):
- 723UL Standard for Safety Test for Surface Burning
Characteristics of Building Materials with
Revision of 08/03

- G. Manufacturer's Standardization Society of the Valve and Fitting Industry (MSS):
 SP58-2002Pipe Hangers and Supports Materials, Design,
 and Manufacture

PART 2 - PRODUCTS

2.1 MINERAL FIBER OR FIBER GLASS

- A. ASTM C612 (Board, Block), Class 1 or 2, density 48 kg/m³ (3 pcf), k = 0.037 (.26) at 24 degrees C (75 degrees F), external insulation for temperatures up to 204 degrees C (400 degrees F).
- B. ASTM C553 (Blanket, Flexible) Type I, Class B-3, Density 16 kg/m³ (1 pcf), k = 0.045 (0.31) at 24 degrees C (75 degrees F), for use at temperatures up to 204 degrees C (400 degrees F).
- C. ASTM C547 (Pipe Fitting Insulation and Preformed Pipe Insulation), Class 1, k = 0.037 (0.26) at 24 degrees C (75 degrees F), for use at temperatures up to 230 degrees C (450 degrees F) with an all service vapor retarder jacket with polyvinyl chloride premolded fitting covering.

2.2 MINERAL WOOL OR REFRACTORY FIBER

- A. Comply with Standard ASTM C612, Class 3, 450 degrees C (850 degrees F).

2.3 RIGID CELLULAR PHENOLIC FOAM

- A. Preformed (molded) pipe insulation, ASTM C1126, type III, grade 1, k = 0.021(0.15) at 10 degrees C (50 degrees F), for use at temperatures up to 121 degrees C (250 degrees F) with vapor retarder and all service vapor retarder jacket with polyvinyl chloride premolded fitting covering.
- B. Equipment Insulation, ASTM C 1126, type II, grade 1, k = 0.021 (0.15) at 10 degrees C (50 degrees F), for use at temperatures up to 121 degrees C (250 degrees F) with rigid cellular phenolic insulation and covering, and all service vapor retarder jacket.

2.4 CELLULAR GLASS CLOSED-CELL

- A. Comply with Standard ASTM C177, C518, density 120 kg/m³ (7.5 pcf) nominal, k = 0.033 (0.29) at 24~~0~~ degrees C (75 degrees F).
- B. Pipe insulation for use at temperatures up to 200 degrees C (400 degrees F) with all service vapor retarder jacket.

2.5 FLEXIBLE ELASTOMERIC CELLULAR THERMAL

ASTM C177, C518, k = 0.039 (0.27) at 24 degrees C (75 degrees F), flame spread not over 25, smoke developed not over 50, for temperatures from

minus 4 degrees C (40 degrees F) to 93 degrees C (200 degrees F). No jacket required.

2.6 CALCIUM SILICATE

- A. Preformed pipe Insulation: ASTM C533, Type I and Type II with indicator denoting asbestos-free material.
- B. Premolded Pipe Fitting Insulation: ASTM C533, Type I and Type II with indicator denoting asbestos-free material.
- C. Equipment Insulation: ASTM C533, Type I and Type II
- D. Characteristics:

Insulation Characteristics		
ITEMS	TYPE I	TYPE II
Temperature, maximum degrees C (degrees F)	649 (1200)	927 (1700)
Density (dry), Kg/m ³ (lb/ ft ³)	232 (14.5)	288 (18)
Thermal conductivity: Min W/ m K (Btu in/h ft ² degrees F)@ mean temperature of 93 degrees C (200 degrees F)	0.059 (0.41)	0.078 (0.540)
Surface burning characteristics: Flame spread Index, Maximum	0	0
Smoke Density index, Maximum	0	0

2.7 INSULATION FACINGS AND JACKETS

- A. Vapor Retarder, higher strength with low water permeance \leq 0.02 or less perm rating, Beach puncture 50 units for insulation facing on pipe insulation jackets. Facings and jackets shall be all service type (ASJ) or PVDC Vapor Retarder jacketing.
- B. ASJ jacket shall be white kraft bonded to 0.025 mm (1 mil) thick aluminum foil, fiberglass reinforced, with pressure sensitive adhesive closure. Comply with ASTM C1136. Beach puncture 50 units, Suitable for painting without sizing. Jackets shall have minimum 40 mm (1-1/2 inch) lap on longitudinal joints and minimum 75mm (3 inch) butt strip on end joints. Butt strip material shall be same as the jacket. Lap and butt strips shall be self-sealing type with factory-applied pressure sensitive adhesive.

- C. Vapor Retarder medium strength with low water vapor permeance of 0.02 or less perm rating), Beach puncture 25 units: Foil-Scrim-Kraft (FSK) or PVDC vapor retarder jacketing type for concealed ductwork and equipment.
- D. Field applied vapor barrier jackets shall be provided, in addition to the specified facings and jackets, on all exterior piping as well as on interior piping conveying fluids below ambient temperature. The vapor barrier jacket shall consist of a multi-layer laminated cladding with a maximum water vapor permeance of 0.001 perms. The minimum puncture resistance shall be 35 cm-kg (30 inch-pounds) for interior locations and 92 cm-kg (80 inch-pounds) for exterior or exposed locations or where the insulation is subject to damage.
- E. Glass Cloth Jackets: Presized, minimum 0.18 kg per square meter (7.8 ounces per square yard), 2000 kPa (300 psig) bursting strength with integral vapor retarder where required or specified. Weather proof if utilized for outside service.
- F. Factory composite materials may be used provided
- G. Pipe fitting insulation covering (jackets): Fitting covering shall be premolded to match shape of fitting and shall be polyvinyl chloride (PVC) conforming to Fed Spec L-P-335, composition A, Type II Grade GU, and Type III, minimum thickness 0.7 mm (0.03 inches). Provide color matching vapor retarder pressure sensitive tape.
- H. Aluminum Jacket-Piping systems and circular breeching and stacks: ASTM B209, 3003 alloy, H-14 temper, 0.6 mm (0.023 inch) minimum thickness with locking longitudinal joints. Jackets for elbows, tees and other fittings shall be factory-fabricated to match shape of fitting and of 0.6 mm (0.024) inch minimum thickness aluminum. Fittings shall be of same construction as straight run jackets but need not be of the same alloy. Factory-fabricated stainless steel bands shall be installed on all circumferential joints. Bands shall be 13 mm (0.5 inch) wide on 450 mm (18 inch) centers. System shall be weatherproof if utilized for outside service.
- I. Aluminum jacket-Rectangular breeching: ASTM B209, 3003 alloy, H-14 temper, 0.5 mm (0.020 inches) thick with 32 mm (1-1/4 inch) corrugations or 0.8 mm (0.032 inches) thick with no corrugations. System shall be weatherproof if used for outside service.

2.8 PIPE COVERING PROTECTION SADDLES

- A. Cold pipe support: Premolded pipe insulation 180 degrees (half-shells) on bottom half of pipe at supports. Material shall be cellular glass or high density Polyisocyanurate insulation of the same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m³ (3.0 pcf).

Nominal Pipe Size and Accessories Material (Insert Blocks)	
Nominal Pipe Size mm (inches)	Insert Blocks mm (inches)
Up through 125 (5)	150 (6) long
150 (6)	150 (6) long
200 (8), 250 (10), 300 (12)	225 (9) long
350 (14), 400 (16)	300 (12) long
450 through 600 (18 through 24)	350 (14) long

- B. Warm or hot pipe supports: Premolded pipe insulation (180 degree half-shells) on bottom half of pipe at supports. Material shall be high density Polyisocyanurate (for temperatures up to 149 degrees C [300 degrees F]), cellular glass or calcium silicate. Insulation at supports shall have same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m³ (3.0 pcf).

2.9 ADHESIVE, MASTIC, CEMENT

- A. Mil. Spec. MIL-A-3316, Class 1: Jacket and lap adhesive and protective finish coating for insulation.
- B. Mil. Spec. MIL-A-3316, Class 2: Adhesive for laps and for adhering insulation to metal surfaces.
- C. Mil. Spec. MIL-A-24179, Type II Class 1: Adhesive for installing flexible unicellular insulation and for laps and general use.
- D. Mil. Spec. MIL-C-19565, Type I: Protective finish for outdoor use.
- E. Mil. Spec. MIL-C-19565, Type I or Type II: Vapor barrier compound for indoor use.
- F. ASTM C449: Mineral fiber hydraulic-setting thermal insulating and finishing cement.
- G. Other: Insulation manufacturers' published recommendations.

2.10 MECHANICAL FASTENERS

- A. Pins, anchors: Welded pins, or metal or nylon anchors with galvanized steel or fiber washer, or clips. Pin diameter shall be as recommended by the insulation manufacturer.

- B. Staples: Outward clinching galvanized steel
- C. Wire: 1.3 mm thick (18 gage) soft annealed galvanized or 1.9 mm (14 gage) copper clad steel or nickel copper alloy.
- D. Bands: 13 mm (1/2 inch) nominal width, brass, galvanized steel, aluminum or stainless steel.

2.11 REINFORCEMENT AND FINISHES

- A. Glass fabric, open weave: ASTM D1668, Type III (resin treated) and Type I (asphalt treated).
- B. Glass fiber fitting tape: Mil. Spec MIL-C-20079, Type II, Class 1.
- C. Tape for Flexible Elastomeric Cellular Insulation: As recommended by the insulation manufacturer.
- D. Hexagonal wire netting: 25 mm (one inch) mesh, 0.85 mm thick (22 gage) galvanized steel.
- E. Corner beads: 50 mm (2 inch) by 50 mm (2 inch), 0.55 mm thick (26 gage) galvanized steel; or, 25 mm (1 inch) by 25 mm (1 inch), 0.47 mm thick (28 gage) aluminum angle adhered to 50 mm (2 inch) by 50 mm (2 inch) Kraft paper.
- F. PVC fitting cover: Fed. Spec L-P-535, Composition A, 11-86 Type II, Grade GU, with Form B Mineral Fiber insert, for media temperature 4 degrees C (40 degrees F) to 121 degrees C (250 degrees F). Below 4 degrees C (40 degrees F) and above 121 degrees C (250 degrees F). Provide double layer insert. Provide color matching vapor barrier pressure sensitive tape.

2.12 FIRESTOPPING MATERIAL

Other than pipe insulation, refer to Section 07 84 00 FIRESTOPPING.

2.13 FLAME AND SMOKE

Unless shown otherwise all assembled systems shall meet flame spread 25 and smoke developed 50 rating as developed under ASTM, NFPA and UL standards and specifications. See paragraph 1.3 "Quality Assurance".

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

- A. Required pressure tests of piping joints and connections shall be completed and the work approved by the Resident Engineer for application of insulation. Surface shall be clean and dry with all foreign materials, such as dirt, oil, loose scale and rust removed.
- B. Except for specific exceptions, insulate all specified equipment, and piping (pipe, fittings, valves, accessories). Insulate each pipe

individually. Do not use scrap pieces of insulation where a full length section will fit.

- C. Insulation materials shall be installed in a first class manner with smooth and even surfaces, with jackets and facings drawn tight and smoothly cemented down at all laps. Insulation shall be continuous through all sleeves and openings, except at fire dampers and duct heaters (NFPA 90A). Vapor retarders shall be continuous and uninterrupted throughout systems with operating temperature 16 degrees C (60 degrees F) and below. Lap and seal vapor barrier over ends and exposed edges of insulation. Anchors, supports and other metal projections through insulation on cold surfaces shall be insulated and vapor sealed for a minimum length of 150 mm (6 inches).
- D. Install vapor stops at all insulation terminations on either side of valves, pumps and equipment and particularly in straight lengths of pipe insulation.
- E. Construct insulation on parts of equipment such as cold water pumps and heat exchangers that must be opened periodically for maintenance or repair, so insulation can be removed and replaced without damage. Install insulation with bolted 1 mm thick (20 gage) galvanized steel or aluminum covers as complete units, or in sections, with all necessary supports, and split to coincide with flange/split of the equipment.
- F. Insulation on hot piping and equipment shall be terminated square at items not to be insulated, access openings and nameplates. Cover all exposed raw insulation with white sealer or jacket material.
- G. Protect all insulations outside of buildings with aluminum jacket using lock joint or other approved system for a continuous weather tight system. Access doors and other items requiring maintenance or access shall be removable and sealable.
- H. Plumbing work not to be insulated:
 - 1. Piping and valves of fire protection system.
 - 2. Chromium plated brass piping.
 - 3. Water piping in contact with earth.
 - 4. Small horizontal cold water branch runs in partitions to individual fixtures may be without insulation for maximum distance of 900 mm (3 feet).
 - 5. Distilled water piping.

- I. Apply insulation materials subject to the manufacturer's recommended temperature limits. Apply adhesives, mastic and coatings at the manufacturer's recommended minimum coverage.
- J. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights.
Use of polyurethane spray-foam to fill a PVC elbow jacket is prohibited on cold applications.
- K. Firestop Pipe insulation:
 - 1. Provide firestopping insulation at fire and smoke barriers through penetrations. Fire stopping insulation shall be UL listed as defines in Section 07 84 00, FIRESTOPPING.
 - 2. Pipe penetrations requiring fire stop insulation including, but not limited to the following:
 - a. Pipe risers through floors
 - b. Pipe chase walls and floors
 - c. Smoke partitions
 - d. Fire partitions
- L. Freeze protection of above grade outdoor piping (over heat tracing tape): 20 mm (0.75) thick insulation, for all pipe sizes 75 mm(3 inches) and smaller and 25 mm(1inch) thick insulation for larger pipes. Provide metal jackets for all pipes. Provide for cold water make-up where indicated on the drawings as described in Section 23 21 13, HYDRONIC PIPING (electrical heat tracing systems).
- M. Provide vapor barrier jackets over insulation as follows:
 - 1. All piping exposed to outdoor weather.
 - 2. All interior piping conveying fluids below ambient air temperature.
- N. Provide metal jackets over insulation as follows:
 - a. All plumbing piping exposed to outdoor weather.
 - b. Piping exposed in building, within 1800 mm (6 feet) of the floor, that connects to sterilizers, kitchen and laundry equipment.
Jackets may be applied with pop rivets. Provide aluminum angle ring escutcheons at wall, ceiling or floor penetrations.
 - c. A 50 mm (2 inch) overlap is required at longitudinal and circumferential joints.

3.2 INSULATION INSTALLATION

- A. Mineral Fiber Board:
 - 1. Faced board: Apply board on pins spaced not more than 300 mm (12 inches) on center each way, and not less than 75 mm (3 inches) from

each edge of board. In addition to pins, apply insulation bonding adhesive to entire underside of horizontal metal surfaces. Butt insulation edges tightly and seal all joints with laps and butt strips. After applying speed clips cut pins off flush and apply vapor seal patches over clips.

2. Plain board:

- a. Insulation shall be scored, beveled or mitered to provide tight joints and be secured to equipment with bands spaced 225 mm (9 inches) on center for irregular surfaces or with pins and clips on flat surfaces. Use corner beads to protect edges of insulation.
- b. For hot equipment: Stretch 25 mm (1 inch) mesh wire, with edges wire laced together, over insulation and finish with insulating and finishing cement applied in one coat, 6 mm (1/4 inch) thick, trowel led to a smooth finish.
- c. For cold equipment: Apply meshed glass fabric in a tack coat 1.5 to 1.7 square meter per liter (60 to 70 square feet per gallon) of vapor mastic and finish with mastic at 0.3 to 0.4 square meter per liter (12 to 15 square feet per gallon) over the entire fabric surface.

3. Cold equipment: 40 mm (1-1/2inch) thick insulation faced with ASJ.

- a. Water filter, chemical feeder pot or tank.
- b. Pneumatic, cold storage water and surge tanks.

4. Hot equipment: 40 mm (1-1/2 inch) thick insulation faced with ASJ.

- a. Domestic water heaters and hot water storage tanks (not factory insulated).
- b. Booster water heaters for dietetics dish and pot washers and for washdown grease-extracting hoods.

B. Molded Mineral Fiber Pipe and Tubing Covering:

1. Fit insulation to pipe, aligning longitudinal joints. Seal longitudinal joint laps and circumferential butt strips by rubbing hard with a nylon sealing tool to assure a positive seal. Staples may be used to assist in securing insulation. Seal all vapor retarder penetrations on cold piping with a generous application of vapor barrier mastic. Provide inserts and install with metal insulation shields at outside pipe supports. Install freeze protection insulation over heating cable.
2. Contractor's options for fitting, flange and valve insulation:

- a. Insulating and finishing cement for sizes less than 100 mm (4 inches) operating at surface temperature of 16 degrees C (61 degrees F) or more.
 - b. Factory premolded, one piece PVC covers with mineral fiber, (Form B), inserts. Provide two insert layers for pipe temperatures below 4 degrees C (40 degrees F), or above 121 degrees C (250 degrees F). Secure first layer of insulation with twine. Seal seam edges with vapor barrier mastic and secure with fitting tape.
 - c. Factory molded, ASTM C547 or field mitered sections, joined with adhesive or wired in place. For hot piping finish with a smoothing coat of finishing cement. For cold fittings, 16 degrees C (60 degrees F) or less, vapor seal with a layer of glass fitting tape imbedded between two 2 mm (1/16 inch) coats of vapor barrier mastic.
 - d. Fitting tape shall extend over the adjacent pipe insulation and overlap on itself at least 50 mm (2 inches).
3. Nominal thickness in millimeters and inches specified in the schedule at the end of this section.
- C. Rigid Cellular Phenolic Foam:
- 1. Rigid closed cell phenolic insulation may be provided for piping, ductwork and equipment for temperatures up to 121 degrees C (250 degrees F).
 - 2. Note the NFPA 90A burning characteristics requirements of 25/50 in paragraph 1.3.B
 - 3. Provide secure attachment facilities such as welding pins.
 - 4. Apply insulation with joints tightly drawn together
 - 5. Apply adhesives, coverings, neatly finished at fittings, and valves.
 - 6. Final installation shall be smooth, tight, neatly finished at all edges.
 - 7. Minimum thickness in millimeters (inches) specified in the schedule at the end of this section.
 - 8. Condensation control insulation: Minimum 25 mm (1.0 inch) thick for all pipe sizes.
 - a. Plumbing piping as follows:
 - 1) Body of roof and overflow drains horizontal runs and offsets (including elbows) of interior downspout piping in all areas above pipe basement.

- 2) Waste piping from electric water coolers and icemakers to drainage system.
- 3) Waste piping located above basement floor from ice making and film developing equipment and air handling units, from equipment(including trap) to main vertical waste pipe.
- 4) MRI quench vent piping.
- 5) Bedpan sanitizer atmospheric vent
- 6) Reagent grade water piping.
- 7) Cold water piping.

D. Cellular Glass Insulation:

1. Pipe and tubing, covering nominal thickness in millimeters and inches as specified in the schedule at the end of this section.
2. Underground Piping Other than or in lieu of that Specified in Section 22 11 00, FACILITY WATER DISTRIBUTION: Type II, factory jacketed with a 3 mm laminate jacketing consisting of 3000 mm x 3000 mm (10 ft x 10 ft) asphalt impregant4ed glass fabric, bituminous mastic and outside protective plastic film.
 - a. 75 mm (3 inches) thick for hot water piping.
 - b. As scheduled at the end of this section for chilled water piping.
 - c. Underground piping: Apply insulation with joints tightly butted. Seal longitudinal self-sealing lap. Use field fabricated or factory made fittings. Seal butt joints and fitting with jacketing as recommended by the insulation manufacturer. Use 100 mm (4 inch) wide strips to seal butt joints.
 - d. Provide expansion chambers for pipe loops, anchors and wall penetrations as recommended by the insulation manufacturer.
 - e. Underground insulation shall be inspected and approved by the Resident Engineer as follows:
 - 1) Insulation in place before coating.
 - 2) After coating.
 - f. Sand bed and backfill: Minimum 75 mm (3 inches) all around Insulated pipe or tank, applied after coating has dried.
3. Cold equipment: 50 mm (2 inch) thick insulation faced with ASJ.

E. Polyisocyanurate Closed-Cell Rigid Insulation:

1. Polyisocyanurate closed-cell rigid insulation (PIR) may be provided for exterior piping and equipment for temperature up to 149 degree C (300 degree F.

2. Install insulation, vapor retarder and jacketing per manufacturer's recommendations. Particular attention should be paid to recommendations for joint staggering, adhesive application, external hanger design, expansion/contraction joint design and spacing and vapor retarder integrity.
3. Install insulation with all joints tightly butted (except expansion joints in hot applications).
4. If insulation thickness exceeds 63 mm (2.5 inches), install as a double layer system with longitudinal (lap) and butt joint staggering as recommended by manufacturer.
5. For cold applications, vapor retarder shall be installed in a continuous manner. No staples, rivets, screws or any other attachment device capable of penetrating the vapor retarder shall be used to attach the vapor retarder or jacketing. No wire ties capable of penetrating the vapor retarder shall be used to hold the insulation in place. Banding shall be used to attach PVC or metal jacketing.
6. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights. The elbow/ fitting insulation shall be field-fabricated, mitered or factory prefabricated to the necessary size and shape to fit on the elbow/ fitting. Use of polyurethane spray-foam to fill PVC elbow jacket is prohibited on cold applications.
7. For cold applications, the vapor retarder on elbows/fittings shall be either mastic-fabric-mastic or 2 mil thick PVDC vapor retarder adhesive tape.
8. All PVC and metal jacketing shall be installed so as to naturally shed water. Joints shall point down and shall be sealed with either adhesive or caulking (except for periodic slip joints).
9. Note the NFPA 90A burning characteristic requirements of 25/50 in paragraph 1.3B. Refer to paragraph 3.1 for items not to be insulated.
10. Minimum thickness in millimeter (inches) specified in the schedule at the end of this section.

F. Flexible Elastomeric Cellular Thermal Insulation:

1. Apply insulation and fabricate fittings in accordance with the manufacturer's installation instructions and finish with two coats

of weather resistant finish as recommended by the insulation manufacturer.

2. Pipe and tubing insulation:

- a. Use proper size material. Do not stretch or strain insulation.
 - b. To avoid undue compression of insulation, provide cork stoppers or wood inserts at supports as recommended by the insulation manufacturer. Insulation shields are specified under Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
 - c. Where possible, slip insulation over the pipe or tubing prior to connection, and seal the butt joints with adhesive. Where the slip-on technique is not possible, slit the insulation and apply it to the pipe sealing the seam and joints with contact adhesive. Optional tape sealing, as recommended by the manufacturer, may be employed. Make changes from mineral fiber insulation in a straight run of pipe, not at a fitting. Seal joint with tape.
3. Apply sheet insulation to flat or large curved surfaces with 100 percent adhesive coverage. For fittings and large pipe, apply adhesive to seams only.
4. Pipe insulation: nominal thickness in millimeters (inches as specified in the schedule at the end of this section.

G. Calcium Silicate:

1. Minimum thickness in millimeter (inches) specified below for piping other than in boiler plant.

Nominal Thickness Of Calcium Silicate Insulation (Non-Boiler Plant)				
Nominal Pipe Size Millimeters (Inches)	Thru 25 (1)	32 to 75 (1-1/4 to 3)	100-200 (4 to 6)	Over 200 (6)
93-260 degrees C(200- 500 degrees F)(HPS, HPR)	100(4)	125(5)	150(6)	150(6)

2. MRI Quench Vent Insulation: Type I, class D, 150 mm (6 inch) nominal thickness.

3.4 PIPE INSULATION SCHEDULE

Provide insulation for piping systems as scheduled below:

Insulation Thickness Millimeters (Inches)					
		Nominal Pipe Size Millimeters (Inches)			
Operating Temperature Range/Service	Insulation Material	Less than 25 (1)	25 - 32 (1 - 1¼)	38 - 75 (1½ - 3)	100 (4) and Above
38-60 degrees C (100-140 degrees F) (Domestic Hot Water Supply and Return)	Mineral Fiber (Above ground piping only)	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
38-60 degrees C (100-140 degrees F) (Domestic Hot Water Supply and Return)	Rigid Cellular Phenolic Foam (Above ground piping only)	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
38-60 degrees C (100-140 degrees F) (Domestic Hot Water Supply and Return)	Polyiso-cyanurate Closed-Cell Rigid (Exterior Locations only)	38 (1.5)	38 (1.5)	----	----
38-60 degrees C (100-140 degrees F) (Domestic Hot Water Supply and Return)	Flexible Elastomeric Cellular Thermal (Above ground piping only)	38 (1.5)	38 (1.5)	----	----
4-16 degrees C (40-60 degrees F) (Ice water piping)	Rigid Cellular Phenolic Foam (Above ground piping only)	25 (1.0)	25(1.0)	25 (1.0)	25 (1.0)
4-16 degrees C (40-60 degrees F) (Ice water piping)	Polyiso-cyanurate Closed-Cell Rigid (Exterior Locations only)	25 (1.0)	25(1.0)	25 (1.0)	25 (1.0)
4-16 degrees C (40-60 degrees F) (Ice water piping)	Flexible Elastomeric Cellular Thermal (Above ground piping only)	25 (1.0)	25(1.0)	25 (1.0)	25 (1.0)

- - - E N D - - -

**SECTION 22 11 00
FACILITY WATER DISTRIBUTION**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Domestic water systems, including piping, equipment and all necessary accessories as designated in this section.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Penetrations in rated enclosures
- B. Section 09 91 00, PAINTING: Preparation and finish painting and identification of piping systems.
- C. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- D. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION, PIPE INSULATION.
- E. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS: Requirements for commissioning, system readiness checklist, and training.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. All items listed in Part 2 - Products.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute (ANSI):
 - American Society of Mechanical Engineers (ASME): (Copyrighted Society)
 - A13.1-2007Scheme for Identification of Piping Systems
 - B16.3-2006Malleable Iron Threaded Fittings Classes 150 and 300
 - B16.9-2007..... Gray Iron Threaded Fittings Classes 125 and 250
 - B16.9-2007Factory-Made Wrought Butt Welding Fittings
ANSI/ASME
 - B16.11-2009Forged Fittings, Socket-Welding and Threaded
ANSI/ASME
 - B16.12-2009Cast Iron Threaded Drainage Fittings ANSI/ASME
 - B16.15-2006Cast Bronze Threaded Fittings Classes 125 and 250 ANSI/ASME

- B16.18-01 (R2005)Cast Copper Alloy Solder-Joint Pressure
Fittings ANSI/ASME
- B16.22-01 (R2005)Wrought Copper and Copper Alloy Solder Joint
Pressure Fittings ANSI/ASME Element ANSI/ASME
- NSF/ANSI 61Drinking Water System Components - Health
Effects
- C. American Society for Testing and Materials (ASTM):
- A47/A47M-99(2009)Ferritic Malleable Iron Castings Revision 1989
- A53/A53M-07Pipe, Steel, Black And Hot-Dipped, Zinc-coated
Welded and Seamless
- A183-03(2009)Carbon Steel Track Bolts and Nuts
- A269-10Standard Specification for Seamless and Welded
Austenitic Stainless Steel Tubing for General
Service
- A312/A312M-09Seamless, Welded, and Heavily Cold Worked
Austenitic Stainless Steel Pipes
- A403/A403M-10aStandard Specification for Wrought Austenitic
Stainless Steel Piping Fittings
- A536-84(2009)Ductile Iron Castings
- A733-03(2009)Welded and Seamless Carbon Steel and Austenitic
Stainless Steel Pipe Nipples
- B32-08Solder Metal
- B61-08Steam or Bronze Castings
- B62-09Composition Bronze or Ounce Metal Castings
- B75-02Seamless Copper Tube
- B88-09Seamless Copper Water Tube
- B300-10AWWA Standard for Hypochlorites
- B301-10AWWA Standard for Liquid Chlorine
- B584-09aCopper Alloy Sand Castings for General
Applications Revision A
- B687-99(2005) e1Brass, Copper, and Chromium-Plated Pipe Nipples
- D1785-06Standard Specification for Poly (Vinyl
Chloride) (PVC) Plastic Pipe, Schedules 40, 80,
and 120
- D2000-08Rubber Products in Automotive Applications
- D4101-09Propylene Plastic Injection and Extrusion
Materials

- D2447-03Polyethylene (PE) Plastic Pipe, Schedule 40 and
80, Based on Outside Diameter
- D2564-04(2009) e1Solvent Cements for Poly (Vinyl Chloride) (PVC)
Plastic Pipe and Fittings
- D4101-09Propylene Plastic Injection and Extrusion
Materials
- E1120-08Standard Specification for Liquid Chlorine
- E1229-08Standard Specification for Calcium Hypochlorite
- D. American Water Works Association (AWWA):
- C110-08Ductile Iron and Gray Iron Fittings - 75 mm
thru 1200 mm (3 inch thru 48 inches) for Water
and other liquids AWWA/ANSI
- C151/A21.51-09Ductile-Iron Pipe, Centrifugally Cast in Metal
Molds or Sand-Lined Molds, for Water or Other
Liquids AWWA/ ANSI
- C153/A21.53-06AWWA Standard for Ductile-Iron Compact Fittings
for Water Service AWWA/ANSI
- C203-08Coal-Tar Protective Coatings and Linings for
Steel Water Pipelines - Enamel and Tape - Hot
Applied AWWA/ANSI
- C213-07Fusion Bonded Epoxy Coating for the Interior &
Exterior of Steel Water Pipelines
- C651-05Disinfecting Water Mains
- E. American Welding Society (AWS):
- A5.8/A5.8M:2004Filler Metals for Brazing
- F. International Plumbing Code
International Plumbing Code - 2009
- G. American Society of Sanitary Engineers (ASSE):
- ANSI/ASSE (Plumbing)
- 1001-2008Pipe Applied Atmospheric Type Vacuum Breakers
- ANSI/ASSE 1010-2004Water Hammer Arresters
- ANSI/ASSE 1018-2001Performance for trap seal primer valves -
potable water supplied.
- ANSI/ASSE (Plumbing)
- 1020-2004Pressure Vacuum Breaker Assembly
- H. Plumbing and Drainage Institute (PDI):
- PDI WH-201 2007Water Hammer Arrestor

1.5 QUALITY ASSURANCE

- A. Submit prior to welding of steel piping a certificate of Welder's certification. The certificate shall be current and more than one year old.
- B. For mechanical pressed sealed fittings, only tools of fitting manufacture shall be used.
- C. Mechanical pressed fittings shall be installed by factory trained workers.
- D. All grooved joint couplings, fittings, valves, and specialties shall be the products of a single manufacturer. Grooving tools shall be by the same manufacturer as the groove components.
- E. All castings used for coupling housings, fittings, valve bodies, etc., shall be date stamped for quality assurance and traceability.

1.6 SPARE PARTS

- A. For mechanical pressed sealed fittings provide tools required for each pipe size used at the facility.

PART 2 - PRODUCTS

2.1 UNDERGROUND WATER SERVICE CONNECTIONS TO BUILDINGS

- A. From inside face of exterior wall to a distance of approximately 1500 mm (5 feet) outside of building and underground inside building, material selected shall be the same for the size specified.
- B. Seventy five millimeters (3 inch) Diameter and Over: Ductile iron, AWWA C151, 850 kPa (125 psi) water steam pressure (WSP), exterior bituminous coating, and cement lined. Provide flanged and anchored connection to interior piping.
- C. Under 75 mm (3 inch) Diameter: Copper tubing, ASTM B88, Type K, seamless, annealed. Fittings as specified under Article 2.2, INTERIOR DOMESTIC WATER PIPING. Use brazing alloys, AWS A5.8, Classification BCuP.
- D. Flexible Expansion Joint: Ductile iron with ball joints rated for 1725 kPa (250 psi) working pressure conforming to ANSI/AWWA C153/A21.53, capable of deflecting a minimum of 20 degrees in each direction and expanding simultaneously to the amount shown on the drawings. Flexible expansion joint size shall match the pipe size it is connected to and shall have the expansion capability designed as an integral part of the ductile iron ball castings. Pressure containing parts shall be lined with a minimum of 15 mils of fusion bonded epoxy conforming to the applicable requirements of ANSI/AWWA C213 and shall be factory tested

with a 1500 volt spark test. Flexible expansion joint shall have flanged connections conforming to ANSI/AWWA C110. Bolts and nuts shall be 316 stainless steel and gaskets shall be neoprene. The coating and gaskets shall meet NSF/ANSI 61. The flexible expansion fitting shall not expand or exert an axial thrust under internal water pressure. Provide piping joint restraints at each mechanical joint end connection and piping restraints at the penetration of the building wall. The restraints shall be provided to address the developed thrust at the change of piping direction.

2.2 ABOVE GROUND (INTERIOR) WATER PIPING

- A. Pipe: Copper tube, ASTM B88, Type K or L, drawn. For pipe 150 mm (6 inches) and larger, stainless, steel ASTM A312, schedule 10 may be used.
- B. Fittings for Copper Tube:
 - 1. Wrought copper or bronze castings conforming to ANSI B16.18 and B16.22. Unions shall be bronze, MSS SP72 & SP 110, Solder or braze joints. Use 95/5 tin and antimony for all soldered joints.
 - 2. Grooved fittings, 50 to 150 mm (2 to 6 inch) wrought copper ASTM B75 C12200, 125 to 150 mm (5 to 6 inch) bronze casting ASTM B584, CDA 844. Mechanical grooved couplings, ductile iron, ASTM A536 (Grade 65-45-12), or malleable iron, ASTM A47 (Grade 32510) housing, with EPDM gasket, steel track head bolts, ASTM A183, coated with copper colored alkyd enamel.
 - 3. Mechanical press sealed fittings, 65 mm (2-1/2") in size and smaller. Fittings shall be double pressed type NSF/ANSI 61 approved and utilize EPDM (Ethylene Propylene Diene Monomer) non toxic synthetic rubber sealing elements.
 - 4. Mechanically formed tee connection: Form mechanically extracted collars in a continuous operation by drilling pilot hole and drawing out tube surface to form collar, having a height of not less than three times the thickness of tube wall. Adjustable collaring device shall insure proper tolerance and complete uniformity of the joint. Notch and dimple joining branch tube in a single process to provide free flow where the branch tube penetrates the fitting. Braze joints.
- C. Fittings for Stainless Steel:
 - 1. Stainless steel butt-welded fittings, Type 316, Schedule 10, conforming to ANSI B16.9.

2. Grooved fittings, stainless steel, Type 316, Schedule 10, conforming to ASTM A403. Segmentally fabricated fittings are not allowed. Mechanical grooved couplings, ductile iron, ASTM A536 (Grade 65-45-12), or Malleable iron, ASTM A47 (Grade 32510) housing, with EPDM gasket, steel track head bolts, ASTM A183, coated with copper colored alkyd enamel.
- D. Adapters: Provide adapters for joining screwed pipe to copper tubing.
- E. Solder: ASTM B32 Composition Sb5 HA or HB. Provide non-corrosive flux.
- F. Brazing alloy: AWS A5.8, Classification BCuP.
- G. Reagent Grade Water Piping and Dialysis Water Piping:
 1. Polypropylene, ASTM D4101, Schedule 80 pressure pipe with dimensions in conformance with ASTM D2447, but without additions of modifiers, plasticizers, colorants, stabilizers or lubricants. This virgin unplasticized pipe and fittings shall transport 10 megohm water with no loss of purity. Provide socket fusion joints.
 2. Polyethylene, food and medical grade, capable of transporting 10 megohm water with no loss of purity. Processed by continuous compression molding without the addition of fillers, polymer modifiers or processing aids. Uniform color with no cracks, flaws, blisters or other imperfections in appearance. Provide heat fusion butt welded joints. In accordance with manufacturer's recommendations, provide continuous channel support under all horizontal piping.
 3. Reverse Osmosis (RO) Water Piping:
 - a. Low Pressure Feed, Reject and Recycle Piping (75 psi and under): ASTM D 1785, Schedule 80 PVC, socket welded and flanged.
 - b. RO Product Tubing From Each Membrane Housing: ASTM D1785, Schedule 80 PVC, socket welded and flanged.
 - c. Low Pressure Control and Pressure Gage Tubing: Polyethylene.
 - d. High Pressure Reject and Recycle Piping (above 75 psi): ASTM A269, Type 304 schedule 10 stainless steel with butt welded joints.
 - e. High Pressure Control and Pressure Gage Tubing: 1000 psi burst nylon.

2.3 EXPOSED WATER PIPING

- A. Finished Room: Use full iron pipe size chrome plated brass piping for exposed water piping connecting fixtures, casework, cabinets, equipment

and reagent racks when not concealed by apron including those furnished by the Government or specified in other sections.

1. Pipe: Fed. Spec. WW-P-351, standard weight.
2. Fittings: ANSI B16.15 cast bronze threaded fittings with chrome finish, (125 and 250).
3. Nipples: ASTM B 687, Chromium-plated.
4. Unions: Mss SP-72, SP-110, Brass or Bronze with chrome finish.
Unions 65 mm (2-1/2 inches) and larger shall be flange type with approved gaskets.

B. Unfinished Rooms, Mechanical Rooms and Kitchens: Chrome-plated brass piping is not required. Paint piping systems as specified in Section 09 91 00, PAINTING.

2.4 ETO (ETHYLENE OXIDE) STERILIZER WATER SUPPLY PIPING

- A. Stainless steel, ASTM A312, Schedule 10 with stainless steel butt welded fittings. Provide on sterilizer water supply.

2.5 TRAP PRIMER WATER PIPING:

- A. Pipe: Copper tube, ASTM B88, type K, hard drawn.
- B. Fittings: Bronze castings conforming to ANSI B16.18 Solder joints.
- C. Solder: ASTM B32 composition Sb5. Provide non-corrosive flux.

2.6 STRAINERS

- A. Provide on high pressure side of pressure reducing valves, on suction side of pumps, on inlet side of indicating and control instruments and equipment subject to sediment damage and where shown on drawings.
Strainer element shall be removable without disconnection of piping.
- B. Water: Basket or "Y" type with easily removable cover and brass strainer basket.
- C. Body: Smaller than 80 mm (3 inches), brass or bronze; 80 mm (3 inches) and larger, cast iron or semi-steel.

2.7 DIELECTRIC FITTINGS

- A. Provide dielectric couplings or unions between ferrous and non-ferrous pipe.

2.8 STERILIZATION CHEMICALS

- A. Hypochlorites ANSI/AWWA B300-10
- B. Liquid Chlorine ANSI/AWWA B301-10

2.9 WATER HAMMER ARRESTER:

- A. Closed copper tube chamber with permanently sealed 410 kPa (60 psig) air charge above a Double O-ring piston. Two high heat Buna-N O-rings pressure packed and lubricated with FDA approved silicone compound. All

units shall be designed in accordance with ASSE 1010 for sealed wall installations without an access panel. Size and install in accordance with Plumbing and Drainage Institute requirements (PDI WH 201). Provide water hammer arrestors at:

1. All solenoid valves.
2. All groups of two or more flush valves.
3. All quick opening or closing valves.
4. All medical washing equipment.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Comply with the International Plumbing Code and the following:

1. Install branch piping for water from the piping system and connect to all fixtures, valves, cocks, outlets, casework, cabinets and equipment, including those furnished by the Government or specified in other sections.
2. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe, except for plastic and glass, shall be reamed to full size after cutting.
3. All pipe runs shall be laid out to avoid interference with other work.
4. Install union and shut-off valve on pressure piping at connections to equipment.
5. Pipe Hangers, Supports and Accessories:
 - a. All piping shall be supported per the International Plumbing Code, Chapter No. 3.
 - b. Shop Painting and Plating: Hangers, supports, rods, inserts and accessories used for pipe supports shall be shop coated with red lead or zinc chromate primer paint. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.
 - c. Floor, Wall and Ceiling Plates, Supports, Hangers:
 - 1) Solid or split unplated cast iron.
 - 2) All plates shall be provided with set screws.
 - 3) Pipe Hangers: Height adjustable clevis type.
 - 4) Adjustable Floor Rests and Base Flanges: Steel.
 - 5) Concrete Inserts: "Universal" or continuous slotted type.
 - 6) Hanger Rods: Mild, low carbon steel, fully threaded or Threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.

- 7) Riser Clamps: Malleable iron or steel.
 - 8) Rollers: Cast iron.
 - 9) Self-drilling type expansion shields shall be "Phillips" type, with case hardened steel expander plugs.
 - 10) Hangers and supports utilized with insulated pipe and tubing shall have 180 degree (min.) metal protection shield Centered on and welded to the hanger and support. The shield shall be 4 inches in length and be 16 gauge steel. The shield shall be sized for the insulation.
 - 11) Miscellaneous Materials: As specified, required, directed or as noted on the drawings for proper installation of hangers, supports and accessories. If the vertical distance exceeds 6 m (20 feet) for cast iron pipe additional support shall be provided in the center of that span. Provide all necessary auxiliary steel to provide that support.
 - 12) With the installation of each flexible expansion joint, provide piping restraints for the upstream and downstream section of the piping at the flexible expansion joint. Provide calculations supporting the restraint length design and type of selected restraints.
6. Install chrome plated cast brass escutcheon with set screw at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.
7. Penetrations:
- a. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING. Completely fill and seal clearances between raceways and openings with the fire stopping materials.
 - b. Waterproofing: At floor penetrations, completely seal clearances around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.
- B. Piping shall conform to the following:
- 1. Domestic Water:
 - a. Grade all lines to facilitate drainage. Provide drain valves at bottom of risers and all low points in system. Design domestic hot water circulating lines with no traps.

- b. Connect branch lines at bottom of main serving fixtures below and pitch down so that main may be drained through fixture. Connect branch lines to top of main serving only fixtures located on floor above.

3.2 TESTS

- A. General: Test system either in its entirety or in sections.
- B. Potable Water System: Test after installation of piping and domestic water heaters, but before piping is concealed, before covering is applied, and before plumbing fixtures are connected. Fill systems with water and maintain hydrostatic pressure of 690 kPa (100 psi) gage for two hours. No decrease in pressure is allowed. Provide a pressure gage with a shutoff and bleeder valve at the highest point of the piping being tested.
- C. Reagent Grade Water Systems: Fill system with water and maintain hydrostatic pressure of 690 kPa (100 psi) gage during inspection and prove tight.
- D. All Other Piping Tests: Test new installed piping under 1 1/2 times actual operating conditions and prove tight.

3.3 STERILIZATION

- A. After tests have been successfully completed, thoroughly flush and sterilize the interior domestic water distribution system in accordance with AWWA C651.
- B. Use liquid chlorine or hypochlorites for sterilization.

- - - E N D - - -

**SECTION 22 13 00
FACILITY SANITARY AND VENT PIPING**

PART 1 - GENERAL

1.1 DESCRIPTION

This section pertains to sanitary sewer and vent systems, including piping, equipment and all necessary accessories as designated in this section.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Penetrations in rated enclosures.
- B. Section 09 91 00, PAINTING: Preparation and finish painting and identification of piping systems.
- C. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: Pipe Hangers and Supports, Materials Identification.
- D. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION: Pipe Insulation.
- E. Section 07 92 00 Joint Sealants: Sealant products.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Piping.
 - 2. Floor Drains.
 - 3. Grease Removal Unit.
 - 4. Cleanouts.
 - 5. All items listed in Part 2 - Products.
- C. Detailed shop drawing of clamping device and extensions when required in connection with the waterproofing membrane or the floor drain.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME): (Copyrighted Society)
 - A112.6.3-01 (R 2007) ...Standard for Floor and Trench Drains
 - A13.1-07Scheme for Identification of Piping Systems
 - B16.3-06Malleable Iron Threaded Fittings, Classes 150 and 300.
 - B16.4-06Standard for Grey Iron Threaded Fittings
Classes 125 and 250

B16.12-98 (R 2006)Cast Iron Threaded Drainage Fittings
 B16.15-06Cast Bronze Threaded Fittings, Classes 125 and
 250

C. American Society for Testing and Materials (ASTM):

A47/A47M-99 (R 2004) ...Standard Specification for Steel Sheet,
 Aluminum Coated, by the Hot Dip Process
 A53/A53M-07Standard Specification for Pipe, Steel, Black
 And Hot-Dipped, Zinc-coated, Welded and
 Seamless
 A74-06Standard Specification for Cast Iron Soil Pipe
 and Fittings
 A183-03Standard Specification for Carbon Steel Track
 Bolts and Nuts
 A536-84(R 2004)Standard Specification for Ductile Iron
 Castings
 B32-08Standard Specification for Solder Metal
 B75-02Standard Specification for Seamless Copper Tube
 B306-02*Standard Specification for Copper Drainage Tube*
 (DWV)
 B584-06aStandard Specification for Copper Alloy Sand
 Castings for General Applications
 C564-03aStandard Specification for Rubber Gaskets for
 Cast Iron Soil Pipe and Fittings
 D2000-08Standard Classification System for Rubber
 Products in Automotive Applications
 D2564-04E1Standard Specification for Solvent Cements for
 Poly (Vinyl Chloride) (PVC) Plastic Pipe and
 Fittings
 D2665-08*Standard Specification for Poly (Vinyl*
Chloride) (PVC) Plastic Drain, Waste, and Vent
Pipe and Fittings

D. International Code Council:

IPC-06International Plumbing Code

E. Cast Iron Soil Pipe Institute (CISPI):

301-05Hubless Cast Iron Soil Pipe and Fittings for
 Sanitary and Storm Drain, Waste, and Vent
 Piping Applications

310-04Coupling for Use in Connection with Hubless
Cast Iron Soil Pipe and Fittings for Sanitary
and Storm Drain, Waste, and Vent Piping
Applications

F. American Society of Sanitary Engineers (ASSE):

1018-01Trap Seal Primer Valves - Potable, Water
Supplied

G. Plumbing and Drainage Institute (PDI):

PDI WH-201Water Hammer Arrestor

PART 2 - PRODUCTS

2.1 SANITARY WASTE, DRAIN, AND VENT PIPING

A. Cast iron waste, drain, and vent pipe and fittings

1. Cast iron waste, drain, and vent pipe and fittings shall be used for the following applications:
 - a. pipe buried in or in contact with earth
 - b. sanitary pipe extensions to a distance of approximately 1500 mm (5 feet) outside of the building.
 - c. interior waste and vent piping above grade.
2. Cast iron Pipe shall be bell and spigot or hubless (plain end or no-hub or hubless).
3. The material for all pipe and fittings shall be cast iron soil pipe and fittings and shall conform to the requirements of CISPI Standard 301, ASTM A-888, or ASTM A-74.
4. Joints for hubless pipe and fittings shall conform to the manufacturer's installation instructions. Couplings for hubless joints shall conform to CISPI 310. Joints for hub and spigot pipe shall be installed with compression gaskets conforming to the requirements of ASTM Standard C-564 or be installed with lead and oakum.

B. Copper Tube, (DWV):

1. Copper DWV tube sanitary waste, drain and vent pipe may be used for piping above ground, except for urinal drains.
2. The copper DWV tube shall be drainage type, drawn temper conforming to ASTM B306.
3. The copper drainage fittings shall be cast copper or wrought copper conforming to ASME B16.23 or ASME 16.29.
4. The joints shall be lead free, using a water flushable flux, and conforming to ASTM B32.

C. Polyvinyl Chloride (PVC)

1. Polyvinyl chloride (PVC) pipe and fittings are permitted where the waste temperature is below 60°C (140°F).
2. PVC piping and fittings shall NOT be used for the following applications:
 - a. Waste collected from steam condensate drains
 - b. spaces such as mechanical equipment rooms, kitchens, SPD, and sterilizer areas.
 - c. Vertical waste and soil stacks serving more than two floors
 - d. Exposed in mechanical equipment rooms.
 - e. Exposed inside of ceiling return plenums
3. Polyvinyl chloride sanitary waste, drain, and vent pipe and fittings shall be schedule 40 solid core sewer piping conforming to ASTM D 1785 and ASTM D2665, sewer and drain series with ends for solvent cemented joints.
4. Fittings:
 - a. PVC fittings shall be solvent welded socket type using solvent cement conforming to ASTM D2564.

2.2 EXPOSED WASTE PIPING

- A. Full iron pipe size chrome plated brass piping shall be used in finished rooms for exposed waste piping connecting fixtures, casework, cabinets, equipment and reagent racks when not concealed by apron including those furnished by the Government or specified in other sections.
 1. The Pipe shall meet Fed. Spec. WW-P-351, standard weight.
 2. The Fittings shall conform to ANSI B16.15, cast bronze threaded fittings with chrome finish, (125 and 250).
 3. Nipples shall conform to ASTM B 687, Chromium-plated.
 4. Unions shall be brass or bronze with chrome finish. Unions 65 mm (2-1/2 inches) and larger shall be flange type with approved gaskets.
- B. In unfinished Rooms such as mechanical Rooms and Kitchens, Chrome-plated brass piping is not required. The pipe materials specified under the paragraph "Sanitary Waste, Drain, and Vent Piping" can be used. The sanitary pipe in unfinished rooms shall be painted as specified in Section 09 91 00, PAINTING.

2.3 SPECIALTY PIPE FITTINGS

- A. Transition pipe couplings shall join piping with small differences in outside diameters or different materials. End connections shall be of the same size and compatible with the pipes being joined. The transition coupling shall be elastomeric, sleeve type reducing or transition pattern and include shear and corrosion resistant metal, tension band and tightening mechanism on each end. The transition coupling sleeve coupling shall be of the following material:
 - 1. For cast iron soil pipes, the sleeve material shall be rubber conforming to ASTM C564.
 - 2. For PVC soil pipes, the sleeve material shall be elastomeric seal or PVC, conforming to ASTM F 477 or ASTM D5926.
 - 3. For dissimilar pipes, the sleeve material shall be PVC conforming to ASTM D5926, or other material compatible with the pipe materials being joined.
- B. The dielectric fittings shall conform to ASSE 1079 with a pressure rating of 860 kPa (125 psig) at a minimum temperature of 82°C (180°F). The end connection shall be solder joint copper alloy and threaded ferrous.
- C. Dielectric flange insulating kits shall be of non conducting materials for field assembly of companion flanges with a pressure rating of 1035 kPa (150 psig). The gasket shall be neoprene or phenolic. The bolt sleeves shall be phenolic or polyethylene. The washers shall be phenolic with steel backing washers.
- D. The di-electric nipples shall be electroplated steel nipple complying with ASTM F 1545 with a pressure ratings of 2070 kPa (300 psig) at 107°C (225°F). The end connection shall be male threaded. The lining shall be inert and noncorrosive propylene.

2.4 CLEANOUTS

- A. Cleanouts shall be the same size as the pipe, up to 100 mm (4 inches); and not less than 100 mm (4 inches) for larger pipe. Cleanouts shall be easily accessible and shall be gastight and watertight. Minimum clearance of 600 mm (24 inches) shall be provided for clearing a clogged sanitary line.
- B. Floor cleanouts shall be gray iron housing with clamping device and round, secured, scoriated, gray iron cover conforming to ASME A112.36.2M. A gray iron ferrule with hubless, socket, inside calk or spigot connection and counter sunk, taper-thread, brass or bronze

closure plug shall be included. The frame and cover material and finish shall be nickel-bronze copper alloy with a square shape. The cleanout shall be vertically adjustable for a minimum of 50 mm (2 inches). When a waterproof membrane is used in the floor system, clamping collars shall be provided on the cleanouts. Cleanouts shall consist of wye fittings and eighth bends with brass or bronze screw plugs. Cleanouts in the resilient tile floors, quarry tile and ceramic tile floors shall be provided with square top covers recessed for tile insertion. In the carpeted areas, carpet cleanout markers shall be provided. Two way cleanouts shall be provided where indicated on drawings and at every building exit. The loading classification for cleanouts in sidewalk areas or subject to vehicular traffic shall be heavy duty type.

- C. Cleanouts shall be provided at or near the base of the vertical stacks with the cleanout plug located approximately 600 mm (24 inches) above the floor. If there are no fixtures installed on the lowest floor, the cleanout shall be installed at the base of the stack. The cleanouts shall be extended to the wall access cover. Cleanout shall consist of sanitary tees. Nickel-bronze square frame and stainless steel cover with minimum opening of 150 by 150 mm (6 by 6 inches) shall be furnished at each wall cleanout. Where the piping is concealed, a fixture trap or a fixture with integral trap, readily removable without disturbing concealed pipe, shall be accepted as a cleanout equivalent providing the opening to be used as a cleanout opening is the size required.
- D. In horizontal runs above grade, cleanouts shall consist of cast brass tapered screw plug in fitting or caulked/hubless cast iron ferrule. Plain end (hubless) piping in interstitial space or above ceiling may use plain end (hubless) blind plug and clamp.

2.5 FLOOR DRAINS

- A. Type 2 (FD-2) floor drain shall comply with ANSI A112.6.3. A caulking flange, inside gasket, or hubless connection shall be provided for connection to cast iron pipe, screwed or no hub outlets for connection to steel pipe. The drain connection shall be bottom outlet. A membrane clamp and extensions shall be provided, if required, where installed in connection with waterproof membrane. Puncturing membrane other than for drain opening will not be permitted. Double drainage pattern floor drains shall have integral seepage pan for embedding into

floor construction, and weep holes to provide adequate drainage from pan to drain pipe. For drains not installed in connection with a waterproof membrane, a 2.2 kg (16-ounce) soft copper membrane, 600 mm (24 inches) square or another approved waterproof membrane shall be provided.

- B. Type 1 (FD-1) floor drain shall comply with ANSI A112.6.3. The type B floor drain shall be constructed of galvanized cast iron with medium duty nickel bronze grate, double drainage pattern, clamping device, without sediment bucket but with secondary strainer in bottom. The grate shall be 175 mm (7 inches) minimum.

2.6 TRAPS

A. Traps shall be provided on all sanitary branch waste connections from fixtures or equipment not provided with traps. Exposed brass shall be polished brass chromium plated with nipple and set screw escutcheons. Concealed traps may be rough cast brass or same material as pipe connected to. Slip joints are not permitted on sewer side of trap. Traps shall correspond to fittings on cast iron soil pipe or steel pipe respectively, and size shall be as required by connected service or fixture.

2.7 TRAP SEAL PRIMER VALVES AND TRAP SEAL PRIMER SYSTEMS

- A. Trap Primer (TP-1): The trap seal primer system shall be electronic type conforming to ASSE 1044.
 1. The controller shall have a 24 hour programmable timer, solid state, 6 outlet zones, minimum adjustable run time of 1 minute for each zone, 12 hour program battery backup, manual switch for 120VAC power, 120VAC to 24VAC internal transformer, fuse protected circuitry, UL listed, 120VAC input-24VAC output, constructed of enameled steel or plastic.
 2. The cabinet shall be recessed mounting with a stainless steel cover.
 3. The solenoid valve shall have a brass body, Buna "N" seats, normally closed, 5.98 kPa (125 psi) rated, 24VAC.
 4. The control wiring shall be copper in accordance with the latest edition of the National Electric Code, Article 725 and not less than 18 gauge. All wiring shall be in conduit and in accordance with Division 26 of the specifications.
 5. The vacuum breaker shall conform to ASSE 1001.

2.8 WATERPROOFING

- A. A sleeve flashing device shall be provided at points where pipes pass through membrane waterproofed floors or walls. The sleeve flashing device shall be manufactured, cast iron fitting with clamping device that forms a sleeve for the pipe floor penetration of the floor membrane. A galvanized steel pipe extension shall be included in the top of the fitting that will extend 50 mm (2 inches) above finished floor and galvanized steel pipe extension in the bottom of the fitting that will extend through the floor slab. A waterproof caulked joint shall be provided at the top hub.

PART 3 - EXECUTION

3.1 PIPE INSTALLATION

- A. The pipe installation shall comply with the requirements of the International Plumbing Code (IPC) and these specifications.
- B. Branch piping shall be installed for waste from the respective piping systems and connect to all fixtures, valves, cocks, outlets, casework, cabinets and equipment, including those furnished by the Government or specified in other sections.
- C. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe shall be reamed to full size after cutting.
- D. All pipe runs shall be laid out to avoid interference with other work.
- E. The piping shall be installed above accessible ceilings where possible.
- F. The piping shall be installed to permit valve servicing or operation.
- G. Unless specifically indicated on the drawings, the minimum slope shall be 2% slope.
- H. The piping shall be installed free of sags and bends.
- I. Seismic restraint shall be installed where required by code.
- J. Changes in direction for soil and waste drainage and vent piping shall be made using appropriate branches, bends and long sweep bends. Sanitary tees and short sweep quarter bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Long turn double wye branch and eighth bend fittings shall be used if two fixtures are installed back to back or side by side with common drain pipe. Straight tees, elbows, and crosses may be used on vent lines. Do not change direction of flow more than 90 degrees. Proper size of standard increaser and reducers shall be used if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.

- K. Buried soil and waste drainage and vent piping shall be laid beginning at the low point of each system. Piping shall be installed true to grades and alignment indicated with unbroken continuity of invert. Hub ends shall be placed upstream. Required gaskets shall be installed according to manufacturer's written instruction for use of lubricants, cements, and other installation requirements.
- L. Cast iron piping shall be installed according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings"
- M. Aboveground copper tubing shall be installed according to CDA's "Copper Tube Handbook".
- N. Aboveground PVC piping shall be installed according to ASTM D2665. Underground PVC piping shall be installed according to ASTM D2321.

3.2 JOINT CONSTRUCTION

- A. Hub and spigot, cast iron piping with gasket joints shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.
- B. Hub and spigot, cast iron piping with calked joints shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for lead and oakum calked joints.
- C. Hubless or No-hub, cast iron piping shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless piping coupling joints.
- D. For threaded joints, thread pipe with tapered pipe threads according to ASME B1.20.1. The threads shall be cut full and clean using sharp disc cutters. Threaded pipe ends shall be reamed to remove burrs and restored to full pipe inside diameter. Pipe fittings and valves shall be joined as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is required by the pipe service
 - 2. Pipe sections with damaged threads shall be replaced with new sections of pipe.
- E. Copper tube and fittings with soldered joints shall be joined according to ASTM B828. A water flushable, lead free flux conforming to ASTM B813 and a lead free alloy solder conforming to ASTM B32 shall be used.
- F. For PVC piping, solvent cement joints shall be used for joints. All surfaces shall be cleaned and dry prior to applying the primer and

solvent cement. Installation practices shall comply with ASTM F402. The joint shall conform to ASTM D2855 and ASTM D2665 appendixes.

3.3 SPECIALTY PIPE FITTINGS

- A. Transition coupling shall be installed at pipe joints with small differences in pipe outside diameters.
- B. Dielectric fittings shall be installed at connections of dissimilar metal piping and tubing.

3.4 PIPE HANGERS, SUPPORTS AND ACCESSORIES:

- A. All piping shall be supported according to the International Plumbing Code (IPC), Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, and these specifications. Where conflicts arise between these the code and Section 22 05 11, the most restrictive or the requirement that specifies supports with highest loading or shortest spacing shall apply.
- B. Hangers, supports, rods, inserts and accessories used for pipe supports shall be shop coated with zinc chromate primer paint. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.
- C. Horizontal piping and tubing shall be supported within 300 mm (12 inches) of each fitting or coupling.
- D. Horizontal cast iron piping shall be supported with the following maximum horizontal spacing and minimum hanger rod diameters:
 - 1. 40 mm or DN40 to 50 mm or DN50 (NPS 1-1/2 inch to NPS 2 inch): 1500 mm (60 inches) with 10 mm (3/8 inch) rod.
 - 2. 80 mm or DN 80 (NPS 3 inch): 1500 mm (60 inches) with 13 mm (1/2 inch) rod.
 - 3. 100 mm or DN100 to 125 mm or DN125 (NPS 4 to NPS 5): 1500 mm (60 inches) with 16 mm (5/8 inch) rod.
 - 4. 150 mm or DN150 to 200 mm or DN200 (NPS 6 inch to NPS 8 inch): 1500 mm (60 inches) with 19 mm (3/4 inch) rod.
 - 5. 250 mm or DN250 to 300 mm or DN 300 (NPS 10 inch to NPS 12 inch): 1500 mm (60 inch) with 22 mm (7/8 inch) rod.
- E. The maximum spacing for plastic pipe shall be 1.22 m (4 feet).
- F. Vertical piping and tubing shall be supported at the base, at each floor, and at intervals no greater than 4.57 m (15 feet).
- G. In addition to the requirements in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, floor, Wall and Ceiling Plates, Supports, Hangers shall have the following characteristics:

1. Solid or split unplated cast iron.
 2. All plates shall be provided with set screws.
 3. Height adjustable clevis type pipe hangers.
 4. Adjustable floor rests and base flanges shall be steel.
 5. Hanger rods shall be low carbon steel, fully threaded or threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.
 6. Riser clamps shall be malleable iron or steel.
 7. Rollers shall be cast iron.
 8. See Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, for requirements on insulated pipe protective shields at hanger supports.
- H. Miscellaneous materials shall be provided as specified, required, directed or as noted on the drawings for proper installation of hangers, supports and accessories. If the vertical distance exceeds 6 m (20 feet) for cast iron pipe additional support shall be provided in the center of that span. All necessary auxiliary steel shall be provided to provide that support.
- I. Cast escutcheon with set screw shall be provided at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.
- J. Penetrations:
1. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, a fire stop shall be installed that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING. Clearances between raceways and openings shall be completely filled and sealed with the fire stopping materials.
 2. Water proofing: At floor penetrations, clearances shall be completely sealed around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.
- K. Piping shall conform to the following:
1. Waste and Vent Drain to main stacks:

Pipe Size	Minimum Pitch
80 mm or DN 80 (3 inches) and smaller	2%
100 mm or DN 100 (4 inches) and larger	1%

2. Exhaust vents shall be extended separately through roof. Sanitary vents shall not connect to exhaust vents.

3.5 TESTS

- A. Sanitary waste and drain systems shall be tested either in its entirety or in sections.
- B. Waste System tests shall be conducted before trenches are backfilled or fixtures are connected. A water test or air test shall be conducted, as directed.
 1. If entire system is tested for a water test, tightly close all openings in pipes except highest opening, and fill system with water to point of overflow. If the waste system is tested in sections, tightly plug each opening except highest opening of section under test, fill each section with water and test with at least a 3 m (10 foot) head of water. In testing successive sections, test at least upper 3 m (10 feet) of next preceding section so that each joint or pipe except upper most 3 m (10 feet) of system has been submitted to a test of at least a 3 m (10 foot) head of water. Water shall be kept in the system, or in portion under test, for at least 15 minutes before inspection starts. System shall then be tight at all joints.
 2. For an air test, an air pressure of 35 kPa (5 psig) gage shall be maintained for at least 15 minutes without leakage. A force pump and mercury column gage shall be used for the air test.
 3. After installing all fixtures and equipment, open water supply so that all p-traps can be observed. For 15 minutes of operation, all p-traps shall be inspected for leaks and any leaks found shall be corrected.
 4. Final Tests: Either one of the following tests may be used.
 - a. Smoke Test: After fixtures are permanently connected and traps are filled with water, fill entire drainage and vent systems with smoke under pressure of 1.3 kPa (1 inch of water) with a smoke machine. Chemical smoke is prohibited.
 - b. Peppermint Test: Introduce (2 ounces) of peppermint into each line or stack.

- - - E N D - - -

**SECTION 22 40 00
PLUMBING FIXTURES**

PART 1 - GENERAL

1.1 DESCRIPTION

Plumbing fixtures, associated trim and fittings necessary to make a complete installation from wall or floor connections to rough piping, and certain accessories.

1.2 RELATED WORK

- A. Sealing between fixtures and other finish surfaces: Section 07 92 00, JOINT SEALANTS.
- B. Flush panel access doors: Section 08 31 13, ACCESS DOORS AND FRAMES.
- C. Through bolts: Section 10 21 13, TOILET COMPARTMENTS.
- D. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submit plumbing fixture information in an assembled brochure, showing cuts and full detailed description of each fixture.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standard Institute (ANSI):
The American Society of Mechanical Engineers (ASME):
A112.6.1M-02(R2008)Floor Affixed Supports for Off-the-Floor
Plumbing Fixtures for Public Use
A112.19.1M-08Enameled Cast Iron Plumbing Fixtures
A112.19.2M-03Vitreous China Plumbing Fixtures
A112.19.3-2001(R2008) ..Stainless Steel Plumbing Fixtures (Designed for
Residential Use)
- C. American Society for Testing and Materials (ASTM):
A276-2010Stainless and Heat-Resisting Steel Bars and
Shapes
WW-P-541-E/GENPlumbing Fixtures with Amendment 1
- D. National Association of Architectural Metal Manufacturers (NAAMM): NAAMM
AMP 500-505
Metal Finishes Manual (1988)

- E. American Society of Sanitary Engineers (ASSE):
 1016-05Performance Requirements for Individual
 Thermostatic, Pressure Balancing and Combination
 Pressure Balancing and Thermostatic Control
 Valves for Individual Fixture Fittings
- F. National Sanitation Foundation (NSF)/American National Standards
 Institute (ANSI):
 61-2009Drinking Water System Components-Health Effects
- G. American with Disabilities Act (A.D.A) Section 4-19.4 Exposed Pipes and
 Surfaces
- H. Environmental Protection Agency EPA PL 93-523 1974; A 1999) Safe
 Drinking Water Act.
- I. International Building Code, ICC IPBC 2009.

PART 2 - PRODUCTS

2.1 STAINLESS STEEL

- A. Corrosion-resistant Steel (CRS):
 - 1. Plate, Sheet and Strip: CRS flat products shall conform to chemical composition requirements of any 300 series steel specified in ASTM A276.
 - 2. Finish: Exposed surfaces shall have standard polish (ground and polished) equal to NAAMM finish Number 4.
- B. Die-cast zinc alloy products are prohibited.

2.2 STOPS

- A. Provide lock-shield loose key or screw driver pattern angle stops, straight stops or stops integral with faucet, with each compression type faucet whether specifically called for or not, including sinks in wood and metal casework, laboratory furniture and pharmacy furniture. Locate stops centrally above or below fixture in accessible location.
- B. Furnish keys for lock shield stops to Resident Engineer.
- C. Supply from stops not integral with faucet shall be chrome plated copper flexible tubing or flexible stainless steel with inner core of non-toxic polymer.
- D. Supply pipe from wall to valve stop shall be rigid threaded IPS copper alloy pipe, i.e. red brass pipe nipple, chrome plated where exposed.
- E. Psychiatric Area: Provide stainless steel drain guard for all lavatories not installed in casework.

2.3 ESCUTCHEONS

Heavy type, chrome plated, with set screws. Provide for piping serving plumbing fixtures and at each wall, ceiling and floor penetrations in exposed finished locations and within cabinets and millwork.

2.4 LAMINAR FLOW CONTROL DEVICE

- A. Smooth, bright stainless steel or satin finish, chrome plated metal laminar flow device shall provide non-aeration, clear, coherent laminar flow that will not splash in basin. Device shall also have a flow control restrictor and have vandal resistant housing.
- B. Flow Control Restrictor:
 - 1. Capable of restricting flow from 95 ml/s to 110 ml/s (1.5 gpm to 1.7 gpm) for lavatories; and 170 ml/s to 190 ml/s (2.75 gpm to 3.0 gpm) for dietary food preparation and rinse sinks or as specified.
 - 2. Compensates for pressure fluctuation maintaining flow rate specified above within 10 percent between 170 kPa and 550 kPa (25 psi and 80 psi).
 - 3. Operates by expansion and contraction, eliminates mineral/sediment build-up with self-cleaning action, and is capable of easy manual cleaning.

2.5 CARRIERS

- A. ASME/ANSI A112.6.1M, with adjustable gasket faceplate chair carriers for wall hung closets with auxiliary anchor foot assembly, hanger rod support feet, and rear anchor tie down.
- B. ASME/ANSI A112.6.1M. All lavatory chair carriers shall be capable of supporting the lavatory with a 250-pound vertical load applied at the front of the fixture.
- C. Where water closets, lavatories or sinks are installed back-to-back and carriers are specified, provide one carrier to serve both fixtures in lieu of individual carriers. The drainage fitting of the back to back carrier shall be so constructed that it prevents the discharge from one fixture from flowing into the opposite fixture.

2.6 WATER CLOSETS

- A. (WC-1) Water Closet - Floor mounted, elongated bowl, top spud, siphon jet 6 L (1.6 gallons) per flush, rear outlet. Top of rim shall be 435 mm to 438 mm (17 1/8 inches to 17 1/4 inches) above finished floor.
 - 1. Seat: Institutional/Industrial, extra heavy duty, chemical resistant, solid plastic, open front less cover for elongated bowls, integrally molded bumpers, concealed check hinge with stainless steel post. Seat shall be posture contoured body design. Color shall be white.
 - 2. Fittings and Accessories: Floor flange fittings-cast iron; Gasket-wax; bolts with chromium plated cap nuts and washers.
 - 3. Flush valve: Large chloramines resistant diaphragm, semi-red brass valve body, exposed chrome plated, non-hold-open ADA approved side oscillating handle, water saver design 6 L (1.6 gallons) per flush with maximum 10 percent variance, top spud connection, adjustable

tailpiece, one-inch IPS screwdriver back check angle stop with vandal resistant cap, high back pressure vacuum breaker, and sweat solder adapter with cover tube and cast set screw wall flange. Set centerline of inlet 292 mm (11 1/2 inches) above rim. Seat bumpers shall be integral part of flush valve. Valve body, cover, tailpiece and control stop shall be in conformance with ASTM Alloy classification for semi-red brass.

- B. (WC-2) Water Closet - Floor mounted, elongated bowl, rear spud, siphon jet 6 L (1.6 gallons) per flush, rear outlet. Top of rim shall be 435 mm to 438 mm (17 1/8 inches to 17 1/4 inches) above finished floor.
1. Seat: Institutional/Industrial, extra heavy duty, chemical resistant, solid plastic, open front less cover for elongated bowls, integrally molded bumpers, concealed check hinge with stainless steel post. Seat shall be posture contoured body design. Color shall be white.
 2. Fittings and Accessories: Floor flange fittings-cast iron; Gasket-wax; bolts with chromium plated cap nuts and washers.
 3. Concealed flush valve: Large chloramines resistant diaphragm, semi-red brass valve body, exposed chrome plated, concealed with hydraulic actuator button, water saver design 6 L (1.6 gallons) per flush with maximum 10 percent variance, rear spud connection, adjustable tailpiece, one-inch IPS screwdriver back check angle stop with vandal resistant cap, high back pressure vacuum breaker, and sweat solder adapter with cover tube and cast set screw wall flange. Set centerline of inlet 292 mm (11 1/2 inches) above rim. Seat bumpers shall be integral part of flush valve. Valve body, cover, tailpiece and control stop shall be in conformance with ASTM Alloy classification for semi-red brass.
- C. (WC-3) Water Closet - Floor mounted, floor outlet), top spud, elongated bowl, siphon jet 6 L (1.6 gallons) per flush.
1. Seat: Institutional/Industrial, extra heavy duty, chemical resistant, solid plastic, open front less cover for elongated bowls, integrally molded bumpers, concealed check hinge with stainless steel post. Seat shall be posture contoured body design. Color shall be white.
 2. Fittings and Accessories: Floor flange fittings-cast iron; Gasket-wax; bolts with chromium plated cap nuts and washers.
 3. Flush valve: Large chloramines resistant diaphragm, semi-red brass valve body, exposed chrome plated, non-hold-open ADA approved side oscillating handle, water saver design 6 L (1.6 gallons) per flush with maximum 10 percent variance, top spud connection, adjustable tailpiece, one-inch IPS screwdriver back check angle stop with vandal resistant cap, high back pressure vacuum breaker, and sweat solder

adapter with cover tube and cast set screw wall flange. Set centerline of inlet 292 mm (11 1/2 inches) above rim. Seat bumpers shall be integral part of flush valve. Valve body, cover, tailpiece and control stop shall be in conformance with ASTM Alloy classification for semi-red brass.

- D. (WC-4) Water Closet - Floor mounted, floor outlet, ADA, top spud, elongated bowl, siphon jet 6 L (1.6 gallons) per flush. Top of rim shall be 435 mm to 438 mm (17 1/8 inches to 17 1/4 inches) above finished floor.
1. Seat: Institutional/Industrial, extra heavy duty, chemical resistant, solid plastic, open front less cover for elongated bowls, integrally molded bumpers, concealed check hinge with stainless steel post. Seat shall be posture contoured body design. Color shall be white.
 2. Fittings and Accessories: Floor flange fittings-cast iron; Gasket-wax; bolts with chromium plated cap nuts and washers.
 3. Flush valve: Large chloramines resistant diaphragm, semi-red brass valve body, exposed chrome plated, non-hold-open ADA approved side oscillating handle, water saver design 6 L (1.6 gallons) per flush with maximum 10 percent variance, top spud connection, adjustable tailpiece, one-inch IPS screwdriver back check angle stop with vandal resistant cap, high back pressure vacuum breaker, and sweat solder adapter with cover tube and cast set screw wall flange. Set centerline of inlet 292 mm (11 1/2 inches) above rim. Seat bumpers shall be integral part of flush valve. Valve body, cover, tailpiece and control stop shall be in conformance with ASTM Alloy classification for semi-red brass.
- E. (WC-5) Water Closet - Seclusion Room - fully enclosed floor mounted, rear outlet, rear spud, with integral contoured seat, siphon jet, 14 gage type 304 stainless steel construction with white enviro-glaze coating and hinged seat with cover, flush valve operated, top of rim 457 mm (18 inches) above floor.
1. Fittings and Accessories: Gaskets-neoprene, bolts with chromium plated cap nuts and washers.
 2. Concealed Flush valve: Large chloramines resistant diaphragm, semi-red brass valve body, exposed chrome plated, concealed with hydraulic actuator button, water saver design 6 L (1.6 gallons) per flush with maximum 10 percent variance, rear spud connection, adjustable tailpiece, one-inch IPS screwdriver back check angle stop with vandal resistant cap, high back pressure vacuum breaker, and sweat solder adapter with cover tube and cast set screw wall flange. Set centerline of inlet 292 mm (11 1/2 inches) above rim. Seat bumpers

shall be integral part of flush valve. Valve body, cover, tailpiece and control stop shall be in conformance with ASTM Alloy classification for semi-red brass.

2.7 URINALS

- A. (UR-1) Urinal - Wall Hung, bowl with integral flush distribution, wall to front of flare 356 mm (14 inches). Wall hung with integral trap, siphon jet flushing action 4 L (1.0 gallons) per flush with 50 mm (2 inches) back outlet and 19 mm (3/4 inch) top inlet spud.
 - 1. Support urinal with chair carrier and install with rim 600 mm (24 inches) above finished floor.
 - 2. Flushing Device: Large chloramines resistant diaphragm, semi-red brass body, exposed flush valve electronic sensor operated, active infrared sensor for automatic operation, 19 mm (3/4 inch) capped screwdriver angle stop valve. Set centerline of inlet 292 mm (11 1/2 inches) above urinal. Valve body, cover, tailpiece, and control stop shall be in conformance with ASTM alloy classification for semi-red brass.

2.8 LAVATORIES

- A. Dimensions for lavatories are specified, Length by width (distance from wall) and depth.
- B. Brass components in contact with water shall contain no more than 3 percent lead content by dry weight.
- C. (L-1) Lavatory - Straight back, approximately 508 mm by 457 mm (20 inches by 18 inches) and a 102 mm (4 inches) minimum apron, first quality vitreous china with single hole. Set rim 864 mm (34 inches) above finished floor.
 - 1. Faucet: Solid cast brass construction, chrome plated, electronic sensor operated, 102 mm (4 inches) center set mounting, wiring box 120/24 volt solenoid, brass hot-cold water mixer adjusted from top deck with barrier free design control handle and inline filter. Provide laminar flow control device. Breaking the light beam shall activate the water flow. Flow shall stop when user moves away from light beam. Provide steel access door with key operated cylinder lock. See Section 08 31 13, ACCESS DOORS AND FRAMES. All connecting wiring between transformer, solenoid valve and sensor shall be cut to length with no excess hanging or wrapped up wiring allowed.
 - 2. Drain: Cast or wrought brass with flat grid strainer with offset tailpiece, brass, chrome plated.
 - 3. Stops: Angle type. See paragraph 2.2.Stops
 - 4. Trap: Cast copper alloy, 38 mm by 32 mm (1 1/2 inches by 1 1/4 inches)P-trap. Adjustable with connected elbow and 17 gage tubing

extension to wall. Exposed metal trap surface and connection hardware shall be chrome plated with a smooth bright finish. Set trap parallel to wall.

5. Provide cover for drain, stops and trap per A.D.A 4-19.4.
- D. (L-2) Lavatory - Wall hung, ligature resistant, single station lavatory made from vandal resistant solid surface material with integral electronic faucet and trap cover.
 1. Faucet: Integral, vandal and ligature resistant electronic sensor operated, wiring box 120/24 volt solenoid. Provide laminar flow control device. Breaking the light beam shall activate the water flow. Flow shall stop when user moves away from light beam. Provide steel access door with key operated cylinder lock. See Section 08 31 13, ACCESS DOORS AND FRAMES. All connecting wiring between transformer, solenoid valve and sensor shall be cut to length with no excess hanging or wrapped up wiring allowed.
 2. Drain: Cast or wrought brass with flat grid strainer with offset tailpiece, brass, chrome plated.
 3. Stops: Angle type. See paragraph 2.2.Stops
 4. Trap: Cast copper alloy, 38 mm by 32 mm (1 1/2 inches by 1 1/4 inches)P-trap. Adjustable with connected elbow and 17 gage tubing extension to wall. Exposed metal trap surface and connection hardware shall be chrome plated with a smooth bright finish. Set trap parallel to wall.
 5. Provide cover for drain, stops and trap per A.D.A 4-19.4.

2.9 SINKS AND LAUNDRY TUBS

- A. Dimensions for sinks and laundry tubs are specified, length by width (distance from wall) and depth.
- B. (SS-1) Service Sink (Corner, Floor Mounted) enamele coated cast iron, 711 mm by 711 mm by 305 mm (28 inches by 28 inches by 12 inches) with 203 mm (8 inches) drop front. Provide with vinyl coated wire rim guard, grid drain and hose with wall hook.
 1. Faucet: Solid brass construction, combination faucet with replaceable monel seat, removable replacement unit containing all parts subject to wear, integral stops, mounted on wall above sink. Spout shall have a pail hook, 19 mm (3/4 inch) hose coupling threads, vacuum breaker, and top or bottom brace to wall. Four-arm handles on faucets shall be cast, formed, or drop forged copper alloy. Escutcheons shall be either forged copper alloy or CRS. Exposed metal parts, including exposed part under valve handle when in open position, shall have a

- smooth bright finish. Provide 914 mm (36 inches) hose with wall hook. Centerline of rough in is 1219 mm (48 inches) above finished floor.
2. Drain: Seventy six millimeter (3 inches) cast brass drain with nickel bronze strainer.
 3. Trap: P-trap, drain through floor.
- C. (SS-2) Clinic Service Sink (Flushing Rim, Wall Hung) approximately 508 mm by 635 mm (20 inches by 25 inches) by 203 mm (8 inches) deep. Support with ASME/ANSI A112. 6.1M chair carrier and secure with 10 mm (3/8 inch) bracket studs and nuts. Set sink with rim 762 mm (30 inches) above finished floor. Provide 762 mm (30 inches) CRS drainboard where required, without corrugations and with heavy duty CRS brackets.
1. Faucet: Elbow control, wall hung, integral stops, single spout with 19 mm (3/4 inch) hose threaded outlet and pail hook, vacuum breaker and brace to wall. Outlet 356 mm to 381 mm (14 inches to 15 inches) from wall. Exposed metal parts shall be chromium plated with a smooth bright finish. Provide laminar flow control device.
 2. Flush valve: Large diaphragm, semi-red brass body, Foot pedal operated, exposed chromium plated flush valve with screwdriver back check straight stop with cap, union outlet, street ells, elevated high pressure vacuum breaker, casing cover, 32 mm (1 1/4 inches) elbow flush connection from finished wall to 38 mm (1 1/2 inches) top spud. Spud coupling, wall and spud flanges.
- D. (SK-1) Sink - CRS, Single Compartment, Counter Mounted, Foot Pedal Control, 14 gage CRS, approximately 381 mm by 305 mm (15 inches by 17.5 inches) by 194 mm (7-5/8 inches) deep.. Provide rolled rim on front and ends. Corners and edges shall be well rounded. Support sink with 10 gage CRS brackets on ASME/ANSI A112.6.1M, Type I, chair carrier and secure fixture with minimum 10 mm (3/8 inch) all-thread bracket studs and nuts. Set rim of sink 914 mm (36 inches) above finished floor.
1. Faucet: Solid brass construction, single rigid gooseneck spout with outlet 127 mm to 203 mm (5 inches to 8 inches) above flood rim of sink. Provide laminar flow control device. Wall mounted, mechanical pedal mixing valve with self-closing pedal valve with stops, renewable seats, and supply from valve to spout, indexed lift up pedals having clearances of not more than 13 mm (1/2 inch) above the floor and not less than 356 mm (14 inches) from wall when in operation. Supply pipe from wall to valve stop shall be rigid threaded IPS copper alloy pipe. Supply pipe from valve to faucet shall be manufacturer's option. Exposed brass parts shall be chrome plated with a smooth bright finish.
 2. Drain: Drain plug with strainer, stainless steel.

3. Trap: Cast copper alloy, 38 mm (1 1/2 inches) P-trap. Adjustable with connected elbow and nipple to wall and escutcheon.
 4. Provide cover for drain, stops and trap per A.D.A 4-19.4.
- E. (SK-2) Sink - Wall mounted, foot pedal control, straight back, approximately 508 mm by 457 mm (20 inches by 18 inches) and a 102 mm (4 inches) minimum apron, first quality vitreous china with single hole. Set rim 864 mm (34 inches) above finished floor.
1. Faucet: Solid brass construction, single rigid gooseneck spout with outlet 127 mm to 203 mm (5 inches to 8 inches) above flood rim of sink. Provide laminar flow control device. Wall mounted, mechanical pedal mixing valve with self-closing pedal valve with stops, renewable seats, and supply from valve to spout, indexed lift up pedals having clearances of not more than 13 mm (1/2 inch) above the floor and not less than 356 mm (14 inches) from wall when in operation. Supply pipe from wall to valve stop shall be rigid threaded IPS copper alloy pipe. Supply pipe from valve to faucet shall be manufacturer's option. Exposed brass parts shall be chrome plated with a smooth bright finish.
 2. Drain: Cast or wrought brass with flat grid strainer with offset tailpiece, brass, chrome plated.
 3. Stops: Angle type. See paragraph 2.2.Stops
 4. Trap: Cast copper alloy, 38 mm by 32 mm (1 1/2 inches by 1 1/4 inches)P-trap. Adjustable with connected elbow and 17 gage tubing extension to wall. Exposed metal trap surface and connection hardware shall be chrome plated with a smooth bright finish. Set trap parallel to wall.
 5. Provide cover for drain, stops and trap per A.D.A 4-19.4.
- F. (SK-3) Sink, (CRS, Double Compartment, Counter Top, ASME/ANSI A112.19.3M, Kitchen Sinks, Figure 6) self rimming, approximately 838 mm by 559 mm (33 inches by 22 inches) with two compartments inside dimensions approximately 343 mm by 406 mm by 191 mm (13 1/2 inches by 16 inches by 7 1/2 inches), minimum 20 gage CRS. Corners and edges shall be well rounded.
1. Faucet: Kitchen sink, solid brass construction, swing spout, chrome plated copper alloy with spray and hose.
 2. Drain: Drain plug with cup strainer, stainless steel.
 3. Trap: Cast copper alloy, 38 mm (1 1/2 inches) P-trap with cleanout plug, continuous drain with wall connection and escutcheon.
 4. Provide cover for drain, stops and trap per A.D.A 4-19.4.
- G. (SK-4) Sink (CRS, Single Compartment, Counter Mounted) 14 gage CRS, approximately 635 mm by 559 mm (25 inches by 22 inches) by 206 mm (8-1/8

inches) deep. Provide rolled rim on front and ends. Corners and edges shall be well rounded. Support sink with 10 gage CRS brackets on ASME/ANSI A112.6.1M, Type I, chair carrier and secure fixture with minimum 10 mm (3/8 inch) all-thread bracket studs and nuts. Set rim of sink 914 mm (36 inches) above finished floor.

1. Faucet: Solid cast brass construction with washerless ceramic mixing cartridge type and centrally exposed rigid gooseneck spout with outlet 102 mm to 127 mm (4 inches to 5 inches) above rim. Provide laminar flow control device. One hundred two millimeter (4-inch) wrist blade type, handles on faucets shall be cast, formed or drop forged copper alloy. Faucet, wall and floor escutcheons shall be either copper alloy or CRS. Exposed metal parts, including exposed part under valve handle when in open position, shall be chrome plated with a smooth bright finish.
 2. Drain: Drain plug with strainer, stainless steel.
 3. Trap: Cast copper alloy, 38 mm (1 1/2 inches) P-trap. Adjustable with connected elbow and nipple to wall and escutcheon.
 4. Provide cover for drain, stops and trap per A.D.A 4-19.4.
- H. (SK-5) Sink (CRS, Single Compartment, Counter Mounted) 14 gage CRS, approximately 432 mm by 508 mm (17 inches by 20 inches) by 194 mm (7-5/8 inches) deep. Provide rolled rim on front and ends. Corners and edges shall be well rounded. Support sink with 10 gage CRS brackets on ASME/ANSI A112.6.1M, Type I, chair carrier and secure fixture with minimum 10 mm (3/8 inch) all-thread bracket studs and nuts. Set rim of sink 914 mm (36 inches) above finished floor.
1. Faucet: Solid cast brass construction with washerless ceramic mixing cartridge type and centrally exposed rigid gooseneck spout with outlet 102 mm to 127 mm (4 inches to 5 inches) above rim. Provide laminar flow control device. One hundred two millimeter (4-inch) wrist blade type, handles on faucets shall be cast, formed or drop forged copper alloy. Faucet, wall and floor escutcheons shall be either copper alloy or CRS. Exposed metal parts, including exposed part under valve handle when in open position, shall be chrome plated with a smooth bright finish.
 2. Drain: Drain plug with strainer, stainless steel.
 3. Trap: Cast copper alloy, 38 mm (1 1/2 inches) P-trap. Adjustable with connected elbow and nipple to wall and escutcheon.
 4. Provide cover for drain, stops and trap per A.D.A 4-19.4.

2.10 DISPENSER, DRINKING WATER

- A. Standard rating conditions: 10 degrees C (50 degrees F) water with 27 degrees C (80 degrees F) inlet water temperature and 32 degrees C (90 degrees F) ambient air temperature.
- B. (EWC-1) Dual Height Electric Water Cooler (Mechanically Cooled, Wall Hung, Self-contained, Wheelchair) bubbler style, 5 ml/s (5 gph) minimum capacity, lead free. Top shall be CRS anti-splash design. Cabinet, CRS, satin finish, approximately 457 mm by 457 mm by 635 mm (18 inches by 18 inches by 25 inches) high with mounting plate. Set bubbler 914 mm (36 inches) above finished floor. Unit shall be push bar operated with front and side bar and automatic stream regulator. All trim polished chrome plated.

2.11 SHOWER BATH FIXTURE

- A. (SH-1) Shower Fixture (Detachable, Wall Mounted, Concealed Supplies, Type T/P Combination Valve):
 - 1. Shower Installation: Wall mounted detachable spray assembly, 600 mm (24 inch) wall bar, elevated vacuum breaker, supply elbow and flange and valve. All external trim, chrome plated metal.
 - 2. Shower Head Assembly: Plastic shower head with flow control to limit discharge to 160 ml/s (2.5 gpm), 1524 mm (60 inches) length of rubber lined CRS, chrome plated metal flexible, or white vinyl reinforced hose and supply wall elbow. Design showerhead to fit in palm of hand. Provide CRS or chrome plated metal wall bar with an adjustable swivel hanger for showerhead. Fasten wall bar securely to wall for hand support.
 - 3. Valves: Type T/P combination thermostatic and pressure balancing, with chrome plated metal lever type operating handle adjustable for rough-in variations and chrome plated metal or CRS face plate. Valve body shall be any suitable copper alloy. Internal parts shall be copper, nickel alloy, CRS or thermoplastic material. Valve inlet and outlet shall be 13 mm (1/2 inch) IPS. Provide external screwdriver check stops, vacuum breaker and temperature limit stops. Set stops for a maximum temperature of 40 degrees C (105 degrees F). All exposed fasteners shall be vandal resistant. Valve shall provide a minimum of 160 ml/s at 310 kPa (2.5 gpm at 45 psi) pressure drop.
- B. (SH-2) Ligature Resistant Shower Bath Fixture (Wall Mounted, Concealed Supplies, Type T/P Combination Valve):
 - 1. Shower Installation: Wall mounted, ligature resistant shower head. All external trim shall be chrome plated metal.
 - 2. Shower Heads: Chrome plated metal head, automatic flow control device to limit discharge to not more than 160 ml/s (2.5 gpm). Body,

internal parts of shower head and flow control fittings shall be copper alloy or CRS. Install showerhead 1829 mm (72 inches) above finished floor.

3. Valves: Type T/P combination thermostatic and pressure balancing, with chrome plated metal lever with adjustment for rough-in variations, type operating handle and chrome plated brass or CRS face plate. Valve body shall be any suitable copper alloy. Internal parts shall be copper, nickel alloy, CRS or thermoplastic material. Valve inlet and outlet shall be 13 mm (1/2 inch) IPS. Provide external screwdriver check stops, and temperature limit stops. Set stops for a maximum temperature of 40 degrees C (105 degrees F). Install valve 1372 mm (54 inches) from bottom of shower receptor. All exposed fasteners shall be vandal and ligature resistant. Valve shall provide a minimum of 160 ml/s at 310 kPa (2.5 gpm at 45 psi) pressure drop.
- C. (SH-3) Ligature Resistant Shower Bath Fixture with (2) Shower Heads for ADA (Wall Mounted, Concealed Supplies, Type T/P Combination Valve):
1. Shower Installation: Wall mounted, (2) ligature resistant shower heads. All external trim shall be chrome plated metal.
 2. Shower Heads: Chrome plated metal head, automatic flow control device to limit discharge to not more than 160 ml/s (2.5 gpm). Body, internal parts of shower head and flow control fittings shall be copper alloy or CRS. Install showerheads at 1829 mm (72 inches) and 1219 mm (48 inches) above finished floor. Provide diverter valve to adjust flow between showerheads
 3. Valves: Type T/P combination thermostatic and pressure balancing, with chrome plated metal lever with adjustment for rough-in variations, type operating handle and chrome plated brass or CRS face plate. Valve body shall be any suitable copper alloy. Internal parts shall be copper, nickel alloy, CRS or thermoplastic material. Valve inlet and outlet shall be 13 mm (1/2 inch) IPS. Provide external screwdriver check stops, and temperature limit stops. Set stops for a maximum temperature of 40 degrees C (105 degrees F). Install valve 1372 mm (54 inches) from bottom of shower receptor. All exposed fasteners shall be vandal and ligature resistant. Valve shall provide a minimum of 160 ml/s at 310 kPa (2.5 gpm at 45 psi) pressure drop.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Fixture Setting: Opening between fixture and floor and wall finish shall be sealed as specified under Section 07 92 00, JOINT SEALANTS.

- B. Supports and Fastening: Secure all fixtures, equipment and trimmings to partitions, walls and related finish surfaces. Exposed heads of bolts and nuts in finished rooms shall be hexagonal, polished chrome plated brass with rounded tops.
- C. Through Bolts: For free standing marble and metal stud partitions refer to Section 10 21 13, TOILET COMPARTMENTS.
- D. Toggle Bolts: For hollow masonry units, finished or unfinished.
- E. Expansion Bolts: For brick or concrete or other solid masonry. Shall be 6 mm (1/4 inch) diameter bolts, and to extend at least 76 mm (3 inches) into masonry and be fitted with loose tubing or sleeves extending into masonry. Wood plugs, fiber plugs, lead or other soft metal shields are prohibited.
- F. Power Set Fasteners: May be used for concrete walls, shall be 6 mm (1/4 inch) threaded studs, and shall extend at least 32 mm (1 1/4 inches) into wall.
- G. Tightly cover and protect fixtures and equipment against dirt, water and chemical or mechanical injury.
- H. Where water closet waste pipe has to be offset due to beam interference, provide correct and additional piping necessary to eliminate relocation of water closet.
- I. Do not use aerators on lavatories and sinks.

3.2 CLEANING

At completion of all work, fixtures, exposed materials and equipment shall be thoroughly cleaned.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 22 62 00
VACUUM SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Central Laboratory and Healthcare Vacuum Systems: This section describes the labor, equipment, and services necessary for and incidental to the installation of piped medical vacuum systems and medical vacuum and waste anesthesia gas disposal systems (WAGD). Medical vacuum and WAGD systems shall be installed started, tested, and ready for use. The scope of work shall include all necessary piping, fittings, valves, cabinets, station outlets and inlets, rough ins, ceiling services, gages, alarms including low voltage wiring, vacuum pumps, electric motors and starters, receivers, and all necessary parts, accessories, connections and equipment. Match existing station inlet terminal connections.
- B. The contractor shall provide all elements and accessories required for a complete system according to the most recent edition of NFPA 99C, Gas and Vacuum Systems.
- C. All necessary connections to owner furnished equipment shall be made as indicated on the documents. A separate construction isolation valve shall be made at the point of connection to an existing vacuum system.
- D. Electrical power and control wiring for vacuum pump(s), WAGD Producer(s), ceiling columns, alarms wiring from equipment to alarm panels, and modular accessories associated with the system(s) shall be included.
- E. Pressure testing, cross connection testing and final testing per NFPA 99 most recent edition and using procedures shall be performed.
- F. The contractor shall retain a qualified third party medical vacuum verifier acceptable to the engineer and VA to perform and attest to final verification of the systems. The contractor shall make all corrections as determined by this third party verifier, including additional testing if necessary to attain full and unqualified certification.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Sealing around pipe penetrations to maintain the integrity of time rated construction.
- B. Section 07 92 00, JOINT SEALANTS: Sealing around pipe penetrations through the floor to prevent moisture migration.
- C. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: General requirements and items common to more than one section of Division 22.
- D. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Alarm interface with ECC.
- E. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit.
- F. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Control wiring.
- G. Section 26 27 26, WIRING DEVICES: Electrical wiring and accessories.
- H. Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT: Electric motors.
- I. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS: Motor starters.
- J. Section 10 25 13, PATIENT BED SERVICE WALLS: Prefabricated bedside patient units.
- K. Section 22 63 00, GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES: Laboratory and Healthcare Gases and Vacuum Alarms.
- L. SECTION 22 63 00, GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES: Laboratory and Healthcare Gas Piping and Equipment:

1.3 QUALITY ASSURANCE

- A. Installation and Start-up: The manufacturer will provide factory authorized representatives to review installation and perform initial start up of system.
- B. Contractor shall include with submittals an affidavit attesting to compliance with all relevant paragraphs of NFPA 99 most recent edition. Personnel assembling medical vacuum and WAGD system shall meet NFPA 99 5.1.10.10.11 "Qualification of Installers" and hold medical gas

endorsements as under ASSE 6010. The Contractor shall furnish documentation attesting that all installed piping materials were purchased cleaned and complied with the requirements of NFPA 99 5.1.10.1 and 5.1.10.2. Electrical Control systems and Medical vacuum Alarms are to be UL listed as assemblies with label affixed. Medical vacuum and WAGD controls are to be wired in accordance with NEC.

C. Equipment Installer: The equipment installer shall show documentation proving that the personnel installing the equipment meet the standards set by the American Society of Sanitary Engineers (ASSE) 6010 Professional Qualification Standards for Medical Gas System Installers. Show technical qualifications and previous experience in installing medical gas equipment on three similar projects. Submit names and addresses of referenced projects. The equipment install shall perform the following coordination functions:

1. Coordinate with other trades to ensure timely installations and avoid conflicts and interferences.
2. Work with the metal stud partition installer and/or mason to ensure anchors, sleeves and similar items are provided in sufficient time to avoid delays; chases and openings are properly sized and prepared.
3. Coordinate with VA to ensure medical vacuum inlets, whether owner supplied or contractor supplied, in walls, ceiling and all equipment is provided by the same Medical Vacuum Equipment Manufacturer satisfactory to the owner.
4. The contractor shall coordinate with the Medical Vacuum System Verifier to deliver a complete, tested medical gas installation ready for owner's use.

D. Equipment Supplier: The Equipment supplier shall demonstrate evidence of installing equivalent product at three installations similar to this project that has been in satisfactory and efficient operation for three years. Names and addresses where the product is installed shall be submitted for verification.

- E. Medical Gas System Testing Organization: The Medical vacuum verifier shall show documentation proving that the medical gas verifier meet the standards set by the American Society of Sanitary Engineers (ASSE) 6010 Professional Qualification Standards for Medical Gas System Verifiers. The testing shall be conducted by a party technically competent and experienced in the field of medical gas pipeline testing. Such testing shall be performed by a party other than the installing contractor.
- F. Names of three projects where testing of vacuum systems has been performed by the testing agency shall be provided. The name of the project, names of such persons at that project who supervised the work for the project owner, or who accepted the report for the project owner, and a written statement that the projects listed required work of similar scope to that set forth in this specification shall be included in the documentation.
- G. The testing agency's detailed procedure which will be followed in the testing of this project shall be submitted. In the testing agency's procedure documentation, include details of the testing sequence, procedures for cross connection tests, outlet function tests, alarm tests, purity tests, etc., as required by this specification. For purity test procedures, data on test methods, types of equipment to be used, calibration sources and method references shall be submitted.
- H. Installation and Start-up: The manufacturer shall provide factory authorized representatives to review the installation and perform the initial startup of the system. The factory authorized representatives shall submit a report to the Contracting Officer Representative and to the Contractor. The Contractor shall make all corrections identified by the factory authorized representative.
- I. Certification: The Final inspection documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and a certification that all results of tests were within limits allowed by this specification.
- J. The installing contractor shall maintain as-built drawings of each completed phases for verification; and, shall provide the complete set at the time of final systems certification testing, for certification

by the Third Party Testing Company. As-built drawings shall be provided, and a copy of them on Auto-Cad version (R-14 or later) provided on compact disk.

1.4 SUBMITTALS

- A. Submit as one package in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Piping.
 - 2. Valves.
 - 3. Inlet and outlet cocks
 - 4. Valve cabinets.
 - 5. Gages.
 - 6. Station inlets, and rough in assemblies.
 - 7. Ceiling services.
 - 8. Alarm controls and panels.
 - 9. Vacuum switches.
- C. Station Inlets: A letter from manufacturer shall be submitted stating that inlets are designed and manufactured to comply with NFPA 99. Inlet shall bear label of approval as an assembly, of Underwriters Laboratories, Inc., or Associated Factory Mutual Research Corporation. In lieu of above labels, certificate may be submitted by a nationally recognized independent testing laboratory, satisfactory to the Contracting Officer, certifying that materials, appliances and assemblies conform to published standards, including methods of tests, of above organizations.
- D. Certification: The completed systems have been installed, tested, purged and analyzed in accordance with the requirements of this specification. Certification shall be submitted to Contracting Officer Representative.

- E. A notarized affidavit from the verifier stating that the verifier undertakes to verify this project and thus agrees to disqualify themselves from supplying any equipment which will be included in the scope of their verification. No verifier who supplies equipment shall be permitted to verify that equipment. Statement declaring that the vacuum system manufacturer has no fiduciary interest in the verifier and that the verifier is not an agent or representative of the vacuum system manufacturer. Statement declaring that the contractor has no fiduciary interest in the third party verifier and that the third party verifier has no fiduciary interest in the contractor.

1.5 TRAINING

- A. The services of a competent instructor shall be provided for not less than two four-hour periods for instructing medical personnel in the operation and maintenance of the vacuum systems, on the dates requested by COR (Contracting Officer Representative).
- B. The other training requirements specified in Section 01 00 00, GENERAL REQUIREMENTS shall be coordinated with the above paragraph

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the test by the basic designation only.
- B. American National Standards Institute (ANSI):
- A13.1-2007.....Scheme for Identification of Piping Systems
- B16.22-01 (R2005).....Wrought Copper and Bronze Solder-Joint Pressure Fittings
- B40.1-(2005)..... Pressure Gauges and Gauge Attachments
- C. American Society for Testing and Materials (ASTM):
- B819-00 (R2006).....Standard Specification for Seamless Copper Tube for Medical Gas Systems
- D. American Society of Mechanical Engineers (ASME):
- Section IX-10.....Welding and Brazing Qualifications

E. American Welding Society (AWS):

AWS A5.8/A5.8M-11.....Braze Filler Metal

AWS B2.2/B2.2M-10.....Standard for Braze Procedure and Performance
Qualification (Modified per NFPA 99)

F. Compressed Gas Association (CGA):

P-9-08.....Inert Gases Argon, Nitrogen and Helium

G. National Electrical Manufacturers Association (NEMA):

ICS-6-1993 (R 2006).....Industrial Controls and Systems Enclosures

H. National Fire Protection Association (NFPA):

99-2012.....Health Care Facilities with 2005 errata

I. National Electrical Code 70, edition (2011)

J. United States Pharmacopoeia XXI/National Formulary XVI (USP/NF)

K. Manufacturing Standardization Society (MSS):

MSS-SP-72-99.....Ball Valves With Flanged or Butt Welding For
General PurposeMSS-SP-110-96.....Ball Valve Threaded, Socket Welding, Solder
Joint, Grooved and Flared EndsMSS-SP-73-03.....Braze Joints for Copper and Copper Alloy
Solder Pressure Fittings**1.7 WARRANTY**

A. Warranty will be expressly complete, include all components of the system and be the responsibility of the vacuum system manufacturer of record only. Warranties limiting the responsibility of the vacuum system for any system component or which pass through to another manufacturer are not acceptable.

B. Warranties shall include on site repairs including travel, labor and parts. Warranties requiring return of equipment for adjustment are not acceptable.

PART 2 - PRODUCTS**2.1 PIPING**

- A. Copper Tubing: Copper tubing shall be type "K" or "L", ASTM B819, seamless copper tube, hard drawn temper, with wrought copper fittings conforming to ANSI B16.22 or brazing fittings complying with MSS SP-73. The copper tubing size designated reflects nominal inside diameter. All tubing and fittings shall be labeled "ACR/OXY", "OXY", "OXY/MED", "ACR/MED", or "MED".
- B. Brazing Alloy: The brazing alloy shall comply with AWS A5.8, Classification BCuP, greater than 537 °C (1000 °F) melting temperature. Flux shall be strictly prohibited for copper to copper connections.
- C. Screw Joints: Screw joints shall use polytetrafluoroethylene (Teflon) tape.
- D. Use only copper or stainless steel pipes for discharge from vacuum product (exhaust pipes).
- E. Memory metal couplings shall have temperature and pressure ratings not less than that of a brazed joint.
- F. Piping identification labels shall be applied at time of installation in accordance with current NFPA. Supplementary color identification shall be in accordance with CGA Pamphlet C-9.
- G. Special Fittings: The following special fittings shall be permitted to be used in lieu of brazed joints:
 - 1. Memory-metal couplings having temperature and pressure ratings joints not less than that of a brazed joint.
 - 2. Listed or approved metallic gas tube fittings that, when made up, provide a permanent joint having the mechanical, thermal, and sealing integrity of a brazed joint.
 - 3. Dielectric fittings where required by the manufacturer of special medical equipment to electrically isolate the equipment from the piping distribution system.
 - 4. Axially swaged, elastic strain preload fittings providing metal to metal seal having pressure and temperature ratings not less than

that of a brazed joint and when complete are permanent and non-separable.

2.2 EXPOSED HEALTHCARE VACUUM PIPING

A. Finished Room: Use full iron pipe size chrome plated brass piping shall be used for exposed laboratory and healthcare vacuum piping connecting fixtures, casework, cabinets, equipment and reagent racks when not concealed by apron including those furnished by the Government or specified in other sections.

1. Pipe: Fed. Spec. WW-P-351, standard weight.
2. Fittings: Fittings shall comply with ANSI B16.15 cast bronze threaded fittings with chrome finish, (125 and 250).
3. Nipples: Nipples shall comply with ASTM B 687, Chromium-plated.
4. Unions: Unions shall comply with Mss SP-72, SP-110, Brass or Bronze with chrome finish. Unions 65 mm (2-1/2 inches) and larger shall be flange type with approved gaskets.
5. Valves: Valves shall comply with Mss SP-72, SP-110, Brass or bronze with chrome finish.

2.3 VALVES

A. Ball: Ball valves shall be in line, other than zone valves in cabinets.

1. Sixty five millimeter or DN65 (2-1/2 inches) and smaller: Ball valves shall be bronze/ brass body, Fed. Spec. MSS SP72 & SP 110 , Type II, Class 150, Style 1, with tubing extensions for brazed connections, full ported, three piece or double union end connections, Teflon seat seals, full flow, 4125 kPa (600 psi) WOG minimum working pressure, with locking type handle.
2. Eighty millimeter or DN80 to 100 millimeter or DN100 (3" to 4" inches): Ball valves shall be bronze/ brass body, Fed. Spec. MSS SP72 & SP 110, Type II, Class 150, Style 1 with tubing extensions brazed to flanges, full ported, three piece, double seal, Teflon seals, full flow, 4125 kPa (600 psi) WOG minimum working pressure, with locking type handle.

B. Check:

1. Check valves eighty millimeters (DN80) (3 inches) and smaller: brass and Bronze body, straight through design for minimum pressure drop, spring loaded, self aligning with Teflon cone seat, vibration free, silent operation, supplied NPT female threads at each end with flow direction arrow permanently cast into, 2750 kPa (400 psi) WOG minimum working pressure.
 2. One hundred millimeter or DN100 (4 inches) and larger check valves shall be iron body, bronze trim, swing type, vertical or horizontal installation, flange connection, 1025 kPa (150 psi) WSP.
- C. Zone valve in cabinet shall be ball valve with bronze/ brass body, double seal, three piece or double union end connections, replaceable Teflon seat seals, Teflon stem seal, 4125 kPa (600 psi) WOG, cold, non shock gas working pressure or vacuum service to 29 inch Hg, blowout proof stem, one quarter turn of handle to completely open or close. Tubing extensions, factory brazed, pressure tested, cleaned for oxygen service shall be provided. A 3 mm (1/8 inches) NPT gauge port shall be provided for a 50mm (2 inch) diameter monitoring gauge downstream of the shut off valve. Zone valves shall be securely attached to the cabinet and provided with type-K copper tube extensions for making connection to system piping outside the cabinet. Zone valves shall be products of one manufacturer, and uniform throughout in pattern, overall size and appearance. Trim with color coded plastic inserts or color coded stick on labels. Valves shall be in cabinets such that cover window cannot be in place when any valve is in the closed position. Color coding for identification plates and labels is as follows:

SERVICE LABEL	IDENTIFICATION COLORS	MFG. STD. CLR.
MEDICAL VACUUM	Black letters on white background	WHITE
Evacuation (Waste Gas)	White letters on purple background	PURPLE

2.4 VALVE CABINETS

- A. Valve cabinets shall be flush mounted, commercially available item for use with medical gas services, constructed from steel not lighter than 1.3 mm (18 gage) steel or extruded aluminum not lighter than 1.9 mm (14

gage). The valve cabinets shall be rigidly assembled, of adequate size to accommodate all valve(s) and fittings indicated. Holes shall be predrilled to receive pipe connections. These pipe connections shall be made outside of the valve box. Anchors shall be provided to secure cabinet to wall construction. Openings in cabinet shall be sealed to be dust tight. Bottom of cabinet shall be located 1375 mm (4 foot 6 inches) above finished floor.

- B. Engraved rigid plastic identification plate shall be mounted on the wall above or adjacent to the cabinet. Color code identification plate to match gas identification colors as indicated above. Identification plate shall be clearly visible at all times. Inscriptions shall be provided on plate to read in substance: "VALVE CONTROL SUPPLY TO ROOMS." The final wording must be approved by the VA project manager.
- C. Cover plate: The cover plate shall be fabricated from 1.3 mm (18 gage) sheet metal with satin chromed finish, extruded anodized aluminum, or .85 mm (22 gage) stainless steel. A cover window shall be provided of replaceable plastic, with a corrosion resistant device or lever secured to window for emergency window removal. The following shall be permanently painted or stenciled on window: "FOR EMERGENCY SHUT-OFF VALVES ONLY, SHUT OFF VALVES FOR PIPED GASES", or equivalent wording. The valve cabinet shall be configured such that it is not possible to install window with any valve in the closed position. Each valve shall have a pressure gauge upstream of valve and this pressure gauge shall be inside valve box.
- D. Cabinets and isolation valves shall be located and piped as shown, and at a minimum, so as to allow the isolation of each smoke compartment separately. Each cabinet shall serve no more than one smoke compartment.

2.5 GAGES

A. Vacuum Gages:

- 1. For vacuum line adjacent to source equipment the vacuum gages shall comply with ANSI B40.1, vacuum gage type, size 115 mm (4-1/2 inches), gage listed for vacuum, accurate to within 2-1/2 percent, with metal case. The vacuum gage range shall be 0 to-100 kPa (0-30 inches Hg). Dial graduations and figures shall be black on a white

background, or white on a black background. Label shall be for vacuum service. A gage cock shall be installed. Compound gages shall be installed for Vacuum system.

2. For vacuum service upstream of main shutoff valve: A 40 mm (1-1/2 inches) diameter gage shall be provided with steel case, bourdon tube and brass movement, dial range 0 to -100 kPa (0-30 inches Hg). Compound gages shall be provided for Vacuum system.

2.6 STATION INLETS

A. Vacuum Station inlets:

1. Station inlets shall be brass, stainless steel or chromed metal non-interchangeable DISS connections for appropriate service to conform with CGA V-5.
2. The outlet station shall be made, cleaned, and packaged to NFPA 99 standards and shall be UL listed and CSA certified.
3. A coupler shall be provided that is non-interchangeable with other services, and leak proof under three times normal working pressure. Threaded DISS connector shall be per CGA standards
4. Each station inlet shall be equipped with an automatic valve to conform with NFPA 99. Valves shall be placed in the assembly to provide easy access after installation for servicing and replacement, and to facilitate line blow-out, purging, and testing.
5. Each inlet shall be securely fastened to rough-in to prevent floating and provide each with a capped stub length of 6 mm (1/4-inch) 10 mm outside diameter (3/8-inch outside diameter) tubing for connection to supply tubing. Stub tubing shall be labeled for appropriate service. Rough in shall be indexed and gas specified latch vale with non-interchangeable safety keying with color coded gas service identification.
6. Rough-in kits and test plugs for Prefabricated Bedside Patient Units (PBPU) shall be furnished under this specification but installed by manufacturer of PBPU before initial test specified herein.
7. Completion kits (valve body and face plate) shall be installed for the remainder of required tests.

2.7 STATION INLET ROUGH-IN

- A. Station inlet rough in shall be flush mounted, and protected against corrosion. Rough in shall be anchored securely to unit or wall construction.
- B. The modular cover plate shall be constructed from die cast plate, two piece .85 mm (22 gage) stainless steel or 1.6 mm (16 gage) chromium plated metal, secured to rough in with stainless steel or chromium plated countersunk screws. The latch mechanism shall be designed for one handed, single thrust mounting and one handed fingertip release of secondary equipment.
- C. Cover Plate for Prefabricated Bedside Patient Units (PBPU) shall be One piece with construction and material as indicated for modular cover plate.
- D. Permanent, metal or plastic, identification plates shall be provided securely fastened at each inlet opening, with inscription for appropriate service using color coded letters and background. Metal plates shall have letters embossed on baked on enamel background. Color coding for identification plates is as follows:

SERVICE LABEL	IDENTIFICATION PLATE COLORS
MEDICAL VACUUM	Black letters on white background
EVACUATION (Waste Gas)	White letters on purple background

2.8 VACUUM SWITCHES

- A. Vacuum switches shall be general purpose, contact or mercury type, allowing both high and low set points, with contact type provided with a protective dust cover. The vacuum switch shall have an adjustable range set by inside or outside adjustment. Vacuum switches shall activate when indicated by alarm requirements. One orifice nipple (or DISS demand check valve) shall be used for each sensor switch.

2.9 VACUUM BOTTLE BRACKET

- A. Vacuum bottle bracket shall be single plate of one piece, .85 mm (22 gage) stainless steel or 1.6 mm (16 gage) chromium plated metal or aluminum, finish matching cover of adjoining vacuum inlet. All components shall be of same material as plate and assembly anchored

securely. The bracket shall be provided and plastic vacuum bottle holder for each vacuum wall inlet.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. All installation shall be performed in strict accordance with NFPA 99 5.1.10. Brazing procedures shall be as detailed in NFPA 99 5.1.10.5. Brazing shall be performed only by brazers qualified under NFPA 99 5.1.10.10.11. Where piping runs underground, the installation shall be made in accordance with NFPA 99 5.1.10.10.5.
- B. Cast escutcheon shall be installed with set screw at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.
- C. Open ends of tube shall be capped or plugged at all times or otherwise sealed until final assembly.
- D. Piping shall be cut square and accurately with a tube cutter (sawing not permitted) to measurements determined at place of installation. the tubing shall be reamed to remove burrs, being careful not to expand tube, and so no chips of copper remain in the tube. The tubing shall be worked into place without springing or forcing. The tubing shall be bottomed in socket so there are no gaps between tube and fitting. Care shall be exercised in handling equipment and tools used in cutting or reaming of tube to prevent oil or grease from being introduced into the tubing. Where contamination has occurred, material shall be no longer suitable for vacuum service and new, sealed tube sections used..
- E. Piping shall be supported with pipe trays or hangers at intervals as shown on the drawings or as defined in NFPA 99 Table 5.1.10.10.4.5. Piping shall not be supported by other piping. Isolation of copper piping from dissimilar metals shall be of a firm, positive nature. Duct tape is not acceptable as an isolation material..
- F. Valves and other equipment shall be rigidly supported to prevent strain on tube or joints.
- G. Piping exposed to physical damage shall be protected.

- H. During any brazing operation, the interior of the pipe shall be purged continuously with oil free, dry nitrogen NF, following the procedure in NFPA 99 5.1.10.5.5. At the completion of any section, all open pipe ends shall be capped using an EXTERNAL cap. The flow of purged gas shall be maintained until joint is cool to touch. The use of flux is prohibited when making of joints between copper to copper pipes and fittings.
- I. Threaded joints in piping systems shall be avoided whenever possible. Where unavoidable, make up the male threads with polytetrafluoroethylene (such as Teflon) tape. Liquid sealants shall not be used.
- J. Tubing shall not be bent. Fittings shall be used in all change of direction or angle.
- K. After installation of the piping, but before installation of the outlet valves, blow lines clear using nitrogen NF.
- L. Pressure and vacuum switches, transmitter and gauges shall be installed to be easily accessed, and provide access panel where installed above plaster ceiling. Pressure switch and sensors shall be installed with orifice nipple between the pipe line and switches/sensors.
- M. Pipe labeling shall be applied during installation process and not after installation is completed. Size of legend letters shall be in accordance with ANSI A13.1.
- N. After initial leakage testing is completed, the piping shall be allowed to remain pressurized with testing gas until testing agency performs final tests.
- O. Penetrations:
 - 1. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoked partitions, or floors, fire stopping shall be installed that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING, Clearances between raceways and openings with the fire stopping material shall be completely filled and sealed..

2. Water proofing: At floor penetrations, clearances shall be completely sealed around the pipe and made watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.
- P. A vacuum gage 40mm (1 1/2 inch) diameter line shall be installed downstream of each zone valve in cabinets.
- Q. Zone valves shall be provided in cabinets where indicated and outside each Operating Room and a minimum one zone valve assembly for each 18 outlets.
- R. Piping shall be labeled with name of service, identification color and direction of flow. Where non-standard pressures are piped, pressure shall be labeled. Labels shall be placed at least once every 20 feet of linear run or once in each story (whichever is more frequent). A label shall additionally be placed immediately on each side of all wall or floor penetrations. Pipe labels shall be self adhesive vinyl type or other water resistant material with permanent adhesive colored in accordance with NFPA 99 Table 5.1.11 and shall be visible on all sides of the pipe. Each master alarm signal shall be labeled for function after ring out. Each zone valve shall be labeled and each area alarm labeled for the area of control or surveillance after test. Labels shall be permanent and of a type approved by the VAMC
- S. Alarms and valves shall be labeled for service and areas monitored or controlled. Coordinate with the VAMC for final room or area designations. Valves shall be labeled with name and identification color of the gas and direction of flow

3.2 INSTALLER TESTING

- A. Prior to declaring the lines ready for final verification, the installing contractor shall strictly follow the procedures for verification as described in NFPA 99 5.1.12.2 and attest in writing over the notarized signature of an officer of the installing company the following;
1. That all brazing was conducted by brazers qualified to ASSE 6010 and holding current medical gas endorsements.
 2. That all brazing was conducted with nitrogen purging. (Procedure per NFPA 99 5.1.10.5.5).

3. That the lines have been blown clear of any construction debris using oil free dry nitrogen or air are clean and ready for use. (Procedure per NFPA 99 5.1.12.2.2).
 4. That the assembled piping, prior to the installation of any devices, maintained a test pressure 1 1/2 times the standard pressures listed in NFPA 99 Table 5.1.11 without leaks. (Procedure per NFPA 99 5.1.12.2.3).
 5. That after installation of all devices, the pipeline was proven leak free for 24hours at a pressure 20% above the standard pressures listed in NFPA 99 Table 5.1.11. (Procedure per NFPA 99 5.1.12.2.2.6)
 6. That the systems have been checked for cross connections and none were found. (Procedure per NFPA 99 5.1.12.2.4)
 7. That the manufacturer has started up all medical air compressors, medical vacuum pumps WAGD producers, liquid oxygen system(s) and manifolds, and that they are in operating order.
- B. Four originals of the affidavit, shall be distributed; (1) to the resident engineer, (1) to the contracting officer representative, (1) to the general contractor and (1) to the verifier (www.mgpho.org).

3.3 VERIFIER TESTING

- A. Prior to handing over the systems to VAMC, the contractor shall retain a Verifier acceptable to the engineer and owner who shall follow strictly the procedures for verification as described in NFPA 99 5.1.12.3 and provide a written report and certificate bearing the notarized signature of an officer of the verification company which contains at least the following:
1. A current ACORD insurance certificate indicating professional liability coverage in the minimum amount of \$1 Million per occurrence, and general aggregate liability in the minimum amount of \$1 Million, valid and in force when the project is to be verified. General liability insurance is not alone acceptable.
 2. An affidavit bearing the notarized signature of an officer of the verification company stating that the verification company is not the supplier of any equipment used on this project or tested in this

- report and that the verification contractor has no relationship to, or pecuniary interest in, the manufacturer, seller, or installer of any equipment used on this project or tested in this report
3. A listing of all tests performed, listing each source, outlet, valve and alarm included in the testing.
 4. An assertion that all tests were performed by a Medical Vacuum System Certified Medical Gas or vacuum Verifier or by individuals qualified to perform the work and holding valid qualifications to ASSE 6030 and under the immediate supervision a Verifier. Include the names, credential numbers and expiration dates for all individuals working on the project.
 5. A statement that equipment used was calibrated at least within the last six months by a method traceable to a National Bureau of Standard Reference and enclosing certificates or other evidence of such calibration(s). Where outside laboratories are used in lieu of on site equipment, those laboratories shall be named and their original reports enclosed.
 6. A statement that where and when needed, equipment was re calibrated during the verification process and describing the method(s) used.
 7. A statement that the systems were tested and found to be free of debris to a procedure per NFPA 99 5.1.12.3.7.
 8. The flow from each outlet when tested to a procedure per NFPA 99-5.1.12.3.10.
 9. A statement that the systems were tested and found to have no cross-connections to a procedure per NFPA 99 5.1.12.3.3.
 10. A statement that the systems were tested and found to be free of contaminants to a procedure per NFPA 99 5.1.12.3.8 except that the purity standard shall be 2 ppm difference for halogenated hydrocarbons and 1 ppm total hydrocarbons (as methane).
 11. Statement that all local signals function as required under NFPA 99 5.1.3.4.7 and as per the relevant NFPA 99 sections relating to the sources.

12. A listing of local alarms, their function and activation per NFPA 99 5.1.12.3.14.
 13. A listing of master alarms, their function and activation, including pressures for high and low alarms per NFPA 99 5.1.12.3.5.2.
 14. A listing of area alarms, their function and activation pressures per NFPA 99 5.1.12.3.5.3.
 15. A statement that the sources include all alarms required by NFPA 99 Table A.5.1.9.5.
 16. The concentration of each component of NFPA 99 Table 5.1.12.3.12 in the medical air after 24hours of operation of the medical air source.
 17. The concentration of each gas at each outlet as specified in NFPA 99 5.1.12.3.11.
 18. A statement that all valves and alarms are accurately labeled as to zone of control.
- B. Perform and document all cross connection tests, labeling verification, supply system operation, and valve and alarm operation tests as required by, and in accordance with, current NFPA and the procedures set forth in pre-qualification documentation.
- C. Verify that the systems, as installed, meet or exceed the requirements of current NFPA, this specification, and that the systems operate as required.
- D. Piping purge test: For each positive pressure gas system, verify cleanliness of piping system. Filter a minimum of 1000 liters (35 cubic feet) of gas through a clean white 0.45 micron filter at a minimum velocity of 100 mps (3.5 fpm). Filter shall show no discoloration, and shall accrue no more than 0.1 mg of matter. Test each zone at the outlet most remote from the source. Perform test with the use of an inert gas as described in CGA P-9.
- E. Inlet flow test:

1. Test all inlets for flow. Perform test with the use of an inert gas as described in CGA P-9.
2. Needle valve vacuum inlets must draw no less than 1.0 scfm with adjacent inlet flowing, at a dynamic inlet pressure of 40kPa (12-inches Hg), and a static vacuum of 10kPa (15-inches Hg)
3. Vacuum inlets must draw no less than 85 Lpm (3.0 scfm) with adjacent inlet flowing, at a dynamic inlet pressure of 40 kPa (12-inches Hg), and a static vacuum of 50 kPa (15-inches Hg).
4. Anesthesia evacuation inlets must draw no less than 1 L/mm (1.0 scfm) at a dynamic inlet pressure of 40 kPa (12-inches Hg), and a static vacuum of 50 kPa (15-inches Hg).

- - - E N D - - -

SECTION 22 63 00
GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. General Laboratory and Healthcare Gas Systems: Consisting of oxygen, and compressed air services; complete, ready for operation, including all necessary piping, fittings, valves, cabinets, station outlets, rough-ins, ceiling services, gages, alarms including low voltage wiring, nitrogen control panels, cylinder manifolds, air compressors, electric motors and starters, air dryers, filters, pressure regulators, dew point, carbon monoxide monitors and all necessary parts, accessories, connections and equipment. Match existing station outlet and inlet terminal connections.
- B. Oxygen System: Ready for connection to outside bulk supply tank, but not including tank.
- C. Laboratory and healthcare gas system alarm wiring from equipment to alarm panels.

1.2 RELATED WORK

- A. Sealing around pipe penetrations to maintain the integrity of time rated construction: Section 07 84 00, FIRESTOPPING.
- B. Sealing around pipe penetrations through the floor to prevent moisture migration: Section 07 92 00, JOINT SEALANTS.
- C. General requirements and items common to more than one section of Division 22. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- D. Alarm interface with ECC. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- E. Conduit: Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS.
- F. Control wiring: Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).
- G. Electrical wiring and accessories: Section 26 27 26, WIRING DEVICES.
- H. Prefabricated bedside patient units: Section 10 25 13, PATIENT BED SERVICE WALLS.

I. Vacuum Piping and Equipment: SECTION 22 62 00, VACUUM SYSTEMS FOR
LABORATORY AND HEALTHCARE FACILITIES

1.3 QUALITY ASSURANCE

- A. Materials and Installation: In accordance with NFPA 99, (2005) and as specified.
- B. Equipment Installer: Show technical qualifications and previous experience in installing laboratory and healthcare equipment on three similar projects. Submit names and addresses of referenced projects. Installers shall meet the qualifications of ANSI/ASSE Standard 6010.
- C. Equipment Supplier: Show evidence of equivalent product installed at three installations similar to this project that has been in satisfactory and efficient operation for three years. Submit names and addresses where the product is installed.
- D. Laboratory and healthcare System Testing Organization: The testing shall be conducted by a party technically competent and experienced in the field of laboratory and healthcare pipeline testing. Testing and systems verification shall be performed by personnel meeting the qualifications of ANSI/ASSE Standard 6030. Such testing shall be performed by a party other than the installing contractor.
- E. Provide names of three projects where testing of medical or laboratory gases systems has been performed by the testing agency. Include the name of the project, names of such persons at that project who supervised the work for the project owner, or who accepted the report for the project owner, and a written statement that the projects listed required work of similar scope to that set forth in this specification.
- F. Submit the testing agency's detailed procedure which will be followed in the testing of this project. Include details of the testing sequence, procedures for cross connection tests, outlet function tests, alarm tests, purity tests, etc., as required by this specification. For purity test procedures, include data on test methods, types of equipment to be used, calibration sources and method references.
- G. Certification: Provide documentation prior to submitting request for final inspection to include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and a certification that all results of tests were within limits allowed by this specification.

- H. Installing contractor shall maintain as-built drawings of each completed phases for verification; and, shall provide the complete set at the time of final systems certification testing, for certification by the Third Party Testing Company. As-built drawings shall be provided on prints and in digital format. The digital format shall be in the native CAD system required for the project design. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.
- I. "Hot taps" are not permitted for operating medical oxygen systems. Methods for connection and extension of active and pressurized medical gas systems without subsequent medical gas testing and verification are not allowed.

1.4 SUBMITTALS

- A. Submit as one package in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Piping.
 2. Valves.
 3. Inlet and outlet cocks
 4. Valve cabinets.
 5. Gages.
 6. Station outlets and rough-in assemblies.
 7. Ceiling services.
 8. Alarm controls and panels.
 9. Pressure Switches.
 10. Manifolds.
- C. Station Outlets: Submit letter from manufacturer stating that outlets are designed and manufactured to comply with NFPA 99. Outlet shall bear label of approval as an assembly, of Underwriters Laboratories, Inc., or Associated Factory Mutual Research Corporation. In lieu of above labels, certificate may be submitted by a nationally recognized independent

testing laboratory, satisfactory to the Contracting Officer, certifying that materials, appliances and assemblies conform to published standards, including methods of tests, of above organizations.

- D. Certification: The completed systems have been installed, tested, purged, analyzed and verified in accordance with the requirements of this specification.
- E. Completed System Readiness Checklist provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 TRAINING

- A. Furnish the services of a competent instructor for not less than two four-hour periods for instructing personnel in the operation and maintenance of the laboratory and healthcare gas systems, on the dates requested by COTR.
- B. Coordinate with other requirements specified in Section 01 00 00, GENERAL REQUIREMENTS.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the test by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 B819-(R2006)Seamless Copper Tube for Medical Gas Systems
- C. American Society of Mechanical Engineers (ASME):
 A13.1-07Scheme for Identification of Piping Systems
 B16.22-01(R2005)Wrought Copper and Bronze Solder-Joint Pressure Fittings
 B40.100 (2005)Pressure Gauges and Gauge Attachments Boiler and Pressure Vessel Code -
 Section VIII-07Pressure Vessels, Division I
 Section IX-07Welding and Brazing Qualifications

D. American Welding Society (AWS):

AWS A5.8-04Brazing Filler Metal

AWS B2.2-91Standard for Brazing Procedure and Performance
Qualification (Modified per NFPA 99)

E. Compressed Gas Association (CGA):

C-9-04Standard Color Marking of Compressed Gas
Cylinders

G-4.1 (2009)Cleaning Equipment for Oxygen Service

G-10.1(2008)Nitrogen, Commodity

P-9-01Inert Gases Argon, Nitrogen and Helium

V-1-05Standard for Compressed Gas Cylinder Valve
Outlet and Inlet Connections

F. National Electrical Manufacturers Association (NEMA):

ICS-6-93(R2006)Industrial Controls and Systems Enclosures

G. National Fire Protection Association (NFPA):

99-05Health Care Facilities

H. United States Pharmacopoeia XXI/National Formulary XVI (USP/NF)

I. Manufacturing Standardization Society (MSS):

MSS-SP-72-99Ball Valves With Flanged or Butt Welding For
General PurposeMSS-SP-110-96Ball Valve Threaded, Socket Welding, Solder
Joint, Grooved and Flared EndsMSS-SP-73-03Brazing Joints for Copper and Copper Alloy
Solder Pressure Fittings**PART 2 - PRODUCTS****2.1 PIPING AND FITTINGS**

- A. Copper Tubing: Type "K", ASTM B819, seamless copper tube, hard drawn temper, with wrought copper fittings conforming to ASME B16.22 or brazing fittings complying with MSS SP-73. Size designated reflecting

nominal inside diameter. All tubing and fittings shall be labeled "ACR/OXY", "OXY", "OXY/MED", "ACR/MED", or "MED".

- B. Brazing Alloy: AWS A5.8, Classification BCuP, greater than 537 °C (1000 °F) melting temperature. Flux is strictly prohibited for copper-to-copper connections.
- C. Screw Joints: Polytetrafluoroethylene (teflon) tape.
- D. Underground Protective Pipe: Polyvinyl Chloride (PVC), ASTM D1785, Schedule 80.
- E. Memory metal couplings: Temperature and pressure rating shall not be less than that of a brazed joint.
- F. Apply piping identification labels at the time of installation in accordance with current NFPA. Apply supplementary color identification in accordance with CGA Pamphlet C-9.
- G. Special Fittings: The following special fittings shall be permitted to be used in lieu of brazed joints:
 - 1. Memory-metal couplings having temperature and pressure ratings joints not less than that of a brazed joint.
 - 2. Listed or approved metallic gas tube fittings that, when made up, provide a permanent joint having the mechanical, thermal, and sealing integrity of a brazed joint.
 - 3. Dielectric fittings where required by the manufacturer of special medical equipment to electrically isolate the equipment from the piping distribution system.
 - 4. Axially swaged, elastic strain preload fittings providing metal to metal seal having pressure and temperature ratings not less than that of a brazed joint and when complete are permanent and non-separable.

2.2 EXPOSED LABORATORY AND HEALTHCARE GASES PIPING

- A. Finished Room: Use full iron pipe size chrome plated brass piping for exposed laboratory and healthcare gas piping connecting fixtures, casework, cabinets, equipment and reagent racks when not concealed by apron including those furnished by the Government or specified in other sections.
 - 1. Pipe: Fed. Spec. WW-P-351, standard weight.

2. Fittings: ASME B16.15 cast bronze threaded fittings with chrome finish, (125 and 250 PS1 Classes).
3. Nipples: ASTM B 687, Chromium-plated.
4. Unions: Mss SP-72, SP-110, Brass or Bronze with chrome finish. Unions 65 mm (2-1/2 inches) and larger shall be flange type with approved gaskets.
5. Valves: Mss SP-72, SP-110, Brass or bronze with chrome finish.

2.3 VALVES

A. Ball: In-line, other than zone valves in cabinets:

1. Seventy five millimeter (2 1/2 inches) and smaller: Bronze/ brass body, Fed. Spec. MSS SP72 & SP 110 , Type II, Class 150, Style 1, with tubing extensions for brazed connections, full port, three-piece or double union end connections, teflon seat seals, full flow, 4125 kPa (600 psi) WOG minimum working pressure, with locking type handle, cleaned for oxygen use and labeled for intended service
2. Eighty to one hundred millimeter (3-4 inches): Bronze/ brass body, Fed. Spec. MSS SP72 & SP 110, Type II, Class 150, Style 1 with tubing extensions brazed to flanges, full ported, three piece, double seal, teflon seals, full flow, 4125 kPa (600 psi) WOG minimum working pressure, with locking type handle, cleaned for oxygen use and labeled for intended service.

B. Check:

1. Eighty millimeter (3 inches) and smaller: Bronze/brass body, straight through design for minimum pressure drop, spring loaded, self aligning with teflon cone seat, vibration free, silent operation, supplied NPT female threads at each end with flow direction arrow permanently cast into, cleaned for oxygen use and labeled for intended service, 2750 kPa (400 psi) WOG minimum working pressure.
2. One hundred millimeter (4 inches) and larger: Iron body, bronze trim, swing type, vertical or horizontal installation, flange connection, with flow direction arrow permanently cast into, cleaned for oxygen use and labeled for intended service, 1025 kPa (150 psi) WSP.

- C. Zone Valve in Cabinet: Ball valve, bronze/ brass body, double seal, three piece or double union end connections, replaceable teflon seat seals, teflon stem seal, 4125 kPa (600 psi) WOG, cold, non-shock gas working pressure service to 100 kPa (29 inch Hg), cleaned for oxygen use and labeled for intended service, blowout proof stem, one quarter turn of handle to completely open or close. Provide tubing extensions factory brazed, and pressure tested. Provide 3 mm (1/8 inch) NPT gauge port for a 50mm (2 inch) diameter monitoring gauge downstream of the shut off valve. Zone valves shall be securely attached to the cabinet and provided with type-K copper tube extensions for making connection to system piping outside the cabinet. Zone valves shall be products of one manufacturer, and uniform throughout in pattern, overall size and appearance. Trim with color coded plastic inserts or color coded stick-on labels. Install valves in cabinets such that cover window cannot be in place when any valve is in the closed position. Color coding for identification plates and labels is as follows:

SERVICE LABEL	IDENTIFICATION COLORS	MFG. STD. CLR.
OXYGEN	White letters on green background	GREEN
MEDICAL AIR	Black or white letters on yellow background	YELLOW

2.4 VALVE CABINETS

- A. Flush mounted commercially available item for use with laboratory and healthcare services, not lighter than 1.3 mm (18 gage) steel or 1.9 mm (14 gage) extruded aluminum, rigidly assembled, of adequate size to accommodate valve(s) and fittings. Punch or drill sides to receive tubing. Provide anchors to secure cabinet to wall construction. Seal openings in cabinet to be dust tight. Locate bottom of cabinet 1375 mm (4 foot 6 inches) above floor.
- B. Mount engraved rigid plastic identification plate on wall above or adjacent to cabinet. Color code identification plate to match gas identification colors as indicated above. Identification plate must be clearly visible at all times. Provide inscriptions on plate to read in substance: "VALVE CONTROL SUPPLY TO ROOMS."
- C. Cover plate: Fabricate from 1.3 mm (18 gage) sheet metal with satin chromed finish, extruded anodized aluminum, or .85 mm (22 gage) stainless steel. Provide cover window of replaceable plastic, with a

corrosion resistant device or lever secured to window for emergency window removal. Permanently paint or stencil on window: CAUTION-CLOSE ONLY IN EMERGENCY, SHUT-OFF VALVES FOR PIPED GASES", or equivalent wording. Configure such that it is not possible to install window with any valve in the closed position. Each valve shall have gauge upstream of valve inside valve box.

- D. Cabinets and isolation valves shall be located and piped as shown, and at a minimum, so as to allow the isolation of each smoke compartment separately. No cabinet shall serve more than one smoke compartment.

2.5 GAGES

- A. Pressure Gages: Includes gages temporarily supplied for testing purposes.
 - 1. For line pressure use adjacent to source equipment: ASME B40.1, pressure gage, single, size 115 mm (4-1/2 inches), for compressed air, nitrogen and oxygen, accurate to within two percent, with metal case. Range shall be two times operating pressure. Dial graduations and figures shall be black on a white background, or white on a black background. Gage shall be cleaned for oxygen use, labeled for appropriate service, and marked "USE NO OIL". Install with gage cock.
 - 2. For all services downstream of main shutoff valve: Manufactured for oxygen use, labeled for the appropriate service and marked "USE NO OIL", 40 mm (1-1/2 inch) diameter gage with dial range 1-690 kPa (1-100 psi) for air service, and 1-690 kPa (1-100 psi) for compressed air service.

2.6 STATION OUTLETS

For all services: Brass, stainless steel or chromed metal non-interchangeable DISS connections for appropriate service to conform with CGA V-5. Equip each station outlet with an automatic valve and a secondary check valve to conform with NFPA 99. Equip each station inlet with an automatic valve to conform with NFPA 99. Place valves in the assembly to provide easy access after installation, for servicing and replacement, and to facilitate line blow-out, purging, and testing. Fasten each outlet securely to outlet rough-in to prevent floating, and provide each outlet with a capped stub length of 6 mm (1/4-inch) (10 mm (3/8-inch) outside diameter) tubing for connection to supply. Label stub tubing for appropriate service. Adjustable to compensate for variations in plaster or cover thickness. Rough-in kits and test plugs for Prefabricated Bedside Patient Units (PBPUs) are furnished under this

specification but installed by manufacturer of PBPU's before initial tests specified herein. Install outlet completion kits (valve body and face plate) for the remainder of required tests.

2.7 STATION OUTLET ROUGH-IN

- A. Flush mounted, protected against corrosion. Anchor rough-in securely to unit or wall construction.
- B. Modular Cover Plate: Die cast back plate, two-piece .85 mm (22 gage) stainless steel or 1.6 mm (16 gage) chromium plated metal, with mounting flanges on all four sides, secured to rough-in with stainless steel or chromium plated countersunk screws.
- C. Cover Plate for Prefabricated Bedside Patient Units (PBPU): One-piece with construction and material as indicated for modular cover plate.
- D. Provide permanent, metal or plastic, identification plates securely fastened at each outlet and inlet opening, with inscription for appropriate service using color coded letters and background. Metal plates shall have letters embossed on baked-on enamel background. Color coding for identification plates is as follows:

SERVICE LABEL	IDENTIFICATION PLATE COLORS
OXYGEN	White letters on green background
MEDICAL AIR	Black or white letters on yellow

2.8 PRESSURE SWITCHES

General purpose, contact or mercury type, allowing both high and low pressure set points, with contact type provided with a protective dust cover; adjustable range set by inside or outside adjustment; switches activate when indicated by alarm requirements. Use one orifice nipple (or DISS demand check valve) for each sensor or pressure switch.

2.9 PRESSURE REGULATORS:

- A. For 690 kPa (100 psi) regulator, provide duplex in parallel, valve for maintenance shut-down without service interruption. For additional pressures, locate regulators remote from compressor near point of use, and provide with isolation valves and valve bypass.
1. For systems 5 L/s (10 scfm) and below: Brass or bronze body and trim, reduced pressure range 170 - 850 kPa (25 - 125 psi) adjustable, spring type, diaphragm operated diaphragm operated, relieving.

Delivered pressure shall vary not more than one kPa (0.15psi) for each 10 kPa (1.5psi) variation in inlet pressure.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install cast escutcheon with set screw at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.
- B. Keep open ends of tube capped or plugged at all times or otherwise sealed until final assembly.
- C. Cut piping square and accurately with a tube cutter (sawing not permitted) to measurements determined at place of installation. Ream tube to remove burrs, being careful not to expand tube, and so no chips of copper remain in the tube. Work into place without springing or forcing. Bottom tube in socket so there are no gaps between tube and fitting. Exercise care in handling equipment and tools used in cutting or reaming of tube to prevent oil or grease being introduced into tubing. Where contamination has occurred, material is no longer suitable for oxygen service.
- D. Spacing of hangers: Current NFPA.
- E. Rigidly support valves and other equipment to prevent strain on tube or joints.
- F. While being brazed, joints shall be continuously purged with *oil* free nitrogen. The flow of purged gas shall be maintained until joint is cool to touch.
- G. Do not bend tubing. Use fittings.
- H. Install pressure switches, transmitter and gauges to be easily accessed, and provide access panel where installed above plaster ceiling. Install pressure switch and sensors with orifice nipple between the pipe line and switches/sensors.
- I. Apply pipe labeling during installation process and not after installation is completed. Size of legend letters shall be in accordance with ANSI A13.1.
- J. After initial leakage testing is completed, allow piping to remain pressurized with testing gas until testing agency performs final tests.

K. Penetrations:

1. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoked partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING, with intumescent materials only. Completely fill and seal clearances between raceways and openings with the fire stopping material.
2. Waterproofing: At floor penetrations, completely seal clearances around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.

L. Provide 40mm (1 1/2 inch) diameter line pressure gage downstream of zone valve in cabinets.

M. Provide zone valves in cabinets where indicated and outside each Operating Room and a minimum one zone valve assembly for each 18 outlet set.

3.2 TESTS

A. Initial Tests: Blow down, and high and low pressure leakage tests as required by current NFPA with documentation.

B. Laboratory and healthcare testing agency shall perform the following:

1. Perform and document all cross connection tests, labeling verification, supply system operation, and valve and alarm operation tests as required by, and in accordance with, current NFPA and the procedures set forth in pre-qualification documentation.
2. Verify that the systems, as installed, meet or exceed the requirements of current NFPA, this specification, and that the systems operate as required.
3. Piping purge test: For each positive pressure gas system, verify cleanliness of piping system. Filter a minimum of 35 cubic feet (1000 liters) of gas through a clean white 0.45 micron filter at a minimum velocity of 3.5 scfm (100 Lpm). Filter shall show no discoloration, and shall accrue no more than 0.1 mg of matter. Test each zone at the outlet most remote from the source. Perform test with the use of an inert gas as described in CGA P-9.

4. Piping purity test: For each positive pressure system, verify purity of piping system. Test each zone at the most remote outlet for dew point, carbon monoxide, total hydrocarbons (as methane), and halogenated hydrocarbons, and compare with source gas. The two tests must in no case exceed variation as specified in Paragraph, Maximum Allowable Variation. Perform test with the use of an inert gas as described in CGA P-9.
5. Outlet and inlet flow test:
 - a. Test all outlets for flow. Perform test with the use of an inert gas as described in CGA P-9.
 - b. Oxygen, nitrous oxide and air outlets must deliver 100 Lpm (3.5 scfm) with a pressure drop of no more than 35 kPa (5 psi), and static pressure of 350 kPa (50 psi).
 - c. Needle valve air outlets must deliver 1.5 scfm with a pressure drop of no more than five psi, and static pressure of 350 kPa (50 psi).
6. Source Contamination Test: Analyze each pressure gas source for concentration of contaminants, by volume. Take samples for air system test at the intake and at a point immediately downstream of the final filter outlet. The compared tests must in no case exceed variation as specified in Paragraph, Maximum Allowable Variation. Allowable concentrations are below the following:

Dew point, air	4 degrees C (39 degrees F) pressure dew point at 690 kPa (100 psi)
Carbon dioxide, air	10 mg/L (ppm)
Carbon dioxide, air	500 mg/L (ppm)
Gaseous hydrocarbons as methane, air	25 mg/L (ppm)
Halogenated hydrocarbons, air	2 mg/L (ppm)

7. Analysis Test:

- a. Analyze each pressure gas source and outlet for concentration of gas, by volume.
- b. Make analysis with instruments designed to measure the specific gas dispensed.
- c. Allowable concentrations are within the following:
 - 1) Laboratory air 19.5 percent to 23.5 percent oxygen.

Oxygen	>=97 plus percent oxygen
Medical air	19.5 percent to 23.5 percent oxygen

8. Maximum Allowable Variation: Between comparative test results required are as follows:

Dew point	2 degrees C (36 degrees F)
Carbon monoxide	2 mg/L (ppm)
Total hydrocarbons as methane	1 mg/L (ppm)
Halogenated hydrocarbons	2 mg/L (ppm)

- C. Coordinate the startup and contractor testing schedules with the Resident Engineer. Provide a minimum of 7 days prior to notice.

- - - E N D - - -

**SECTION 23 05 11
COMMON WORK RESULTS FOR HVAC**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. The requirements of this Section apply to all sections of Division 23.
- B. Definitions:
 - 1. Exposed: Piping, ductwork, and equipment exposed to view in finished rooms.
 - 2. Option or optional: Contractor's choice of an alternate material or method.
 - 3. RE: Resident Engineer
 - 4. COTR: Contracting Officer's Technical Representative.

1.2 RELATED WORK

- A. Section 00 72 00, GENERAL CONDITIONS
- B. Section 01 00 00, GENERAL REQUIREMENTS
- C. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES
- D. Section 03 30 00, CAST-IN-PLACE CONCRETE: Concrete and Grout
- E. Section 05 31 00, STEEL DECKING, and Section 05 36 00, COMPOSITE METAL DECKING: Building Components for Attachment of Hangers
- F. Section 05 50 00, METAL FABRICATIONS
- G. Section 07 84 00, FIRESTOPPING
- H. Section 07 60 00, FLASHING AND SHEET METAL: Flashing for Wall and Roof Penetrations
- I. Section 07 92 00, JOINT SEALANTS
- J. Section 09 91 00, PAINTING
- K. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION
- L. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT
- M. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC
- N. Section 23 07 11, HVAC, PLUMBING, and Boiler Plant Insulation
- O. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC
- P. Section 23 21 13, HYDRONIC PIPING
- Q. Section 23 21 23, HYDRONIC PUMPS
- R. Section 23 25 00, HVAC WATER TREATMENT
- S. Section 23 31 00, HVAC DUCTS and CASINGS
- T. Section 23 34 00, HVAC FANS
- U. Section 23 36 00, AIR TERMINAL UNITS
- V. Section 23 37 00, AIR OUTLETS and INLETS
- W. Section 23 40 00, HVAC AIR CLEANING DEVICES

- X. Section 23 64 00, PACKAGED WATER CHILLERS
- Y. Section 23 73 00, INDOOR CENTRAL-STATION AIR-HANDLING UNITS
- Z. Section 23 82 00, CONVECTION HEATING and COOLING UNITS
- AA. Section 23 82 16, AIR COILS
- BB. Section 23 84 00, HUMIDITY CONTROL EQUIPMENT
- CC. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training

1.3 QUALITY ASSURANCE

- A. Mechanical, electrical and associated systems shall be safe, reliable, efficient, durable, easily and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional HVAC
- B. Flow Rate Tolerance for HVAC Equipment: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.
- C. Equipment Vibration Tolerance:
 - 1. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Equipment shall be factory-balanced to this tolerance and re-balanced on site, as necessary.
 - 2. After HVAC air balance work is completed and permanent drive sheaves are in place, perform field mechanical balancing and adjustments required to meet the specified vibration tolerance.
- D. Products Criteria:
 - 1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years (or longer as specified elsewhere). The design, model and size of each item shall have been in satisfactory and efficient operation on at least three installations for approximately three years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years. See other specification sections for any exceptions and/or additional requirements.
 - 2. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.

3. Conform to codes and standards as required by the specifications.
Conform to local codes, if required by local authorities such as the natural gas supplier, if the local codes are more stringent than those specified. Refer any conflicts to the Resident Engineer.
4. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be products of one manufacturer.
5. Assembled Units: Manufacturers of equipment assemblies, which use components made by others, assume complete responsibility for the final assembled product.
6. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
7. Asbestos products or equipment or materials containing asbestos shall not be used.

E. Equipment Service Organizations:

1. HVAC: Products and systems shall be supported by service organizations that maintain a complete inventory of repair parts and are located within 50 miles to the site.

F. HVAC Mechanical Systems Welding: Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:

1. Qualify welding processes and operators for piping according to ASME "Boiler and Pressure Vessel Code", Section IX, "Welding and Brazing Qualifications".
2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
3. Certify that each welder has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.

G. Execution (Installation, Construction) Quality:

1. Apply and install all items in accordance with manufacturer's written instructions. Refer conflicts between the manufacturer's instructions and the contract drawings and specifications to the Resident Engineer for resolution. Provide written hard copies or computer files of manufacturer's installation instructions to the Resident Engineer at least two weeks prior to commencing installation of any item. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations is a cause for rejection of the material.

2. Provide complete layout drawings required by Paragraph, SUBMITTALS.
Do not commence construction work on any system until the layout drawings have been approved.

- H. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with telephone numbers and e-mail addresses.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, and with requirements in the individual specification sections.
- B. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements.
- C. If equipment is submitted which differs in arrangement from that shown, provide drawings that show the rearrangement of all associated systems. Approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.
- D. Prior to submitting shop drawings for approval, contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed drawings and specifications, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.
- E. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together and complete in a group. Coordinate and properly integrate materials and equipment in each group to provide a completely compatible and efficient.
- F. Layout Drawings:
 - 1. Submit complete consolidated and coordinated layout drawings for all new systems, and for existing systems that are in the same areas. Refer to Section 00 72 00, GENERAL CONDITIONS, Article, SUBCONTRACTS AND WORK COORDINATION.
 - 2. The drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to one foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed layout drawings of all piping and duct systems.

3. Do not install equipment foundations, equipment or piping until layout drawings have been approved.
4. In addition, for HVAC systems, provide details of the following:
 - a. Mechanical equipment rooms.
 - b. Hangers, inserts, supports, and bracing.
 - c. Pipe sleeves.
 - d. Duct or equipment penetrations of floors, walls, ceilings, or roofs.
- G. Manufacturer's Literature and Data: Submit under the pertinent section rather than under this section.
 1. Submit belt drive with the driven equipment. Submit selection data for specific drives when requested by the Resident Engineer.
 2. Submit electric motor data and variable speed drive data with the driven equipment.
 3. Equipment and materials identification.
 4. Fire-stopping materials.
 5. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
 6. Wall, floor, and ceiling plates.
- H. HVAC Maintenance Data and Operating Instructions:
 1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
 2. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size and style, and distinguished whether of multiple belt sets.
- I. Provide copies of approved HVAC equipment submittals to the Testing, Adjusting and Balancing Subcontractor.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Conditioning, Heating and Refrigeration Institute (AHRI):
430-2009Central Station Air-Handling Units
- C. American National Standard Institute (ANSI):
B31.1-2007Power Piping

- D. Rubber Manufacturers Association (ANSI/RMA):
 - IP-20-2007Specifications for Drives Using Classical
V-Belts and Sheaves
 - IP-21-2009Specifications for Drives Using Double-V
(Hexagonal) Belts
 - IP-22-2007Specifications for Drives Using Narrow V-Belts
and Sheaves
- E. Air Movement and Control Association (AMCA):
 - 410-96Recommended Safety Practices for Air Moving
Devices
- F. American Society of Mechanical Engineers (ASME):
 - Boiler and Pressure Vessel Code (BPVC):
 - Section I-2007Power Boilers
 - Section IX-2007Welding and Brazing Qualifications
 - Code for Pressure Piping:
 - B31.1-2007Power Piping
- G. American Society for Testing and Materials (ASTM):
 - A36/A36M-08Standard Specification for Carbon Structural
Steel
 - A575-96(2007)Standard Specification for Steel Bars, Carbon,
Merchant Quality, M-Grades
 - E84-10Standard Test Method for Surface Burning
Characteristics of Building Materials
 - E119-09cStandard Test Methods for Fire Tests of Building
Construction and Materials
- H. Manufacturers Standardization Society (MSS) of the Valve and Fittings
Industry, Inc:
 - SP-58-2009Pipe Hangers and Supports-Materials, Design and
Manufacture, Selection, Application, and
Installation
 - SP 69-2003Pipe Hangers and Supports-Selection and
Application
 - SP 127-2001Bracing for Piping Systems, Seismic - Wind -
Dynamic, Design, Selection, Application
- I. National Electrical Manufacturers Association (NEMA):
 - MG-1-2009Motors and Generators
- J. National Fire Protection Association (NFPA):
 - 31-06Standard for Installation of Oil-Burning
Equipment
 - 54-09National Fuel Gas Code
 - 70-08National Electrical Code

85-07Boiler and Combustion Systems Hazards Code

90A-09Standard for the Installation of Air
Conditioning and Ventilating Systems

101-09Life Safety Code

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage.
2. Place damaged equipment in first class, new operating condition; or, replace same as determined and directed by the Resident Engineer. Such repair or replacement shall be at no additional cost to the Government.
3. Protect interiors of new equipment and piping systems against entry of foreign matter. Clean both inside and outside before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.

B. Cleanliness of Piping and Equipment Systems:

1. Exercise care in storage and handling of equipment and piping material to be incorporated in the work. Remove debris arising from cutting, threading and welding of piping.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. Clean interior of all tanks prior to delivery for beneficial use by the Government.
4. Boilers shall be left clean following final internal inspection by Government insurance representative or inspector.
5. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.7 JOB CONDITIONS - WORK IN EXISTING BUILDING

- A. Building Operation: Government employees will be continuously operating and managing all facilities, including temporary facilities, that serve the medical center.
- B. Maintenance of Service: Schedule all work to permit continuous service as required by the medical center.

- C. Steam and Condensate Service Interruptions: Limited steam and condensate service interruptions, as required for interconnections of new and existing systems, will be permitted by the Resident Engineer during periods when the demands are not critical to the operation of the medical center. These non-critical periods are limited to between 8 pm and 5 am in the appropriate off-season (if applicable). Provide at least one week advance notice to the Resident Engineer.
- D. Phasing of Work: Comply with all requirements shown on drawings or specified.
- E. Building Working Environment: Maintain the architectural and structural integrity of the building and the working environment at all times. Maintain the interior of building at 18 degrees C (65 degrees F) minimum. Limit the opening of doors, windows or other access openings to brief periods as necessary for rigging purposes. No storm water or ground water leakage permitted. Provide daily clean-up of construction and demolition debris on all floor surfaces and on all equipment being operated by VA.
- F. Acceptance of Work for Government Operation: As new facilities are made available for operation and these facilities are of beneficial use to the Government, inspections will be made and tests will be performed. Based on the inspections, a list of contract deficiencies will be issued to the Contractor. After correction of deficiencies as necessary for beneficial use, the Contracting Officer will process necessary acceptance and the equipment will then be under the control and operation of Government personnel.

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

- A. Provide maximum standardization of components to reduce spare part requirements.
- B. Manufacturers of equipment assemblies that include components made by others shall assume complete responsibility for final assembled unit.
 - 1. All components of an assembled unit need not be products of same manufacturer.
 - 2. Constituent parts that are alike shall be products of a single manufacturer.
 - 3. Components shall be compatible with each other and with the total assembly for intended service.
 - 4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

- C. Components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a name plate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.
- D. Major items of equipment, which serve the same function, must be the same make and model. Exceptions will be permitted if performance requirements cannot be met.

2.2 COMPATIBILITY OF RELATED EQUIPMENT

Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational plant that conforms to contract requirements.

2.3 BELT DRIVES

- A. Type: ANSI/RMA standard V-belts with proper motor pulley and driven sheave. Belts shall be constructed of reinforced cord and rubber.
- B. Dimensions, rating and selection standards: ANSI/RMA IP-20 and IP-21.
- C. Minimum Horsepower Rating: Motor horsepower plus recommended ANSI/RMA service factor (not less than 20 percent) in addition to the ANSI/RMA allowances for pitch diameter, center distance, and arc of contact.
- D. Maximum Speed: 25 m/s (5000 feet per minute).
- E. Adjustment Provisions: For alignment and ANSI/RMA standard allowances for installation and take-up.
- F. Drives may utilize a single V-Belt (any cross section) when it is the manufacturer's standard.
- G. Multiple Belts: Matched to ANSI/RMA specified limits by measurement on a belt measuring fixture. Seal matched sets together to prevent mixing or partial loss of sets. Replacement, when necessary, shall be an entire set of new matched belts.
- H. Sheaves and Pulleys:
 - 1. Material: Pressed steel, or close grained cast iron.
 - 2. Bore: Fixed or bushing type for securing to shaft with keys.
 - 3. Balanced: Statically and dynamically.
 - 4. Groove spacing for driving and driven pulleys shall be the same.
- I. Drive Types, Based on ARI 435:
 - 1. Provide adjustable-pitch drive as follows:
 - a. Fan speeds up to 1800 RPM: 7.5 kW (10 horsepower) and smaller.
 - b. Fan speeds over 1800 RPM: 2.2 kW (3 horsepower) and smaller.
 - 2. Provide fixed-pitch drives for drives larger than those listed above.
 - 3. The final fan speeds required to just meet the system CFM and pressure requirements, without throttling, shall be determined by adjustment of a temporary adjustable-pitch motor sheave or by fan law calculation if a fixed-pitch drive is used initially.

2.4 DRIVE GUARDS

- A. For machinery and equipment, provide guards as shown in AMCA 410 for belts, chains, couplings, pulleys, sheaves, shafts, gears and other moving parts regardless of height above the floor to prevent damage to equipment and injury to personnel. Drive guards may be excluded where motors and drives are inside factory fabricated air handling unit casings.
- B. Pump shafts and couplings shall be fully guarded by a sheet steel guard, covering coupling and shaft but not bearings. Material shall be minimum 16-gage sheet steel; ends shall be braked and drilled and attached to pump base with minimum of four 6 mm (1/4-inch) bolts. Reinforce guard as necessary to prevent side play forcing guard onto couplings.
- C. V-belt and sheave assemblies shall be totally enclosed, firmly mounted, non-resonant. Guard shall be an assembly of minimum 22-gage sheet steel and expanded or perforated metal to permit observation of belts. 25 mm (one-inch) diameter hole shall be provided at each shaft centerline to permit speed measurement.
- D. Materials: Sheet steel, cast iron, expanded metal or wire mesh rigidly secured so as to be removable without disassembling pipe, duct, or electrical connections to equipment.
- E. Access for Speed Measurement: 25 mm (One inch) diameter hole at each shaft center.

2.5 LIFTING ATTACHMENTS

Provide equipment with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.6 ELECTRIC MOTORS

- A. All material and equipment furnished and installation methods shall conform to the requirements of Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT; Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS; and, Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide special energy efficient premium efficiency type motors as scheduled.

2.7 VARIABLE SPEED MOTOR CONTROLLERS

- A. Refer to Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS and Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS for specifications.
- B. The combination of controller and motor shall be provided by the manufacturer of the driven equipment, such as pumps and fans, and shall be rated for 100 percent output performance. Multiple units of the same class of equipment, i.e. air handlers, fans, pumps, shall be product of a single manufacturer.
- C. Motors shall be premium efficiency type and be approved by the motor controller manufacturer. The controller-motor combination shall be guaranteed to provide full motor nameplate horsepower in variable frequency operation. Both driving and driven motor/fan sheaves shall be fixed pitch.
- D. Controller shall not add any current or voltage transients to the input AC power distribution system, DDC controls, sensitive medical equipment, etc., nor shall be affected from other devices on the AC power system.
- E. Controller shall be provided with the following operating features and accessories:
 - 1. Suitable for variable torque load.
 - 2. Provide thermal magnetic circuit breaker or fused switch with external operator and incoming line fuses. Unit shall be rated for minimum 25,000 AIC. Provide AC input filters on incoming power line. Provide output line reactors on line between drive and motor where the distance between the breaker and motor exceeds 50 feet.

2.8 EQUIPMENT AND MATERIALS IDENTIFICATION

- A. Use symbols, nomenclature and equipment numbers specified, shown on the drawings and shown in the maintenance manuals. Refer to Section 09 51 00, ACOUSTICAL CEILINGS, for access identification markers and Section 09 91 00, PAINTING, for identity markings and painting of systems to be accomplished by Mechanical Contractors.
- B. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 48 mm (3/16-inch) high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING permanently fastened to the equipment. Identify unit components such as coils, filters, fans, etc.
- C. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 48 mm (3/16-inch) high riveted or bolted to the equipment.
- D. Control Items: Label all temperature and humidity sensors, controllers and control dampers. Identify and label each item as they appear on the control diagrams.

E. Valve Tags and Lists:

1. HVAC and Boiler Plant: Provide for all valves other than for equipment in Section 23 82 00, CONVECTION HEATING AND COOLING UNITS.
2. Valve tags: Engraved black filled numbers and letters not less than 13 mm (1/2-inch) high for number designation, and not less than 6.4 mm (1/4-inch) for service designation on 19 gage 38 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
3. Valve lists: Typed or printed plastic coated card(s), sized 216 mm (8-1/2 inches) by 280 mm (11 inches) showing tag number, valve function and area of control, for each service or system. Punch sheets for a 3-ring notebook.
4. Provide detailed plan for each floor of the building indicating the location and valve number for each valve. Identify location of each valve with a color coded thumb tack in ceiling.

2.9 FIRESTOPPING

Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping and ductwork. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION, for firestop pipe and duct insulation.

2.10 GALVANIZED REPAIR COMPOUND

Mil. Spec. DOD-P-21035B, paint form.

2.11 HVAC PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

- A. Vibration Isolators: Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- B. Supports for Roof Mounted Items:
 1. Equipment: Equipment rails shall be galvanized steel, minimum 1.3 mm (18 gauge), with integral baseplate, continuous welded corner seams, factory installed 50 mm by 100 mm (2 by 4) treated wood nailer, 1.3 mm (18 gauge) galvanized steel counter flashing cap with screws, built-in cant strip, (except for gypsum or tectum deck), minimum height 280 mm (11 inches). For surface insulated roof deck, provide raised cant strip to start at the upper surface of the insulation.
 2. Pipe/duct pedestals: Provide a galvanized Unistrut channel welded to U-shaped mounting brackets which are secured to side of rail with galvanized lag bolts.
- C. Pipe Supports: Comply with MSS SP-58. Type Numbers specified refer to this standard. For selection and application comply with MSS SP-69. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting requirements.

D. Attachment to Concrete Building Construction:

1. Concrete insert: MSS SP-58, Type 18.
2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 102 mm (four inches) thick when approved by the Resident Engineer for each job condition.
3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 102 mm (four inches) thick when approved by the Resident Engineer for each job condition.

E. Attachment to Steel Building Construction:

1. Welded attachment: MSS SP-58, Type 22.
2. Beam clamps: MSS SP-58, Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23mm (7/8-inch) outside diameter.

G. Attachment to existing structure: Support from existing floor/roof frame.

H. Attachment to Wood Construction: Wood screws or lag bolts.

I. Hanger Rods: Hot-rolled steel, ASTM A36 or A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 38 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.

J. Hangers Supporting Multiple Pipes (Trapeze Hangers): Galvanized, cold formed, lipped steel channel horizontal member, not less than 41 mm by 41 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (No. 12 gage), designed to accept special spring held, hardened steel nuts. Not permitted for steam supply and condensate piping.

1. Allowable hanger load: Manufacturers rating less 91kg (200 pounds).
2. Guide individual pipes on the horizontal member of every other trapeze hanger with 6 mm (1/4-inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 13mm (1/2-inch) galvanized steel bands, or preinsulated calcium silicate shield for insulated piping at each hanger.

K. Supports for Piping Systems:

1. Select hangers sized to encircle insulation on insulated piping. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or preinsulated calcium silicate shields. Provide Type 40 insulation shield or preinsulated calcium silicate shield at all other types of supports and hangers including those for preinsulated piping.

2. Piping Systems except High and Medium Pressure Steam (MSS SP-58):
 - a. Standard clevis hanger: Type 1; provide locknut.
 - b. Riser clamps: Type 8.
 - c. Wall brackets: Types 31, 32 or 33.
 - d. Roller supports: Type 41, 43, 44 and 46.
 - e. Saddle support: Type 36, 37 or 38.
 - f. Turnbuckle: Types 13 or 15. Preinsulate.
 - g. U-bolt clamp: Type 24.
 - h. Copper Tube:
 - 1) Hangers, clamps and other support material in contact with tubing shall be painted with copper colored epoxy paint, plastic coated or taped with non adhesive isolation tape to prevent electrolysis.
 - 2) For vertical runs use epoxy painted or plastic coated riser clamps.
 - 3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
 - 4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.
 - i. Supports for plastic or glass piping: As recommended by the pipe manufacturer with black rubber tape extending one inch beyond steel support or clamp.
- L. Pre-insulated Calcium Silicate Shields:
 1. Provide 360 degree water resistant high density 965 kPa (140 psi) compressive strength calcium silicate shields encased in galvanized metal.
 2. Pre-insulated calcium silicate shields to be installed at the point of support during erection.
 3. Shield thickness shall match the pipe insulation.
 4. The type of shield is selected by the temperature of the pipe, the load it must carry, and the type of support it will be used with.
 - a. Shields for supporting chilled or cold water shall have insulation that extends a minimum of 1 inch past the sheet metal. Provide for an adequate vapor barrier in chilled lines.
 - b. The pre-insulated calcium silicate shield shall support the maximum allowable water filled span as indicated in MSS-SP 69. To support the load, the shields may have one or more of the following features: structural inserts 4138 kPa (600 psi) compressive strength, an extra bottom metal shield, or formed structural steel (ASTM A36) wear plates welded to the bottom sheet metal jacket.
 5. Shields may be used on steel clevis hanger type supports, roller supports or flat surfaces.

- M. Seismic Restraint of Piping and Ductwork: Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS. Comply with MSS SP-127.

2.12 PIPE PENETRATIONS

- A. Install sleeves during construction for other than blocked out floor openings for risers in mechanical bays.
- B. To prevent accidental liquid spills from passing to a lower level, provide the following:
 - 1. For sleeves: Extend sleeve 25 mm (one inch) above finished floor and provide sealant for watertight joint.
 - 2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
 - 3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.
- C. Penetrations are not allowed through beams or ribs, but may be installed in concrete beam flanges. Any deviation from these requirements must receive prior approval of Resident Engineer.
- D. Sheet Metal, Plastic, or Moisture-resistant Fiber Sleeves: Provide for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.
- E. Cast Iron or Zinc Coated Pipe Sleeves: Provide for pipe passing through exterior walls below grade. Make space between sleeve and pipe watertight with a modular or link rubber seal. Seal shall be applied at both ends of sleeve.
- F. Galvanized Steel or an alternate Black Iron Pipe with asphalt coating Sleeves: Provide for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. Provide sleeve for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, connect sleeve with floor plate.
- G. Brass Pipe Sleeves: Provide for pipe passing through quarry tile, terrazzo or ceramic tile floors. Connect sleeve with floor plate.
- H. Sleeves are not required for wall hydrants for fire department connections or in drywall construction.
- I. Sleeve Clearance: Sleeve through floors, walls, partitions, and beam flanges shall be one inch greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.
- J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

2.13 DUCT PENETRATIONS

- A. Provide curbs for roof mounted piping, ductwork and equipment. Curbs shall be 18 inches high with continuously welded seams, built-in cant strip, interior baffle with acoustic insulation, curb bottom, hinged curb adapter.
- B. Provide firestopping for openings through fire and smoke barriers, maintaining minimum required rating of floor, ceiling or wall assembly. See section 07 84 00, FIRESTOPPING.

2.14 SPECIAL TOOLS AND LUBRICANTS

- A. Furnish, and turn over to the Resident Engineer, tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.
- B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.
- C. Refrigerant Tools: Provide system charging/Evacuation equipment, gauges, fittings, and tools required for maintenance of furnished equipment.
- D. Tool Containers: Hardwood or metal, permanently identified for intended service and mounted, or located, where directed by the Resident Engineer.
- E. Lubricants: A minimum of 0.95 L (one quart) of oil, and 0.45 kg (one pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

2.15 WALL, FLOOR AND CEILING PLATES

- A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.
- B. Thickness: Not less than 2.4 mm (3/32-inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025-inch) for up to 80 mm (3-inch pipe), 0.89 mm (0.035-inch) for larger pipe.
- C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Provide a watertight joint in spaces where brass or steel pipe sleeves are specified.

2.16 ASBESTOS

Materials containing asbestos are not permitted.

PART 3 - EXECUTION

3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

- A. Coordinate location of piping, sleeves, inserts, hangers, ductwork and equipment. Locate piping, sleeves, inserts, hangers, ductwork and equipment clear of windows, doors, openings, light outlets, and other services and utilities. Prepare equipment layout drawings to coordinate proper location and personnel access of all facilities. Submit the drawings for review as required by Part 1. Follow manufacturer's published recommendations for installation methods not otherwise specified.
- B. Operating Personnel Access and Observation Provisions: Select and arrange all equipment and systems to provide clear view and easy access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to: all equipment items, valves, filters, strainers, transmitters, sensors, control devices. All gages and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Do not reduce or change maintenance and operating space and access provisions that are shown on the drawings.
- C. Equipment and Piping Support: Coordinate structural systems necessary for pipe and equipment support with pipe and equipment locations to permit proper installation.
- D. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.
- E. Cutting Holes:
 - 1. Cut holes through concrete and masonry by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill will not be allowed, except as permitted by Resident Engineer where working area space is limited.
 - 2. Locate holes to avoid interference with structural members such as beams or grade beams. Holes shall be laid out in advance and drilling done only after approval by Resident Engineer. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to Resident Engineer for approval.
 - 3. Do not penetrate membrane waterproofing.
- F. Interconnection of Instrumentation or Control Devices: Generally, electrical and pneumatic interconnections are not shown but must be provided.
- G. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other service are not shown but must be provided.

- H. Electrical Interconnection of Controls and Instruments: This generally not shown but must be provided. This includes interconnections of sensors, transmitters, transducers, control devices, control and instrumentation panels, instruments and computer workstations. Comply with NFPA-70.
- I. Protection and Cleaning:
1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the Resident Engineer. Damaged or defective items in the opinion of the Resident Engineer, shall be replaced.
 2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Tightly cover and protect fixtures and equipment against dirt, water chemical, or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.
- J. Concrete and Grout: Use concrete and shrink compensating grout 25 MPa (3000 psi) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.
- K. Install gages, thermometers, valves and other devices with due regard for ease in reading or operating and maintaining said devices. Locate and position thermometers and gages to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.
- L. Install steam piping expansion joints as per manufacturer's recommendations.
- M. Work in Existing Building:
1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
 2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will least interfere with normal operation of the facility.
 3. Cut required openings through existing masonry and reinforced concrete using diamond core drills. Use of pneumatic hammer type drills, impact type electric drills, and hand or manual hammer type drills, will be permitted only with approval of the Resident Engineer. Locate openings that will least effect structural slabs,

columns, ribs or beams. Refer to the Resident Engineer for determination of proper design for openings through structural sections and opening layouts approval, prior to cutting or drilling into structure. After Resident Engineer's approval, carefully cut opening through construction no larger than absolutely necessary for the required installation.

N. Switchgear/Electrical Equipment Drip Protection: Every effort shall be made to eliminate the installation of pipe above electrical and telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints. Installation of piping, ductwork, leak protection apparatus or other installations foreign to the electrical installation shall be located in the space equal to the width and depth of the equipment and extending from to a height of 1.8 m (6 ft.) above the equipment of to ceiling structure, whichever is lower (NFPA 70).

O. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost to the Government.
2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

3.2 TEMPORARY PIPING AND EQUIPMENT

- A. Continuity of operation of existing facilities will generally require temporary installation or relocation of equipment and piping.
- B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain, operate without excessive stress, and shall be insulated where injury can occur to personnel by contact with operating facilities. The requirements of Paragraph 3.1 apply.
- C. Temporary facilities and piping shall be completely removed and any openings in structures sealed. Provide necessary blind flanges and caps to seal open piping remaining in service.

3.3 RIGGING

- A. Design is based on application of available equipment. Openings in building structures are planned to accommodate design scheme.

- B. Alternative methods of equipment delivery may be offered by Contractor and will be considered by Government under specified restrictions of phasing and maintenance of service as well as structural integrity of the building.
- C. Close all openings in the building when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.
- D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility. Upon request, the Government will check structure adequacy and advise Contractor of recommended restrictions.
- E. Contractor shall check all clearances, weight limitations and shall offer a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.
- F. Rigging plan and methods shall be referred to Resident Engineer for evaluation prior to actual work.
- G. Restore building to original condition upon completion of rigging work.

3.4 PIPE AND EQUIPMENT SUPPORTS

- A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Drill or burn holes in structural steel only with the prior approval of the Resident Engineer.
- B. Use of chain, wire or strap hangers; wood for blocking, stays and bracing; or, hangers suspended from piping above will not be permitted. Replace or thoroughly clean rusty products and paint with zinc primer.
- C. Use hanger rods that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. Provide a minimum of 15 mm (1/2-inch) clearance between pipe or piping covering and adjacent work.
- D. HVAC Horizontal Pipe Support Spacing: Refer to MSS SP-69. Provide additional supports at valves, strainers, in-line pumps and other heavy components. Provide a support within one foot of each elbow.

E. HVAC Vertical Pipe Supports:

1. Up to 150 mm (6-inch pipe), 9 m (30 feet) long, bolt riser clamps to the pipe below couplings, or welded to the pipe and rests supports securely on the building structure.
2. Vertical pipe larger than the foregoing, support on base elbows or tees, or substantial pipe legs extending to the building structure.

F. Overhead Supports:

1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
3. Tubing and capillary systems shall be supported in channel troughs.

G. Floor Supports:

1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Anchor and dowel concrete bases and structural systems to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
2. Do not locate or install bases and supports until equipment mounted thereon has been approved. Size bases to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Boiler foundations shall have horizontal dimensions that exceed boiler base frame dimensions by at least 150 mm (6 inches) on all sides. Refer to structural drawings. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.
3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves, anchored to the bases. Fill the annular space between sleeves and bolts with a granular material to permit alignment and realignment.
4. For seismic anchoring, refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.5 MECHANICAL DEMOLITION

- A. Rigging access, other than indicated on the drawings, shall be provided by the Contractor after approval for structural integrity by the Resident Engineer. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, provide approved protection from dust and debris at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.

- B. In an operating facility, maintain the operation, cleanliness and safety. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Confine the work to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Do not permit debris to accumulate in the area to the detriment of plant operation. Perform all flame cutting to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. Perform all work in accordance with recognized fire protection standards. Inspection will be made by personnel of the VA Medical Center, and Contractor shall follow all directives of the RE or COTR with regard to rigging, safety, fire safety, and maintenance of operations.
- C. Completely remove all piping, wiring, conduit, and other devices associated with the equipment not to be re-used in the new work. This includes all pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. Seal all openings, after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.
- D. All valves including gate, globe, ball, butterfly and check, all pressure gages and thermometers with wells shall remain Government property and shall be removed and delivered to Resident Engineer and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these plans and specifications. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate.

3.6 CLEANING AND PAINTING

- A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.
- B. In addition, the following special conditions apply:
 - 1. Cleaning shall be thorough. Use solvents, cleaning materials and methods recommended by the manufacturers for the specific tasks. Remove all rust prior to painting and from surfaces to remain unpainted. Repair scratches, scuffs, and abrasions prior to applying prime and finish coats.

2. Material And Equipment Not To Be Painted Includes:
 - a. Motors, controllers, control switches, and safety switches.
 - b. Control and interlock devices.
 - c. Regulators.
 - d. Pressure reducing valves.
 - e. Control valves and thermostatic elements.
 - f. Lubrication devices and grease fittings.
 - g. Copper, brass, aluminum, stainless steel and bronze surfaces.
 - h. Valve stems and rotating shafts.
 - i. Pressure gauges and thermometers.
 - j. Glass.
 - k. Name plates.
3. Control and instrument panels shall be cleaned, damaged surfaces repaired, and shall be touched-up with matching paint obtained from panel manufacturer.
4. Pumps, motors, steel and cast iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same color as utilized by the pump manufacturer
5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats.
6. Final result shall be smooth, even-colored, even-textured factory finish on all items. Completely repaint the entire piece of equipment if necessary to achieve this.

3.7 IDENTIFICATION SIGNS

- A. Provide laminated plastic signs, with engraved lettering not less than 5 mm (3/16-inch) high, designating functions, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.
- B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, performance.
- C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

3.8 MOTOR AND DRIVE ALIGNMENT

- A. Belt Drive: Set driving and driven shafts parallel and align so that the corresponding grooves are in the same plane.
- B. Direct-connect Drive: Securely mount motor in accurate alignment so that shafts are free from both angular and parallel misalignment when both motor and driven machine are operating at normal temperatures.

3.9 LUBRICATION

- A. Lubricate all devices requiring lubrication prior to initial operation. Field-check all devices for proper lubrication.

- B. Equip all devices with required lubrication fittings or devices. Provide a minimum of one liter (one quart) of oil and 0.5 kg (one pound) of grease of manufacturer's recommended grade and type for each different application; also provide 12 grease sticks for lubricated plug valves. Deliver all materials to Resident Engineer in unopened containers that are properly identified as to application.
- C. Provide a separate grease gun with attachments for applicable fittings for each type of grease applied.
- D. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.

3.10 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specifications will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.11 STARTUP AND TEMPORARY OPERATION

Start up equipment as described in equipment specifications. Verify that vibration is within specified tolerance prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.12 OPERATING AND PERFORMANCE TESTS

- A. Prior to the final inspection, perform required tests as specified in Section 01 00 00, GENERAL REQUIREMENTS and submit the test reports and records to the Resident Engineer.
- B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.
- C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then make performance tests for heating systems and for cooling systems respectively during first actual seasonal use of respective systems following completion of work.

3.13 INSTRUCTIONS TO VA PERSONNEL

Provide in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS, and Section 23 08 11, DEMONSTRATIONS AND TESTS FOR BOILER PLANT.

- - - E N D - - -

SECTION 23 05 12
GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies the furnishing, installation and connection of motors for HVAC and steam generation equipment.

1.2 RELATED WORK:

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements common to more than one Section of Division 26.
- B. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS: Starters, control and protection for motors.
- C. Section 26 24 19, MOTOR-CONTROL CENTERS: Multiple motor control assemblies, which include motor starters.
- D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- E. Section 23 21 23, HYDRONIC PUMPS.
- F. Section 23 34 00, HVAC FANS.
- G. Section 23 36 00, AIR TERMINAL UNITS.
- H. Section 23 64 00, PACKAGED WATER CHILLERS.
- I. Section 23 73 00, INDOOR CENTRAL-STATION AIR-HANDLING UNITS.
- J. Section 23 82 00, CONVECTION HEATING and COOLING UNITS.
- K. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

1.3 SUBMITTALS:

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Shop Drawings:
 - 1. Provide documentation to demonstrate compliance with drawings and specifications.
 - 2. Include electrical ratings, efficiency, bearing data, power factor, frame size, dimensions, mounting details, materials, horsepower, voltage, phase, speed (RPM), enclosure, starting characteristics, torque characteristics, code letter, full load and locked rotor current, service factor, and lubrication method.
- C. Manuals:
 - 1. Submit simultaneously with the shop drawings, companion copies of complete installation, maintenance and operating manuals, including technical data sheets and application data.

- D. Certification: Two weeks prior to final inspection, unless otherwise noted, submit four copies of the following certification to the Resident Engineer:
 - 1. Certification that the motors have been applied, installed, adjusted, lubricated, and tested according to manufacturer published recommendations.
- E. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

1.4 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. National Electrical Manufacturers Association (NEMA):
 - MG 1-2006 Rev. 1 2009 .Motors and Generators
 - MG 2-2001 Rev. 1 2007 ..Safety Standard for Construction and Guide for Selection, Installation and Use of Electric Motors and Generators
- C. National Fire Protection Association (NFPA):
 - 70-2008National Electrical Code (NEC)
- D. Institute of Electrical and Electronics Engineers (IEEE):
 - 112-04Standard Test Procedure for Polyphase Induction Motors and Generators
- E. American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE):
 - 90.1-2007Energy Standard for Buildings Except Low-Rise Residential Buildings

PART 2 - PRODUCTS

2.1 MOTORS:

- A. For alternating current, fractional and integral horsepower motors, NEMA Publications MG 1 and MG 2 shall apply.
- B. All material and equipment furnished and installation methods shall conform to the requirements of Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS; and Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide premium efficiency type motors as scheduled. Unless otherwise specified for a particular application, use electric motors with the following requirements.

- C. Single-phase Motors: Motors for centrifugal fans and pumps may be split phase or permanent split capacitor (PSC) type. Provide capacitor-start type for hard starting applications.
- D. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type.
 - 1. Two Speed Motors: Each two-speed motor shall have two separate windings. Provide a time- delay (20 seconds minimum) relay for switching from high to low speed.
- E. Voltage ratings shall be as follows:
 - 1. Single phase:
 - a. Motors connected to 120-volt systems: 115 volts.
 - b. Motors connected to 208-volt systems: 200 volts.
 - c. Motors connected to 240 volt or 480 volt systems: 230/460 volts, dual connection.
 - 2. Three phase:
 - a. Motors connected to 208-volt systems: 200 volts.
 - b. Motors, less than 74.6 kW (100 HP), connected to 240 volt or 480 volt systems: 208-230/460 volts, dual connection.
 - c. Motors, 74.6 kW (100 HP) or larger, connected to 240-volt systems: 230 volts.
 - d. Motors, 74.6 kW (100 HP) or larger, connected to 480-volt systems: 460 volts.
 - e. Motors connected to high voltage systems (Over 600V): Shall conform to NEMA Standards for connection to the nominal system voltage shown on the drawings.
- F. Number of phases shall be as follows:
 - 1. Motors, less than 373 W (1/2 HP): Single phase.
 - 2. Motors, 373 W (1/2 HP) and larger: 3 phase.
 - 3. Exceptions:
 - a. Hermetically sealed motors.
 - b. Motors for equipment assemblies, less than 746 W (one HP), may be single phase provided the manufacturer of the proposed assemblies cannot supply the assemblies with three phase motors.
- G. Motors shall be designed for operating the connected loads continuously in a 40°C (104°F) environment, where the motors are installed, without exceeding the NEMA standard temperature rises for the motor insulation. If the motors exceed 40°C (104°F), the motors shall be rated for the actual ambient temperatures.
- H. Motor designs, as indicated by the NEMA code letters, shall be coordinated with the connected loads to assure adequate starting and running torque.

I. Motor Enclosures:

1. Shall be the NEMA types as specified and/or shown on the drawings.
2. Where the types of motor enclosures are not shown on the drawings, they shall be the NEMA types, which are most suitable for the environmental conditions where the motors are being installed.
Enclosure requirements for certain conditions are as follows:
 - a. Motors located outdoors, indoors in wet or high humidity locations, or in unfiltered airstreams shall be totally enclosed type.
 - b. Where motors are located in an NEC 511 classified area, provide TEFC explosion proof motor enclosures.
 - c. Where motors are located in a corrosive environment, provide TEFC enclosures with corrosion resistant finish.
3. Enclosures shall be primed and finish coated at the factory with manufacturer's prime coat and standard finish.

J. Special Requirements:

1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the requirements of NFPA 70 without additional time or cost to the Government.
2. Assemblies of motors, starters, controls and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.
3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
 - a. Wiring material located where temperatures can exceed 71 degrees C (160 degrees F) shall be stranded copper with Teflon FEP insulation with jacket. This includes wiring on the boilers.
 - b. Other wiring at boilers and to control panels shall be NFPA 70 designation THWN.
 - c. Provide shielded conductors or wiring in separate conduits for all instrumentation and control systems where recommended by manufacturer of equipment.
4. Select motor sizes so that the motors do not operate into the service factor at maximum required loads on the driven equipment. Motors on pumps shall be sized for non-overloading at all points on the pump performance curves.
5. Motors utilized with variable frequency drives shall be rated "inverter-duty" per NEMA Standard, MG1, Part 31.4.4.2. Provide motor shaft grounding apparatus that will protect bearings from damage from stray currents.

K. Additional requirements for specific motors, as indicated in the other sections listed in Article 1.2, shall also apply.

L. Energy-Efficient Motors (Motor Efficiencies): All permanently wired polyphase motors of 746 Watts (1 HP) or more shall meet the minimum full-load efficiencies as indicated in the following table. Motors of 746 Watts or more with open, drip-proof or totally enclosed fan-cooled enclosures shall be NEMA premium efficiency type, unless otherwise indicated. Motors provided as an integral part of motor driven equipment are excluded from this requirement if a minimum seasonal or overall efficiency requirement is indicated for that equipment by the provisions of another section. Motors not specified as "premium efficiency" shall comply with the Energy Policy Act of 2005 (EPACT).

Minimum Premium Efficiencies Open Drip-Proof				Minimum Premium Efficiencies Totally Enclosed Fan-Cooled			
Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM	Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM
0.746 (1)	82.5%	85.5%	77.0%	0.746 (1)	82.5%	85.5%	77.0%
1.12 (1.5)	86.5%	86.5%	84.0%	1.12 (1.5)	87.5%	86.5%	84.0%
1.49 (2)	87.5%	86.5%	85.5%	1.49 (2)	88.5%	86.5%	85.5%
2.24 (3)	88.5%	89.5%	85.5%	2.24 (3)	89.5%	89.5%	86.5%
3.73 (5)	89.5%	89.5%	86.5%	3.73 (5)	89.5%	89.5%	88.5%
5.60 (7.5)	90.2%	91.0%	88.5%	5.60 (7.5)	91.0%	91.7%	89.5%
7.46 (10)	91.7%	91.7%	89.5%	7.46 (10)	91.0%	91.7%	90.2%
11.2 (15)	91.7%	93.0%	90.2%	11.2 (15)	91.7%	92.4%	91.0%
14.9 (20)	92.4%	93.0%	91.0%	14.9 (20)	91.7%	93.0%	91.0%
18.7 (25)	93.0%	93.6%	91.7%	18.7 (25)	93.0%	93.6%	91.7%
22.4 (30)	93.6%	94.1%	91.7%	22.4 (30)	93.0%	93.6%	91.7%
29.8 (40)	94.1%	94.1%	92.4%	29.8 (40)	94.1%	94.1%	92.4%
37.3 (50)	94.1%	94.5%	93.0%	37.3 (50)	94.1%	94.5%	93.0%
44.8 (60)	94.5%	95.0%	93.6%	44.8 (60)	94.5%	95.0%	93.6%
56.9 (75)	94.5%	95.0%	93.6%	56.9 (75)	94.5%	95.4%	93.6%
74.6 (100)	95.0%	95.4%	93.6%	74.6 (100)	95.0%	95.4%	94.1%
93.3 (125)	95.0%	95.4%	94.1%	93.3 (125)	95.0%	95.4%	95.0%
112 (150)	95.4%	95.8%	94.1%	112 (150)	95.8%	95.8%	95.0%
149.2 (200)	95.4%	95.8%	95.0%	149.2 (200)	95.8%	96.2%	95.4%

M. Minimum Power Factor at Full Load and Rated Voltage: 90 percent at 1200 RPM, 1800 RPM and 3600 RPM.

PART 3 - EXECUTION

3.1 INSTALLATION:

Install motors in accordance with manufacturer's recommendations, the NEC, NEMA, as shown on the drawings and/or as required by other sections of these specifications.

3.2 FIELD TESTS

- A. Perform an electric insulation resistance Test using a megohmmeter on all motors after installation, before start-up. All shall test free from grounds.
- B. Perform Load test in accordance with ANSI/IEEE 112, Test Method B, to determine freedom from electrical or mechanical defects and compliance with performance data.
- C. Insulation Resistance: Not less than one-half meg-ohm between stator conductors and frame, to be determined at the time of final inspection.

3.3 STARTUP AND TESTING

- A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with Resident Engineer and Commissioning Agent. Provide a minimum of 7 days prior notice.

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.5 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of units.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 23 05 41
NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 DESCRIPTION

Noise criteria, seismic restraints for equipment, vibration tolerance and vibration isolation for HVAC and plumbing work.

1.2 RELATED WORK

- A. Section 03 30 00, CAST-IN-PLACE CONCRETE: Requirements for concrete inertia bases.
- B. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic requirements for non-structural equipment
- C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION: General mechanical requirements and items, which are common to more than one section of Division 23.
- D. Section 23 73 00, INDOOR CENTRAL-STATION AIR-HANDLING UNITS: Requirements for optional Air Handling Unit internal vibration isolation.
- E. Section 23 31 00, HVAC DUCTS and CASINGS: requirements for flexible duct connectors, sound attenuators and sound absorbing duct lining.
- F. SECTION 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC: requirements for sound and vibration tests.
- G. SECTION 23 37 00, AIR OUTLETS and INLETS: noise requirements for G-grilles.
- H. SECTION 23 21 23, HYDRONIC PUMPS: vibration isolation requirements for pumps.
- I. SECTION 23 34 00, HVAC FANS: sound and vibration isolation requirements for fans.
- J. SECTION 26 32 13, ENGINEER GENERATORS: requirements for sound and vibration isolation.
- K. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

1.3 QUALITY ASSURANCE

- A. Refer to article, QUALITY ASSURANCE in specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

B. Noise Criteria:

1. Noise levels in all 8 octave bands due to equipment and duct systems shall not exceed following NC levels:

TYPE OF ROOM	NC LEVEL
Audio Speech Pathology	25
Audio Suites	25
Auditoriums, Theaters	35-40
Bathrooms and Toilet Rooms	40
Chapels	35
Conference Rooms	35
Corridors (Nurse Stations)	40
Corridors(Public)	40
Dining Rooms, Food Services/ Serving	40
Examination Rooms	35
Gymnasiums	50
Kitchens	50
Laboratories (With Fume Hoods)	45 to 55
Laundries	50
Lobbies, Waiting Areas	40
Locker Rooms	45
Offices, Large Open	40
Offices, Small Private	35
Operating Rooms	40
Patient Rooms	35
Phono/Cardiology	25
Recreation Rooms	40-45
Shops	50
SPD (Decontamination and Clean Preparation)	45
Therapeutic Pools	45
Treatment Rooms	35
Warehouse	50
X-Ray and General Work Rooms	40

2. For equipment which has no sound power ratings scheduled on the plans, the contractor shall select equipment such that the foregoing noise criteria, local ordinance noise levels, and OSHA requirements are not exceeded. Selection procedure shall be in accordance with ASHRAE Fundamentals Handbook, Chapter 7, Sound and Vibration.
3. An allowance, not to exceed 5db, may be added to the measured value to compensate for the variation of the room attenuating effect between room test condition prior to occupancy and design condition after occupancy which may include the addition of sound absorbing material, such as, furniture. This allowance may not be taken after occupancy. The room attenuating effect is defined as the difference between sound power level emitted to room and sound pressure level in room.
4. In absence of specified measurement requirements, measure equipment noise levels three feet from equipment and at an elevation of maximum noise generation.

C. Seismic Restraint Requirements:

1. Equipment:

- a. All mechanical equipment not supported with isolators external to the unit shall be securely anchored to the structure. Such mechanical equipment shall be properly supported to resist a horizontal force of 50 percent of the weight of the equipment furnished.
- b. All mechanical equipment mounted on vibration isolators shall be provided with seismic restraints capable of resisting a horizontal force of 50 percent of the weight of the equipment furnished.

2. Piping: Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

3. Ductwork: Refer to specification Section 23 31 00, HVAC DUCTS AND CASINGS.

- D. Allowable Vibration Tolerances for Rotating, Non-reciprocating Equipment: Not to exceed a self-excited vibration maximum velocity of 5 mm per second (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions or measured at equipment mounting feet if bearings are concealed. Measurements for internally isolated fans and motors may be made at the mounting feet.

1.4 SUBMITTALS

- A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Vibration isolators:
 - a. Floor mountings
 - b. Hangers
 - c. Snubbers
 - d. Thrust restraints
 - 2. Bases.
 - 3. Seismic restraint provisions and bolting.
 - 4. Acoustical enclosures.
- C. Isolator manufacturer shall furnish with submittal load calculations for selection of isolators, including supplemental bases, based on lowest operating speed of equipment supported.
- D. Seismic Requirements: Submittals are required for all equipment anchors, supports and seismic restraints. Submittals shall include weights, dimensions, standard connections, and manufacturer's certification that all specified equipment will withstand seismic Lateral Force requirements as shown on drawings.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):
 - 2009Fundamentals Handbook, Chapter 7, Sound and Vibration
- C. American Society for Testing and Materials (ASTM):
 - A123/A123M-09Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
 - A307-07bStandard Specification for Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength
 - D2240-05(2010)Standard Test Method for Rubber Property - Durometer Hardness
- D. Manufacturers Standardization (MSS):
 - SP-58-2009Pipe Hangers and Supports-Materials, Design and Manufacture

- E. Occupational Safety and Health Administration (OSHA):
29 CFR 1910.95Occupational Noise Exposure
- F. American Society of Civil Engineers (ASCE):
ASCE 7-10Minimum Design Loads for Buildings and Other
Structures.
- G. American National Standards Institute / Sheet Metal and Air
Conditioning Contractor's National Association (ANSI/SMACNA):
001-2008Seismic Restraint Manual: Guidelines for
Mechanical Systems, 3rd Edition.
- H. International Code Council (ICC):
2009 IBCInternational Building Code.
- I. Department of Veterans Affairs (VA):
H-18-8 2010Seismic Design Requirements.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

- A. Type of isolator, base, and minimum static deflection shall be as required for each specific equipment application as recommended by isolator or equipment manufacturer but subject to minimum requirements indicated herein and in the schedule on the drawings.
- B. Elastometric Isolators shall comply with ASTM D2240 and be oil resistant neoprene with a maximum stiffness of 60 durometer and have a straight-line deflection curve.
- C. Exposure to weather: Isolator housings to be either hot dipped galvanized or powder coated to ASTM B117 salt spray testing standards. Springs to be powder coated or electro galvanized. All hardware to be electro galvanized. In addition provide limit stops to resist wind velocity. Velocity pressure established by wind shall be calculated in accordance with section 1609 of the International Building Code. A minimum wind velocity of 75 mph shall be employed.
- D. Uniform Loading: Select and locate isolators to produce uniform loading and deflection even when equipment weight is not evenly distributed.
- E. Color code isolators by type and size for easy identification of capacity.

2.2 SEISMIC RESTRAINT REQUIREMENTS FOR EQUIPMENTS

- A. Bolt pad mounted equipment, without vibration isolators, to the floor or other support using ASTM A307 standard bolting material.

- B. Floor mounted equipment, with vibration Isolators: Type SS. Where Type N isolators are used provide channel frame base horizontal restraints bolted to the floor, or other support, on all sides of the equipment. Size and material required for the base shall be as recommended by the isolator manufacturer.
- C. On all sides of suspended equipment, provide bracing for rigid supports and provide restraints for resiliently supported equipment.

2.3 VIBRATION ISOLATORS

A. Floor Mountings:

1. Double Deflection Neoprene (Type N): Shall include neoprene covered steel support plated (top and bottom), friction pads, and necessary bolt holes.
2. Spring Isolators (Type S): Shall be free-standing, laterally stable and include acoustical friction pads and leveling bolts. Isolators shall have a minimum ratio of spring diameter-to-operating spring height of 1.0 and an additional travel to solid equal to 50 percent of rated deflection.
3. Captive Spring Mount for Seismic Restraint (Type SS):
 - a. Design mounts to resiliently resist seismic forces in all directions. Snubbing shall take place in all modes with adjustment to limit upward, downward, and horizontal travel to a maximum of 6 mm (1/4-inch) before contacting snubbers. Mountings shall have a minimum rating of one G coefficient of gravity as calculated and certified by a registered structural engineer.
 - b. All mountings shall have leveling bolts that must be rigidly bolted to the equipment. Spring diameters shall be no less than 0.8 of the compressed height of the spring at rated load. Springs shall have a minimum additional travel to solid equal to 50 percent of the rated deflection. Mountings shall have ports for spring inspection. Provide an all directional neoprene cushion collar around the equipment bolt.
4. Spring Isolators with Vertical Limit Stops (Type SP): Similar to spring isolators noted above, except include a vertical limit stop to limit upward travel if weight is removed and also to reduce movement and spring extension due to wind loads. Provide clearance around restraining bolts to prevent mechanical short circuiting.

5. Pads (Type D), Washers (Type W), and Bushings (Type L): Pads shall be natural rubber or neoprene waffle, neoprene and steel waffle, or reinforced duck and neoprene. Washers and bushings shall be reinforced duck and neoprene. Washers and bushings shall be reinforced duck and neoprene. Size pads for a maximum load of 345 kPa (50 pounds per square inch).
 6. Seismic Pad (Type DS): Pads shall be natural rubber / neoprene waffle with steel top plate and drilled for an anchor bolt. Washers and bushings shall be reinforced duck and neoprene. Size pads for a maximum load of 345 kPa (50 pounds per square inch).
- B. Hangers: Shall be combination neoprene and springs unless otherwise noted and shall allow for expansion of pipe.
1. Combination Neoprene and Spring (Type H): Vibration hanger shall contain a spring and double deflection neoprene element in series. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15 degree angular misalignment without rubbing on hanger box.
 2. Spring Position Hanger (Type HP): Similar to combination neoprene and spring hanger except hanger shall hold piping at a fixed elevation during installation and include a secondary adjustment feature to transfer load to spring while maintaining same position.
 3. Neoprene (Type HN): Vibration hanger shall contain a double deflection type neoprene isolation element. Hanger rod shall be separated from contact with hanger bracket by a neoprene grommet.
 4. Spring (Type HS): Vibration hanger shall contain a coiled steel spring in series with a neoprene grommet. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15 degree angular misalignment without rubbing on hanger box.
 5. Hanger supports for piping 50 mm (2 inches) and larger shall have a pointer and scale deflection indicator.
 6. Hangers used in seismic applications shall be provided with a neoprene and steel rebound washer installed $\frac{1}{4}$ ' clear of bottom of hanger housing in operation to prevent spring from excessive upward travel

- C. Snubbers: Each spring mounted base shall have a minimum of four all-directional or eight two directional (two per side) seismic snubbers that are double acting. Elastomeric materials shall be shock absorbent neoprene bridge quality bearing pads, maximum 60 durometer, replaceable and have a minimum thickness of 6 mm (1/4 inch). Air gap between hard and resilient material shall be not less than 3 mm (1/8 inch) nor more than 6 mm (1/4 inch). Restraints shall be capable of withstanding design load without permanent deformation.
- D. Thrust Restraints (Type THR): Restraints shall provide a spring element contained in a steel frame with neoprene pads at each end attachment. Restraints shall have factory preset thrust and be field adjustable to allow a maximum movement of 6 mm (1/4 inch) when the fan starts and stops. Restraint assemblies shall include rods, angle brackets and other hardware for field installation.

2.4 BASES

- A. Rails (Type R): Design rails with isolator brackets to reduce mounting height of equipment and cradle machines having legs or bases that do not require a complete supplementary base. To assure adequate stiffness, height of members shall be a minimum of 1/12 of longest base dimension but not less than 100 mm (4 inches). Where rails are used with neoprene mounts for small fans or close coupled pumps, extend rails to compensate overhang of housing.
- B. Integral Structural Steel Base (Type B): Design base with isolator brackets to reduce mounting height of equipment which require a complete supplementary rigid base. To assure adequate stiffness, height of members shall be a minimum of 1/12 of longest base dimension, but not less than 100 mm (four inches).
- C. Inertia Base (Type I): Base shall be a reinforced concrete inertia base. Pour concrete into a welded steel channel frame, incorporating prelocated equipment anchor bolts and pipe sleeves. Level the concrete to provide a smooth uniform bearing surface for equipment mounting. Provide grout under uneven supports. Channel depth shall be a minimum of 1/12 of longest dimension of base but not less than 150 mm (six inches). Form shall include 13-mm (1/2-inch) reinforcing bars welded in place on minimum of 203 mm (eight inch) centers running both ways in a layer 40 mm (1-1/2 inches) above bottom. Use height saving brackets in all mounting locations. Weight of inertia base shall be equal to or greater than weight of equipment supported to provide a maximum peak-to-peak displacement of 2 mm (1/16 inch).

- D. Curb Mounted Isolation Base (Type CB): Fabricate from aluminum to fit on top of standard curb with overlap to allow water run-off and have wind and water seals which shall not interfere with spring action. Provide resilient snubbers with 6 mm (1/4 inch) clearance for wind resistance. Top and bottom bearing surfaces shall have sponge type weather seals. Integral spring isolators shall comply with Spring Isolator (Type S) requirements.

2.5 SOUND ATTENUATING UNITS

Refer to specification Section 23 31 00, HVAC DUCTS and CASINGS.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Vibration Isolation:

1. No metal-to-metal contact will be permitted between fixed and floating parts.
2. Connections to Equipment: Allow for deflections equal to or greater than equipment deflections. Electrical, drain, piping connections, and other items made to rotating or reciprocating equipment (pumps, compressors, etc.) which rests on vibration isolators, shall be isolated from building structure for first three hangers or supports with a deflection equal to that used on the corresponding equipment.
3. Common Foundation: Mount each electric motor on same foundation as driven machine. Hold driving motor and driven machine in positive rigid alignment with provision for adjusting motor alignment and belt tension. Bases shall be level throughout length and width. Provide shims to facilitate pipe connections, leveling, and bolting.
4. Provide heat shields where elastomers are subject to temperatures over 38 degrees C (100 degrees F).
5. Extend bases for pipe elbow supports at discharge and suction connections at pumps. Pipe elbow supports shall not short circuit pump vibration to structure.
6. Non-rotating equipment such as heat exchangers and convertors shall be mounted on isolation units having the same static deflection as the isolation hangers or support of the pipe connected to the equipment.

- B. Inspection and Adjustments: Check for vibration and noise transmission through connections, piping, ductwork, foundations, and walls. Adjust, repair, or replace isolators as required to reduce vibration and noise transmissions to specified levels.

3.2 ADJUSTING

- A. Adjust vibration isolators after piping systems are filled and equipment is at operating weight.
- B. Adjust limit stops on restrained spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.
- C. Attach thrust limits at centerline of thrust and adjust to a maximum of 1/4inch (6-mm) movement during start and stop.
- D. Adjust active height of spring isolators.
- E. Adjust snubbers according to manufacturer's recommendations.
- F. Adjust seismic restraints to permit free movement of equipment within normal mode of operation.
- G. Torque anchor bolts according to equipment manufacturer's recommendations to resist seismic forces.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

SELECTION GUIDE FOR VIBRATION ISOLATORS

EQUIPMENT	ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
REFRIGERATION MACHINES															
ABSORPTION	---	D	0.3	---	SP	0.8	---	SP	1.5	---	SP	1.5	---	SP	2.0
PACKAGED HERMETIC	---	D	0.3	---	SP	0.8	---	SP	1.5	---	SP	1.5	R	SP	2.5
OPEN CENTRIFUGAL	B	D	0.3	B	SP	0.8	---	SP	1.5	B	SP	1.5	B	SP	3.5
RECIPROCATING:															
ALL	---	D	0.3	---	SP	0.8	R	SP	2.0	R	SP	2.5	R	SP	3.5
COMPRESSORS AND VACUUM PUMPS															
UP THROUGH 1-1/2 HP	---	D,L, W	0.8	----	D,L, W	0.8	---	D,L, W	1.5	---	D,L, W	1.5	---	D,L, W	---
2 HP AND OVER:															
500 - 750 RPM	---	D	0.8	---	S	0.8	---	S	1.5	---	S	1.5	---	S	2.5
750 RPM & OVER	---	D	0.8	---	S	0.8	---	S	1.5	---	S	1.5	---	S	2.5
PUMPS															
CLOSE COUPLED	UP TO 1-1/2 HP	---	---	---	---	D,L, W	---	---	D,L, W	---	---	D,L, W	---	---	D,L, W
	2 HP & OVER	---	---	---	I	S	0.8	I	S	1.5	I	S	1.5	I	S

EQUIPMENT		ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
		BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
LARGE INLINE	Up to 25 HP	---	---	---	---	S	0.75	---	S	1.50	---	S	1.50	---	---	NA
	26 HP THRU 30 HP	---	---	---	---	S	1.0	---	S	1.50	---	S	2.50	---	---	NA
BASE MOUNTED	UP TO 10 HP	---	---	---	---	D,L, W	---	---	D,L, W	---	---	D,L, W	---	---	D,L, W	---
	15 HP THRU 40 HP	I	S	1.0	I	S	1.0	I	S	2.0	I	S	2.0	I	S	2.0
	50 HP & OVER	I	S	1.0	I	S	1.0	I	S	2.0	I	S	2.5	I	S	2.5

ROOF FANS

ABOVE OCCUPIED AREAS:

5 HP & OVER	---	---	---	CB	S	1.0	CB	S	1.0	CB	S	1.0	CB	S	1.0
-------------	-----	-----	-----	----	---	-----	----	---	-----	----	---	-----	----	---	-----

CENTRIFUGAL FANS

UP TO 50 HP:

UP TO 200 RPM	B	N	0.3	B	S	2.5	B	S	2.5	B	S	3.5	B	S	3.5
201 - 300 RPM	B	N	0.3	B	S	2.0	B	S	2.5	B	S	2.5	B	S	3.5
301 - 500 RPM	B	N	0.3	B	S	2.0	B	S	2.0	B	S	2.5	B	S	3.5
501 RPM & OVER	B	N	0.3	B	S	2.0	B	S	2.0	B	S	2.0	B	S	2.5

EQUIPMENT	ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
60 HP & OVER:															
UP TO 300 RPM	B	S	2.0	I	S	2.5	I	S	3.5	I	S	3.5	I	S	3.5
301 - 500 RPM	B	S	2.0	I	S	2.0	I	S	2.5	I	S	3.5	I	S	3.5
501 RPM & OVER	B	S	1.0	I	S	2.0	I	S	2.0	I	S	2.5	I	S	2.5
COOLING TOWERS															
UP TO 500 RPM	---	---	---	---	SP	2.5	---	SP	2.5	---	SP	2.5	---	SP	3.5
501 RPM & OVER	---	---	---	---	SP	0.75	---	SP	0.75	---	SP	1.5	---	SP	2.5
INTERNAL COMBUSTION ENGINES															
UP TO 25 HP	I	N	0.75	I	N	1.5	I	S	2.5	I	S	3.5	I	S	4.5
30 THRU 100 HP	I	N	0.75	I	N	1.5	I	S	2.5	I	S	3.5	I	S	4.5
125 HP & OVER	I	N	0.75	I	N	1.5	I	S	2.5	I	S	3.5	I	S	4.5
AIR HANDLING UNIT PACKAGES															
SUSPENDED:															
UP THRU 5 HP	---	---	---	---	H	1.0	---	H	1.0	---	H	1.0	---	H	1.0
7-1/2 HP & OVER:															
UP TO 500 RPM	---	---	---	---	H, THR	1.5	---	H, THR	2.5	---	H, THR	2.5	---	H, THR	2.5
501 RPM & OVER	---	---	---	---	H, THR	0.8	---	H, THR	0.8	---	H,TH R	0.8	---	H,TH R	2.0

EQUIPMENT	ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
FLOOR MOUNTED:															
UP THRU 5 HP	---	D	---	---	S	1.0	---	S	1.0	---	S	1.0	---	S	1.0
7-1/2 HP & OVER:															
UP TO 500 RPM	---	D	---	R	S, THR	1.5	R	S, THR	2.5	R	S, THR	2.5	R	S, THR	2.5
501 RPM & OVER	---	D	---	---	S, THR	0.8	---	S, THR	0.8	R	S, THR	1.5	R	S, THR	2.0
HEAT PUMPS															
ALL	---	S	0.75	---	S	0.75	---	S	0.75	CB	S	1.5	---	---	NA
CONDENSING UNITS															
ALL	---	SS	0.25	---	SS	0.75	---	SS	1.5	CB	SS	1.5	---	---	NA
IN-LINE CENTRIFUGAL AND VANE AXIAL FANS, FLOOR MOUNTED: (APR 9)															
UP THRU 50 HP:															
UP TO 300 RPM	---	D	---	R	S	2.5	R	S	2.5	R	S	2.5	R	S	3.5
301 - 500 RPM	---	D	---	R	S	2.0	R	S	2.0	R	S	2.5	R	S	2.5
501 - & OVER	---	D	---	---	S	1.0	---	S	1.0	R	S	2.0	R	S	2.5
60 HP AND OVER:															
301 - 500 RPM	R	S	1.0	R	S	2.0	R	S	2.0	R	S	2.5	R	S	3.5
501 RPM & OVER	R	S	1.0	R	S	2.0	R	S	2.0	R	S	2.0	R	S	2.5

NOTES:

1. Edit the Table above to suit where isolator, other than those shown, are used, such as for seismic restraints and position limit stops.
2. For suspended floors lighter than 100 mm (4 inch) thick concrete, select deflection requirements from next higher span.
3. For separate chiller building on grade, pump isolators may be omitted.
4. Direct bolt fire pumps to concrete base. Provide pads (D) for domestic water booster pump package.
5. For projects in seismic areas, use only SS & DS type isolators and snubbers.
6. For floor mounted in-line centrifugal blowers (ARR 1): use "B" type in lieu of "R" type base.
7. Suspended: Use "H" isolators of same deflection as floor mounted.

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 05 93
TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. Testing, adjusting, and balancing (TAB) of heating, ventilating and air conditioning (HVAC) systems. TAB includes the following:

1. Planning systematic TAB procedures.
2. Design Review Report.
3. Systems Inspection report.
4. Duct Air Leakage test report.
5. Systems Readiness Report.
6. Balancing air and water distribution systems; adjustment of total system to provide design performance; and testing performance of equipment and automatic controls.
7. Vibration and sound measurements.
8. Recording and reporting results.

B. Definitions:

1. Basic TAB used in this Section: Chapter 37, "Testing, Adjusting and Balancing" of 2007 ASHRAE Handbook, "HVAC Applications".
2. TAB: Testing, Adjusting and Balancing; the process of checking and adjusting HVAC systems to meet design objectives.
3. AABC: Associated Air Balance Council.
4. NEBB: National Environmental Balancing Bureau.
5. Hydronic Systems: Includes chilled water, heating hot water and glycol-water systems.
6. Air Systems: Includes all outside air, supply air, return air, exhaust air and relief air systems.
7. Flow rate tolerance: The allowable percentage variation, minus to plus, of actual flow rate from values (design) in the contract documents.

1.2 RELATED WORK

- A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General Mechanical Requirements.
- B. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT: Noise and Vibration Requirements.
- C. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION: Piping and Equipment Insulation.

- D. Section 23 64 00, PACKAGED WATER CHILLERS: Testing Refrigeration Equipment.
- E. Section 23 36 00, AIR TERMINAL UNITS: Terminal Units Performance.
- F. Section 23 31 00, HVAC DUCTS AND CASINGS: Duct Leakage.
- G. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Controls and Instrumentation Settings.
- H. Section 23 82 00, CONVECTION HEATING AND COOLING UNITS
- I. Section 23 73 00, INDOOR CENTRAL-STATION AIR-HANDLING UNITS
- J. Section 23 34 00, HVAC FANS
- K. Section 23 21 23, HYDRONIC PUMPS
- L. Section 23 37 00, AIR OUTLETS AND INLETS
- M. Section 23 21 13, HYDRONIC PIPING
- N. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS. Requirements for commissioning, systems readiness checklists, and training
- O. Section 23 05 12 GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT

1.3 QUALITY ASSURANCE

- A. Refer to Articles, Quality Assurance and Submittals, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC, Section 23 05 10, COMMON WORK RESULTS FOR BOILER PLANTS and STEAM GENERATION, and Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
- B. Qualifications:
 - 1. TAB Agency: The TAB agency shall be a subcontractor of the General Contractor and shall report to and be paid by the General Contractor.
 - 2. The TAB agency shall be either a certified member of AABC or certified by the NEBB to perform TAB service for HVAC, water balancing and vibrations and sound testing of equipment. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the agency loses subject certification during this period, the General Contractor shall immediately notify the Resident Engineer and submit another TAB firm for approval. Any agency that has been the subject of disciplinary action by either the AABC or the NEBB within the five years preceding Contract Award shall not be eligible to perform any work related to the TAB. All work performed in this Section and in other related Sections by the TAB agency shall be considered invalid if the TAB agency loses its certification prior to Contract completion, and the successor agency's review shows unsatisfactory work performed by the predecessor agency.

3. TAB Specialist: The TAB specialist shall be either a member of AABC or an experienced technician of the Agency certified by NEBB. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the Specialist loses subject certification during this period, the General Contractor shall immediately notify the Resident Engineer and submit another TAB Specialist for approval. Any individual that has been the subject of disciplinary action by either the AABC or the NEBB within the five years preceding Contract Award shall not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections performed by the TAB specialist shall be considered invalid if the TAB Specialist loses its certification prior to Contract completion and must be performed by an approved successor.
 4. TAB Specialist shall be identified by the General Contractor within 60 days after the notice to proceed. The TAB specialist will be coordinating, scheduling and reporting all TAB work and related activities and will provide necessary information as required by the Resident Engineer. The responsibilities would specifically include:
 - a. Shall directly supervise all TAB work.
 - b. Shall sign the TAB reports that bear the seal of the TAB standard. The reports shall be accompanied by report forms and schematic drawings required by the TAB standard, AABC or NEBB.
 - c. Would follow all TAB work through its satisfactory completion.
 - d. Shall provide final markings of settings of all HVAC adjustment devices.
 - e. Permanently mark location of duct test ports.
 5. All TAB technicians performing actual TAB work shall be experienced and must have done satisfactory work on a minimum of 3 projects comparable in size and complexity to this project. Qualifications must be certified by the TAB agency in writing. The lead technician shall be certified by AABC or NEBB
- C. Test Equipment Criteria: The instrumentation shall meet the accuracy/calibration requirements established by AABC National Standards or by NEBB Procedural Standards for Testing, Adjusting and Balancing of Environmental Systems and instrument manufacturer. Provide calibration history of the instruments to be used for test and balance purpose.

D. Tab Criteria:

1. One or more of the applicable AABC, NEBB or SMACNA publications, supplemented by ASHRAE Handbook "HVAC Applications" Chapter 36, and requirements stated herein shall be the basis for planning, procedures, and reports.
2. Flow rate tolerance: Following tolerances are allowed. For tolerances not mentioned herein follow ASHRAE Handbook "HVAC Applications", Chapter 36, as a guideline. Air Filter resistance during tests, artificially imposed if necessary, shall be at least 100 percent of manufacturer recommended change over pressure drop values for pre-filters and after-filters.
 - a. Air handling unit and all other fans, cubic meters/min (cubic feet per minute): Minus 0 percent to plus 10 percent.
 - b. Air terminal units (maximum values): Minus 2 percent to plus 10 percent.
 - c. Exhaust hoods/cabinets: 0 percent to plus 10 percent.
 - d. Minimum outside air: 0 percent to plus 10 percent.
 - e. Individual room air outlets and inlets, and air flow rates not mentioned above: Minus 5 percent to plus 10 percent except if the air to a space is 100 CFM or less the tolerance would be minus 5 to plus 5 percent.
 - f. Heating hot water pumps and hot water coils: Minus 5 percent to plus 5 percent.
 - g. Chilled water and condenser water pumps: Minus 0 percent to plus 5 percent.
 - h. Chilled water coils: Minus 0 percent to plus 5 percent.
3. Systems shall be adjusted for energy efficient operation as described in PART 3.
4. Typical TAB procedures and results shall be demonstrated to the Resident Engineer for one air distribution system (including all fans, three terminal units, three rooms randomly selected by the Resident Engineer) and one hydronic system (pumps and three coils) as follows:
 - a. When field TAB work begins.
 - b. During each partial final inspection and the final inspection for the project if requested by VA.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Submit names and qualifications of TAB agency and TAB specialists within 60 days after the notice to proceed. Submit information on three recently completed projects and a list of proposed test equipment.
- C. For use by the Resident Engineer staff, submit one complete set of applicable AABC or NEBB publications that will be the basis of TAB work.
- D. Submit the following for review and approval for each phase of the project. See Drawings G1.4 and G1.5 for project phases.
 - 1. Design Review Report within 90 days for conventional design projects after the system layout on air and water side is completed by the Contractor.
 - 2. Systems inspection report on equipment and installation for conformance with design.
 - 3. Duct Air Leakage Test Report.
 - 4. Systems Readiness Report.
 - 5. Intermediate and Final TAB reports covering flow balance and adjustments, performance tests, vibration tests and sound tests.
 - 6. Include in final reports uncorrected installation deficiencies noted during TAB and applicable explanatory comments on test results that differ from design requirements.
- E. Prior to request for Final or Partial Final inspection, submit completed Test and Balance report for the area.

1.5 APPLICABLE PUBLICATIONS

- A. The following publications form a part of this specification to the extent indicated by the reference thereto. In text the publications are referenced to by the acronym of the organization.
- B. American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE):
 - 2007HVAC Applications ASHRAE Handbook, Chapter 37, Testing, Adjusting, and Balancing and Chapter 47, Sound and Vibration Control
- C. Associated Air Balance Council (AABC):
 - 2002AABC National Standards for Total System Balance

D. National Environmental Balancing Bureau (NEBB):

7th Edition 2005Procedural Standards for Testing, Adjusting,
Balancing of Environmental Systems

2nd Edition 2006Procedural Standards for the Measurement of
Sound and Vibration

3rd Edition 2009Procedural Standards for Whole Building Systems
Commissioning of New Construction

E. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA):

3rd Edition 2002HVAC SYSTEMS Testing, Adjusting and Balancing

PART 2 - PRODUCTS

2.1 PLUGS

Provide plastic plugs to seal holes drilled in ductwork for test purposes.

2.2 INSULATION REPAIR MATERIAL

See Section 23 07 11, HVAC and BOILER PLANT INSULATION Provide for repair of insulation removed or damaged for TAB work.

PART 3 - EXECUTION

3.1 GENERAL

- A. Refer to TAB Criteria in Article, Quality Assurance.
- B. Obtain applicable contract documents and copies of approved submittals for HVAC equipment and automatic control systems.

3.2 DESIGN REVIEW REPORT

The TAB Specialist shall review the Contract Plans and specifications and advise the Resident Engineer of any design deficiencies that would prevent the HVAC systems from effectively operating in accordance with the sequence of operation specified or prevent the effective and accurate TAB of the system. The TAB Specialist shall provide a report individually listing each deficiency and the corresponding proposed corrective action necessary for proper system operation.

3.3 SYSTEMS INSPECTION REPORT

- A. Inspect equipment and installation for conformance with design.
- B. The inspection and report is to be done after air distribution equipment is on site and duct installation has begun, but well in advance of performance testing and balancing work. The purpose of the inspection is to identify and report deviations from design and ensure that systems will be ready for TAB at the appropriate time.

- C. Reports: Follow check list format developed by AABC, NEBB or SMACNA, supplemented by narrative comments, with emphasis on air handling units and fans. Check for conformance with submittals. Verify that diffuser and register sizes are correct. Check air terminal unit installation including their duct sizes and routing.

3.4 DUCT AIR LEAKAGE TEST REPORT

TAB Agency shall perform the leakage test as outlined in "Duct leakage Tests and Repairs" in Section 23 31 00, HVAC DUCTS and CASINGS for TAB agency's role and responsibilities in witnessing, recording and reporting of deficiencies.

3.5 SYSTEM READINESS REPORT

- A. The TAB Contractor shall measure existing air and water flow rates associated with existing systems utilized to serve renovated areas as indicated on drawings. Submit report of findings to resident engineer.
- B. Inspect each System to ensure that it is complete including installation and operation of controls. Submit report to RE in standard format and forms prepared and or approved by the Commissioning Agent.
- C. Verify that all items such as ductwork piping, ports, terminals, connectors, etc., that is required for TAB are installed. Provide a report to the Resident Engineer.

3.6 TAB REPORTS

- A. Submit an intermediate report for 50 percent of systems and equipment tested and balanced to establish satisfactory test results.
- B. The TAB contractor shall provide raw data immediately in writing to the Resident Engineer if there is a problem in achieving intended results before submitting a formal report.
- C. If over 20 percent of readings in the intermediate report fall outside the acceptable range, the TAB report shall be considered invalid and all contract TAB work shall be repeated and re-submitted for approval at no additional cost to the owner.
- D. Do not proceed with the remaining systems until intermediate report is approved by the Resident Engineer.

3.7 TAB PROCEDURES

- A. Tab shall be performed in accordance with the requirement of the Standard under which TAB agency is certified by either AABC or NEBB.

- B. General: During TAB all related system components shall be in full operation. Fan and pump rotation, motor loads and equipment vibration shall be checked and corrected as necessary before proceeding with TAB. Set controls and/or block off parts of distribution systems to simulate design operation of variable volume air or water systems for test and balance work.
- C. Coordinate TAB procedures with existing systems and any phased construction completion requirements for the project. Provide TAB reports for pre construction air and water flow rate and for each phase of the project prior to partial final inspections of each phase of the project. Return existing areas outside the work area to pre constructed conditions.
- D. Allow 10 days time in construction schedule for TAB and submission of all reports for an organized and timely correction of deficiencies.
- E. Air Balance and Equipment Test: Include air handling units, fans, terminal units, fan coil units, room diffusers/outlets/inlets, computer room AC units, and laboratory fume hoods and biological safety cabinets.
 - 1. Artificially load air filters by partial blanking to produce air pressure drop of manufacturer's recommended pressure drop.
 - 2. Adjust fan speeds to provide design air flow. V-belt drives, including fixed pitch pulley requirements, are specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
 - 3. Test and balance systems in all specified modes of operation, including variable volume, economizer, and fire emergency modes. Verify that dampers and other controls function properly.
 - 4. Record final measurements for air handling equipment performance data sheets.
- F. Water Balance and Equipment Test: Include circulating pumps, coils, coolers:
 - 1. Coordinate water chiller flow balancing with Section 23 64 00, PACKAGED WATER CHILLERS.
 - 2. Adjust flow rates for equipment. Set coils and evaporator to values on equipment submittals, if different from values on contract drawings.

3. Primary-secondary (variable volume) systems: Coordinate TAB with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC. Balance systems at design water flow and then verify that variable flow controls function as designed.
4. Record final measurements for hydronic equipment on performance data sheets. Include entering and leaving water temperatures for heating and cooling coils, and for convertors. Include entering and leaving air temperatures (DB/WB for cooling coils) for air handling units and reheat coils. Make air and water temperature measurements at the same time.

3.8 VIBRATION TESTING

- A. Furnish instruments and perform vibration measurements as specified in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Field vibration balancing is specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC. Provide measurements for all rotating HVAC equipment of 373 watts (1/2 horsepower) and larger, including centrifugal/screw compressors, cooling towers, pumps, fans and motors.
- B. Record initial measurements for each unit of equipment on test forms and submit a report to the Resident Engineer. Where vibration readings exceed the allowable tolerance Contractor shall be directed to correct the problem. The TAB agency shall verify that the corrections are done and submit a final report to the Resident Engineer.

3.9 SOUND TESTING

- A. Perform and record required sound measurements in accordance with Paragraph, QUALITY ASSURANCE in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
 1. Take readings in rooms, approximately ten percent of all rooms. The Resident Engineer may designate the specific rooms to be tested.
- B. Take measurements with a calibrated sound level meter and octave band analyzer of the accuracy required by AABC or NEBB.
- C. Sound reference levels, formulas and coefficients shall be according to ASHRAE Handbook, "HVAC Applications", Chapter 46, SOUND AND VIBRATION CONTROL.

D. Determine compliance with specifications as follows:

1. When sound pressure levels are specified, including the NC Criteria in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT:
 - a. Reduce the background noise as much as possible by shutting off unrelated audible equipment.
 - b. Measure octave band sound pressure levels with specified equipment "off."
 - c. Measure octave band sound pressure levels with specified equipment "on."
 - d. Use the DIFFERENCE in corresponding readings to determine the sound pressure due to equipment.

DIFFERENCE:	0	1	2	3	4	5 to 9	10 or More
FACTOR:	10	7	4	3	2	1	0

Sound pressure level due to equipment equals sound pressure level with equipment "on" minus FACTOR.

- e. Plot octave bands of sound pressure level due to equipment for typical rooms on a graph which also shows noise criteria (NC) curves.
2. When sound power levels are specified:
 - a. Perform steps 1.a. thru 1.d., as above.
 - b. For indoor equipment: Determine room attenuating effect, i.e., difference between sound power level and sound pressure level. Determined sound power level will be the sum of sound pressure level due to equipment plus the room attenuating effect.
 - c. For outdoor equipment: Use directivity factor and distance from noise source to determine distance factor, i.e., difference between sound power level and sound pressure level. Measured sound power level will be the sum of sound pressure level due to equipment plus the distance factor. Use 10 meters (30 feet) for sound level location.
3. Where sound pressure levels are specified in terms of dB(A), as in Section 23 65 00, COOLING TOWERS, measure sound levels using the "A" scale of meter. Single value readings will be used instead of octave band analysis.

- E. Where measured sound levels exceed specified level, the installing contractor or equipment manufacturer shall take remedial action approved by the Resident Engineer and the necessary sound tests shall be repeated.
- F. Test readings for sound testing could go higher than 15 percent if determination is made by the Resident Engineer based on the recorded sound data.

3.10 MARKING OF SETTINGS

Following approval of Tab final Report, the setting of all HVAC adjustment devices including valves, splitters and dampers shall be permanently marked by the TAB Specialist so that adjustment can be restored if disturbed at any time. Style and colors used for markings shall be coordinated with the Resident Engineer.

3.11 IDENTIFICATION OF TEST PORTS

The TAB Specialist shall permanently and legibly identify the location points of duct test ports. If the ductwork has exterior insulation, the identification shall be made on the exterior side of the insulation. All penetrations through ductwork and ductwork insulation shall be sealed to prevent air leaks and maintain integrity of vapor barrier.

3.12 PHASING

- A. Phased Projects: Testing and Balancing Work to follow project with areas shall be completed per the project phasing. Upon completion of the project all areas shall have been tested and balanced per the contract documents.
- B. Existing Areas: Systems that serve areas outside of the project scope shall not be adversely affected. Measure existing parameters where shown to document system capacity.

3.13 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 07 11
HVAC AND BOILER PLANT INSULATION

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Field applied insulation for thermal efficiency and condensation control for
 - 1. HVAC piping, ductwork and equipment.
- B. Definitions
 - 1. ASJ: All service jacket, white finish facing or jacket.
 - 2. Air conditioned space: Space having air temperature and/or humidity controlled by mechanical equipment.
 - 3. Cold: Equipment, ductwork or piping handling media at design temperature of 16 degrees C (60 degrees F) or below.
 - 4. Concealed: Ductwork and piping above ceilings and in chases, interstitial space, and pipe spaces.
 - 5. Exposed: Piping, ductwork, and equipment exposed to view in finished areas including mechanical and electrical equipment rooms or exposed to outdoor weather. Attics and crawl spaces where air handling units are located are considered to be mechanical rooms. Shafts, chases, interstitial spaces, unfinished attics, crawl spaces and pipe basements are not considered finished areas.
 - 6. FSK: Foil-scrim-kraft facing.
 - 7. Hot: HVAC Ductwork handling air at design temperature above 16 degrees C (60 degrees F); HVAC equipment or piping handling media above 41 degrees C (105 degrees F).
 - 8. Density: kg/m^3 - kilograms per cubic meter (Pcf - pounds per cubic foot).
 - 9. Runouts: Branch pipe connections up to 25-mm (one-inch) nominal size to fan coil units or reheat coils for terminal units.
 - 10. Thermal conductance: Heat flow rate through materials.
 - a. Flat surface: Watt per square meter (BTU per hour per square foot).
 - b. Pipe or Cylinder: Watt per square meter (BTU per hour per linear foot).
 - 11. Thermal Conductivity (k): Watt per meter, per degree C (BTU per inch thickness, per hour, per square foot, per degree F temperature difference).

12. Vapor Retarder (Vapor Barrier): A material which retards the transmission (migration) of water vapor. Performance of the vapor retarder is rated in terms of permeance (perms). For the purpose of this specification, vapor retarders shall have a maximum published permeance of 0.1 perms and vapor barriers shall have a maximum published permeance of 0.001 perms.
13. HWH: Hot water heating supply.
14. HWHR: Hot water heating return.
15. GH: Hot glycol-water heating supply.
16. GHR: Hot glycol-water heating return.
17. R: Pump recirculation.
18. CW: Cold water.
19. SW: Soft water.
20. HW: Hot water.
21. CH: Chilled water supply.
22. CHR: Chilled water return.
23. GC: Chilled glycol-water supply.
24. GCR: Chilled glycol-water return.
25. RS: Refrigerant suction.
26. PVDC: Polyvinylidene chloride vapor retarder jacketing, white.

1.2 RELATED WORK

- A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.
- B. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT
- C. Section 23 21 23, HYDRONIC PUMPS
- D. Section 23 64 00, PACKAGED WATER CHILLERS: Compressor, evaporator and piping.
- E. Section 23 21 13, HYDRONIC PIPING and Section 23 22 13, STEAM and CONDENSATE HEATING PIPING: Piping and equipment.
- F. Section 23 21 13, HYDRONIC PIPING: Hot water, chilled water, and glycol piping.
- G. Section 23 31 00, HVAC DUCTS AND CASINGS: Ductwork, plenum and fittings.
- H. Section 26 32 13, ENGINE GENERATORS: Exhaust stacks and muffler.
- I. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS. Requirements for commissioning, systems readiness checklists, and training.

1.3 QUALITY ASSURANCE

A. Refer to article QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Criteria:

1. Comply with NFPA 90A, particularly paragraphs 4.3.3.1 through 4.3.3.6, 4.3.10.2.6, and 5.4.6.4, parts of which are quoted as follows:

4.3.3.1 Pipe insulation and coverings, duct coverings, duct linings, vapor retarder facings, adhesives, fasteners, tapes, and supplementary materials added to air ducts, plenums, panels, and duct silencers used in duct systems, unless otherwise provided for in 4.3.3.1.1 or 4.3.3.1.2., shall have, in the form in which they are used, a maximum flame spread index of 25 without evidence of continued progressive combustion and a maximum smoke developed index of 50 when tested in accordance with NFPA 255, Standard Method of Test of Surface Burning Characteristics of Building Materials.

4.3.3.1.1 Where these products are to be applied with adhesives, they shall be tested with such adhesives applied, or the adhesives used shall have a maximum flame spread index of 25 and a maximum smoke developed index of 50 when in the final dry state. (See 4.2.4.2.)

4.3.3.1.2 The flame spread and smoke developed index requirements of 4.3.3.1.1 shall not apply to air duct weatherproof coverings where they are located entirely outside of a building, do not penetrate a wall or roof, and do not create an exposure hazard.

4.3.3.2 Closure systems for use with rigid and flexible air ducts tested in accordance with UL 181, Standard for Safety Factory-Made Air Ducts and Air Connectors, shall have been tested, listed, and used in accordance with the conditions of their listings, in accordance with one of the following:

(1) UL 181A, Standard for Safety Closure Systems for Use with Rigid Air Ducts and Air Connectors

(2) UL 181B, Standard for Safety Closure Systems for Use with Flexible Air Ducts and Air Connectors

4.3.3.3 Air duct, panel, and plenum coverings and linings, and pipe insulation and coverings shall not flame, glow, smolder, or smoke when tested in accordance with a similar test for pipe covering, ASTM C 411, Standard Test Method for Hot-Surface Performance of High-Temperature Thermal Insulation, at the temperature to which they are exposed in service.

4.3.3.3.1 In no case shall the test temperature be below 121°C (250°F).

4.3.3.4 Air duct coverings shall not extend through walls or floors that are required to be fire stopped or required to have a fire resistance rating, unless such coverings meet the requirements of 5.4.6.4.

4.3.3.5* Air duct linings shall be interrupted at fire dampers to prevent interference with the operation of devices.

4.3.3.6 Air duct coverings shall not be installed so as to conceal or prevent the use of any service opening.

4.3.10.2.6 Materials exposed to the airflow shall be noncombustible or limited combustible and have a maximum smoke developed index of 50 or comply with the following.

4.3.10.2.6.1 Electrical wires and cables and optical fiber cables shall be listed as noncombustible or limited combustible and have a maximum smoke developed index of 50 or shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with NFPA 262, Standard Method of Test for Flame Travel and Smoke of Wires and Cables for Use in Air-Handling Spaces.

4.3.10.2.6.4 Optical-fiber and communication raceways shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with UL 2024, Standard for Safety Optical-Fiber Cable Raceway.

4.3.10.2.6.6 Supplementary materials for air distribution systems shall be permitted when complying with the provisions of 4.3.3.

5.4.6.4 Where air ducts pass through walls, floors, or partitions that are required to have a fire resistance rating and where fire dampers are not required, the opening in the construction around the air duct shall be as follows:

(1) Not exceeding a 25.4 mm (1 in.) average clearance on all sides

(2) Filled solid with an approved material capable of preventing the passage of flame and hot gases sufficient to ignite cotton waste when subjected to the time-temperature fire conditions required for fire barrier penetration as specified in NFPA 251, Standard Methods of Tests of Fire Endurance of Building Construction and Materials

2. Test methods: ASTM E84, UL 723, or NFPA 255.
3. Specified k factors are at 24 degrees C (75 degrees F) mean temperature unless stated otherwise. Where optional thermal insulation material is used, select thickness to provide thermal conductance no greater than that for the specified material. For pipe, use insulation manufacturer's published heat flow tables. For domestic hot water supply and return, run out insulation and condensation control insulation, no thickness adjustment need be made.
4. All materials shall be compatible and suitable for service temperature, and shall not contribute to corrosion or otherwise attack surface to which applied in either the wet or dry state.

- C. Every package or standard container of insulation or accessories delivered to the job site for use must have a manufacturer's stamp or label giving the name of the manufacturer and description of the material.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Shop Drawings:
 - 1. All information, clearly presented, shall be included to determine compliance with drawings and specifications and ASTM, federal and military specifications.
 - a. Insulation materials: Specify each type used and state surface burning characteristics.
 - b. Insulation facings and jackets: Each type used. Make it clear that white finish will be furnished for exposed ductwork, casings and equipment.
 - c. Insulation accessory materials: Each type used.
 - d. Manufacturer's installation and fitting fabrication instructions for flexible unicellular insulation.
 - e. Make reference to applicable specification paragraph numbers for coordination.
- C. Samples:
 - 1. Each type of insulation: Minimum size 100 mm (4 inches) square for board/block/ blanket; 150 mm (6 inches) long, full diameter for round types.
 - 2. Each type of facing and jacket: Minimum size 100 mm (4 inches square).
 - 3. Each accessory material: Minimum 120 ML (4 ounce) liquid container or 120 gram (4 ounce) dry weight for adhesives / cement / mastic.

1.5 STORAGE AND HANDLING OF MATERIAL

Store materials in clean and dry environment, pipe covering jackets shall be clean and unmarred. Place adhesives in original containers. Maintain ambient temperatures and conditions as required by printed instructions of manufacturers of adhesives, mastics and finishing cements.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. Federal Specifications (Fed. Spec.):
- L-P-535E (2)- 99Plastic Sheet (Sheeting): Plastic Strip; Poly (Vinyl Chloride) and Poly (Vinyl Chloride - Vinyl Acetate), Rigid.
- C. Military Specifications (Mil. Spec.):
- MIL-A-3316C (2)-90Adhesives, Fire-Resistant, Thermal Insulation
- MIL-A-24179A (1)-87Adhesive, Flexible Unicellular-Plastic Thermal Insulation
- MIL-C-19565C (1)-88Coating Compounds, Thermal Insulation, Fire-and Water-Resistant, Vapor-Barrier
- MIL-C-20079H-87Cloth, Glass; Tape, Textile Glass; and Thread, Glass and Wire-Reinforced Glass
- D. American Society for Testing and Materials (ASTM):
- A167-99(2004)Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
- B209-07Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
- C411-05Standard test method for Hot-Surface Performance of High-Temperature Thermal Insulation
- C449-07Standard Specification for Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement
- C533-09Standard Specification for Calcium Silicate Block and Pipe Thermal Insulation
- C534-08Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form
- C547-07Standard Specification for Mineral Fiber pipe Insulation
- C552-07Standard Specification for Cellular Glass Thermal Insulation

- C553-08Standard Specification for Mineral Fiber
Blanket Thermal Insulation for Commercial and
Industrial Applications
- C585-09Standard Practice for Inner and Outer Diameters
of Rigid Thermal Insulation for Nominal Sizes
of Pipe and Tubing (NPS System) R (1998)
- C612-10Standard Specification for Mineral Fiber Block
and Board Thermal Insulation
- C1126-04Standard Specification for Faced or Unfaced
Rigid Cellular Phenolic Thermal Insulation
- C1136-10Standard Specification for Flexible, Low
Permeance Vapor Retarders for Thermal
Insulation
- D1668-97a (2006)Standard Specification for Glass Fabrics (Woven
and Treated) for Roofing and Waterproofing
- E84-10Standard Test Method for Surface Burning
Characteristics of Building
Materials
- E119-09cStandard Test Method for Fire Tests of Building
Construction and Materials
- E136-09bStandard Test Methods for Behavior of Materials
in a Vertical Tube Furnace at 750 degrees C
(1380 F)
- E. National Fire Protection Association (NFPA):
- 90A-09Standard for the Installation of Air
Conditioning and Ventilating Systems
- 96-08Standards for Ventilation Control and Fire
Protection of Commercial Cooking Operations
- 101-09Life Safety Code
- 251-06Standard methods of Tests of Fire Endurance of
Building Construction Materials
- 255-06Standard Method of tests of Surface Burning
Characteristics of Building Materials
- F. Underwriters Laboratories, Inc (UL):
- 723UL Standard for Safety Test for Surface Burning
Characteristics of Building Materials with
Revision of 09/08

G. Manufacturer's Standardization Society of the Valve and Fitting Industry (MSS):

SP58-2009Pipe Hangers and Supports Materials, Design,
and Manufacture

PART 2 - PRODUCTS

2.1 MINERAL FIBER OR FIBER GLASS

- A. ASTM C612 (Board, Block), Class 1 or 2, density 48 kg/m^3 (3 pcf), $k = 0.037$ (0.26) at 24 degrees C (75 degrees F), external insulation for temperatures up to 204 degrees C (400 degrees F) with foil scrim (FSK) facing.
- B. ASTM C553 (Blanket, Flexible) Type I, Class B-3, Density 16 kg/m^3 (1 pcf), $k = 0.045$ (0.31) at 24 degrees C (75 degrees F), for use at temperatures up to 204 degrees C (400 degrees F) with foil scrim (FSK) facing.
- C. ASTM C547 (Pipe Fitting Insulation and Preformed Pipe Insulation), Class 1, $k = 0.037$ (0.26) at 24 degrees C (75 degrees F), for use at temperatures up to 230 degrees C (450 degrees F) with an all service vapor retarder jacket with polyvinyl chloride premolded fitting covering.

2.2 MINERAL WOOL OR REFRACTORY FIBER

- A. Comply with Standard ASTM C612, Class 3, 450 degrees C (850 degrees F).

2.3 RIGID CELLULAR PHENOLIC FOAM

- A. Preformed (molded) pipe insulation, ASTM C1126, type III, grade 1, $k = 0.021$ (0.15) at 10 degrees C (50 degrees F), for use at temperatures up to 121 degrees C (250 degrees F) with all service vapor retarder jacket with polyvinyl chloride premolded fitting covering.
- B. Equipment and Duct Insulation, ASTM C 1126, type II, grade 1, $k = 0.021$ (0.15) at 10 degrees C (50 degrees F), for use at temperatures up to 121 degrees C (250 degrees F) with rigid cellular phenolic insulation and covering, and all service vapor retarder jacket.

2.4 CELLULAR GLASS CLOSED-CELL

- A. Comply with Standard ASTM C177, C518, density 120 kg/m^3 (7.5 pcf) nominal, $k = 0.033$ (0.29) at 24 degrees C (75 degrees F).
- B. Pipe insulation for use at temperatures up to 200 degrees C (400 degrees F) with all service vapor retarder jacket.

2.5 POLYISOCYANURATE CLOSED-CELL RIGID

- A. Preformed (fabricated) pipe insulation, ASTM C591, type IV, $K=0.027$ (0.19) at 24 degrees C (75 degrees F), flame spread not over 25,

smoke developed not over 50, for use at temperatures up to 149 degree C (300 degree F) with factory applied PVDC or all service vapor retarder jacket with polyvinyl chloride premolded fitting covers.

- B. Equipment and duct insulation, ASTM C 591, type IV, K=0.027(0.19) at 24 degrees C (75 degrees F), for use at temperatures up to 149 degrees C (300 degrees F) with PVDC or all service jacket vapor retarder jacket.

2.6 FLEXIBLE ELASTOMERIC CELLULAR THERMAL

ASTM C177, C518, k = 0.039 (0.27) at 24 degrees C (75 degrees F), flame spread not over 25, smoke developed not over 50, for temperatures from minus 4 degrees C (40 degrees F) to 93 degrees C (200 degrees F). No jacket required.

2.7 CALCIUM SILICATE

- A. Preformed pipe Insulation: ASTM C533, Type I and Type II with indicator denoting asbestos-free material.
- B. Premolded Pipe Fitting Insulation: ASTM C533, Type I and Type II with indicator denoting asbestos-free material.
- C. Equipment Insulation: ASTM C533, Type I and Type II
- D. Characteristics:

Insulation Characteristics		
ITEMS	TYPE I	TYPE II
Temperature, maximum degrees C (degrees F)	649 (1200)	927 (1700)
Density (dry), Kg/m ³ (lb/ ft ³)	232 (14.5)	288 (18)
Thermal conductivity: Min W/ m K (Btu in/h ft ² degrees F)@ mean temperature of 93 degrees C (200 degrees F)	0.059 (0.41)	0.078 (0.540)
Surface burning characteristics:		
Flame spread Index, Maximum	0	0
Smoke Density index, Maximum	0	0

2.8 INSULATION FACINGS AND JACKETS

- A. Vapor Retarder, higher strength with low water permeance \leq 0.02 or less perm rating, Beach puncture 50 units for insulation facing on exposed ductwork, casings and equipment, and for pipe insulation jackets. Facings and jackets shall be all service type (ASJ) or PVDC Vapor Retarder jacketing.
- B. ASJ jacket shall be white kraft bonded to 0.025 mm (1 mil) thick aluminum foil, fiberglass reinforced, with pressure sensitive adhesive

closure. Comply with ASTM C1136. Beach puncture 50 units, Suitable for painting without sizing. Jackets shall have minimum 40 mm (1-1/2 inch) lap on longitudinal joints and minimum 75 mm (3 inch) butt strip on end joints. Butt strip material shall be same as the jacket. Lap and butt strips shall be self-sealing type with factory-applied pressure sensitive adhesive.

- C. Vapor Retarder medium strength with low water vapor permeance of 0.02 or less perm rating), Beach puncture 25 units: Foil-Scrim-Kraft (FSK) or PVDC vapor retarder jacketing type for concealed ductwork and equipment.
- D. Field applied vapor barrier jackets shall be provided, in addition to the specified facings and jackets, on all exterior piping and ductwork as well as on interior piping and ductwork exposed to outdoor air (i.e.; in ventilated attics, piping in ventilated (not air conditioned) spaces, etc.) conveying fluids below ambient temperature. The vapor barrier jacket shall consist of a multi-layer laminated cladding with a maximum water vapor permeance of 0.001 perms. The minimum puncture resistance shall be 35 cm-kg (30 inch-pounds) for interior locations and 92 cm-kg (80 inch-pounds) for exterior or exposed locations or where the insulation is subject to damage.
- E. Glass Cloth Jackets: Presized, minimum 0.18 kg per square meter (7.8 ounces per square yard), 2000 kPa (300 psig) bursting strength with integral vapor retarder where required or specified. Weather proof if utilized for outside service.
- F. Factory composite materials may be used provided that they have been tested and certified by the manufacturer.
- G. Pipe fitting insulation covering (jackets): Fitting covering shall be premolded to match shape of fitting and shall be polyvinyl chloride (PVC) conforming to Fed Spec L-P-335, composition A, Type II Grade GU, and Type III, minimum thickness 0.7 mm (0.03 inches). Provide color matching vapor retarder pressure sensitive tape.
- H. Aluminum Jacket-Piping systems: ASTM B209, 3003 alloy, H-14 temper, 0.6 mm (0.023 inch) minimum thickness with locking longitudinal joints. Jackets for elbows, tees and other fittings shall be factory-fabricated to match shape of fitting and of 0.6 mm (0.024) inch minimum thickness aluminum. Fittings shall be of same construction as straight run jackets but need not be of the same alloy. Factory-fabricated stainless steel bands shall be installed on all circumferential joints. Bands shall be 13 mm (0.5 inch) wide on 450 mm (18 inch) centers. System shall be weatherproof if utilized for outside service.

2.9 PIPE COVERING PROTECTION SADDLES

- A. Cold pipe support: Premolded pipe insulation 180 degrees (half-shells) on bottom half of pipe at supports. Material shall be cellular glass or high density Polyisocyanurate insulation of the same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m³ (3.0 pcf).

Nominal Pipe Size and Accessories Material (Insert Blocks)	
Nominal Pipe Size mm (inches)	Insert Blocks mm (inches)
Up through 125 (5)	150 (6) long
150 (6)	150 (6) long
200 (8), 250 (10), 300 (12)	225 (9) long
350 (14), 400 (16)	300 (12) long
450 through 600 (18 through 24)	350 (14) long

- B. Warm or hot pipe supports: Premolded pipe insulation (180 degree half-shells) on bottom half of pipe at supports. Material shall be high density Polyisocyanurate (for temperatures up to 149 degrees C [300 degrees F]), cellular glass or calcium silicate. Insulation at supports shall have same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m³ (3.0 pcf).

2.10 ADHESIVE, MASTIC, CEMENT

- A. Mil. Spec. MIL-A-3316, Class 1: Jacket and lap adhesive and protective finish coating for insulation.
- B. Mil. Spec. MIL-A-3316, Class 2: Adhesive for laps and for adhering insulation to metal surfaces.
- C. Mil. Spec. MIL-A-24179, Type II Class 1: Adhesive for installing flexible unicellular insulation and for laps and general use.
- D. Mil. Spec. MIL-C-19565, Type I: Protective finish for outdoor use.
- E. Mil. Spec. MIL-C-19565, Type I or Type II: Vapor barrier compound for indoor use.
- F. ASTM C449: Mineral fiber hydraulic-setting thermal insulating and finishing cement.
- G. Other: Insulation manufacturers' published recommendations.

2.11 MECHANICAL FASTENERS

- A. Pins, anchors: Welded pins, or metal or nylon anchors with galvanized steel-coated or fiber washer, or clips. Pin diameter shall be as recommended by the insulation manufacturer.

- B. Staples: Outward clinching galvanized steel.
- C. Wire: 1.3 mm thick (18 gage) soft annealed galvanized or 1.9 mm (14 gage) copper clad steel or nickel copper alloy.
- D. Bands: 13 mm (0.5 inch) nominal width, brass, galvanized steel, aluminum or stainless steel.

2.12 REINFORCEMENT AND FINISHES

- A. Glass fabric, open weave: ASTM D1668, Type III (resin treated) and Type I (asphalt treated).
- B. Glass fiber fitting tape: Mil. Spec MIL-C-20079, Type II, Class 1.
- C. Tape for Flexible Elastomeric Cellular Insulation: As recommended by the insulation manufacturer.
- D. Hexagonal wire netting: 25 mm (one inch) mesh, 0.85 mm thick (22 gage) galvanized steel.
- E. Corner beads: 50 mm (2 inch) by 50 mm (2 inch), 0.55 mm thick (26 gage) galvanized steel; or, 25 mm (1 inch) by 25 mm (1 inch), 0.47 mm thick (28 gage) aluminum angle adhered to 50 mm (2 inch) by 50 mm (2 inch) Kraft paper.
- F. PVC fitting cover: Fed. Spec L-P-535, Composition A, 11-86 Type II, Grade GU, with Form B Mineral Fiber insert, for media temperature 4 degrees C (40 degrees F) to 121 degrees C (250 degrees F). Below 4 degrees C (40 degrees F) and above 121 degrees C (250 degrees F). Provide double layer insert. Provide color matching vapor barrier pressure sensitive tape.

2.13 FIRESTOPPING MATERIAL

Other than pipe and duct insulation, refer to Section 07 84 00
FIRESTOPPING.

2.14 FLAME AND SMOKE

Unless shown otherwise all assembled systems shall meet flame spread 25 and smoke developed 50 rating as developed under ASTM, NFPA and UL standards and specifications. See paragraph 1.3 "Quality Assurance".

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

- A. Required pressure tests of duct and piping joints and connections shall be completed and the work approved by the Resident Engineer for application of insulation. Surface shall be clean and dry with all foreign materials, such as dirt, oil, loose scale and rust removed.
- B. Except for specific exceptions, insulate entire specified equipment, piping (pipe, fittings, valves, accessories), and duct systems.

Insulate each pipe and duct individually. Do not use scrap pieces of insulation where a full length section will fit.

- C. Insulation materials shall be installed in a first class manner with smooth and even surfaces, with jackets and facings drawn tight and smoothly cemented down at all laps. Insulation shall be continuous through all sleeves and openings, except at fire dampers and duct heaters (NFPA 90A). Vapor retarders shall be continuous and uninterrupted throughout systems with operating temperature 16 degrees C (60 degrees F) and below. Lap and seal vapor retarder over ends and exposed edges of insulation. Anchors, supports and other metal projections through insulation on cold surfaces shall be insulated and vapor sealed for a minimum length of 150 mm (6 inches).
- D. Install vapor stops at all insulation terminations on either side of valves, pumps and equipment and particularly in straight lengths of pipe insulation.
- E. Construct insulation on parts of equipment such as chilled water pumps and heads of chillers, convertors and heat exchangers that must be opened periodically for maintenance or repair, so insulation can be removed and replaced without damage. Install insulation with bolted 1 mm thick (20 gage) galvanized steel or aluminum covers as complete units, or in sections, with all necessary supports, and split to coincide with flange/split of the equipment.
- F. Insulation on hot piping and equipment shall be terminated square at items not to be insulated, access openings and nameplates. Cover all exposed raw insulation with white sealer or jacket material.
- G. Protect all insulations outside of buildings with aluminum jacket using lock joint or other approved system for a continuous weather tight system. Access doors and other items requiring maintenance or access shall be removable and sealable.
- H. HVAC work not to be insulated:
 - 1. Internally insulated ductwork and air handling units.
 - 2. Relief air ducts (Economizer cycle exhaust air).
 - 3. Exhaust air ducts and plenums, and ventilation exhaust air shafts.
 - 4. Equipment: Expansion tanks, hot water pumps.
 - 5. In hot piping: Unions, flexible connectors, control valves, safety valves and discharge vent piping, vacuum breakers, thermostatic vent valves, steam traps 20 mm (3/4 inch) and smaller, exposed piping

- through floor for convectors and radiators. Insulate piping to within approximately 75 mm (3 inches) of uninsulated items.
- I. Apply insulation materials subject to the manufacturer's recommended temperature limits. Apply adhesives, mastic and coatings at the manufacturer's recommended minimum coverage.
 - J. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights. The elbow/ fitting insulation shall be field-fabricated, mitered or factory prefabricated to the necessary size and shape to fit on the elbow/ fitting. Use of polyurethane spray-foam to fill a PVC elbow jacket is prohibited on cold applications.
 - K. Firestop Pipe and Duct insulation:
 - 1. Provide firestopping insulation at fire and smoke barriers through penetrations. Fire stopping insulation shall be UL listed as defines in Section 07 84 00, FIRESTOPPING.
 - 2. Pipe and duct penetrations requiring firestop insulation including, but not limited to the following:
 - a. Pipe risers through floors
 - b. Pipe or duct chase walls and floors
 - c. Smoke partitions
 - d. Fire partitions
 - L. Freeze protection of above grade outdoor piping (over heat tracing tape): 26 mm (10 inch) thick insulation, for all pipe sizes 75 mm(3 inches) and smaller and 25 mm(1inch) thick insulation for larger pipes. Provide metal jackets for all pipes. Provide for cold water make-up to cooling towers and condenser water piping and chilled water piping as described in Section 23 21 13, HYDRONIC PIPING (electrical heat tracing systems).
 - M. Provide vapor barrier jackets over insulation as follows:
 - 1. All piping and ductwork exposed to outdoor weather.
 - 2. All interior piping and ducts conveying fluids exposed to outdoor air (i.e. in attics, ventilated (not air conditioned) spaces, etc.) below ambient air temperature.
 - N. Provide metal jackets over insulation as follows:
 - 1. All piping and ducts exposed to outdoor weather.
 - 2. Piping exposed in building, within 1800 mm (6 feet) of the floor, that connects to sterilizers, kitchen and laundry equipment. Jackets may be applied with pop rivets. Provide aluminum angle ring escutcheons at wall, ceiling or floor penetrations.

3. A 50 mm (2 inch) overlap is required at longitudinal and circumferential joints.

3.2 INSULATION INSTALLATION

A. Mineral Fiber Board:

1. Faced board: Apply board on pins spaced not more than 300 mm (12 inches) on center each way, and not less than 75 mm (3 inches) from each edge of board. In addition to pins, apply insulation bonding adhesive to entire underside of horizontal metal surfaces. Butt insulation edges tightly and seal all joints with laps and butt strips. After applying speed clips cut pins off flush and apply vapor seal patches over clips.
2. Plain board:
 - a. Insulation shall be scored, beveled or mitered to provide tight joints and be secured to equipment with bands spaced 225 mm (9 inches) on center for irregular surfaces or with pins and clips on flat surfaces. Use corner beads to protect edges of insulation.
 - b. For hot equipment: Stretch 25 mm (1 inch) mesh wire, with edges wire laced together, over insulation and finish with insulating and finishing cement applied in one coat, 6 mm (1/4 inch) thick, trowel led to a smooth finish.
 - c. For cold equipment: Apply meshed glass fabric in a tack coat 1.5 to 1.7 square meter per liter (60 to 70 square feet per gallon) of vapor mastic and finish with mastic at 0.3 to 0.4 square meter per liter (12 to 15 square feet per gallon) over the entire fabric surface.
 - d. Chilled water pumps: Insulate with removable and replaceable 1 mm thick (20 gage) aluminum or galvanized steel covers lined with insulation. Seal closure joints/flanges of covers with gasket material. Fill void space in enclosure with flexible mineral fiber insulation.
3. Exposed, unlined ductwork and equipment in unfinished areas, mechanical and electrical equipment rooms and attics, interstitial spaces and duct work exposed to outdoor weather:
 - a. 40 mm (1-1/2 inch) thick insulation faced with ASJ (white all service jacket): Supply air duct.
 - b. 40 mm (1-1/2 inch) thick insulation faced with ASJ: Return air duct.

- c. Outside air intake ducts: 50 mm (2 inch) thick insulation faced with ASJ.
- d. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a reinforcing membrane and two coats of vapor barrier mastic or multi-layer vapor barrier with a maximum water vapor permeability of 0.001 perms.
- 4. Cold equipment: 40 mm (1-1/2 inch) thick insulation faced with ASJ.
 - a. Chilled water pumps, water filter, chemical feeder pot or tank.
 - b. Pneumatic, cold storage water and surge tanks.
- 5. Hot equipment: 40 mm (1-1/2 inch) thick insulation faced with ASJ.
 - a. Domestic water heaters and hot water storage tanks (not factory insulated).
- B. Flexible Mineral Fiber Blanket:
 - 1. Adhere insulation to metal with 75 mm (3 inch) wide strips of insulation bonding adhesive at 200 mm (8 inches) on center all around duct. Additionally secure insulation to bottom of ducts exceeding 600 mm (24 inches) in width with pins welded or adhered on 450 mm (18 inch) centers. Secure washers on pins. Butt insulation edges and seal joints with laps and butt strips. Staples may be used to assist in securing insulation. Seal all vapor retarder penetrations with mastic. Sagging duct insulation will not be acceptable. Install firestop duct insulation where required.
 - 2. Supply air ductwork to be insulated includes main and branch ducts from AHU discharge to room supply outlets, and the bodies of ceiling outlets to prevent condensation. Insulate sound attenuator units, coil casings and damper frames. To prevent condensation insulate trapeze type supports and angle iron hangers for flat oval ducts that are in direct contact with metal duct.
 - 3. Concealed supply air ductwork.
 - a. Above ceilings at a roof level, in attics, and duct work exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with FSK.
 - b. Above ceilings for other than roof level: 40 mm (1 ½ inch) thick insulation faced with FSK.
 - 4. Concealed return air duct:
 - a. In attics (where not subject to damage) and where exposed to outdoor weather: 50mmmm (2 inch)thick insulation faced with FSK.

- b. Above ceilings at a roof level, unconditioned areas, and in chases with external wall or containing steam piping; 40 mm (1-1/2 inch) thick, insulation faced with FSK.
 - c. In interstitial spaces (where not subject to damage): 40 mm (1-1/2 inch thick insulation faced with FSK.
 - d. Concealed return air ductwork in other locations need not be insulated.
- 5. Concealed outside air duct: 40 mm (1-1/2 inch) thick insulation faced with FSK.
- C. Molded Mineral Fiber Pipe and Tubing Covering:
 - 1. Fit insulation to pipe or duct, aligning longitudinal joints. Seal longitudinal joint laps and circumferential butt strips by rubbing hard with a nylon sealing tool to assure a positive seal. Staples may be used to assist in securing insulation. Seal all vapor retarder penetrations on cold piping with a generous application of vapor barrier mastic. Provide inserts and install with metal insulation shields at outside pipe supports. Install freeze protection insulation over heating cable.
 - 2. Contractor's options for fitting, flange and valve insulation:
 - a. Insulating and finishing cement for sizes less than 100 mm (4 inches) operating at surface temperature of 16 degrees C (61 degrees F) or more.
 - b. Factory premolded, one piece PVC covers with mineral fiber, (Form B), inserts. Provide two insert layers for pipe temperatures below 4 degrees C (40 degrees F), or above 121 degrees C (250 degrees F). Secure first layer of insulation with twine. Seal seam edges with vapor barrier mastic and secure with fitting tape.
 - c. Factory molded, ASTM C547 or field mitered sections, joined with adhesive or wired in place. For hot piping finish with a smoothing coat of finishing cement. For cold fittings, 16 degrees C (60 degrees F) or less, vapor seal with a layer of glass fitting tape imbedded between two 2 mm (1/16 inch) coats of vapor barrier mastic.
 - d. Fitting tape shall extend over the adjacent pipe insulation and overlap on itself at least 50 mm (2 inches).
 - 3. Nominal thickness in millimeters and inches specified in the schedule at the end of this section.

D. Rigid Cellular Phenolic Foam:

1. Rigid closed cell phenolic insulation may be provided for piping, ductwork and equipment for temperatures up to 121 degrees C (250 degrees F).
2. Note the NFPA 90A burning characteristics requirements of 25/50 in paragraph 1.3.B
3. Provide secure attachment facilities such as welding pins.
4. Apply insulation with joints tightly drawn together
5. Apply adhesives, coverings, neatly finished at fittings, and valves.
6. Final installation shall be smooth, tight, neatly finished at all edges.
7. Minimum thickness in millimeters (inches) specified in the schedule at the end of this section.
8. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a multi-layer vapor barrier with a maximum water vapor permeance of 0.00 perms.
9. Condensation control insulation: Minimum 25 mm (1.0 inch) thick for all pipe sizes.
 - a. HVAC: Cooling coil condensation piping to waste piping fixture or drain inlet. Omit insulation on plastic piping in mechanical rooms.

E. Cellular Glass Insulation:

1. Pipe and tubing, covering nominal thickness in millimeters and inches as specified in the schedule at the end of this section.
2. Underground Piping Other than or in lieu of that Specified in Section 23 21 13, HYDRONIC PIPING and Section 33 63 00, STEAM ENERGY DISTRIBUTION: Type II, factory jacketed with a 3 mm laminate jacketing consisting of 3000 mm x 3000 mm (10 ft x 10 ft) asphalt impregnated glass fabric, bituminous mastic and outside protective plastic film.
 - a. 75 mm (3 inches) thick for hot water piping.
 - b. As scheduled at the end of this section for chilled water piping.
 - c. Underground piping: Apply insulation with joints tightly butted. Seal longitudinal self-sealing lap. Use field fabricated or factory made fittings. Seal butt joints and fitting with jacketing as recommended by the insulation manufacturer. Use 100 mm (4 inch) wide strips to seal butt joints.
 - d. Provide expansion chambers for pipe loops, anchors and wall penetrations as recommended by the insulation manufacturer.

- e. Underground insulation shall be inspected and approved by the Resident Engineer as follows:
 - 1) Insulation in place before coating.
 - 2) After coating.
- f. Sand bed and backfill: Minimum 75 mm (3 inches) all around insulated pipe or tank, applied after coating has dried.
- 3. Cold equipment: 50 mm (2 inch) thick insulation faced with ASJ for chilled water pumps, water filters, chemical feeder pots or tanks, expansion tanks, air separators and air purgers.
- 4. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a reinforcing membrane and two coats of vapor barrier mastic or multi-layer vapor barrier with a water vapor permeability of 0.00 perms.
- F. Polyisocyanurate Closed-Cell Rigid Insulation:
 - 1. Polyisocyanurate closed-cell rigid insulation (PIR) may be provided for exterior piping, equipment and ductwork for temperature up to 149 degree C (300 degree F).
 - 2. Install insulation, vapor barrier and jacketing per manufacturer's recommendations. Particular attention should be paid to recommendations for joint staggering, adhesive application, external hanger design, expansion/contraction joint design and spacing and vapor barrier integrity.
 - 3. Install insulation with all joints tightly butted (except expansion joints in hot applications).
 - 4. If insulation thickness exceeds 63 mm (2.5 inches), install as a double layer system with longitudinal (lap) and butt joint staggering as recommended by manufacturer.
 - 5. For cold applications, vapor barrier shall be installed in a continuous manner. No staples, rivets, screws or any other attachment device capable of penetrating the vapor barrier shall be used to attach the vapor barrier or jacketing. No wire ties capable of penetrating the vapor barrier shall be used to hold the insulation in place. Banding shall be used to attach PVC or metal jacketing.
 - 6. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights. The elbow/ fitting insulation shall be field-fabricated, mitered or factory prefabricated to the necessary size and shape to fit on the elbow/

- fitting. Use of polyurethane spray-foam to fill PVC elbow jacket is prohibited on cold applications.
7. For cold applications, the vapor barrier on elbows/fittings shall be either mastic-fabric-mastic or 2 mil thick PVDC vapor barrier adhesive tape.
 8. All PVC and metal jacketing shall be installed so as to naturally shed water. Joints shall point down and shall be sealed with either adhesive or caulking (except for periodic slip joints).
 9. Underground piping: Follow instructions for above ground piping but the vapor retarder jacketing shall be 6 mil thick PVDC or minimum 30 mil thick rubberized bituminous membrane. Sand bed and backfill shall be a minimum of 150 mm (6 inches) all around insulated pipe.
 10. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a multi-layer vapor barrier with a water vapor permeance of 0.00 perms.
 11. Note the NFPA 90A burning characteristic requirements of 25/50 in paragraph 1.3B. Refer to paragraph 3.1 for items not to be insulated.
 12. Minimum thickness in millimeter (inches) specified in the schedule at the end of this section.
- G. Flexible Elastomeric Cellular Thermal Insulation:
1. Apply insulation and fabricate fittings in accordance with the manufacturer's installation instructions and finish with two coats of weather resistant finish as recommended by the insulation manufacturer.
 2. Pipe and tubing insulation:
 - a. Use proper size material. Do not stretch or strain insulation.
 - b. To avoid undue compression of insulation, provide cork stoppers or wood inserts at supports as recommended by the insulation manufacturer. Insulation shields are specified under Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
 - c. Where possible, slip insulation over the pipe or tubing prior to connection, and seal the butt joints with adhesive. Where the slip-on technique is not possible, slit the insulation and apply it to the pipe sealing the seam and joints with contact adhesive. Optional tape sealing, as recommended by the manufacturer, may be employed. Make changes from mineral fiber insulation in a straight run of pipe, not at a fitting. Seal joint with tape.

3. Apply sheet insulation to flat or large curved surfaces with 100 percent adhesive coverage. For fittings and large pipe, apply adhesive to seams only.
4. Pipe insulation: nominal thickness in millimeters (inches as specified in the schedule at the end of this section.
5. Minimum 20 mm (0.75 inch) thick insulation for pneumatic control lines for a minimum distance of 6 m (20 feet) from discharge side of the refrigerated dryer.
6. Use Class S (Sheet), 20 mm (3/4 inch) thick for the following:
 - a. Chilled water pumps
 - b. Bottom and sides of metal basins for winterized cooling towers (where basin water is heated).
 - c. Chillers, insulate any cold chiller surfaces subject to condensation which has not been factory insulated.
 - d. Piping inside refrigerators and freezers: Provide heat tape under insulation.
7. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a multi-layer vapor barrier with a water vapor permeance of 0.00 perms.

H. Calcium Silicate:

1. Minimum thickness in millimeter (inches) specified in the schedule at the end of this section for piping other than in boiler plant. See paragraphs 3.3 through 3.7 for Boiler Plant Applications.

I. Temperature range 32 to 99 degrees C (90 to 211 degrees F):

1. Application: Pumped condensate, vacuum heating return, gravity and pumped heating returns, condensate transfer, condensate transfer pump recirculation, heated oil system to heaters and returns from burners, condensate return from convertors and heated water storage tanks.
2. Insulation Jacket:
 - a. Calcium silicate for piping from zero to 1800 mm (six feet above boiler room floor, feedwater heater mezzanine floor and access platform and any floor or access platform on which tanks or pumps are located.
 - b. Mineral fiber or rigid closed-cell phenolic foam for remaining locations.
 - c. ASJ with PVC premolded fitting coverings.
3. Thickness-calcium silicate and mineral fiber insulation:

Nominal Thickness Of Insulation	
Pipe Diameter mm (in)	Insulation Thickness mm (in)
25 (1 and below)	38 (1.5)
25 to 38 (1-1/4 to 1-1/2)	50(2)
38 (1-1/2) and above	75 (3)

4. Thickness-rigid closed-cell phenolic foam insulation:

Nominal Thickness Of Insulation	
Pipe Diameter mm (in)	Insulation Thickness mm (in)
25 (1 and below)	19 (0.75)
25 to 38 (1-1/4 to 1-1/2)	19 (0.75)
38 (1-1/2) and above	25 (1)

J. Protective insulation to prevent personnel injury:

1. Application: Piping from zero to 1800 mm (6 feet) above all floors and access platforms including continuous blowoff, feedwater and boiler water sample, blowoff tank vent, flash tank vents and condensater tank vent, shot-type chemical feed, fire tube boiler bottom blowoff after valves, valve by-passes.
2. Insulation thickness: 25 mm (1 inch).
3. Insulation and jacket: Calcium silicate with ASJ except provide aluminum jacket on piping at boilers within 1800 mm (6 feet) of floor. Use PVC premolded fitting coverings when all service jacket is utilized.

K. Installation:

1. At pipe supports, weld pipe covering protection saddles to pipe, except where MS-SP58, type 3 pipe clamps are utilized.
2. Insulation shall be firmly applied, joints butted tightly, mechanically fastened by stainless steel wires on 300 mm (12 inch) centers.
3. At support points, fill and thoroughly pack space between pipe covering protective saddle bearing area.
4. Terminate insulation and jacket hard and tight at anchor points.
5. Terminate insulation at piping facilities not insulated with a 45 degree chamfered section of insulating and finishing cement covered with jacket.
6. On calcium silicate, mineral fiber and rigid closed-cell phenolic foam systems, insulated flanged fittings, strainers and valves with

sections of pipe insulation cut, fitted and arranged neatly and firmly wired in place. Fill all cracks, voids and coat outer surface with insulating cement. Install jacket. Provide similar construction on welded and threaded fittings on calcium silicate systems or use premolded fitting insulation.

7. On mineral fiber systems, insulate welded and threaded fittings more than 50 mm (2 inches) in diameter with compressed blanket insulation (minimum 2/1) and finish with jacket or PVC cover.
8. Insulate fittings 50 mm (2 inches) and smaller with mastic finishing material and cover with jacket.
9. Insulate valve bonnet up to valve side of bonnet flange to permit bonnet flange removal without disturbing insulation.
10. Install jacket smooth, tight and neatly finish all edges. Over wrap ASJ butt strips by 50 percent. Secure aluminum jacket with stainless steel bands 300 mm (12 inches) on center or aluminum screws on 200 mm (4 inch) centers.
11. Do not insulate basket removal flanges on strainers.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.4 PIPE INSULATION SCHEDULE

Provide insulation for piping systems as scheduled below:

Insulation Thickness Millimeters (Inches)					
		Nominal Pipe Size Millimeters (Inches)			
Operating Temperature Range/Service	Insulation Material	Less than 25 (1)	25 - 32 (1 - 1¼)	38 - 75 (1½ - 3)	100 (4) and Above
122-177 degrees C	Mineral Fiber	75 (3)	100 (4)	113 (4.5)	113 (4.5)

(251-350 degrees F) (HPS, MPS)	(Above ground piping only)				
93-260 degrees C (200-500 degrees F) (HPS, HPR)	Calcium Silicate	100 (4)	125 (5)	150 (6)	150 (6)
100-121 degrees C (212-250 degrees F) (HPR, MPR, LPS, vent piping from PRV Safety Valves, Condensate receivers and flash tanks)	Mineral Fiber (Above ground piping only)	62 (2.5)	62 (2.5)	75 (3.0)	75 (3.0)
100-121 degrees C (212-250 degrees F) (HPR, MPR, LPS, vent piping from PRV Safety Valves, Condensate receivers and flash tanks)	Rigid Cellular Phenolic Foam	50 (2.0)	50 (2.0)	75 (3.0)	75 (3.0)
38-94 degrees C (100-200 degrees F) (LPR, PC, HWH, HWHR, GH and GHR)	Mineral Fiber (Above ground piping only)	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
38-99 degrees C (100-211 degrees F) (LPR, PC, HWH, HWHR, GH and GHR)	Rigid Cellular Phenolic Foam	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
39-99 degrees C (100-211 degrees F) (LPR, PC, HWH, HWHR, GH and GHR)	Polyiso- cyanurate Closed-Cell Rigid	38 (1.5)	38 (1.5)	----	----

GH and GHR)	(Exterior Locations only)				
38-94 degrees C (100-200 degrees F) (LPR, PC, HWH, HWHR, GH and GHR)	Flexible Elastomeric Cellular Thermal (Above ground piping only)	38 (1.5)	38 (1.5)	----	----
4-16 degrees C (40-60 degrees F) (CH, CHR, GC, GCR and RS for DX refrigeration)	Rigid Cellular Phenolic Foam	38 (1.5)	38 (1.5)	38 (1.5)	38 (1.5)
4-16 degrees C (40-60 degrees F) (CH and CHR within chiller room and pipe chase and underground)	Cellular Glass Closed-Cell	50 (2.0)	50 (2.0)	75 (3.0)	75 (3.0)
4-16 degrees C (40-60 degrees F) (CH, CHR, GC, GCR and RS for DX refrigeration)	Cellular Glass Closed-Cell	38 (1.5)	38 (1.5)	38 (1.5)	38 (1.5)
4-16 degrees C (40-60 degrees F) (CH, CHR, GC and GCR (where underground)	Polyiso-cyanurate Closed-Cell Rigid	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
4-16 degrees C (40-60 degrees F) (CH, CHR, GC, GCR	Polyiso-cyanurate Closed-Cell Rigid	38 (1.5)	38 (1.5)	38 (1.5)	38 (1.5)

and RS for DX refrigeration)	(Exterior Locations only)				
(40-60 degrees F) (CH, CHR, GC, GCR and RS for DX refrigeration)	Flexible Elastomeric Cellular Thermal (Above ground piping only)	38 (1.5)	38 (1.5)	38 (1.5)	38 (1.5)

- - - E N D - - -

SECTION 23 08 00**COMMISSIONING OF HVAC SYSTEMS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. The requirements of this Section apply to all sections of Division 23.
- B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. A Commissioning Agent (CxA) appointed by the Department of Veterans Affairs will manage the commissioning process.

1.2 RELATED WORK

- A. Section 01 00 00 GENERAL REQUIREMENTS.
- B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.
- C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.3 SUMMARY

- A. This Section includes requirements for commissioning the HVAC systems, subsystems and equipment. This Section supplements the general requirements specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.
- B. The commissioning activities have been developed to support the VA requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.
- C. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more specifics regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

- A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

- A. Commissioning of a system or systems specified in this Division is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel, is required in cooperation with the VA and the Commissioning Agent.

B. The following HVAC systems will be commissioned:

1. Air Handling Systems (including terminal units and energy recovery units)
2. Heating Hot Water Systems (Boilers, controls, instrumentation and gages, flues, heating water pumps and motors, Variable Speed Drives, mixing valves).
3. Chilled Water Systems (Chilled water pumps and motors, Variable Speed Drives, chiller motor/compressor, controls, instrumentation and safeties, isolation valves, blending valves, side stream water cleaners/scrubbers/filters).
4. Exhaust Fans (Fan, motor, controls and safeties).
5. Direct Digital Control System (BACnet or similar Local Area Network (LAN), Operator Work Station hardware and software, building controller hardware and software, terminal unit controller hardware and software, all sequences of operation, system accuracy and response time).
6. Room Pressurization Equipment (Pressure sensors, terminal units/dampers, and controls and alarms).
7. HVAC Water Treatment Systems (Closed circuits - including shot feeders and final water analysis, open circuits - including water analysis, chemical/biocide tanks, injection piping, chemical/biocide pumps and motors, controls, water meter, and automatic blowdown).

1.6 SUBMITTALS

- A. The commissioning process requires review of selected Submittals. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.
- B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION**3.1 PRE-FUNCTIONAL CHECKLISTS**

- A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the type of equipment will be returned to the Contractor for correction and resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.2 CONTRACTORS TESTS

- A. Contractor tests as required by other sections of Division 23 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. The Commissioning Agent will witness selected Contractor tests. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.3 SYSTEMS FUNCTIONAL PERFORMANCE TESTING:

- A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the Resident Engineer. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional details.

3.4 TRAINING OF VA PERSONNEL

- A. Training of the VA's operation and maintenance personnel is required in cooperation with the Resident Engineer and Commissioning Agent.

Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. The instruction shall be scheduled in coordination with the Resident Engineer after submission and approval of formal training plans. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 23 Sections for additional Contractor training requirements.

----- END -----

SECTION 23 09 23
DIRECT-DIGITAL CONTROL AND INSTRUMENTATION (DDC)

PART 1 - GENERAL

1.1 WORK INCLUDED

- A. Furnish a totally native Alerton BACnet-based system. System shall be connected to existing Alerton BACTalk operator's workstations in building 114, 50, 85, 67, & 46 (7 total) using Microsoft Windows XP Professional as the operating system and shall be based on a distributed control system in accordance with this specification. The operator's workstation, all building controllers, application controllers, and all input/output devices shall communicate using the protocols and network standards as defined by ANSI/ASHRAE Standard 135-2001, BACnet. In other words, all workstations and controllers, including unitary controllers, shall be Alerton BACTalk native BACnet devices. No gateways shall be used for communication to controllers installed under this section. Gateways may be used for communication to existing systems or to systems installed under other sections.
- B. Prepare individual hardware layouts, interconnection drawings, and software configuration from project design data as needed.
- C. Implement the detailed design for all analog and binary objects, system databases, graphic displays, logs, and management reports based on control descriptions, logic drawings, configuration data, and bid documents.
- D. Design: Provide, and install all equipment cabinets, panels, data communication network cables needed, and all associated hardware.
- E. Provide and install all interconnecting cables between supplied cabinets, application controllers, and input/output devices.
- F. Provide and install all interconnecting cables between all operator's terminals and peripheral devices (such as printers, etc.) supplied under this section.
- G. Provide supervisory specialists and technicians at the job site to assist in all phases of system installation, startup, and commissioning.
- H. Provide a comprehensive operator and technician training program.
- I. Provide as-built documentation on approved media, the sum total of which accurately represents the final system.

- J. Provide new sensors, dampers, and valves where required. Install only new electronic actuators. No used components shall be used as any part or piece of installed system.

1.2 RELATED WORK

- A. Section 230511, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION
- B. Section 232113, HYDRONIC PIPING
- C. Section 230593, TESTING, ADJUSTING AND BALANCING
- D. Section 16111, CONDUIT SYSTEMS
- E. Section 16127, CABLES, LOW VOLTAGE

1.3 SUBMITTALS

- A. Detailed sequence of operation

1.4 WARRANTY

- A. Warranty shall cover all costs for parts, labor, associated travel, and expenses for a period of one year from completion of system acceptance.
- B. Hardware and software personnel supporting this warranty agreement shall provide on-site or off-site service in a timely manner after failure notification to the vendor. The maximum acceptable response time to provide this service at the site shall be 24 hours Monday through Friday, 48 hours on Saturday and Sunday.
- C. This warranty shall apply equally to both hardware and software.

PART 2 - PRODUCTS

2.1 BUILDING CONTROLLER (GLOBAL CONTROLLER - BCM POWER SUPPLY AND BCM ETHERNET MODULE IF NO GLOBAL CONTROLLER EXISTS, BCM MS/TP IF EXPANSION OF EXISTING BCM IS REQUIRED)

A. General

1. All communication with operator workstation and all application controllers shall be via BACnet. Building controller shall incorporate as a minimum, the functions of a 3-way BACnet router. Controller shall route BACnet messages between the high-speed LAN (Ethernet 10/100MHz), master slave token passing (MS/TP) LANs, a point-to-point (PTP - RS-232) connection and modem.
 - a. Each MS/TP LAN must be software configurable from 9.6 to 76.8 Kbps.
 - b. The RJ-45 Ethernet connections must accept either 10Base-T or 100Base-TX BACnet over twisted pair cable (UTP).
 - c. The direct access port must be a female DB-9 connector supporting BACnet temporary PTP connection of a portable BACnet operator terminal at 9.6 to 115.2 Kbps over RS-232 null modem cable.

2. Building controller shall be capable of providing global control strategies for the system based on information from any objects in the system regardless if the object is directly monitored by the controller or by another controller. The program that implements these strategies shall be completely flexible and user definable. Any systems utilizing factory pre-programmed global strategies that cannot be modified by field personnel on-site or downloaded via remote communications are not acceptable. Changing global strategies via firmware changes is also unacceptable.
3. Programming shall be object-oriented using control function blocks, supporting DDC functions, 1000 Analog Values and 1000 Binary Values. All flowcharts shall be generated and automatically downloaded to controller. Programming tool shall be resident on workstation and the same tool used for all controllers.
4. Provide means to graphically view inputs and outputs to each program block in real-time as program is executing. This function may be performed via the operator's workstation or field computer.
5. Building controller shall provide battery-backed real-time (hardware) clock functions.
6. Controller shall have a memory needed to ensure high performance and data reliability. Battery shall retain static RAM memory and real-time clock functions for a minimum of 1.5 years (cumulative).
7. Global control algorithms and automated control functions should execute via 32-bit processor.
8. Controller installation shall include memory-free gel-cell battery providing ongoing power conditioning and noise filtering for operation data integrity. It shall provide up to 5 minutes of powerless operation for orderly shutdown and data backup.
9. Install an outdoor air temperature sensor for each new global controller installed.

2.2 CENTRAL PLANT APPLICATION CONTROLLERS

- A. Provide one or more native BACnet application controllers for the condensing unit, air handler, boiler, VAV boxes and heating water pumps and provide native BACnet application controllers as needed for central plant control that adequately cover all objects listed in object list. All controllers shall interface to building controller via MS/TP LAN using BACnet protocol. No gateways shall be used. Controllers shall include input, output and self-contained logic program as needed for

complete control of units. Controllers shall be fully programmable using graphical programming blocks. Programming tool shall be resident on operator workstation and be the same tool as used for the building controller. No auxiliary or non-BACnet controllers shall be used.

B. BACnet Conformance

1. Application controllers shall as a minimum support MS/TP BACnet LAN types. They shall communicate directly via this BACnet LAN at 9.6, 19.2, 38.4 and 76.8 Kbps, as native BACnet devices. Application controllers shall be of BACnet conformance class 3 and support all BACnet services necessary to provide the following BACnet functional groups:
 - a. Files Functional Group
 - b. Reinitialize Functional Group
 - c. Device Communications Functional Group
2. Please refer to section 22.2, BACnet Functional Groups, in the BACnet standard, for a complete list of the services that must be directly supported to provide each of the functional groups listed above. All proprietary services, if used in the system, shall be thoroughly documented and provided as part of the submittal data. All necessary tools shall be supplied for working with proprietary information.
3. Standard BACnet object types supported shall include as a minimum—Analog Input, Analog Output, Analog Value, Binary Input, Binary Output, Binary Value, Device, File, and Program object types. All proprietary object types, if used in the system, shall be thoroughly documented and provided as part of the submittal data. All necessary tools shall be supplied for working with proprietary information.

- C. Application controllers shall include universal inputs with 10-bit resolution that accept 3K and 10K thermistors, 0-10VDC, 0-5 VDC, 4-20 mA and dry contact signals. Any input on a controller may be either analog or digital with a minimum of 3 inputs that accept pulses. Controller shall also include support and modifiable programming for interface to intelligent room sensor with digital display. Controller shall include binary and analog outputs on board. Analog outputs shall be switch selectable as either 0-10VDC or 0-20mA. Software shall include scaling features for analog outputs. Application controller shall include 24VDC voltage supply for use as power supply to external sensors.

- D. All program sequences shall be stored on board application controller in EEPROM. No batteries shall be needed to retain logic program. All program sequences shall be executed by controller 10 times per second and capable of multiple PID loops for control of multiple devices. All calculations shall be completed using floating-point math and system shall support display of all information in floating-point nomenclature at operator's terminal. Programming of application controller shall be completely modifiable in the field over installed BACnet LANs or remotely via modem interface. Operator shall program logic sequences by graphically moving function blocks on screen and tying blocks together on screen. Application controller shall be programmed using programming tools as described in operator's terminal section.
- E. Application controller shall include support for intelligent room sensor (see section 2.9.B.) Display on intelligent room sensor shall be programmable at application controller and include an operating mode and a field service mode. All button functions and display data shall be programmable to show specific controller data in each mode based on which button is pressed on the sensor. See sequence of operation for specific display requirements at intelligent room sensor.

2.3 SENSORS AND MISCELLANEOUS DEVICES

A. Temperature Sensors

1. All temperature sensors to be solid state electronic, factory-calibrated to within 0.5°F, totally interchangeable with housing appropriate for application. Mount wall sensors over location of existing thermostats, or if not replacing an existing thermostat, mount 48 inches above finished floor. Duct sensors to be installed such that the sensing element is in the main air stream. Immersion sensors to be installed in wells provided by control contractor. Immersion wells shall be filled with thermal compound before installation of immersion sensors. Outside air sensors shall be installed away from exhaust or relief vents, not in an outside air intake and in a location that is in the shade most of the day.

B. Intelligent Room Sensor with LCD Readout

1. Sensor shall contain a backlit LCD digital display and user function keys along with temperature sensor. Controller shall function as room control unit, and shall allow occupant to raise and lower setpoint, and activate terminal unit for override use—all within limits as programmed by building operator. Sensor shall also allow service technician access to hidden functions as described in sequence of operation.
2. The Intelligent Room Sensor shall simultaneously display room setpoint, room temperature, outside temperature, and fan status (if applicable) at each controller. This unit shall be programmable, allowing site developers the flexibility to configure the display to match their application. The site developer should be able to program the unit to display time-of-day, room humidity and outdoor humidity. Unit must have the capability to show temperatures in Fahrenheit or Centigrade.
3. Override time may be set and viewed in half-hour increments. Override time count down shall be automatic, but may be reset to zero by occupant from the sensor. Time remaining shall be displayed. Display shall show the word "OFF" in unoccupied mode unless a function button is pressed.
4. See sequence of operation for specific operation of LCD displays and function keys in field service mode and in normal occupant mode. Provide intelligent room sensors as specified in point list.
5. Field service mode shall be customizable to fit different applications. If intelligent room sensor is connected to VAV controller, VAV box shall be balanced and all airflow parameters shall be viewed and set from the intelligent room sensor with no computer or other field service tool needed.

2.4 ELECTRONIC ACTUATORS AND VALVES

A. Quality Assurance for Actuators and Valves:

1. UL Listed Standard 873 and C.S.A. Class 4813 02 certified.
2. NEMA 2 rated enclosures for inside mounting, provide with weather shield for outside mounting.

B. Execution Details for Actuators and Valves:

1. Furnish a Freeze-stat and install "Hard Wire" or DDC freeze stat (coordinate with owner). Interlock to disconnect the mechanical spring return actuator power circuit for fail-safe (heat mode) operation. Use of the control signal to drive the actuators closed is not acceptable except when using DDC freeze stat.
2. VAV box damper actuation shall be Floating type or Analog (2-10vdc, 4-20ma).
3. Re-heat coil valve actuation shall be Floating type or Analog (2-10vdc, 4-20ma).
4. Primary valve control shall be Analog (2-10vdc, 4-20ma).

C. Actuators for Damper and Control Valves ½" to 6" shall be Electric unless otherwise specified, provide actuators as follows:

1. UL Listed Standard 873 and Canadian Standards association Class 481302 shall certify Actuators.
2. NEMA 2 rated actuator enclosures for inside mounting, use additional weather shield to protect actuator when mounted outside.
3. Mechanical spring shall be provided when specified. Capacitors or other non-mechanical forms of fail-safe are not acceptable.
4. Position indicator device shall be installed and made visible to the exposed side of the Actuator. For damper short shaft mounting, a separate indicator shall be provided to the exposed side of the Actuator.
5. Overload Protection: Actuators shall provide protection against actuator burnout by using an internal current limiting circuit or digital motor rotation sensing circuit. Circuit shall insure that actuators cannot burn out due to stalled damper or mechanical and electrical paralleling. End switches to deactivate the actuator at the end of rotation are acceptable only for Butterfly Valve actuators.
6. A push button gearbox release shall be provided for all non-spring actuators.
7. Modulating actuators shall be 24Vac and consume 10VA power or less.
8. Conduit connectors are required when specified and when code requires it.

D. Valve Actuators $\frac{1}{2}$ " to 6":

1. Mechanical spring shall be provided on all actuators for pre-heat coil and actuators for AHU heating or cooling coil when units are mounted outside. See plans for fail-safe flow function: Normal Open or Normal Closed. Capacitors or other non-mechanical forms of fail-safe are not acceptable.
2. All zone service actuators shall be non-spring return unless otherwise specified.
3. The valve actuator shall be capable of providing the minimum torque required for proper valve close off for the required application.
4. All control valves actuators shall have an attached 3-foot cable for easy installation to a junction box, or terminal block.
5. Override handle and gearbox release shall be provided for all non-spring return valve actuators.
6. Valve Sizing for Water Coil:
 - a. On/Off Control Valves shall be linesize.
 - b. Modulating Control Valve Body Size may be reduced at most two-pipe sizes from the line size or not less than $\frac{1}{2}$ the pipe size. The BAS contractor shall size all water coil control valves for the application as follows:
 - i. Re-heat coil valves shall be sized not to exceed 4-9psi differential pressure. Size valve for 50% Valve Authority. Valve design pressure drop is equal to the sum of coil drop plus the balance valve drop.
 - ii. Primary valves shall be sized not to exceed 5-15psi differential pressure. Size valve for 50% Valve Authority. Valve design pressure drop is equal to the sum of coil drop plus the balance valve drop.
 - iii. Butterfly valves shall be sized for modulating service at 60-70 degree rotation. Design velocity shall be 12 feet per second or less when used with standard EPDM seats.
 - c. Valve mounting arrangements shall comply with the following:
 - i. Unions shall be provided on all ports of two-way and three-way valves.
 - ii. Install three-way equal percentage Characterized Control valves in a mixing configuration with the "A" port piped to the coil.
 - iii. Install 2 $\frac{1}{2}$ inch and above, Three-Way globe valves, as manufactured for mixing or diverting service to the coil.
 - iv. Two-Way valve shall be piped in the return side of the coil.

2.5 ENCLOSURES

- A. All controllers, power supplies and relays shall be mounted in enclosures.
- B. Enclosures may be NEMA 1 when located in a clean, dry, indoor environment. Indoor enclosures shall be NEMA 12 when installed in other than a clean environment.
- C. Enclosures shall have hinged, locking doors.
- D. Provide laminated plastic nameplates for all enclosures in any mechanical room or electrical room. Include location and unit served on nameplate. Laminated plastic shall be 1/8" thick sized appropriately to make label easy to read.

2.6 WIRING

- A. All communication wiring shall be labeled Alerton communication cable.

PART 3 - EXECUTION**3.1 EXAMINATION**

- A. Prior to starting work, carefully inspect installed work of other trades and verify that such work is complete to the point where work of this Section may properly commence.
- B. Notify the owners' representative in writing of conditions detrimental to the proper and timely completion of the work.
- C. Do not begin work until all unsatisfactory conditions are resolved.

3.2 INSTALLATION (GENERAL)

- A. Install in accordance with manufacturer's instructions.
- B. Provide all miscellaneous devices, hardware, software, interconnections installation and programming required to ensure a complete operating system in accordance with the sequences of operation and point schedules.
- C. Installation control components shall be the full responsibility of, and provided by, the control contractor. The control contractor may subcontract out the installation to qualified electricians.
- D. Division 26 Electrical Contractor shall Provide and install all control conduits required. See Division 26.

3.3 LOCATION AND INSTALLATION OF COMPONENTS

- A. Locate and install components for easy accessibility; in general, mount 48 inches above floor with minimum 3'-0" clear access space in front of units. Obtain approval on locations from owner's representative prior to installation.
- B. All instruments, switches, transmitters, etc., shall be suitably wired and mounted to protect them from vibration, moisture and high or low temperatures.
- C. Identify all equipment and panels. Provide permanently mounted tags for all panels.

- D. Provide stainless steel or brass thermowells suitable for respective application and for installation under other sections—sized to suit pipe diameter without restricting flow.

3.4 INTERLOCKING AND CONTROL WIRING

- A. Provide all interlock and control wiring. All wiring shall be installed neatly and professionally, in accordance with all national, state and local electrical codes.
- B. Provide wiring as required by functions as specified and as recommended by equipment manufacturers, to serve specified control functions. Provide shielded low capacitance wire for all communications trunks.
- C. Control wiring shall not be installed in power circuit raceways. Magnetic starters and disconnect switches shall not be used as junction boxes. Provide auxiliary junction boxes as required. Coordinate location and arrangement of all control equipment with the owner's representative prior to rough-in.
- D. Provide auxiliary pilot duty relays on motor starters as required for control function.
- E. Provide power for all control components.
- F. All control wiring in the mechanical, electrical, boiler rooms, and spaces without suspended ceilings is to be installed in raceways, except where approved otherwise by the VA. Control wiring above accessible ceiling spaces may be run with plenum rated cable (without conduit).
- G. Use existing underground raceways to run wiring between buildings as required. Coordinate exact routing of wiring with VA prior to installation.

3.5 DDC OBJECT TYPE SUMMARY

- A. Provide all database generation.
- B. Displays:
 - 1. System displays shall show all analog and binary object types within the system. They shall be logically laid out for easy use by the owner. Provide outside air temperature indication on all system displays.
- C. Run Time Totalization:
 - 1. At a minimum, run time totalization shall be incorporated for each monitored supply fan, return fan, exhaust fan, hot water and chilled water pumps. Warning limits for each point shall be entered for alarm and or maintenance purposes.
- D. Trendlog:
 - 1. All binary and analog object types (including zones) shall have the capability to be automatically trended.

E. Alarm:

1. All analog inputs (High/Low Limits) and selected binary input alarm points shall be prioritized and routed (locally or remotely) with alarm message per owner's requirements. Create or update existing building overall alarm screen.

F. Database Save:

1. Provide back-up database for all stand-alone application controllers on disk.

3.6 FIELD SERVICES

- A. Prepare and start logic control system under provisions of this section.
- B. Start-up and commission systems. Allow sufficient time for start-up and commissioning prior to placing control systems in permanent operation.
- C. Provide the capability for off-site monitoring at control contractor's local or main office. At a minimum, off-site facility shall be capable of system diagnostics and software download.
- D. Provide Owner's Representative with spare parts list. Identify equipment critical to maintaining the integrity of the operating system.

3.7 TRAINING

- A. Provide application engineer to instruct owner in operation of systems and equipment.
- B. Provide system operator's training to include (but not limited to) such items as the following: modification of data displays, alarm and status descriptors, requesting data, execution of commands, and request of logs. Provide this training to a minimum of 3 persons.
- C. Provide on-site training above as required.

3.8 DEMONSTRATION

- A. Provide systems demonstration.
- B. Demonstrate complete operating system to owner's representative.
- C. Provide certificate stating that control system has been tested and adjusted for proper operation.

3.9 GRAPHICS UPDATES

- A. If the project work results in changes to the current DDC floor plans, either because of architectural changes or changes to the HVAC system, the DDC contractor is responsible for updating the DDC floor plan in the DDC system to make it current and accurate.
- B. The DDC contractor is responsible for creating accurate graphical floor plans showing the HVAC system for each floor created as a result of the project and adding them to the DDC system. The VA reserves the right to approve any floor plans before they are uploaded.

- C. If the project has altered the look of a building compared to the building photo in the DDC system, the DDC contractor is responsible for updating the photo in the DDC system to make it current. The VA reserves the right to approve any photo before it is uploaded.
- D. The DDC contractor is responsible for adding a new photo to the DDC system for each new building added to the campus as a result of the project. The VA reserves the right to approve any photo before it is uploaded.

PART 4 - SUMMARY

4.1 GENERAL

- A. HVAC control system shall consist of microprocessors, sensors, indicators, switches, and final control elements, low voltage plenum wiring and termination to Controlled Equipment. Interface software and equipment for the existing front end P/C based system. Graphical based control screens, and other accessories, which will provide a complete HVAC control system package for the heating and cooling equipment.
- B. Provide and install the software system to enable the end user at the facility to manage a wide range of parameters for each piece of controlled mechanical equipment located throughout the building using the existing computer terminals in buildings listed above.
- C. Facility management shall be able to install or update day-to-day schedules as well as event, holiday, and after hour's schedules. Program each piece of equipment into an established schedule or create new schedules for a group of equipment as requested by the VA.
- D. The computer environment shall be a windows based program with security levels and will be password protected for each user(s).
- E. Custom programming of the system will enable the end user(s) to navigate through different levels of informational GUI (graphical user interface) screens with computer graphics and floor plans indicating the status of each piece of mechanical equipment controlled. Graphics shall match the existing scheme of architecture in use at the VA. Contractor is to receive approval of graphics from VA prior to install.
- F. Create/update com wire riser diagram on operators' screens.
- G. End user(s) shall also be able to trend log occupants setpoints, room temperature, supply air temperatures and alarms in order to generate management reports.

- H. Programming of DDC controllers to accomplish specified sequence of operation for each piece of mechanical equipment controlled. Coordinate with owner. Naming/tagging of equipment is to be approved by VA prior to final programming. All device identifications shall include the building number where the device is located. All DDC files must be located in existing subfolders in accordance with existing layout. Program alarms as requested by the VA.
- I. Provide technical support for the facility management to help troubleshoot possible mechanical problems through the use of the P/C software.
- J. Provide one year warranty.
- K. Provide training for the operation of the control system.
- L. At the conclusion of the work, provide a detailed written sequence of operation in digital, "Microsoft Word", format. Sample sequences of operation are available from the VA upon request.

PART 5 - SEQUENCE OF OPERATIONS

5.1 GENERAL

- A. Provide a complete and operational temperature control and building automation system based on the following points and sequence of operation. The system shall be complete as to sequences and standard control practices. The determined point list is the minimum amount of points that are to be provided. If additional points are required to meet the sequence of operation, they will be provided.
- B. The Contractor is to provide an updated sequence of operation in digital format indicating all changes made to the original sequence of operations.
- C. BACnet Object List:
 - 1. The following points as defined for each piece of equipment are designated as follows:
 - a. Binary Out (BO) - Defined as any two-state output (start/stop) (enable/disable), etc.
 - b. Binary In (BI) - Defined as any two-state input (alarm, status), etc.
 - c. Analog In (AI) - Defined as any variable input (temperature) (position), etc.
 - d. Analog Out (AO) - Defined as any electrical variable output. 0-20mA, 4-20mA and 0-10VDC are the only acceptable analog outputs. The driver for analog outputs must come from both hardware and software resident in the controllers. Transducers will not be acceptable under any circumstance.

5.2 SEQUENCE OF OPERATION: Verify with owner and receive approval prior to programming.

- A. Provide and install a BCM/MSTP communications global controller if needed. Locate inside existing global controller panel. Global controller will provide all schedules, alarms, and trend logs. Provide all programming required for interconnecting to the existing system.
- B. Provide alarms, trend logs, as needed for all points.
- C. Communication shall be from existing campus network in communication closet. Connect and verify all controllers are operational.
- D. See the mechanical drawings for equipment and systems sequences of operation.

PART 6 - APPROVED CONTRACTORS

6.1 GENERAL

- A. Control contractors who have worked on and are familiar with the DDC system in use at the Boise VA include:

ATS Inland NW

(208)891-9111

- - - E N D - - -

SECTION 23 21 13
HYDRONIC PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Water piping to connect HVAC equipment, including the following:
 - 1. Chilled water, condenser water, heating hot water and drain piping.
 - 2. Extension of domestic water make-up piping.
 - 3. Glycol-water piping.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- C. Section 31 20 00, EARTH MOVING: Excavation and backfill.
- D. Section 03 30 00, CAST-IN-PLACE CONCRETE.
- E. Section 07 12 00, BUILT-UP BITUMINOUS WATERPROOFING, and Section 07 13 52, MODIFIED BITUMINOUS SHEET WATERPROOFING.
- F. Section 33 10 00, WATER UTILITIES: Underground piping.
- G. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic restraints for piping.
- H. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION: General mechanical requirements and items, which are common to more than one section of Division 23.
- I. Section 23 21 23, HYDRONIC PUMPS: Pumps.
- J. Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION: Piping insulation.
- M. Section 23 25 00, HVAC WATER TREATMENT: Water treatment for open and closed systems.
- N. Section 23 82 00, CONVECTION HEATING AND COOLING UNITS: VAV and CV units, fan coil units, and radiant ceiling panels.
- O. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Temperature and pressure sensors and valve operators.

1.3 QUALITY ASSURANCE

- A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION, which includes welding qualifications.
- B. Submit prior to welding of steel piping a certificate of Welder's certification. The certificate shall be current and not more than one year old.

C. All grooved joint couplings, fittings, valves, and specialties shall be the products of a single manufacturer. Grooving tools shall be the same manufacturer as the grooved components.

1. All castings used for coupling housings, fittings, valve bodies, etc., shall be date stamped for quality assurance and traceability.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Pipe and equipment supports.
2. Pipe and tubing, with specification, class or type, and schedule.
3. Pipe fittings, including miscellaneous adapters and special fittings.
4. Flanges, gaskets and bolting.
5. Grooved joint couplings and fittings.
6. Valves of all types.
7. Strainers.
8. Flexible connectors for water service.
9. Pipe alignment guides.
10. Expansion joints.
11. Expansion compensators.
12. All specified hydronic system components.
13. Water flow measuring devices.
14. Gages.
15. Thermometers and test wells.
16. Electric heat tracing systems.
17. Seismic bracing details for piping.

C. Manufacturer's certified data report, Form No. U-1, for ASME pressure vessels:

1. Heat Exchangers (Water to Water)
2. Air separators.
3. Expansion tanks.

D. Submit the welder's qualifications in the form of a current (less than one year old) and formal certificate.

E. Coordination Drawings: Refer to Article, SUBMITTALS of Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

F. As-Built Piping Diagrams: Provide drawing as follows for chilled water, condenser water, and heating hot water system and other piping systems and equipment.

1. One wall-mounted stick file with complete set of prints. Mount stick file in the chiller plant or control room along with control diagram stick file.
2. One complete set of reproducible drawings.
3. One complete set of drawings in electronic Autocad and pdf format.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. American National Standards Institute, Inc.

B. American Society of Mechanical Engineers/American National Standards Institute, Inc. (ASME/ANSI):

B1.20.1-83(R2006)Pipe Threads, General Purpose (Inch)

B16.4-06Gray Iron Threaded FittingsB16.18-01 Cast
Copper Alloy Solder joint Pressure fittings

B16.23-02Cast Copper Alloy Solder joint Drainage
fittings

B40.100-05Pressure Gauges and Gauge Attachments

C. American National Standards Institute, Inc./Fluid Controls Institute (ANSI/FCI):

70-2-2006Control Valve Seat Leakage

D. American Society of Mechanical Engineers (ASME):

B16.1-98Cast Iron Pipe Flanges and Flanged Fittings

B16.3-2006Malleable Iron Threaded Fittings: Class 150 and
300

B16.4-2006Gray Iron Threaded Fittings: (Class 125 and
250)

B16.5-2003Pipe Flanges and Flanged Fittings: NPS ½
through NPS 24 Metric/Inch Standard

B16.9-07Factory Made Wrought Butt Welding Fittings

B16.11-05Forged Fittings, Socket Welding and Threaded

B16.18-01Cast Copper Alloy Solder Joint Pressure
Fittings

B16.22-01Wrought Copper and Bronze Solder Joint Pressure
Fittings.

- B16.24-06Cast Copper Alloy Pipe Flanges and Flanged Fittings
- B16.39-06Malleable Iron Threaded Pipe Unions
- B16.42-06Ductile Iron Pipe Flanges and Flanged Fittings
- B31.1-08Power Piping
- E. American Society for Testing and Materials (ASTM):
- A47/A47M-99 (2004)Ferritic Malleable Iron Castings
- A53/A53M-07Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
- A106/A106M-08Standard Specification for Seamless Carbon Steel Pipe for High-Temperature Service
- A126-04Standard Specification for Gray Iron Castings for Valves, Flanges, and Pipe Fittings
- A183-03 Standard Specification for Carbon Steel Track Bolts and Nuts
- A216/A216M-08 Standard Specification for Steel Castings, Carbon, Suitable for Fusion Welding, for High Temperature Service
- A234/A234M-07 Piping Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and High Temperature Service
- A307-07 Standard Specification for Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength
- A536-84 (2004) Standard Specification for Ductile Iron Castings
- A615/A615M-08 Deformed and Plain Carbon Steel Bars for Concrete Reinforcement
- A653/A 653M-08 Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) By the Hot-Dip Process
- B32-08 Standard Specification for Solder Metal
- B62-02 Standard Specification for Composition Bronze or Ounce Metal Castings
- B88-03 Standard Specification for Seamless Copper Water Tube
- B209-07 Aluminum and Aluminum Alloy Sheet and Plate

- C177-04 Standard Test Method for Steady State Heat Flux Measurements and Thermal Transmission Properties by Means of the Guarded Hot Plate Apparatus
- C478-09 Precast Reinforced Concrete Manhole Sections
- C533-07 Calcium Silicate Block and Pipe Thermal Insulation
- C552-07 Cellular Glass Thermal Insulation
- D3350-08 Polyethylene Plastics Pipe and Fittings Materials
- C591-08 Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation
- D1784-08 Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compound
- D1785-06 Poly (Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80 and 120
- D2241-05 Poly (Vinyl Chloride) (PVC) Pressure Rated Pipe (SDR Series)
- F439-06 Standard Specification for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80
- F441/F441M-02 Standard Specification for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe, Schedules 40 and 80
- F477-08 Elastomeric Seals Gaskets) for Joining Plastic Pipe
- F. American Water Works Association (AWWA):
- C110-08 Ductile Iron and Grey Iron Fittings for Water
- C203-02 Coal Tar Protective Coatings and Linings for Steel Water Pipe Lines Enamel and Tape Hot Applied
- G. American Welding Society (AWS):
- B2.1-02 Standard Welding Procedure Specification
- H. Copper Development Association, Inc. (CDA):
- CDA A4015-06 Copper Tube Handbook
- I. Expansion Joint Manufacturer's Association, Inc. (EJMA):
- EMJA-2003 Expansion Joint Manufacturer's Association Standards, Ninth Edition

J. Manufacturers Standardization Society (MSS) of the Valve and Fitting Industry, Inc.:

SP-67-02aButterfly Valves

SP-70-06Gray Iron Gate Valves, Flanged and Threaded Ends

SP-71-05Gray Iron Swing Check Valves, Flanged and Threaded Ends

SP-80-08Bronze Gate, Globe, Angle and Check Valves

SP-85-02Cast Iron Globe and Angle Valves, Flanged and Threaded Ends

SP-110-96Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

SP-125-00Gray Iron and Ductile Iron In-line, Spring Loaded, Center-Guided Check Valves

K. National Sanitation Foundation/American National Standards Institute, Inc. (NSF/ANSI):

14-06Plastic Piping System Components and Related Materials

50-2009aEquipment for Swimming Pools, Spas, Hot Tubs and other Recreational Water Facilities - Evaluation criteria for materials, components, products, equipment and systems for use at recreational water facilities

61-2008Drinking Water System Components - Health Effects

L. Tubular Exchanger Manufacturers Association: TEMA 9th Edition, 2007

1.6 SPARE PARTS

A. For mechanical pressed sealed fittings provide tools required for each pipe size used at the facility.

PART 2 - PRODUCTS

2.1 PIPE AND EQUIPMENT SUPPORTS, PIPE SLEEVES, AND WALL AND CEILING PLATES

A. Provide in accordance with Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

2.2 PIPE AND TUBING

A. Chilled Water, Heating Hot Water, and Glycol-Water, and Vent Piping:

1. Steel: ASTM A53 Grade B, seamless or ERW, Schedule 40.

2. Copper water tube option: ASTM B88, Type K or L, hard drawn.

- B. Extension of Domestic Water Make-up Piping: ASTM B88, Type K or L, hard drawn copper tubing.
- C. Cooling Coil Condensate Drain Piping:
 - 1. From air handling units: Copper water tube, ASTM B88, Type M, or schedule 40 PVC plastic piping.
 - 2. From fan coil or other terminal units: Copper water tube, ASTM B88, Type L for runouts and Type M for mains.
- D. Chemical Feed Piping for Condenser Water Treatment: Chlorinated polyvinyl chloride (CPVC), Schedule 80, ASTM F441.
- E. Pipe supports, including insulation shields, for above ground piping: Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

2.3 FITTINGS FOR STEEL PIPE

- A. 50 mm (2 inches) and Smaller: Screwed or welded joints.
 - 1. Butt welding: ASME B16.9 with same wall thickness as connecting piping.
 - 2. Forged steel, socket welding or threaded: ASME B16.11.
 - 3. Screwed: 150 pound malleable iron, ASME B16.3. 125 pound cast iron, ASME B16.4, may be used in lieu of malleable iron. Bushing reduction of a single pipe size, or use of close nipples, is not acceptable.
 - 4. Unions: ASME B16.39.
 - 5. Water hose connection adapter: Brass, pipe thread to 20 mm (3/4 inch) garden hose thread, with hose cap nut.
- B. 65 mm (2-1/2 inches) and Larger: Welded or flanged joints. Contractor's option: Grooved mechanical couplings and fittings are optional.
 - 1. Butt welding fittings: ASME B16.9 with same wall thickness as connecting piping. Elbows shall be long radius type, unless otherwise noted.
 - 2. Welding flanges and bolting: ASME B16.5:
 - a. Water service: Weld neck or slip-on, plain face, with 6 mm (1/8 inch) thick full face neoprene gasket suitable for 104 degrees C (220 degrees F).
 - 1) Contractor's option: Convoluted, cold formed 150 pound steel flanges, with teflon gaskets, may be used for water service.
 - b. Flange bolting: Carbon steel machine bolts or studs and nuts, ASTM A307, Grade B.

- C. Welded Branch and Tap Connections: Forged steel weldolets, or branchlets and threadolets may be used for branch connections up to one pipe size smaller than the main. Forged steel half-couplings, ASME B16.11 may be used for drain, vent and gage connections.
- D. Grooved Mechanical Pipe Couplings and Fittings (Contractor's Option): Grooved Mechanical Pipe Couplings and Fittings may be used, with cut or roll grooved pipe, in water service up to 110 degrees C (230 degrees F) in lieu of welded, screwed or flanged connections. All joints must be rigid type.
 - 1. Grooved mechanical couplings: Malleable iron, ASTM A47 or ductile iron, ASTM A536, fabricated in two or more parts, securely held together by two or more track-head, square, or oval-neck bolts, ASTM A449 and A183.
 - 2. Gaskets: Rubber product recommended by the coupling manufacturer for the intended service.
 - 3. Grooved end fittings: Malleable iron, ASTM A47; ductile iron, ASTM A536; or steel, ASTM A53 or A106, designed to accept grooved mechanical couplings. Tap-in type branch connections are acceptable.

2.4 FITTINGS FOR COPPER TUBING

- A. Joints:
 - 1. Solder Joints: Joints shall be made up in accordance with recommended practices of the materials applied. Apply 95/5 tin and antimony on all copper piping.
 - 2. Mechanically formed tee connection in water and drain piping: Form mechanically extracted collars in a continuous operation by drilling pilot hole and drawing out tube surface to form collar, having a height of not less than three times the thickness of tube wall. Adjustable collaring device shall insure proper tolerance and complete uniformity of the joint. Notch and dimple joining branch tube in a single process to provide free flow where the branch tube penetrates the fitting.
- B. Bronze Flanges and Flanged Fittings: ASME B16.24.
- C. Fittings: ANSI/ASME B16.18 cast copper or ANSI/ASME B16.22 solder wrought copper.

2.5 FITTINGS FOR PLASTIC PIPING

- A. Schedule 40, socket type for solvent welding.
- B. Schedule 40 PVC drain piping: Drainage pattern.

- C. Chemical feed piping for condenser water treatment: Chlorinated polyvinyl chloride (CPVC), Schedule 80, ASTM F439.

2.6 DIELECTRIC FITTINGS

- A. Provide where copper tubing and ferrous metal pipe are joined.
- B. 50 mm (2 inches) and Smaller: Threaded dielectric union, ASME B16.39.
- C. 65 mm (2 1/2 inches) and Larger: Flange union with dielectric gasket and bolt sleeves, ASME B16.42.
- D. Temperature Rating, 99 degrees C (210 degrees F).
- E. Contractor's option: On pipe sizes 2" and smaller, screwed end brass ball valves may be used in lieu of dielectric unions.

2.7 SCREWED JOINTS

- A. Pipe Thread: ANSI B1.20.
- B. Lubricant or Sealant: Oil and graphite or other compound approved for the intended service.

2.8 VALVES

- A. Asbestos packing is not acceptable.
- B. All valves of the same type shall be products of a single manufacturer.
- C. Provide chain operators for valves 150 mm (6 inches) and larger when the centerline is located 2400 mm (8 feet) or more above the floor or operating platform.
- D. Shut-Off Valves
 - 1. Ball Valves (Pipe sizes 2" and smaller): MSS-SP 110, screwed or solder connections, brass or bronze body with chrome-plated ball with full port and Teflon seat at 2760 kPa (400 psig) working pressure rating. Provide stem extension to allow operation without interfering with pipe insulation.
 - 2. Butterfly Valves (Pipe Sizes 2-1/2" and larger): Provide stem extension to allow 50 mm (2 inches) of pipe insulation without interfering with valve operation. MSS-SP 67, flange lug type or grooved end rated 1205 kPa (175 psig) working pressure at 93 degrees C (200 degrees F). Valves shall be ANSI Leakage Class VI and rated for bubble tight shut-off to full valve pressure rating. Valve shall be rated for dead end service and bi-directional flow capability to full rated pressure. Not permitted for direct buried pipe applications.
 - a. Body: Cast iron, ASTM A126, Class B. Malleable iron, ASTM A47 electro-plated, or ductile iron, ASTM A536, Grade 65-45-12 electro-plated.

- b. Trim: Bronze, aluminum bronze, or 300 series stainless steel disc, bronze bearings, 316 stainless steel shaft and manufacturer's recommended resilient seat. Resilient seat shall be field replaceable, and fully line the body to completely isolate the body from the product. A phosphate coated steel shaft or stem is acceptable, if the stem is completely isolated from the product.
- c. Actuators: Field interchangeable. Valves for balancing service shall have adjustable memory stop to limit open position.
 - 1) Valves 150 mm (6 inches) and smaller: Lever actuator with minimum of seven locking positions, except where chain wheel is required.
 - 2) Valves 200 mm (8 inches) and larger: Enclosed worm gear with handwheel, and where required, chain-wheel operator.
 - 3) 3. Gate Valves (Contractor's Option in lieu of Ball or Butterfly Valves):
 - a) 50 mm (2 inches) and smaller: MSS-SP 80, Bronze, 1034 kPa (150 psig), wedge disc, rising stem, union bonnet.
 - b) 65 mm (2 1/2 inches) and larger: Flanged, outside screw and yoke. MSS-SP 70, iron body, bronze mounted, 861 kPa (125 psig) wedge disc.
- E. Globe and Angle Valves
 - 1. Globe Valves
 - a. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 lb.) Globe valves shall be union bonnet with metal plug type disc.
 - b. 65 mm (2 1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-85 for globe valves.
 - 2. Angle Valves:
 - a. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 lb.) Angle valves shall be union bonnet with metal plug type disc.
 - b. 65 mm (2 1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-85 for angle.
- F. Check Valves
 - 1. Swing Check Valves:
 - a. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 lb.), 45 degree swing disc.
 - b. 65 mm (2 1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-71 for check valves.

2. Non-Slam or Silent Check Valve: Spring loaded double disc swing check or internally guided flat disc lift type check for bubble tight shut-off. Provide where check valves are shown in chilled water and hot water piping. Check valves incorporating a balancing feature may be used.
 - a. Body: MSS-SP 125 cast iron, ASTM A126, Class B, or steel, ASTM A216, Class WCB, or ductile iron, ASTM 536, flanged, grooved, or wafer type.
 - b. Seat, disc and spring: 18-8 stainless steel, or bronze, ASTM B62. Seats may be elastomer material.
- G. Water Flow Balancing Valves: For flow regulation and shut-off. Valves shall be line size rather than reduced to control valve size.
 1. Ball style valve.
 2. A dual purpose flow balancing valve and adjustable flow meter, with bronze or cast iron body, calibrated position pointer, valved pressure taps or quick disconnects with integral check valves and preformed polyurethane insulating enclosure.
 3. Provide a readout kit including flow meter, readout probes, hoses, flow charts or calculator, and carrying case.
- H. Automatic Balancing Control Valves: Factory calibrated to maintain constant flow (plus or minus five percent) over system pressure fluctuations of at least 10 times the minimum required for control. Provide standard pressure taps and four sets of capacity charts. Valves shall be line size and be one of the following designs:
 1. Gray iron (ASTM A126) or brass body rated 1205 kPa (175 psig) at 93 degrees C (200 degrees F), with stainless steel piston and spring.
 2. Brass or ferrous body designed for 2067 kPa (300 psig) service at 121 degrees C (250 degrees F), with corrosion resistant, tamper proof, self-cleaning piston/spring assembly that is easily removable for inspection or replacement.
 3. Combination assemblies containing ball type shut-off valves, unions, flow regulators, strainers with blowdown valves and pressure temperature ports shall be acceptable.

2.9 WATER FLOW MEASURING DEVICES

- A. Minimum overall accuracy plus or minus three percent over a range of 70 to 110 percent of design flow. Select devices for not less than 110 percent of design flow rate.

- B. Venturi Type: Bronze, steel, or cast iron with bronze throat, with valved pressure sensing taps upstream and at the throat.
- C. Wafer Type Circuit Sensor: Cast iron wafer-type flow meter equipped with readout valves to facilitate the connecting of a differential pressure meter. Each readout valve shall be fitted with an integral check valve designed to minimize system fluid loss during the monitoring process.
- D. Self-Averaging Annular Sensor Type: Brass or stainless steel metering tube, shutoff valves and quick-coupling pressure connections. Metering tube shall be rotatable so all sensing ports may be pointed down-stream when unit is not in use.
- E. Insertion Turbine Type Sensor: Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- F. Flow Measuring Device Identification:
 - 1. Metal tag attached by chain to the device.
 - 2. Include meter or equipment number, manufacturer's name, meter model, flow rate factor and design flow rate in l/m (gpm).
- G. Portable Water Flow Indicating Meters:
 - 1. Minimum 150 mm (6 inch) diameter dial, forged brass body, beryllium-copper bellows, designed for 1205 kPa (175 psig) working pressure at 121 degrees C (250 degrees F).
 - 2. Bleed and equalizing valves.
 - 3. Vent and drain hose and two 3000 mm (10 feet) lengths of hose with quick disconnect connections.
 - 4. Factory fabricated carrying case with hose compartment and a bound set of capacity curves showing flow rate versus pressure differential.
 - 5. Provide one portable meter for each range of differential pressure required for the installed flow devices.
- H. Permanently Mounted Water Flow Indicating Meters: Minimum 150 mm (6 inch) diameter, or 450 mm (18 inch) long scale, for 120 percent of design flow rate, direct reading in lps (gpm), with three valve manifold and two shut-off valves.

2.10 STRAINERS

- A. Y Type.
 - 1. Screens: Bronze, monel metal or 18-8 stainless steel, free area not less than 2-1/2 times pipe area, with perforations as follows: 1.1 mm (0.045 inch) diameter perforations for 100 mm (4 inches) and larger: 3.2 mm (0.125 inch) diameter perforations.
- B. Suction Diffusers: Specified in Section 23 21 23, HYDRONIC PUMPS.

2.11 FLEXIBLE CONNECTORS FOR WATER SERVICE**A. Flanged Spool Connector:**

1. Single arch or multiple arch type. Tube and cover shall be constructed of chlorobutyl elastomer with full faced integral flanges to provide a tight seal without gaskets. Connectors shall be internally reinforced with high strength synthetic fibers impregnated with rubber or synthetic compounds as recommended by connector manufacturer, and steel reinforcing rings.
2. Working pressures and temperatures shall be as follows:
 - a. Connector sizes 50 mm to 100 mm (2 inches to 4 inches), 1137 kPa (165psig) at 121 degrees C (250 degrees F).
 - b. Connector sizes 125 mm to 300 mm (5 inches to 12 inches), 965 kPa (140 psig) at 121 degrees C (250 degrees F).
3. Provide ductile iron retaining rings and control units.

B. Mechanical Pipe Couplings:

See other fittings specified under Part 2, PRODUCTS.

2.12 EXPANSION JOINTS

- A. Factory built devices, inserted in the pipe lines, designed to absorb axial cyclical pipe movement which results from thermal expansion and contraction. This includes factory-built or field-fabricated guides located along the pipe lines to restrain lateral pipe motion and direct the axial pipe movement into the expansion joints.
- B. Manufacturing Quality Assurance: Conform to Expansion Joints Manufacturers Association Standards.
- C. Bellows - Internally Pressurized Type:
 1. Multiple corrugations of Type 304 or Type A240-321 stainless steel.
 2. Internal stainless steel sleeve entire length of bellows.
 3. External cast iron equalizing rings for services exceeding 340 kPa (50 psig).
 4. Welded ends.
 5. Design shall conform to standards of EJMA and ASME B31.1.
 6. External tie rods designed to withstand pressure thrust force upon anchor failure if one or both anchors for the joint are at change in direction of pipeline.
 7. Integral external cover.

D. Bellows - Externally Pressurized Type:

1. Multiple corrugations of Type 304 stainless steel.
2. Internal and external guide integral with joint.
3. Design for external pressurization of bellows to eliminate squirm.
4. Welded ends.
5. Conform to the standards of EJMA and ASME B31.1.
6. Threaded connection at bottom, 25 mm (one inch) minimum, for drain or drip point.
7. Integral external cover and internal sleeve.

E. Expansion Compensators:

1. Corrugated bellows, externally pressurized, stainless steel or bronze.
2. Internal guides and anti-torque devices.
3. Threaded ends.
4. External shroud.
5. Conform to standards of EJMA.

F. Expansion Joint (Contractor's Option): 2415 kPa (350 psig) maximum working pressure, steel pipe fitting consisting of telescoping body and slip-pipe sections, PTFE modified polyphenylene sulfide coated slide section, with grooved ends, suitable for axial end movement to 75 mm (3 inch).

G. Expansion Joint Identification: Provide stamped brass or stainless steel nameplate on each expansion joint listing the manufacturer, the allowable movement, flow direction, design pressure and temperature, date of manufacture, and identifying the expansion joint by the identification number on the contract drawings.

H. Guides: Provide factory-built guides along the pipe line to permit axial movement only and to restrain lateral and angular movement. Guides must be designed to withstand a minimum of 15 percent of the axial force which will be imposed on the expansion joints and anchors. Field-built guides may be used if detailed on the contract drawings.

I. Supports: Provide saddle supports and frame or hangers for heat exchanger. Mounting height shall be adjusted to facilitate gravity return of steam condensate. Construct supports from steel, weld joints.

2.13 HYDRONIC SYSTEM COMPONENTS

- A. Heat Exchanger (Water to Water): Shell and tube type, U-bend removable tube bundle, heating fluid in shell, heated fluid in tubes, equipped with support cradles.
 - 1. Maximum tube velocity: 2.3 m/s (7.5 feet per second).
 - 2. Tube fouling factor: TEMA Standards, but not less than 0.001.
 - 3. Materials:
 - a. Shell: Steel.
 - b. Tube sheet and tube supports: Steel or brass.
 - c. Tubes: 20 mm (3/4 inch) OD copper.
 - d. Head or bonnet: Cast iron or steel.
 - 4. Construction: In accordance with ASME Pressure Vessel Code for 861 kPa (125 psig) working pressure for shell and tubes. Provide manufacturer's certified data report, Form No. U-1.
- B. Plate and Frame Heat Exchanger:
 - 1. Fixed frame with bolted removable corrugated channel plate assembly, ASME code stamped for 150 psig working pressure.
 - 2. Corrugated channel plates shall be type 316 or 304 stainless steel.
 - 3. Channel plate ports to be double gasketed to prevent mixing or cross-contamination of hot side and cold side fluids. Gaskets to be EPPM.
 - 4. Channel plate carrying bars to be carbon steel with zinc yellow chromate finish.
 - 5. Fixed frame plates and moveable pressure plates to be corrosion resistant epoxy painted carbon steel.
 - 6. Piping connections 2" and smaller to be carbon steel NPT tappings. Piping connections 4" and larger to be studed port design to accept ANSI flange connections. Connection ports to be integral to the frame or pressure plate.
 - 7. Finished units to be provided with OSHA required, formed aluminum splash guards to enclose exterior channel plate and gasket surfaces.
 - 8. Provide two sets of replacement gaskets and provide one set of wrenches for disassembly of plate type heat exchangers.
 - 9. Performance: As scheduled on drawings.
- C. Optional Heat Transfer Package: In lieu of field erected individual components, the Contractor may provide a factory or shop assembled package of converters, pumps, and other components supported on a welded steel frame.

- D. Air Purger: Cast iron or fabricated steel, 861 kPa (125 psig) water working pressure, for in-line installation.
- E. Tangential Air Separator: ASME Pressure Vessel Code construction for 861 kPa (125 psig) working pressure, flanged tangential inlet and outlet connection, internal perforated stainless steel air collector tube designed to direct released air into expansion tank, bottom blowdown connection. Provide Form No. U-1. If scheduled on the drawings, provide a removable stainless steel strainer element having 5 mm (3/16 inch) perforations and free area of not less than five times the cross-sectional area of connecting piping.
- F. Diaphragm Type Pre-Pressurized Expansion Tank: ASME Pressure Vessel Code construction for 861 kPa (125 psig) working pressure, welded steel shell, rust-proof coated, with a flexible elastomeric diaphragm suitable for a maximum operating temperature of 116 degrees C (240 degrees F). Provide Form No. U-1. Tank shall be equipped with system connection, drain connection, standard air fill valve and be factory pre-charged to a minimum of 83 kPa (12 psig).
- G. Closed Expansion (Compression) Tank: ASME Pressure Vessel Code construction for 861 kPa (125 psig) working pressure, steel, rust-proof coated. Provide gage glass, with protection guard, and angle valves with tapped openings for drain (bottom) and plugged vent (top). Provide Form No. U-1.
 - 1. Horizontal tank: Provide cradle supports and following accessories:
 - a. Air control tank fittings: Provide in each expansion tank to facilitate air transfer from air separator, or purger, into tank while restricting gravity circulation. Fitting shall include an integral or separate air vent tube, cut to length of about 2/3 of tank diameter, to allow venting air from the tank when establishing the initial water level in the tank.
 - b. Tank drainer-air charger: Shall incorporate a vent tube, cut to above 2/3 of tank diameter, and drain valve with hose connection draining and recharging with air.
 - 2. Vertical floor-mounted expansion tank: Provide gage glass, system or drain connection (bottom) and air charging (top) tappings. Provide gate valve and necessary adapters for charging system. Tank support shall consist of floor mounted base ring with drain access opening or four angle iron legs with base plates.

- H. Pressure Reducing Valve (Water): Diaphragm or bellows operated, spring loaded type, with minimum adjustable range of 28 kPa (4 psig) above and below set point. Bronze, brass or iron body and bronze, brass or stainless steel trim, rated 861 kPa (125 psig) working pressure at 107 degrees C (225 degrees F).
- I. Pressure Relief Valve: Bronze or iron body and bronze or stainless steel trim, with testing lever. Comply with ASME Code for Pressure Vessels, Section 8, and bear ASME stamp.
- J. Automatic Air Vent Valves (where shown): Cast iron or semi-steel body, 1034 kPa (150 psig) working pressure, stainless steel float, valve, valve seat and mechanism, minimum 15 mm (1/2 inch) water connection and 6 mm (1/4 inch) air outlet. Air outlet shall be piped to the nearest floor drain.

2.14 WATER FILTERS AND POT CHEMICAL FEEDERS

See section 23 25 00, HVAC WATER TREATMENT, Article 2.2, CHEMICAL TREATMENT FOR CLOSED LOOP SYSTEMS.

2.15 GAGES, PRESSURE AND COMPOUND

- A. ASME B40.100, Accuracy Grade 1A, (pressure, vacuum, or compound for air, oil or water), initial mid-scale accuracy 1 percent of scale (Qualify grade), metal or phenolic case, 59 mm (2-1/2 inches) in diameter, 6 mm (1/4 inch) NPT bottom connection, white dial with black or blue graduations and pointer, clear glass or acrylic plastic window, glycerin filled as manufactured by TIF or approved equal.
- B. Provide brass lever handle union cock. Provide brass/bronze pressure snubber for gages in water service.
- C. Range of Gages: Provide range equal to at least 130 percent of normal operating range.
 - 1. For condenser water suction (compound): Minus 100 kPa (30 inches Hg) to plus 700 kPa (100 psig).

2.16 PRESSURE/TEMPERATURE TEST PROVISIONS

- A. Pete's Plug: 6 mm (1/4 inch) MPT by 75 mm (3 inches) long, brass body and cap, with retained safety cap, norel self-closing valve cores, permanently installed in piping where shown, or in lieu of pressure gage test connections shown on the drawings.
- B. Provide one each of the following test items to the Resident Engineer:
 - 1. 6 mm (1/4 inch) FPT by 3 mm (1/8 inch) diameter stainless steel pressure gage adapter probe for extra long test plug. PETE'S 500 XL is an example.

2. 90 mm (3-1/2 inch) diameter, one percent accuracy, compound gage, -- 100 kPa (30 inches) Hg to 700 kPa (100 psig) range.
3. 0 - 104 degrees C (220 degrees F) pocket thermometer one-half degree accuracy, 25 mm (one inch) dial, 125 mm (5 inch) long stainless steel stem, plastic case.

2.17 THERMOMETERS

- A. 5" Bimetal thermometer with stainless steel case and adjustable angle connection. WIKA T 1.52 or approved equal.
- B. Scale: Range as described below, two degree graduations.
- C. Separable Socket (Well): Brass, extension neck type to clear pipe insulation.
- D. Scale ranges:
 1. Chilled Water and Glycol-Water: 0-38 degrees C (32-100 degrees F).
 2. Hot Water and Glycol-Water: -1 - 116 degrees C (30-240 degrees F).

2.18 FIRESTOPPING MATERIAL

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

2.19 ELECTRICAL HEAT TRACING SYSTEMS

- A. Systems shall meet requirements of the National Electrical Code (NEC), Section 427.
- B. Provide tracing for outdoor piping subject to freezing temperatures (Below 38 degrees F) as follows:
 1. Make-up water
 2. Chilled water piping.
 3. Domestic water lines exposed to weather.
- C. Heat tracing shall be provided to the extent shown on the drawings (Floor plans and Elevations). Heat tracing shall extend below grade to below the defined frost line.
- D. Heating Cable: Flexible, parallel circuit construction consisting of a continuous self-limiting resistance, conductive inner core material between two parallel copper bus wires, designed for cut-to-length at the job site and for wrapping around valves and complex fittings. Self-regulation shall prevent overheating and burnouts even where the cable overlaps itself.
 1. Provide end seals at ends of circuits. Wire at the ends of the circuits is not to be tied together.
 2. Provide sufficient cable, as recommended by the manufacturer, to keep the pipe surface at 2.2 degrees C (36 degrees F) minimum during winter outdoor design temperature, but not less than the following:

- a. 75 mm (3 inch) pipe and smaller with 25 mm (1 inch) thick insulation: 4 watts per foot of pipe.
 - b. 100 mm (4 inch) pipe and larger 38 mm (1-1/2 inch) thick insulation: 8 watts per foot of pipe.
- E. Electrical Heating Tracing Accessories:
- 1. Power supply connection fitting and stainless steel mounting brackets. Provide stainless steel worm gear clamp to fasten bracket to pipe.
 - 2. 13 mm (1/2 inch) wide fiberglass reinforced pressure sensitive cloth tape to fasten cable to pipe at 300 mm (12 inch) intervals.
 - 3. Pipe surface temperature control thermostat: Cast aluminum, NEMA 4 (watertight) enclosure, 13 mm (1/2 inch) NPT conduit hub, SPST switch rated 20 amps at 480 volts AC, with capillary and copper bulb sensor. Set thermostat to maintain pipe surface temperature at not less than 1.1 degrees C (34 degrees F).
 - 4. Signs: Manufacturer's standard (NEC Code), stamped "ELECTRIC TRACED" located on the insulation jacket at 3000 mm (10 feet) intervals along the pipe on alternating sides.

PART 3 - EXECUTION

3.1 GENERAL

- A. The drawings show the general arrangement of pipe and equipment but do not show all required fittings and offsets that may be necessary to connect pipes to equipment, fan-coils, coils, radiators, etc., and to coordinate with other trades. Provide all necessary fittings, offsets and pipe runs based on field measurements and at no additional cost to the government. Coordinate with other trades for space available and relative location of HVAC equipment and accessories to be connected on ceiling grid. Pipe location on the drawings shall be altered by contractor where necessary to avoid interferences and clearance difficulties.
- B. Store materials to avoid excessive exposure to weather or foreign materials. Keep inside of piping relatively clean during installation and protect open ends when work is not in progress.
- C. Support piping securely. Refer to PART 3, Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION. Install heat exchangers at height sufficient to provide gravity flow of condensate to the flash tank and condensate pump.
- D. Install piping generally parallel to walls and column center lines, unless shown otherwise on the drawings. Space piping, including insulation, to provide 25 mm (one inch) minimum clearance between adjacent piping or other surface. Unless shown otherwise, slope drain

piping down in the direction of flow not less than 25 mm (one inch) in 12 m (40 feet). Provide eccentric reducers to keep bottom of sloped piping flat.

- E. Locate and orient valves to permit proper operation and access for maintenance of packing, seat and disc. Generally locate valve stems in overhead piping in horizontal position. Provide a union adjacent to one end of all threaded end valves. Control valves usually require reducers to connect to pipe sizes shown on the drawing. Install butterfly valves with the valve open as recommended by the manufacturer to prevent binding of the disc in the seat.
- F. Offset equipment connections to allow valving off for maintenance and repair with minimal removal of piping. Provide flexibility in equipment connections and branch line take-offs with 3-elbow swing joints where noted on the drawings.
- G. Tee water piping runouts or branches into the side of mains or other branches. Avoid bull-head tees, which are two return lines entering opposite ends of a tee and exiting out the common side.
- H. Provide manual or automatic air vent at all piping system high points and drain valves at all low points. Install piping to floor drains from all automatic air vents.
- I. Connect piping to equipment as shown on the drawings. Install components furnished by others such as:
 - 1. Water treatment pot feeders and condenser water treatment systems.
 - 2. Flow elements (orifice unions), control valve bodies, flow switches, pressure taps with valve, and wells for sensors.
- J. Thermometer Wells: In pipes 65 mm (2-1/2 inches) and smaller increase the pipe size to provide free area equal to the upstream pipe area.
- K. Firestopping: Fill openings around uninsulated piping penetrating floors or fire walls, with firestop material. For firestopping insulated piping refer to Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION.
- L. Where copper piping is connected to steel piping, provide dielectric connections.

3.2 PIPE JOINTS

- A. Welded: Beveling, spacing and other details shall conform to ASME B31.1 and AWS B2.1. See Welder's qualification requirements under "Quality Assurance" in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

- B. Screwed: Threads shall conform to ASME B1.20; joint compound shall be applied to male threads only and joints made up so no more than three threads show. Coat exposed threads on steel pipe with joint compound, or red lead paint for corrosion protection.
- C. Mechanical Joint: Pipe grooving shall be in accordance with joint manufacturer's specifications. Lubricate gasket exterior including lips, pipe ends and housing interiors to prevent pinching the gasket during installation. Lubricant shall be as recommended by coupling manufacturer.
- D. 125 Pound Cast Iron Flange (Plain Face): Mating flange shall have raised face, if any, removed to avoid overstressing the cast iron flange.
- E. Solvent Welded Joints: As recommended by the manufacturer.

3.3 EXPANSION JOINTS (BELLOWS AND SLIP TYPE)

- A. Anchors and Guides: Provide type, quantity and spacing as recommended by manufacturer of expansion joint and as shown. A professional engineer shall verify in writing that anchors and guides are properly designed for forces and moments which will be imposed.
- B. Cold Set: Provide setting of joint travel at installation as recommended by the manufacturer for the ambient temperature during the installation.
- C. Preparation for Service: Remove all apparatus provided to restrain joint during shipping or installation. Representative of manufacturer shall visit the site and verify that installation is proper.
- D. Access: Expansion joints must be located in readily accessible space. Locate joints to permit access without removing piping or other devices. Allow clear space to permit replacement of joints and to permit access to devices for inspection of all surfaces and for adding.

3.4 SEISMIC BRACING ABOVEGROUND PIPING

Provide in accordance with Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.5 LEAK TESTING ABOVEGROUND PIPING

- A. Inspect all joints and connections for leaks and workmanship and make corrections as necessary, to the satisfaction of the Resident Engineer. Tests may be either of those below, or a combination, as approved by the Resident Engineer.
- B. An operating test at design pressure, and for hot systems, design maximum temperature.

- C. A hydrostatic test at 1.5 times design pressure. For water systems the design maximum pressure would usually be the static head, or expansion tank maximum pressure, plus pump head. Factory tested equipment (convertors, exchangers, coils, etc.) need not be field tested. Isolate equipment where necessary to avoid excessive pressure on mechanical seals and safety devices.

3.6 FLUSHING AND CLEANING PIPING SYSTEMS

- A. Water Piping: Clean systems as recommended by the suppliers of chemicals specified in Section 23 25 00, HVAC WATER TREATMENT.
1. Initial flushing: Remove loose dirt, mill scale, metal chips, weld beads, rust, and like deleterious substances without damage to any system component. Provide temporary piping or hose to bypass coils, control valves, exchangers and other factory cleaned equipment unless acceptable means of protection are provided and subsequent inspection of hide-out areas takes place. Isolate or protect clean system components, including pumps and pressure vessels, and remove any component which may be damaged. Open all valves, drains, vents and strainers at all system levels. Remove plugs, caps, spool pieces, and components to facilitate early debris discharge from system. Sectionalize system to obtain debris carrying velocity of 1.8 m/S (6 feet per second), if possible. Connect dead-end supply and return headers as necessary. Flush bottoms of risers. Install temporary strainers where necessary to protect down-stream equipment. Supply and remove flushing water and drainage by various type hose, temporary and permanent piping and Contractor's booster pumps. Flush until clean as approved by the Resident Engineer.
 2. Cleaning: Using products supplied in Section 23 25 00, HVAC WATER TREATMENT, circulatesystems at normal temperature to remove adherent organic soil, hydrocarbons, flux, pipe mill varnish, pipe joint compounds, iron oxide, and like deleterious substances not removed by flushing, without chemical or mechanical damage to any system component. Removal of tightly adherent mill scale is not required. Keep isolated equipment which is "clean" and where dead-end debris accumulation cannot occur. Sectionalize system if possible, to circulate at velocities not less than 1.8 m/S (6 feet per second). Circulate each section for not less than four hours. Blow-down all strainers, or remove and clean as frequently as necessary. Drain and prepare for final flushing.

3. Final Flushing: Return systems to conditions required by initial flushing after all cleaning solution has been displaced by clean make-up. Flush all dead ends and isolated clean equipment. Gently operate all valves to dislodge any debris in valve body by throttling velocity. Flush for not less than one hour.

3.7 WATER TREATMENT

- A. Install water treatment equipment and provide water treatment system piping.
- B. Close and fill system as soon as possible after final flushing to minimize corrosion.
- C. Charge systems with chemicals specified in Section 23 25 00, HVAC WATER TREATMENT.
- D. Utilize this activity, by arrangement with the Resident Engineer, for instructing VA operating personnel.

3.8 ELECTRIC HEAT TRACING

- A. Install tracing as recommended by the manufacturer.
- B. Coordinate electrical connections.

3.9 OPERATING AND PERFORMANCE TEST AND INSTRUCTION

- A. Refer to PART 3, Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Adjust red set hand on pressure gages to normal working pressure.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

RORSECTION 23 21 23
HYDRONIC PUMPS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Hydronic pumps for Heating, Ventilating and Air Conditioning.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- C. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- E. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
- F. Section 23 21 13, HYDRONIC PIPING.
- G. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT.
- H. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Design Criteria:
1. Pumps design and manufacturer shall conform to Hydraulic Institute Standards.
 2. Pump sizes, capacities, pressures, operating characteristics and efficiency shall be as scheduled.
 3. Head-capacity curves shall slope up to maximum head at shut-off. Curves shall be relatively flat for closed systems. Select pumps near the midrange of the curve, so the design capacity falls to the left of the best efficiency point, to allow a cushion for the usual drift to the right in operation, without approaching the pump curve end point and possible cavitation and unstable operation. Select pumps

for open systems so that required net positive suction head (NPSHR) does not exceed the net positive head available (NPSHA).

4. Pump Driver: Furnish with pump. Size shall be non-overloading at any point on the head-capacity curve, including in a parallel or series pumping installation with one pump in operation.
5. Provide all pumps with motors, impellers, drive assemblies, bearings, coupling guard and other accessories specified. Statically and dynamically balance all rotating parts.
6. Furnish each pump and motor with a nameplate giving the manufacturers name, serial number of pump, capacity in GPM and head in feet at design condition, horsepower, voltage, frequency, speed and full load current and motor efficiency.
7. Test all pumps before shipment. The manufacturer shall certify all pump ratings.
8. After completion of balancing, provide replacement of impellers or trim impellers to provide specified flow at actual pumping head, as installed.

C. Allowable Vibration Tolerance for Pump Units: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 1. Pumps and accessories.
 2. Motors and drives.
 3. Variable speed motor controllers.
- C. Manufacturer's installation, maintenance and operating instructions, in accordance with Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- D. Characteristic Curves: Head-capacity, efficiency-capacity, brake horsepower-capacity, and NPSHR-capacity for each pump and for combined pumps in parallel or series service. Identify pump and show fluid

pumped, specific gravity, pump speed and curves plotted from zero flow to maximum for the impeller being furnished and at least the maximum diameter impeller that can be used with the casing.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only:

B. American Iron and Steel Institute (AISI):

AISI 1045Cold Drawn Carbon Steel Bar, Type 1045

AISI 416Type 416 Stainless Steel

C. American National Standards Institute (ANSI):

ANSI B15.1-00(R2008)..... Safety Standard for Mechanical Power
Transmission Apparatus

ANSI B16.1-05Cast Iron Pipe Flanges and Flanged Fittings,
Class 25, 125, 250 and 800

D. American Society for Testing and Materials (ASTM):

A48-03 (2008)Standard Specification for Gray Iron Castings

B62-2009Standard Specification for Composition Bronze or
Ounce Metal Castings

E. Maintenance and Operating Manuals in accordance with Section 01 00 00,
General Requirements.

1.6 DEFINITIONS

A. Capacity: Liters per second (L/s) (Gallons per minute (GPM) of the fluid pumped.

B. Head: Total dynamic head in kPa (feet) of the fluid pumped.

C. Flat head-capacity curve: Where the shutoff head is less than 1.16 times the head at the best efficiency point.

1.7 SPARE MATERIALS

A. Furnish one spare seal and casing gasket for each pump to the Resident Engineer.

PART 2 - PRODUCTS

2.1 CENTRIFUGAL PUMPS, BRONZE FITTED

A. General:

1. Provide pumps that will operate continuously without overheating bearings or motors at every condition of operation on the pump curve, or produce noise audible outside the room or space in which installed.
2. Provide pumps of size, type and capacity as indicated, complete with electric motor and drive assembly, unless otherwise indicated. Design pump casings for the indicated working pressure and factory test at 1½ times the designed pressure.
3. Provide pumps of the same type, the product of a single manufacturer, with pump parts of the same size and type interchangeable.
4. General Construction Requirements
 - a. Balance: Rotating parts, statically and dynamically.
 - b. Construction: To permit servicing without breaking piping or motor connections.
 - c. Pump Motors: Provide high efficiency motors, inverter duty for variable speed service. Refer to Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT. Motors shall be Open Drip Proof and operate at 1750 rpm unless noted otherwise.
 - d. Heating pumps shall be suitable for handling water to 225°F.
 - e. Provide coupling guards that meet ANSI B15.1, Section 8 and OSHA requirements.
 - f. Pump Connections: Flanged.
 - g. Pump shall be factory tested.
 - h. Performance: As scheduled on the Contract Drawings.
5. Variable Speed Pumps:
 - a. The pumps shall be the type shown on the drawings and specified herein flex coupled to an open drip-proof motor.
 - b. Variable Speed Motor Controllers: Refer to Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS and to Section 23 05 11, COMMON WORK

RESULTS FOR HVAC and STEAM GENERATION paragraph, Variable Speed Motor Controllers. Furnish controllers with pumps and motors.

c. Pump operation and speed control shall be as shown on the drawings.

B. In-Line Type, Base Mounted End Suction or Double Suction Type:

1. Casing and Bearing Housing: Close-grained cast iron, ASTM A48.
2. Casing Wear Rings: Bronze.
3. Suction and Discharge: Plain face flange, 850 kPa (125 psig), ANSI B16.1.
4. Casing Vent: Manual brass cock at high point.
5. Casing Drain and Gage Taps: 15 mm (1/2-inch) plugged connections minimum size.
6. Impeller: Bronze, ASTM B62, enclosed type, keyed to shaft.
7. Shaft: Steel, AISI Type 1045 or stainless steel.
8. Shaft Seal: Manufacturer's standard mechanical type to suit pressure and temperature and fluid pumped.
9. Shaft Sleeve: Bronze or stainless steel.
10. Motor: Furnish with pump. Refer to Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT.
11. Base Mounted Pumps:
 - a. Designed for disassembling for service or repair without disturbing the piping or removing the motor.
 - b. Impeller Wear Rings: Bronze.
 - c. Shaft Coupling: Non-lubricated steel flexible type or spacer type with coupling guard, ANSI B15.1, bolted to the baseplate.
 - d. Bearings (Double-Suction pumps): Regreaseable ball or roller type. Provide lip seal and slinger outboard of each bearing.
 - e. Base: Cast iron or fabricated steel for common mounting to a concrete base.
12. Provide line sized shut-off valve and suction strainer, maintain manufacturer recommended straight pipe length on pump suction (with

blow down valve). Contractor option: Provide suction diffuser as follows:

- a. Body: Cast iron with steel inlet vanes and combination diffuser-strainer-orifice cylinder with 5 mm (3/16-inch) diameter openings for pump protection. Provide taps for strainer blowdown and gage connections.
- b. Provide adjustable foot support for suction piping.
- c. Strainer free area: Not less than five times the suction piping.
- d. Provide disposable start-up strainer.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Follow manufacturer's written instructions for pump mounting and start-up. Access/Service space around pumps shall not be less than minimum space recommended by pumps manufacturer.
- B. Provide drains for bases and seals for base mounted pumps, piped to and discharging into floor drains.
- C. Coordinate location of thermometer and pressure gauges as per Section 23 21 13, HYDRONIC PIPING.

3.2 START-UP

- A. Verify that the piping system has been flushed, cleaned and filled.
- B. Lubricate pumps before start-up.
- C. Prime the pump, vent all air from the casing and verify that the rotation is correct. To avoid damage to mechanical seals, never start or run the pump in dry condition.
- D. Verify that correct size heaters-motor over-load devices are installed for each pump controller unit.
- E. Field modifications to the bearings and or impeller (including trimming) are not permitted. If the pump does not meet the specified vibration tolerance send the pump back to the manufacturer for a replacement pump. All modifications to the pump shall be performed at the factory.
- F. Ensure the disposable strainer is free of debris prior to testing and balancing of the hydronic system.

- G. After several days of operation, replace the disposable start-up strainer with a regular strainer in the suction diffuser.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 23 25 00
HVAC WATER TREATMENT**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies cleaning and treatment of circulating HVAC water systems, including the following.
1. Cleaning compounds.
 2. Chemical treatment for closed loop heat transfer systems.
 3. Chemical treatment for open loop systems.
 4. Glycol-water heat transfer systems.

1.2 RELATED WORK

- A. Test requirements and instructions on use of equipment/system: Section 01 00 00, GENERAL REQUIREMENTS.
- B. General mechanical requirements and items, which are common to more than one section of Division 23: Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- C. Piping and valves: Section 23 21 13, HYDRONIC PIPING and Section 23 22 13, STEAM and CONDENSATE HEATING PIPING.

1.3 QUALITY ASSURANCE

- A. Refer to paragraph, QUALITY ASSURANCE in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Technical Services: Provide the services of an experienced water treatment chemical engineer or technical representative to direct flushing, cleaning, pre-treatment, training, debugging, and acceptance testing operations; direct and perform chemical limit control during construction period and monitor systems for a period of 12 months after acceptance, including not less than 6 service calls and written status reports. Emergency calls are not included. Minimum service during construction/start-up shall be 6 hours.
- C. Chemicals: Chemicals shall be non-toxic approved by local authorities and meeting applicable EPA requirements.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data including:
1. Cleaning compounds and recommended procedures for their use.
 2. Chemical treatment for closed systems, including installation and operating instructions.

- 3. Chemical treatment for open loop systems, including installation and operating instructions.
- 4. Glycol-water system materials, equipment, and installation.
- C. Water analysis verification.
- D. Materials Safety Data Sheet for all proposed chemical compounds, based on U.S. Department of Labor Form No. L5B-005-4.
- E. Maintenance and operating instructions in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1.5 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. National Fire Protection Association (NFPA):
70-2008National Electric Code (NEC)
- C. American Society for Testing and Materials (ASTM):
F441/F441M-02 (2008) ... Standard Specification for Chlorinated Poly
(Vinyl Chloride) (CPVC) Plastic Pipe, Schedules
40 and 80

PART 2 - PRODUCTS

2.1 CLEANING COMPOUNDS

- A. Alkaline phosphate or non-phosphate detergent/surfactant/specific to remove organic soil, hydrocarbons, flux, pipe mill varnish, pipe compounds, iron oxide, and like deleterious substances, with or without inhibitor, suitable for system wetted metals without deleterious effects.
- B. All chemicals to be acceptable for discharge to sanitary sewer.
- C. Refer to Section 23 21 13, HYDRONIC PIPING and Section 23 22 13, STEAM and CONDENSATE HEATING PIPING, PART 3, for flushing and cleaning procedures.

2.2 CHEMICAL TREATMENT FOR CLOSED LOOP SYSTEMS

- A. Inhibitor: Provide sodium nitrite/borate, molybdate-based inhibitor or other approved compound suitable for make-up quality and make-up rate and which will cause or enhance bacteria/corrosion problems or mechanical seal failure due to excessive total dissolved solids. Shot feed manually. Maintain inhibitor residual as determined by water treatment laboratory, taking into consideration residual and temperature effect on pump mechanical seals.

- B. pH Control: Inhibitor formulation shall include adequate buffer to maintain pH range of 8.0 to 10.5.
- C. Performance: Protect various wetted, coupled, materials of construction including ferrous, and red and yellow metals. Maintain system essentially free of scale, corrosion, and fouling. Corrosion rate of following metals shall not exceed specified mills per year penetration; ferrous, 0-2; brass, 0-1; copper, 0-1. Inhibitor shall be stable at equipment skin surface temperatures and bulk water temperatures of not less than 121 degrees C (250 degrees F) and 52 degrees C (125 degrees Fahrenheit) respectively. Heat exchanger fouling and capacity reduction shall not exceed that allowed by fouling factor 0.0005.
- D. Pot Feeder: By-pass type, complete with necessary shut off valves, drain and air release valves, and system connections, for introducing chemicals into system, cast iron or steel tank with funnel or large opening on top for easy chemical addition. Feeders shall be 18.9 L (five gallon) minimum capacity at 860 kPa (125 psig) minimum working pressure.
- E. Side stream Water Filter for Closed Loop Systems: Stainless steel housing, and polypropylene filter media with polypropylene core. Filter media shall be compatible with antifreeze and water treatment chemicals used in the system. Replaceable filter cartridges for sediment removal service with minimum 20 micrometer particulate at 98 percent efficiency for approximately five (5) percent of system design flow rate. Filter cartridge shall have a maximum pressure drop of 13.8 kPa (2 psig) at design flow rate when clean, and maximum pressure drop of 172 kPa (25 psig) when dirty. A constant flow rate valve shall be provided in the piping to the filter. Inlet and outlet pressure gauges shall be provided to monitor filter condition.

2.3 GLYCOL-WATER SYSTEM

- A. Propylene glycol shall be inhibited with 1.75 percent dipotassium phosphate. Do not use automotive anti-freeze because the inhibitors used are not needed and can cause sludge precipitate that interferes with heat transfer.
- B. Provide required amount of glycol to obtain the percent by volume for glycol-water systems as follows and to provide one-half tank reserve supply: 30 percent for hydronic system.

- C. Pot Feeder Make-up Unit: By pass type for chemical treatment, schedule 3.5 mm (10 gauge) heads, 20 mm (3/4-inch) system connections and large neck opening for chemical addition. Feeders shall be 19 Liters (5 gallon) minimum size.
- D. Glycol-Water Make-up System:
1. Glycol-Water storage tank: Self supporting polyethylene, minimum 90 mil thickness, with removable cover or black steel with 90 mil polyethylene insert. Capacity shall be 213 L (55 gallons), with approximate diameter of 584 mm (23 inches) and height of 914 mm (36 inches). Reinforced threaded pipe connections shall be provided for all connections. Provide identification for tank showing name of the contents.
 2. Glycol-Water make-up pump: Bronze fitted, self-priming, high head type suitable for pumping a 33 percent to 50 percent glycol-water solution in intermittent service. The pump shall be provided with a mechanical shaft seal and be flange connected to a 1750 rpm NEMA type C motor. The pump capacity shall be 11 L/m (3 gpm), 345 kPa (50 psig) discharge pressure with a suction lift capability of 127 mm (5 inches) of mercury, with a 2.5 kW (1/3 horsepower) drip-proof motor. The pump may be a "gear-within-a-gear" positive displacement type with built-in relief valve set for 296 kPa (43 psig), or the pump may be a regenerative turbine type providing self-priming with built-in or external relief valve set for design head of the pump.
 3. Back pressure regulating valve: Spring loaded, diaphragm actuated type with bronze or steel body, stainless steel trim with capacity to relieve 100 percent of pump flow with an allowable rise in the regulated pressure of 69 kPa (10 psig) above the set point. Set point shall be 103 kPa (15 psig) above system PRV setting.
 4. Low water level control: Steel or plastic float housing, stainless steel or plastic float, positive snap-acting SPST switch mechanism, rated 10 amps-120 volt AC, in General Purpose (NEMA 1) enclosure. The control shall be rated for pressures to 1034 kPa (150 psig) and make alarm circuit on low water level. The alarm circuit shall be wired to an alarm light on the nearest local Temperature Control panel (LTCP). Provide remote output relay to indicate alarm condition at the Building Control System specified under Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

2.5 EQUIPMENT AND MATERIALS IDENTIFICATION

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Delivery and Storage: Deliver all chemicals in manufacturer's sealed shipping containers. Store in designated space and protect from deleterious exposure and hazardous spills.
- B. Install equipment furnished by the chemical treatment supplier and charge systems according to the manufacturer's instructions and as directed by the Technical Representative.
- C. Refer to Section 23 21 13 HYDRONIC PIPING for chemical treatment piping, installed as follows:
 - 1. Provide a by-pass line around water meters and bleed off piping assembly. Provide ball valves to allow for bypassing, isolation, and servicing of components.
 - 2. Bleed off water piping with bleed off piping assembly shall be piped from pressure side of circulating water piping to a convenient drain. Bleed off connection to main circulating water piping shall be upstream of chemical injection nozzles.
 - 3. Provide piping for the flow assembly piping to the main control panel and accessories.
 - a. The inlet piping shall connect to the discharge side of the circulating water pump.
 - b. The outlet piping shall connect to the water piping serving the cooling tower downstream of the heat source.
 - c. Provide inlet Y-strainer and ball valves to isolate and service main control panel and accessories.
 - 4. Install injection nozzles with corporation stops in the water piping serving the cooling tower downstream of the heat source.
 - 5. Provide piping for corrosion monitor rack per manufacturer's installation instructions. Provide ball valves to isolate and service rack.
 - 6. Provide piping for erosion chemical feeder per manufacturer's installation instructions. Provide ball valves to isolate and service feeder.
 - 7. Provide installation supervision, start-up and operating instruction by manufacturer's technical representative.

- D. Before adding cleaning chemical to the closed system, all air handling coils and fan coil units should be isolated by closing the inlet and outlet valves and opening the bypass valves. This is done to prevent dirt and solids from lodging the coils.
- E. Do not valve in or operate system pumps until after system has been cleaned.
- F. After chemical cleaning is satisfactorily completed, open the inlet and outlet valves to each coil and close the by-pass valves. Also, clean all strainers.
- G. Perform tests and report results in accordance with Section 01 00 00, GENERAL REQUIREMENTS.
- H. After cleaning is complete, and water PH is acceptable to manufacturer of water treatment chemical, add manufacturer-recommended amount of chemicals to systems.
- I. Instruct VA personnel in system maintenance and operation in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

- - - E N D - - -

SECTION 23 31 00
HVAC DUCTS AND CASINGS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Ductwork and accessories for HVAC including the following:
 - 1. Supply air, return air, outside air, exhaust, make-up air, and relief systems.
- B. Definitions:
 - 1. SMACNA Standards as used in this specification means the HVAC Duct Construction Standards, Metal and Flexible.
 - 2. Seal or Sealing: Use of liquid or mastic sealant, with or without compatible tape overlay, or gasketing of flanged joints, to keep air leakage at duct joints, seams and connections to an acceptable minimum.
 - 3. Duct Pressure Classification: SMACNA HVAC Duct Construction Standards, Metal and Flexible.
 - 4. Exposed Duct: Exposed to view in a finished room.

1.2 RELATED WORK

- A. Fire Stopping Material: Section 07 84 00, FIRESTOPPING.
- B. Outdoor and Exhaust Louvers: Section 08 90 00, LOUVERS and VENTS.
- C. Seismic Reinforcing: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- D. General Mechanical Requirements: Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- E. Noise Level Requirements: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
- F. Duct Insulation: Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION
- G. Plumbing Connections: Section 22 11 00, FACILITY WATER DISTRIBUTION
- H. Air Flow Control Valves and Terminal Units: Section 23 36 00, AIR TERMINAL UNITS.
- I. Supply Air Fans: Section 23 73 00, INDOOR CENTRAL-STATION AIR-HANDLING UNITS.
- J. Return Air and Exhaust Air Fans: Section 23 34 00, HVAC FANS.
- K. Air Filters and Filters' Efficiencies: Section 23 40 00, HVAC AIR CLEANING DEVICES.
- L. Duct Mounted Instrumentation: Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- M. Testing and Balancing of Air Flows: Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

N. Smoke Detectors: Section 28 31 00, FIRE DETECTION and ALARM.

1.3 QUALITY ASSURANCE

- A. Refer to article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Fire Safety Code: Comply with NFPA 90A.
- C. Duct System Construction and Installation: Referenced SMACNA Standards are the minimum acceptable quality.
- D. Duct Sealing, Air Leakage Criteria, and Air Leakage Tests: Ducts shall be sealed as per duct sealing requirements of SMACNA HVAC Air Duct Leakage Test Manual for duct pressure classes shown on the drawings.
- E. Duct accessories exposed to the air stream, such as dampers of all types (except smoke dampers) and access openings, shall be of the same material as the duct or provide at least the same level of corrosion resistance.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Rectangular ducts:
 - a. Schedules of duct systems, materials and selected SMACNA construction alternatives for joints, sealing, gage and reinforcement.
 - b. Duct liner.
 - c. Sealants and gaskets.
 - d. Access doors.
 - 2. Round and flat oval duct construction details:
 - a. Manufacturer's details for duct fittings.
 - b. Duct liner.
 - c. Sealants and gaskets.
 - d. Access sections.
 - e. Installation instructions.
 - 3. Volume dampers, back draft dampers.
 - 4. Upper hanger attachments.
 - 5. Fire dampers, fire doors, and smoke dampers with installation instructions.
 - 6. Sound attenuators, including pressure drop and acoustic performance.
 - 7. Flexible ducts and clamps, with manufacturer's installation instructions.
 - 8. Flexible connections.
 - 9. Instrument test fittings.
 - 10 Details and design analysis of alternate or optional duct systems.

11 COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

C. Coordination Drawings: Refer to article, SUBMITTALS, in Section 23 05 11, Paragraph 1.4.H.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Civil Engineers (ASCE):

ASCE7-05Minimum Design Loads for Buildings and Other Structures

C. American Society for Testing and Materials (ASTM):

A167-99(2009)Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

A653-09Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy coated (Galvannealed) by the Hot-Dip process

A1011-09aStandard Specification for Steel, Sheet and Strip, Hot rolled, Carbon, structural, High-Strength Low-Alloy, High Strength Low-Alloy with Improved Formability, and Ultra-High Strength

B209-07Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

C1071-05e1Standard Specification for Fibrous Glass Duct Lining Insulation (Thermal and Sound Absorbing Material)

E84-09aStandard Test Method for Surface Burning Characteristics of Building Materials

D. National Fire Protection Association (NFPA):

90A-09Standard for the Installation of Air Conditioning and Ventilating Systems

96-08Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations

E. Sheet Metal and Air Conditioning Contractors National Association (SMACNA):

2nd Edition - 2005HVAC Duct Construction Standards, Metal and Flexible

1st Edition - 1985HVAC Air Duct Leakage Test Manual

6th Edition - 2003Fibrous Glass Duct Construction Standards

F. Underwriters Laboratories, Inc. (UL):

181-08Factory-Made Air Ducts and Air Connectors

555-06Standard for Fire Dampers
 555S-06Standard for Smoke Dampers

PART 2 - PRODUCTS

2.1 DUCT MATERIALS AND SEALANTS

- A. General: Except for systems specified otherwise, construct ducts, casings, and accessories of galvanized sheet steel, ASTM A653, coating G90; or, aluminum sheet, ASTM B209, alloy 1100, 3003 or 5052.
- B. Specified Corrosion Resistant Systems: Stainless steel sheet, ASTM A167, Class 302 or 304, Condition A (annealed) Finish No. 4 for exposed ducts and Finish No. 2B for concealed duct or ducts located in mechanical rooms.
- C. Optional Duct Materials:
 - 1. Grease Duct: Double wall factory-built grease duct, UL labeled and complying with NFPA 96 may be furnished in lieu of specified materials for kitchen and grill hood exhaust duct. Installation and accessories shall comply with the manufacturers catalog data. Outer jacket of exposed ductwork shall be stainless steel. Square and rectangular duct shown on the drawings will have to be converted to equivalent round size.
- D. Joint Sealing: Refer to SMACNA HVAC Duct Construction Standards, paragraph S1.9.
 - 1. Sealant: Elastomeric compound, gun or brush grade, maximum 25 flame spread and 50 smoke developed (dry state) compounded specifically for sealing ductwork as recommended by the manufacturer. Generally provide liquid sealant, with or without compatible tape, for low clearance slip joints and heavy, permanently elastic, mastic type where clearances are larger. Oil base caulking and glazing compounds are not acceptable because they do not retain elasticity and bond.
 - 2. Tape: Use only tape specifically designated by the sealant manufacturer and apply only over wet sealant. Pressure sensitive tape shall not be used on bare metal or on dry sealant.
 - 3. Gaskets in Flanged Joints: Soft neoprene.
- E. Approved factory made joints may be used.

2.2 DUCT CONSTRUCTION AND INSTALLATION

- A. Regardless of the pressure classifications outlined in the SMACNA Standards, fabricate and seal the ductwork in accordance with the following pressure classifications:

B. Duct Pressure Classification:

- 0 to 50 mm (2 inch)
- > 50 mm to 75 mm (2 inch to 3 inch)
- > 75 mm to 100 mm (3 inch to 4 inch)

Show pressure classifications on the floor plans.

C. Seal Class: All ductwork shall receive Class A Seal

D. Round and Flat Oval Ducts: Furnish duct and fittings made by the same manufacturer to insure good fit of slip joints. When submitted and approved in advance, round and flat oval duct, with size converted on the basis of equal pressure drop, may be furnished in lieu of rectangular duct design shown on the drawings.

1. Elbows: Diameters 80 through 200 mm (3 through 8 inches) shall be two sections die stamped, all others shall be gored construction, maximum 18 degree angle, with all seams continuously welded or standing seam. Coat galvanized areas of fittings damaged by welding with corrosion resistant aluminum paint or galvanized repair compound.
2. Provide bell mouth, conical tees or taps, laterals, reducers, and other low loss fittings as shown in SMACNA HVAC Duct Construction Standards.
3. Ribbed Duct Option: Lighter gage round/oval duct and fittings may be furnished provided certified tests indicating that the rigidity and performance is equivalent to SMACNA standard gage ducts are submitted.
 - a. Ducts: Manufacturer's published standard gage, G90 coating, spiral lock seam construction with an intermediate standing rib.
 - b. Fittings: May be manufacturer's standard as shown in published catalogs, fabricated by spot welding and bonding with neoprene base cement or machine formed seam in lieu of continuous welded seams.
4. Provide flat side reinforcement of oval ducts as recommended by the manufacturer and SMACNA HVAC Duct Construction Standard S3.13. Because of high pressure loss, do not use internal tie-rod reinforcement unless approved by the Resident Engineer.

E. Casings and Plenums: Construct in accordance with SMACNA HVAC Duct Construction Standards Section 6, including curbs, access doors, pipe penetrations, eliminators and drain pans. Access doors shall be hollow metal, insulated, with latches and door pulls, 500 mm (20 inches) wide by 1200 - 1350 mm (48 - 54 inches) high. Provide view port in the doors where shown. Provide drain for outside air louver plenum. Outside air plenum shall have exterior insulation. Drain piping shall be routed to the nearest floor drain.

- F. Volume Dampers: Single blade or opposed blade, multi-louver type as detailed in SMACNA Standards. Refer to SMACNA Detail Figure 2-12 for Single Blade and Figure 2.13 for Multi-blade Volume Dampers.
- G. Duct Hangers and Supports: Refer to SMACNA Standards Section IV. Avoid use of trapeze hangers for round duct.

2.3 DUCT LINER (WHERE INDICATED ON DRAWINGS)

- A. Duct sizes shown on drawings for lined duct are clear opening inside lining.
- B. Duct liner is only permitted to be used for return, relief and general exhaust ducts. Duct liner is not permitted for outside air ducts, supply air ducts or any other positive pressure ductwork (provide exterior insulation only).
- C. Rectangular Duct or Casing Liner: ASTM C1071, Type I (flexible), or Type II (board), 25 mm (one inch) minimum thickness, applied with mechanical fasteners and 100 percent coverage of adhesive in conformance with SMACNA, Duct Liner Application Standard.
- D. Round and Oval Duct Liner: Factory fabricated double-walled with 25 mm (one inch) thick sound insulation and inner perforated galvanized metal liner. Construction shall comply with flame and smoke rating required by NFPA 90A. Metal liner shall be 1.0 to 0.60 mm (20 to 24 gage) having perforations not exceeding 2.4 mm (3/32 inch) diameter and approximately 22 percent free area. Metal liner for fittings need not be perforated. Assemblies shall be complete with continuous sheet Mylar liner, 2 mil thickness, between the perforated liner and the insulation to prevent erosion of the insulation. Provide liner couplings/spacer for metal liner. At the end of insulated sections, provide insulation end fittings to reduce outer shell to liner size. Provide liner spacing/concentricity leaving airway unobstructed.

2.4 DUCT ACCESS DOORS, PANELS AND SECTIONS

- A. Provide access doors, sized and located for maintenance work, upstream, in the following locations:
 - 1. Each duct mounted coil and humidifier.
 - 2. Each fire damper (for link service), smoke damper and automatic control damper.
 - 3. Each duct mounted smoke detector.
 - 4. For cleaning operating room supply air duct and kitchen hood exhaust duct, locate access doors at 6 m (20 feet) intervals and at each change in duct direction.

- B. Openings shall be as large as feasible in small ducts, 300 mm by 300 mm (12 inch by 12 inch) minimum where possible. Access sections in insulated ducts shall be double-wall, insulated. Transparent shatterproof covers are preferred for uninsulated ducts.
 - 1. For rectangular ducts: Refer to SMACNA HVAC Duct Construction Standards (Figure 2-12).
 - 2. For round and flat oval duct: Refer to SMACNA HVAC duct Construction Standards (Figure 2-11).

2.5 FIRE DAMPERS

- A. Galvanized steel, interlocking blade type, UL listing and label, 1-1/2 hour rating, 70 degrees C (160 degrees F) fusible line, 100 percent free opening with no part of the blade stack or damper frame in the air stream.
- B. Fire dampers in wet air exhaust shall be of stainless steel construction, all others may be galvanized steel.
- C. Minimum requirements for fire dampers:
 - 1. The damper frame may be of design and length as to function as the mounting sleeve, thus eliminating the need for a separate sleeve, as allowed by UL 555. Otherwise provide sleeves and mounting angles, minimum 1.9 mm (14 gage), required to provide installation equivalent to the damper manufacturer's UL test installation.
 - 2. Submit manufacturer's installation instructions conforming to UL rating test.

2.6 SMOKE DAMPERS

- A. Maximum air velocity, through free area of open damper, and pressure loss: Low pressure and medium pressure duct (supply, return, exhaust, outside air): 450 m/min (1500 fpm). Maximum static pressure loss: 32 Pa (0.13 inch W.G.).
- B. Maximum air leakage, closed damper: 0.32 cubic meters /min/square meter (4.0 CFM per square foot) at 750 Pa (3 inch W.G.) differential pressure.
- C. Minimum requirements for dampers:
 - 1. Shall comply with requirements of Table 6-1 of UL 555S, except for the Fire Endurance and Hose Stream Test.
 - 2. Frame: Galvanized steel channel with side, top and bottom stops or seals.
 - 3. Blades: Galvanized steel, parallel type preferably, 300 mm (12 inch) maximum width, edges sealed with neoprene, rubber or felt, if required to meet minimum leakage. Airfoil (streamlined) type for minimum noise generation and pressure drop are preferred for duct mounted dampers.

4. Shafts: Galvanized steel.
5. Bearings: Nylon, bronze sleeve or ball type.
6. Hardware: Zinc plated.
7. Operation: Automatic open/close. No smoke damper that requires manual reset or link replacement after actuation is acceptable. See drawings for required control operation.

D. Motor operator (actuator): Provide pneumatic or electric as required by the automatic control system, externally mounted on stand-offs to allow complete insulation coverage.

2.7 COMBINATION FIRE AND SMOKE DAMPERS

Combination fire and smoke dampers: Multi-blade type units meeting all requirements of both fire dampers and smoke dampers shall be used where shown and may be used at the Contractor's option where applicable.

2.8 FIRE DOORS

Galvanized steel, interlocking blade type, UL listing and label, 71 degrees C (160 degrees F) fusible link, 3 hour rating and approved for openings in Class A fire walls with rating up to 4 hours, 100 percent free opening with no part of the blade stack or damper frame in the air stream.

2.9 FLEXIBLE AIR DUCT

- A. General: Factory fabricated, complying with NFPA 90A for connectors not passing through floors of buildings. Flexible ducts shall not penetrate any fire or smoke barrier which is required to have a fire resistance rating of one hour or more. Flexible duct length shall not exceed 1.5 m (5 feet). Provide insulated acoustical air duct connectors in supply air duct systems and elsewhere as shown.
- B. Flexible ducts shall be listed by Underwriters Laboratories, Inc., complying with UL 181. Ducts larger than 200 mm (8 inches) in diameter shall be Class 1. Ducts 200 mm (8 inches) in diameter and smaller may be Class 1 or Class 2.
- C. Insulated Flexible Air Duct: Factory made including mineral fiber insulation with maximum C factor of 0.25 at 24 degrees C (75 degrees F) mean temperature, encased with a low permeability moisture barrier outer jacket, having a puncture resistance of not less than 50 Beach Units. Acoustic insertion loss shall not be less than 3 dB per 300 mm (foot) of straight duct, at 500 Hz, based on 150 mm (6 inch) duct, of 750 m/min (2500 fpm).
- D. Application Criteria:
 1. Temperature range: -18 to 93 degrees C (0 to 200 degrees F) internal.
 2. Maximum working velocity: 1200 m/min (4000 feet per minute).
 3. Minimum working pressure, inches of water gage: 2500 Pa (10 inches) positive, 500 Pa (2 inches) negative.

- E. Duct Clamps: 100 percent nylon strap, 80 kg (175 pounds) minimum loop tensile strength manufactured for this purpose or stainless steel strap with cadmium plated worm gear tightening device. Apply clamps with sealant and as approved for UL 181, Class 1 installation.

2.10 FLEXIBLE DUCT CONNECTIONS

Where duct connections are made to fans, air terminal units, and air handling units, install a non-combustible flexible connection of 822 g (29 ounce) neoprene coated fiberglass fabric approximately 150 mm (6 inches) wide. For connections exposed to sun and weather provide hypalon coating in lieu of neoprene. Burning characteristics shall conform to NFPA 90A. Securely fasten flexible connections to round ducts with stainless steel or zinc-coated iron draw bands with worm gear fastener. For rectangular connections, crimp fabric to sheet metal and fasten sheet metal to ducts by screws 50 mm (2 inches) on center. Fabric shall not be stressed other than by air pressure. Allow at least 25 mm (one inch) slack to insure that no vibration is transmitted.

2.11 SOUND ATTENUATING UNITS

- A. Casing, not less than 1.0 mm (20 gage) galvanized sheet steel, or 1.3 mm (18 gage) aluminum fitted with suitable flanges to make clean airtight connections to ductwork. Sound-absorbent material faced with glass fiber cloth and covered with not less than 0.6 mm (24 gage) or heavier galvanized perforated sheet steel, or 0.85 mm (22 gage) or heavier perforated aluminum. Perforations shall not exceed 4 mm (5/32-inch) diameter, approximately 25 percent free area. Sound absorbent material shall be long glass fiber acoustic blanket meeting requirements of NFPA 90A.
- B. Entire unit shall be completely air tight and free of vibration and buckling at internal static pressures up to 2000 Pa (8 inches W.G.) at operating velocities.
- C. Pressure drop through each unit: Not to exceed indicated value at design air quantities indicated.
- D. Submit complete independent laboratory test data showing pressure drop and acoustical performance.
- E. Cap open ends of attenuators at factory with plastic, heavy duty paper, cardboard, or other appropriate material to prevent entrance of dirt, water, or any other foreign matter to inside of attenuator. Caps shall not be removed until attenuator is installed in duct system.

2.12 PREFABRICATED ROOF CURBS

Galvanized steel or extruded aluminum 300 mm (12 inches) above finish roof service, continuous welded corner seams, treated wood nailer, 40 mm (1-1/2 inch) thick, 48 kg/cubic meter (3 pound/cubic feet) density rigid mineral fiberboard insulation with metal liner, built-in cant strip (except for gypsum or tectum decks). For surface insulated roof deck, provide raised cant strip (recessed mounting flange) to start at the upper surface of the insulation. Curbs shall be constructed for pitched roof or ridge mounting as required to keep top of curb level.

2.13 FIRESTOPPING MATERIAL

Refer to Section 07 84 00, FIRESTOPPING.

2.14 SEISMIC RESTRAINT FOR DUCTWORK

Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

2.15 DUCT MOUNTED THERMOMETER (AIR)

- A. Stem Type Thermometers: ASTM E1, 7 inch scale, red appearing mercury, lens front tube, cast aluminum case with enamel finish and clear glass or polycarbonate window, brass stem, 2 percent of scale accuracy to ASTM E77 scale calibrated in degrees Fahrenheit.
- B. Thermometer Supports:
 - 1. Socket: Brass separable sockets for thermometer stems with or without extensions as required, and with cap and chain.
 - 2. Flange: 3 inch outside diameter reversible flange, designed to fasten to sheet metal air ducts, with brass perforated stem.

2.16 DUCT MOUNTED TEMPERATURE SENSOR (AIR)

Refer to Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

2.17 INSTRUMENT TEST FITTINGS

- A. Manufactured type with a minimum 50 mm (two inch) length for insulated duct, and a minimum 25 mm (one inch) length for duct not insulated. Test hole shall have a flat gasket for rectangular ducts and a concave gasket for round ducts at the base, and a screw cap to prevent air leakage.
- B. Provide instrument test holes at each duct or casing mounted temperature sensor or transmitter, and at entering and leaving side of each heating coil, cooling coil, and heat recovery unit.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION, particularly regarding coordination with other trades and work in existing buildings.

- B. Fabricate and install ductwork and accessories in accordance with referenced SMACNA Standards:
1. Drawings show the general layout of ductwork and accessories but do not show all required fittings and offsets that may be necessary to connect ducts to equipment, boxes, diffusers, grilles, etc., and to coordinate with other trades. Fabricate ductwork based on field measurements. Provide all necessary fittings and offsets at no additional cost to the government. Coordinate with other trades for space available and relative location of HVAC equipment and accessories on ceiling grid. Duct sizes on the drawings are inside dimensions which shall be altered by Contractor to other dimensions with the same air handling characteristics where necessary to avoid interferences and clearance difficulties.
 2. Provide duct transitions, offsets and connections to dampers, coils, and other equipment in accordance with SMACNA Standards, Section II. Provide streamliner, when an obstruction cannot be avoided and must be taken in by a duct. Repair galvanized areas with galvanizing repair compound.
 3. Provide bolted construction and tie-rod reinforcement in accordance with SMACNA Standards.
 4. Construct casings, eliminators, and pipe penetrations in accordance with SMACNA Standards, Chapter 6. Design casing access doors to swing against air pressure so that pressure helps to maintain a tight seal.
- C. Install duct hangers and supports in accordance with SMACNA Standards, Chapter 4.
- D. Install fire dampers, smoke dampers and combination fire/smoke dampers in accordance with the manufacturer's instructions to conform to the installation used for the rating test. Install fire dampers, smoke dampers and combination fire/smoke dampers at locations indicated and where ducts penetrate fire rated and/or smoke rated walls, shafts and where required by the Resident Engineer. Install with required perimeter mounting angles, sleeves, breakaway duct connections, corrosion resistant springs, bearings, bushings and hinges per UL and NFPA. Demonstrate re-setting of fire dampers and operation of smoke dampers to the Resident Engineer.
- E. Seal openings around duct penetrations of floors and fire rated partitions with fire stop material as required by NFPA 90A.

- F. Flexible duct installation: Refer to SMACNA Standards, Chapter 3. Ducts shall be continuous, single pieces not over 1.5 m (5 feet) long (NFPA 90A), as straight and short as feasible, adequately supported. Centerline radius of bends shall be not less than two duct diameters. Make connections with clamps as recommended by SMACNA. Clamp per SMACNA with one clamp on the core duct and one on the insulation jacket. Flexible ducts shall not penetrate floors, or any chase or partition designated as a fire or smoke barrier, including corridor partitions fire rated one hour or two hour. Support ducts SMACNA Standards.
- G. Where diffusers, registers and grilles cannot be installed to avoid seeing inside the duct, paint the inside of the duct with flat black paint to reduce visibility.
- H. Control Damper Installation:
1. Provide necessary blank-off plates required to install dampers that are smaller than duct size. Provide necessary transitions required to install dampers larger than duct size.
 2. Assemble multiple sections dampers with required interconnecting linkage and extend required number of shafts through duct for external mounting of damper motors.
 3. Provide necessary sheet metal baffle plates to eliminate stratification and provide air volumes specified. Locate baffles by experimentation, and affix and seal permanently in place, only after stratification problem has been eliminated.
 4. Install all damper control/adjustment devices on stand-offs to allow complete coverage of insulation.
- I. Air Flow Measuring Devices (AFMD): Install units with minimum straight run distances, upstream and downstream as recommended by the manufacturer.
- J. Low Pressure Duct Liner: Install in accordance with SMACNA, Duct Liner Application Standard.
- K. Protection and Cleaning: Adequately protect equipment and materials against physical damage. Place equipment in first class operating condition, or return to source of supply for repair or replacement, as determined by Resident Engineer. Protect equipment and ducts during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting. When new ducts are connected to existing ductwork, clean both new and existing ductwork by mopping and vacuum cleaning inside and outside before operation.

3.2 DUCT LEAKAGE TESTS AND REPAIR

- A. Ductwork leakage testing shall be performed by the Testing and Balancing Contractor directly contracted by the General Contractor and independent of the Sheet Metal Contractor.
- B. Ductwork leakage testing shall be performed for the entire air distribution system (including all supply, return, exhaust and relief ductwork), section by section, including fans, coils and filter sections.
- C. Test procedure, apparatus and report shall conform to SMACNA Leakage Test manual. The maximum leakage rate allowed is 4 percent of the design air flow rate.
- D. All ductwork shall be leak tested first before enclosed in a shaft or covered in other inaccessible areas.
- E. All tests shall be performed in the presence of the Resident Engineer and the Test and Balance agency. The Test and Balance agency shall measure and record duct leakage and report to the Resident Engineer and identify leakage source with excessive leakage.
- F. If any portion of the duct system tested fails to meet the permissible leakage level, the Contractor shall rectify sealing of ductwork to bring it into compliance and shall retest it until acceptable leakage is demonstrated to the Resident Engineer.
- G. All tests and necessary repairs shall be completed prior to insulation or concealment of ductwork.
- H. Make sure all openings used for testing flow and temperatures by TAB Contractor are sealed properly.

3.3 TESTING, ADJUSTING AND BALANCING (TAB)

Refer to Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

3.4 OPERATING AND PERFORMANCE TESTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 34 00

HVAC FANS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Fans for heating, ventilating and air conditioning.
- B. Product Definitions: AMCA Publication 99, Standard 1-66.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
- E. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT.
- F. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- G. Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.
- H. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- I. Section 23 73 00, INDOOR CENTRAL-STATION AIR-HANDLING UNITS.
- J. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.

1.3 QUALITY ASSURANCE

- A. Refer to paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
- B. Fans and power ventilators shall be listed in the current edition of AMCA 261, and shall bear the AMCA performance seal.
- C. Operating Limits for Centrifugal Fans: AMCA 99 (Class I, II, and III).
- D. Fans and power ventilators shall comply with the following standards:
 - 1. Testing and Rating: AMCA 210.
 - 2. Sound Rating: AMCA 300.
- E. Vibration Tolerance for Fans and Power Ventilators: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- F. Performance Criteria:
 - 1. The fan schedule shall show the design air volume and static pressure. Select the fan motor HP by increasing the fan BHP by 10 percent to account for the drive losses and field conditions.
 - 2. Select the fan operating point as follows:
 - a. Forward Curve and Axial Flow Fans: Right hand side of peak pressure point
 - b. Air Foil, Backward Inclined, or Tubular: At or near the peak static efficiency

- G. Safety Criteria: Provide manufacturer's standard screen on fan inlet and discharge where exposed to operating and maintenance personnel.
- H. Corrosion Protection:
 - 1. Except for fans in fume hood exhaust service, all steel shall be mill-galvanized, or phosphatized and coated with minimum two coats, corrosion resistant enamel paint. Manufacturers paint and paint system shall meet the minimum specifications of: ASTM D1735 water fog; ASTM B117 salt spray; ASTM D3359 adhesion; and ASTM G152 and G153 for carbon arc light apparatus for exposure of non-metallic material.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturers Literature and Data:
 - 1. Fan sections, motors and drives.
 - 2. Centrifugal fans, motors, drives, accessories and coatings.
 - a. In-line centrifugal fans.
 - b. Tubular Centrifugal Fans.
 - c. Industrial fans.
 - d. Utility fans and vent sets.
 - 3. Prefabricated roof curbs.
 - 4. Power roof and wall ventilators.
 - 5. Centrifugal ceiling fans.
 - 6. Propeller fans.
- C. Certified Sound power levels for each fan.
- D. Motor ratings types, electrical characteristics and accessories.
- E. Roof curbs.
- F. Belt guards.
- G. Maintenance and Operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS.
- H. Certified fan performance curves for each fan showing cubic feet per minute (CFM) versus static pressure, efficiency, and horsepower for design point of operation.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

- B. Air Movement and Control Association International, Inc. (AMCA):
- 99-86Standards Handbook
 - 210-06Laboratory Methods of Testing Fans for
Aerodynamic Performance Rating
 - 261-09Directory of Products Licensed to bear the AMCA
Certified Ratings Seal - Published Annually
 - 300-08Reverberant Room Method for Sound Testing of
Fans
- C. American Society for Testing and Materials (ASTM):
- B117-07aStandard Practice for Operating Salt Spray (Fog)
Apparatus
 - D1735-08Standard Practice for Testing Water Resistance
of Coatings Using Water Fog Apparatus
 - D3359-08Standard Test Methods for Measuring Adhesion by
Tape Test
 - G152-06Standard Practice for Operating Open Flame
Carbon Arc Light Apparatus for Exposure of Non-
Metallic Materials
 - G153-04Standard Practice for Operating Enclosed Carbon
Arc Light Apparatus for Exposure of Non-Metallic
Materials
- D. National Fire Protection Association (NFPA):
- NFPA 96-08Standard for Ventilation Control and Fire
Protection of Commercial Cooking Operations
- E. National Sanitation Foundation (NSF):
- 37-07Air Curtains for Entrance Ways in Food and Food
Service Establishments
- F. Underwriters Laboratories, Inc. (UL):
- 181-2005Factory Made Air Ducts and Air Connectors

1.6 EXTRA MATERIALS

- A. Provide one additional set of belts for all belt-driven fans.

PART 2 - PRODUCTS

2.1 FAN SECTION (CABINET FAN)

Refer to specification Section 23 73 00, INDOOR CENTRAL-STATION AIR-HANDLING UNITS.

2.2 CENTRIFUGAL FANS

- A. Standards and Performance Criteria: Refer to Paragraph, QUALITY ASSURANCE. Record factory vibration test results on the fan or furnish to the Contractor.

- B. Fan arrangement, unless noted or approved otherwise:
1. DWD1 fans: Arrangement 3.
 2. SWS1 fans: Arrangement 1, 3, 9 or 10.
- C. Construction: Wheel diameters and outlet areas shall be in accordance with AMCA standards.
1. Housing: Low carbon steel, arc welded throughout, braced and supported by structural channel or angle iron to prevent vibration or pulsation, flanged outlet, inlet fully streamlined. Provide lifting clips, and casing drain. Provide manufacturer's standard access door. Provide 12.5 mm (1/2 inches) wire mesh screens for fan inlets without duct connections.
 2. Wheel: Steel plate with die formed blades welded or riveted in place, factory balanced statically and dynamically.
 3. Shaft: Designed to operate at no more than 70 percent of the first critical speed at the top of the speed range of the fans class.
 4. Bearings: Heavy duty ball or roller type sized to produce a B10 life of not less than 50,000 hours, and an average fatigue life of 200,000 hours. Extend filled lubrication tubes for interior bearings or ducted units to outside of housing.
 5. Belts: Oil resistant, non-sparking and non-static.
 6. Belt Drives: Factory installed with final alignment belt adjustment made after installation.
 7. Motors and Fan Wheel Pulleys: Adjustable pitch for use with motors through 15HP, fixed pitch for use with motors larger than 15HP. Select pulleys so that pitch adjustment is at the middle of the adjustment range at fan design conditions.
 8. Motor, adjustable motor base, drive and guard: Furnish from factory with fan. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION for specifications. Provide protective sheet metal enclosure for fans located outdoors.
 9. Furnish variable speed fan motor controllers where shown on the drawings. Refer to Section, MOTOR STARTERS. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION for controller/motor combination requirements.
- D. In-line Centrifugal Fans: In addition to the requirements of paragraphs A and 2.2.C3 thru 2.2.C9, provide minimum 18 Gauge galvanized steel housing with inlet and outlet flanges, backward inclined aluminum centrifugal fan wheel, bolted access door and supports as required. Motors shall be factory pre-wired to an external junction box. Provide factory wired disconnect switch.

- E. Tubular Centrifugal Fans: In addition to the requirements of paragraphs A and 2.2.C2 thru 2.2.C9 provide;
 - 1. Housings: Hot rolled steel, one-piece design, incorporating integral guide vanes, motor mounts, bolted access hatch and end flanges. Provide spun inlet bell and screen for unducted inlet and screen for unducted outlet. Provide welded steel, flanged inlet and outlet cones for ducted connection. Provide mounting legs or suspension brackets as required for support. Guide vanes shall straighten the discharge air pattern to provide linear flow.
- F. Industrial Fans: Use where scheduled or in lieu of centrifugal fans for low volume high static service. Construction specifications paragraphs A and C for centrifugal fans shall apply. Provide material handling flat blade type fan wheel.
- G. Utility Fans, Vent Sets and Small Capacity Fans: Class 1 design, arc welded housing, spun intake cone. Applicable construction specification, paragraphs A and C, for centrifugal fans shall apply for wheel diameters 300 mm (12 inches) and larger. Requirement for AMCA seal is waived for wheel diameters less than 300 mm (12 inches) and housings may be cast iron.

2.3 POWER ROOF VENTILATOR

- A. Standards and Performance Criteria: Refer to Paragraph, QUALITY ASSURANCE.
- B. Type: Centrifugal fan, backward inclined blades. Provide down-blast or up-blast type as indicated.
- C. Construction: Steel or aluminum, completely weatherproof, for curb mounting, exhaust cowl or entire drive assembly readily removable for servicing, aluminum bird screen on discharge, UL approved safety disconnect switch, conduit for wiring, vibration isolators for wheel, motor and drive assembly. Provide self acting back draft damper.
- D. Motor and Drive: Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION. Bearings shall be pillow block ball type with a minimum L-50 life of 200,000 hours. Motor shall be located out of air stream.
- E. Prefabricated Roof Curb: As specified in paragraph 2.3 of this section.
- F. Up-blast Type: Top discharge exhauster, motor out of air stream. For kitchen hood exhaust applications, provide grease trough on base and threaded drain. The mounting height of the kitchen up-blast exhaust fan shall be in compliance with NFPA 96. (Provide vented curb extension if required to maintain required clearances.)

2.4 CENTRIFUGAL CEILING FANS (SMALL CABINET FAN)

- A. Standards and Performance Criteria: Refer to Paragraph, QUALITY ASSURANCE.
- B. Steel housing, baked enamel finish, direct connected fan assembly, attached grille. Provide gravity back draft assembly, aluminum wall cap and bird or insect screen.
- C. Acoustical Lining: 12.5 mm (1/2 inch) thick mineral fiber, dark finish. Comply with UL 181 for erosion.
- D. Motor: Shaded pole or permanent split capacitor, sleeve bearings, supported by steel brackets in combination with rubber isolators.
- E. Ceiling Grille, (Where indicated): White plastic egg crate design, 80 percent free area.
- F. Control: Provide solid state speed control (located at unit) for final air balancing.

2.5 PROPELLER FANS

- A. Standards and Performance Criteria: Refer to Paragraph, QUALITY ASSURANCE.
- B. Belt-driven or direct-driven fans as indicated on drawings.
- C. Square steel panel, deep drawn venturi, arc welded to support arms and fan/motor support brackets, baked enamel finish. Provide wall collar for thru-wall installations.
- D. Motor, Motor Base and Drive: Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION. Motor shall be totally enclosed type.
- E. Wall Shutter: Fan manufacturer's standard, steel frame, aluminum blades, heavy duty stall type electric damper motor, spring closed.
- F. Wire Safety Guards: Provide on exposed inlet and outlet.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Install fan, motor and drive in accordance with manufacturer's instructions.
- B. Align fan and motor sheaves to allow belts to run true and straight.
- C. Bolt equipment to curbs with galvanized lag bolts.
- D. Install vibration control devices as shown on drawings and specified in Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

3.2 PRE-OPERATION MAINTENANCE

- A. Lubricate bearings, pulleys, belts and other moving parts with manufacturer recommended lubricants.

- B. Rotate impeller by hand and check for shifting during shipment and check all bolts, collars, and other parts for tightness.
- C. Clean fan interiors to remove foreign material and construction dirt and dust.

3.3 START-UP AND INSTRUCTIONS

- A. Verify operation of motor, drive system and fan wheel according to the drawings and specifications.
- B. Check vibration and correct as necessary for air balance work.
- C. After air balancing is complete and permanent sheaves are in place perform necessary field mechanical balancing to meet vibration tolerance in Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 36 00
AIR TERMINAL UNITS

PART 1 - GENERAL

1.1 DESCRIPTION

Air flow control valves.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic restraints for equipment.
- B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION: General mechanical requirements and items, which are common to more than one section of Division 23.
- C. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT: Noise requirements.
- D. Section 23 31 00, HVAC DUCTS AND CASINGS: Ducts and flexible connectors.
- E. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Valve operators.
- F. Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC: Flow rates adjusting and balancing.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Air Terminal Units: Submit test data.
 - 2. Air flow control valves.
- C. Certificates:
 - 1. Compliance with paragraph, QUALITY ASSURANCE.
 - 2. Compliance with specified standards.
- D. Operation and Maintenance Manuals: Submit in accordance with paragraph, INSTRUCTIONS, in Section 01 00 00, GENERAL REQUIREMENTS.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

- B. Air Conditioning and Refrigeration Institute (AHRI)/(ARI):
 880-08Air Terminals Addendum to ARI 888-98
 incorporated into standard posted 15th December
 2002
- C. National Fire Protection Association (NFPA):
 90A-09Standard for the Installation of Air
 Conditioning and Ventilating Systems
- D. Underwriters Laboratories, Inc. (UL):
 181-08Standard for Factory-Made Air Ducts and Air
 Connectors
- E. American Society for Testing and Materials (ASTM):
 C 665-06Standard Specification for Mineral-Fiber
 Blanket Thermal Insulation for Light Frame
 Construction and Manufactured Housing

1.6 GUARANTY

In accordance with the GENERAL CONDITIONS

PART 2 - PRODUCTS

2.1 AIR FLOW CONTROL VALVE (AFCV)

- A. Airflow control device shall be a venturi valve type air flow control valve.
- B. Pressure independent over a 150 Pa-750 Pa (0.6 inch WG - 3.0 inch WG) drop across valve.
- C. Volume control accurate to plus or minus 5% of airflow over an airflow turndown range of 16 to 1. No minimum entrance or exit duct diameters shall be required to ensure accuracy or pressure independence.
- D. Response time to change in command signal and duct static pressure within three seconds.
- E. 16 gauge spun aluminum valve body and control device with continuous welded seam and 316 stainless steel shaft and shaft support brackets. Pressure independent springs shall be stainless steel. Shaft bearing surfaces shall be Teflon or polyester.
- F. Variable volume units:
 - 1. Actuator to be factory mounted to the valve.
 - 2. Closed loop control of airflow by way of flow feedback signal with less than 1 second response time.
 - 3. Shaft positioned using direct potentiometer measurement to produce a linear factory calibrated feedback.

G. Certification:

1. Control device: factory calibrated to airflows detailed on plans using NIST traceable air stations and instrumentation having a combined accuracy of plus or minus 1% of signal over the entire range of measurement.
2. Electronic airflow control devices: further calibrated and their accuracy verified to plus or minus 5% of signal at a minimum of eight different airflows across the full operating range of the device.
3. All airflow control devices: individually marked with device specific, factory calibration data to include: tag number, serial number, model number, eight point characterization information (for electronic devices), and quality control inspection numbers.

H. Airflow measuring devices and airflow control devices that are not venturi valves (e.g., Pitot tube, flow cross, air bar, orifice ring, vortex shedder, etc.) are acceptable, provided the following conditions are met:

1. They meet the performance and construction characteristics stated throughout this section of the specification.
2. Suppliers of airflow control devices or airflow measuring devices requiring minimum duct diameters: provide revised duct layouts showing the required straight duct runs upstream and downstream of these devices.
3. Supplier of the airflow control system: submit coordination drawings reflecting these changes and include static pressure loss calculations as part of submittal.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Work shall be installed as shown and according to the manufacturer's diagrams and recommendations.
- B. Handle and install units in accordance with manufacturer's written instructions.
- C. Support units rigidly so they remain stationary at all times. Cross-bracing or other means of stiffening shall be provided as necessary. Method of support shall be such that distortion and malfunction of units cannot occur.
- D. Locate air terminal units to provide a straight section of inlet duct for proper functioning of volume controls. See VA Standard Detail.

3.2 OPERATIONAL TEST

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM
GENERATION.

- - - E N D - - -

SECTION 23 37 00
AIR OUTLETS AND INLETS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Roof Curbs
- B. Air Outlets and Inlets: Diffusers, Registers, and Grilles.

1.2 RELATED WORK

- A. Outdoor and Exhaust Louvers: Section 08 90 00, LOUVERS AND VENTS.
- B. Seismic Reinforcing: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- C. General Mechanical Requirements: Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
- D. Noise Level Requirements: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- E. Testing and Balancing of Air Flows: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

1.3 QUALITY ASSURANCE

- A. Refer to article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
- B. Fire Safety Code: Comply with NFPA 90A.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Air intake/exhaust hoods.
 - 2. Diffusers, registers, grilles and accessories.
- C. Coordination Drawings: Refer to article, SUBMITTALS, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Diffusion Council Test Code:
 - 1062 GRD-84Certification, Rating, and Test Manual 4th Edition
- C. American Society of Civil Engineers (ASCE):
 - ASCE7-05Minimum Design Loads for Buildings and Other Structures

D. American Society for Testing and Materials (ASTM):

A167-99 (2004)Standard Specification for Stainless and
Heat-Resisting Chromium-Nickel Steel Plate,
Sheet and Strip

B209-07Standard Specification for Aluminum and
Aluminum-Alloy Sheet and Plate

E. National Fire Protection Association (NFPA):

90A-09Standard for the Installation of Air
Conditioning and Ventilating Systems

F. Underwriters Laboratories, Inc. (UL):

181-08UL Standard for Safety Factory-Made Air Ducts
and Connectors

PART 2 - PRODUCTS

2.1 GRAVITY INTAKE/EXHAUST VENTILATORS (ROOF MOUNTED)

- A. Aluminum, ASTM B209, louvered, spun, or fabricated using panel sections with roll-formed edges, 13 mm (1/2 inch) mesh aluminum welded wire bird screen, with gravity or motorized dampers where shown, accessible interior, designed for wind velocity specified in Paragraph 3.3.
 1. Spun Intake/Exhaust Ventilators: Spun aluminum structural components shall be constructed of minimum 1.3 mm (16 Gauge) marine alloy aluminum, bolted to a rigid aluminum support structure. The aluminum base shall have continuously welded curb cap corners for maximum leak protection. The spun aluminum baffle shall have a rolled bead for added strength.
 2. Louvered Intake/Exhaust Hoods: Louvered hood constructed from 0.081 Gauge extruded aluminum tiers welded to a minimum 3.3 mm (8 Gauge) aluminum support structure. The aluminum hood shall be constructed of a minimum 0.064 marine alloy aluminum and provided with a layer of anti-condensate coating. The aluminum base shall have continuously welded curb cap corners for maximum leak protection.
 3. Low Silhouette Intake/Exhaust Ventilator: The unit shall be of bolted and welded construction utilizing corrosion resistant fasteners. The aluminum hood shall be constructed of minimum 1.60 mm (14 Gauge) marine alloy aluminum, bolted to a minimum 3.25 mm (8 Gauge) aluminum support structure. The aluminum base shall have continuously welded curb cap corners for maximum leak protection. Birdscreen constructed of 13 mm (1/2 inch) mesh shall be mounted across the relief opening.
- B. See ventilator schedule on the drawings. Sizes shown on the drawings designate throat size. Area of ventilator perimeter opening shall be not less than the throat area.

- C. Dampers for Gravity Ventilators without Duct Connection: Construct damper of the same material as the ventilator and of the design to completely close opening or remain wide open. Hold damper in closed position by a brass chain and catch. Extend chains 300 mm (12 inches) below and engage catch when damper is closed.
- D. Provide Roof Curb by unit manufacturer. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION for additional requirements.

2.2 EQUIPMENT SUPPORTS

Refer to Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION, Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, and Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

2.3 AIR OUTLETS AND INLETS

- A. Materials:
 - 1. Steel or aluminum. Exhaust air registers located in combination toilets and shower stalls shall be constructed from aluminum. Provide manufacturer's standard gasket.
 - 2. Exposed Fastenings: The same material as the respective inlet or outlet. Fasteners for aluminum may be stainless steel.
 - 3. Contractor shall review all ceiling drawings and details and provide all ceiling mounted devices with appropriate dimensions and trim for the specific locations.
- B. Performance Test Data: In accordance with Air Diffusion Council Code 1062GRD. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT for NC criteria.
- C. Air Supply Outlets:
 - 1. Ceiling Diffusers: Suitable for surface mounting, exposed T-bar or special tile ceilings, off-white finish, square or round neck connection as shown on the drawings. Provide plaster frame for units in plaster ceilings.
 - a. Square, louver, fully adjustable pattern: Round neck, surface mounting unless shown otherwise on the drawings. Provide equalizing or control grid and volume control damper.
 - b. Louver face type: Square or rectangular, removable core for 1, 2, 3, or 4 way directional pattern. Provide equalizing or control grid and opposed blade damper.

- c. Perforated face type: Manual adjustment for one-, two-, three-, or four-way horizontal air distribution pattern without change of air volume or pressure. Provide equalizing or control grid and opposed blade over overlapping blade damper. Perforated face diffusers for VAV systems shall have the pattern controller on the inner face, rather than in the neck and designed to discharge air horizontally at the ceiling maintaining a Coanda effect.
- 2. Supply Registers: Double deflection type with horizontal face bars and opposed blade damper with removable key operator.
 - a. Margin: Flat, 30 mm (1-1/4 inches) wide.
 - b. Bar spacing: 20 mm (3/4 inch) maximum.
 - c. Finish: Off white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting, or shall be extruded with manufacturer's standard finish.
- 3. Supply Grilles: Same as registers but without the opposed blade damper.
- D. Return and Exhaust Registers and Grilles: Provide opposed blade damper without removable key operator for registers.
 - 1. Finish: Off-white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting, or shall be extruded aluminum with manufacturer's standard aluminum finish.
 - 2. Standard Type: Fixed horizontal face bars set at 30 to 45 degrees, approximately 30 mm (1-1/4 inch) margin.
 - 3. Perforated Face Type: To match supply units.
 - 4. Grid Core Type: 13 mm by 13 mm (1/2 inch by 1/2 inch) core with 30 mm (1-1/4 inch) margin.
 - 5. Linear Type: To match supply units.
 - 6. Door Grilles: Are furnished with the doors.
 - 7. Egg Crate Grilles: Aluminum or Painted Steel 1/2 by 1/2 by 1/2 inch grid providing 90% free area.
 - a. Heavy extruded aluminum frame shall have countersunk screw mounting. Unless otherwise indicated, register blades and frame shall have factory applied white finish.
 - b. Grille shall be suitable for duct or surface mounting as indicated on drawings. All necessary appurtenances shall be provided to allow for mounting.

- E. Supply Registers in Psychiatric Rooms: Supply air registers shall be security type, steel with perforated faceplate, flat surface margin, extension sleeve, opposed blade damper and back mounting flanges. Faceplate shall be 5 mm (3/16 inch) (minimum) with 5x5 mm holes on 7 mm (3/16 by 3/16 inch holes on 9/32 inch) spacing and a minimum free area of 45 percent. Wall sleeve shall be 5 mm (3/16 inch) thick (minimum).
- F. Air Inlet Registers in Psychiatric Rooms: Return, exhaust, transfer and relief air registers shall be security type, steel with perforated faceplate, flat surface margin, wall sleeve, opposed blade damper and back mounting flanges. Faceplate shall be 5 mm (3/16 inch) (minimum) with 5x5 mm holes on 7 mm (3/16 by 3/16 inch holes on 9/32 inch) spacing and a minimum free area of 45 percent. Wall sleeve shall be 5 mm (3/16 inch) thick (minimum).
- G. Acoustic Transfer Grille: Aluminum, suitable for partition or wall mounting.

2.5 FILTER RETURN/EXHAUST GRILLE

- A. Provide grille with in stream 1-inch deep MERV 4 filter and removable face.
 - 1. Finish: Off-white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting, or shall be extruded aluminum with manufacturer's standard aluminum finish. Stainless Steel shall be No. 4 finish.
 - 2. Standard Type: Fixed horizontal face bars set at 30 to 45 degrees, approximately 30 mm (1-1/4 inch) margin.
 - 3. Steel, Aluminum, or Stainless steel as scheduled.
 - 4. Standard face connected to a mounting frame with space for a throwaway filter. Hold face closed by a locking screw. Provide retaining clips to hold filter in place. Provide fiberglass throwaway filter.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, particularly regarding coordination with other trades and work in existing buildings.

B. Protection and Cleaning: Protect equipment and materials against physical damage. Place equipment in first class operating condition, or return to source of supply for repair or replacement, as determined by Resident Engineer. Protect equipment during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting.

3.3 TESTING, ADJUSTING AND BALANCING (TAB)

Refer to Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

3.4 OPERATING AND PERFORMANCE TESTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION

- - - E N D - - -

SECTION 23 40 00
HVAC AIR CLEANING DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Air filters for heating, ventilating and air conditioning.
- B. Definitions: Refer to ASHRAE Standard 52.2 for definitions of face velocity, net effective filtering area, media velocity, initial resistance (pressure drop), MERV (Minimum Efficiency Reporting Value), PSE (Particle Size Efficiency), particle size ranges for each MERV number, dust holding capacity and explanation of electrostatic media based filtration products versus mechanical filtration products. Refer to ASHRAE Standard 52.2 Appendix J for definition of MERV-A.

1.2 RELATED WORK

- A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION: General mechanical requirements and items, which are common to more than one section of Division 23.
- B. Section 23 73 00, INDOOR CENTRAL-STATION AIR-HANDLING UNITS: Filter housing and racks.
- C. Section 23 73 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS: Filter housing and racks.
- D. Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

1.3 QUALITY ASSURANCE

- A. Air Filter Performance Report for Extended Surface Filters:
 - 1. Submit a test report for each Grade of filter being offered. The report shall not be more than three (3) years old and prepared by using test equipment, method and duct section as specified by ASHRAE Standard 52.2 for type filter under test and acceptable to Resident Engineer, indicating that filters comply with the requirements of this specification. Filters utilizing partial or complete synthetic media will be tested in compliance with pre-conditioning steps as stated in Appendix J. All testing is to be conducted on filters with a nominal 24 inch by 24 inch face dimension. Test for 150 m/min (500 fpm) will be accepted for lower velocity rated filters provided the test report of an independent testing laboratory complies with all the requirements of this specification.
- B. Filter Warranty for Extended Surface Filters: Guarantee the filters against leakage, blow-outs, and other deficiencies during their normal useful life, up to the time that the filter reaches the final pressure drop. Defective filters shall be replaced at no cost to the Government.

- C. Comply with UL Standard 900 for flame test.
- D. Nameplates: Each filter shall bear a label or name plate indicating manufacturer's name, filter size, rated efficiency, UL classification, and file number.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Extended surface filters.
 - 2. Holding frames. Identify locations.
 - 3. Side access housings. Identify locations, verify insulated doors.
 - 4. HEPA filters.
 - 5. Magnehelic gages.
- C. Air Filter performance reports.
- D. Suppliers warranty.
- E. Field test results for HEPA filters as per paragraph 2.3.E.3.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society of Heating, Refrigerating and Air-conditioning Engineers, Inc. (ASHRAE):
 - 52.2-2007.....Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size, including Appendix J
- C. American Society of Mechanical Engineers (ASME):
 - NQA-1-2008Quality Assurance Requirements for Nuclear Facilities Applications
- D. Underwriters Laboratories, Inc. (UL):
 - 900; Revision 15 July 2009 Test Performance of Air Filter Units

PART 2 - PRODUCTS

2.1 REPLACEMENT FILTER ELEMENTS TO BE FURNISHED

- A. To allow temporary use of HVAC systems for testing and in accordance with Paragraph, TEMPORARY USE OF MECHANICAL AND ELECTRICAL SYSTEMS in Section 01 00 00, GENERAL REQUIREMENTS, provide one complete set of additional filters to the Resident Engineer.
- B. The Resident Engineer will direct whether these additional filters will either be installed as replacements for dirty units or turned over to VA for future use as replacements.

2.2 EXTENDED SURFACE AIR FILTERS

- A. Use factory assembled air filters of the extended surface type with supported or non-supported cartridges for removal of particulate matter in air conditioning, heating and ventilating systems. Filter units shall be of the extended surface type fabricated for disposal when the contaminant load limit is reached as indicated by maximum (final) pressure drop.
- B. Filter Classification: UL listed and approved conforming to UL Standard 900.
- C. HVAC Filter Types

HVAC Filter Types Table 2.2C				
MERV Value ASHRAE 52.2	MERV-A Value ASHRAE 62.2 Appendix J	Application	Particle Size	Thickness /Type
8	8-A	Pre-Filter	3 to 10 Microns	50 mm (2-inch) Throwaway
11	11-A	After-Filter	1 to 3 Microns	150 mm (6-inch) or 300 mm (12-inch) Rigid Cartridge
13	13-A	After-Filter	0.3 to 1 Microns	150 mm (6-inch) or 300 mm (12-inch) Rigid Cartridge
14	14-A	After-Filter	0.3 to 1 Microns	150 mm (6-inch) or 300 mm (12-inch) Rigid Cartridge

D. HEPA Filters

HEPA Filters Table 2.2D				
Efficiency at 0.3 Micron	Application	Initial Resistance (inches w.g.)	Rated CFM	Construction
99.97	Final Filter	1.35	1100	Galvanized Frame X- Body
99.97	Final Filter	1.00	2000	Aluminum Frame V-Bank

2.3 MEDIUM EFFICIENCY PLEATED PANEL PRE-FILTERS (2"; MERV 8; UL 900 CLASS 2):

- A. Construction: Air filters shall be medium efficiency ASHRAE pleated panels consisting of cotton and synthetic or 100% virgin synthetic media, self supporting media with required media stabilizers, and beverage board enclosing frame. Filter media shall be lofted to a uniform depth and formed into a uniform radial pleat. The media stabilizers shall be bonded to the downstream side of the media to maintain radial pleats and prevent media oscillation. An enclosing frame of no less than 28-point high wet-strength beverage board shall provide a rigid and durable enclosure. The frame shall be bonded to the media on all sides to prevent air bypass. Integral diagonal support members on the air entering and air exiting side shall be bonded to the apex of each pleat to maintain uniform pleat spacing in varying airflows.

- B. Performance: The filter shall have a Minimum Efficiency Reporting Value of MERV 8 when evaluated under the guidelines of ASHRAE Standard 52.2. It shall also have a MERV-A of 8 when tested per Appendix J of the same standard. The media shall maintain or increase in efficiency over the life of the filter. Pertinent tolerances specified in Section 7.4 of the Air-Conditioning and Refrigeration Institute (ARI) Standard 850-93 shall apply to the performance ratings. All testing is to be conducted on filters with a nominal 24" x 24" face dimension.

Minimum Efficiency Reporting (MERV)	8
Dust Holding Capacity (Grams)	105
Nominal Size (Width x Height x Depth)	24x24x2
Rated Air Flow Capacity (Cubic Feet per Minute)	2,000
Rated Air Flow Rate (Feet per Minute)	500
Final Resistance (Inches w.g.)	1.0
Maximum Recommended Change-Out Resistance (Inches w.g.)	0.66
Rated Initial Resistance (Inches w.g.)	0.33

- C. The filters shall be approved and listed by Underwriters' Laboratories, Inc. as Class 2 when tested according to U. L. Standard 900 and CAN 4-5111.

2.4 HIGH EFFICIENCY EXTENDED SURFACE (INTERMEDIATE/AFTER (FINAL)) CARTRIDGE FILTERS (12"; MERV 14/13/11; UL 900 CLASS 2):

- A. Construction: Air filters shall consist of 8 pleated media packs assembled into 4 V-banks within a totally plastic frame. The filters shall be capable of operating at temperatures up to 80 degrees C (176 degrees F). The filters must either fit without modification or be adaptable to the existing holding frames. The molded end panels are to be made of high impact polystyrene plastic. The center support members shall be made of ABS plastic. No metal components are to be used.
- B. Media: The media shall be made of micro glass fibers with a water repellent binder. The media shall be a dual density construction, with coarser fibers on the air entering side and finer fibers on the air leaving side. The media shall be pleated using separators made of continuous beads of low profile thermoplastic material. The media packs shall be bonded to the structural support members at all points of contact, this improves the rigidity as well as eliminates potential air bypass in the filter

- C. Performance: Filters of the size, air flow capacity and nominal efficiency (MERV) shall meet the following rated performance specifications based on the ASHRAE 52.2-1999 test method. Where applicable, performance tolerance specified in Section 7.4 of the Air-Conditioning and Refrigeration Institute (ARI) Standard 850-93 shall apply to the performance ratings. All testing is to be conducted on filters with a nominal 24"x24" header dimension.

Minimum Efficiency Reporting Value (MERV)	14	13	11
Gross Media Area (Sq. Ft.)	197	197	197
Dust Holding Capacity (Grams)	486	430	465
Nominal Size (Width x Height x Depth)	24x24x12	24x24x12	24x24x12
Rated Air Flow Capacity (cubic feet per minute)	2,000	2,000	2,000
Rated Air Flow Rate (feet per minute)	500	500	500
Final Resistance (inches w.g.)	2.0	2.0	2.0
Maximum Recommended Change-Out Resistance (Inches w.g.)	0.74	0.68	0.54
Rated Initial Resistance (inches w.g.)	0.37	0.34	0.27

2.5 HIGH EFFICIENCY PARTICULATE AIR (HEPA) FILTERS STANDARD CAPACITY (FINAL FILTER APPLICATION)

- A. Air filters shall be HEPA grade standard capacity air filters with waterproof micro glass fiber media, corrugated aluminum separators, urethane sealant, 16-gauge steel enclosing frame and fluid sealing gasket. Sizes shall be as noted on drawings or other supporting materials.
- B. Construction: Filter media shall be one continuous pleating of microfine glass fiber media. Pleats shall be uniformly separated by corrugated aluminum separators incorporating a hemmed edge to prevent damage to the media. The media pack shall be potted into the enclosing frame with a fire-retardant urethane sealant. The enclosing frame shall be of 16-gauge steel, with a zinc aluminum alloy finish, and shall be bonded to the media pack to form a rugged and durable enclosure. The filter shall be assembled without the use of fasteners to ensure no frame penetrations. Overall dimensional tolerance shall be correct within - 1/8", +0", and square within 1/8". A poured-in-place seamless sealing gasket shall be included on the downstream side of the enclosing frame to form a positive seal upon installation.
- C. Performance: The filter shall have a tested efficiency of 99.97% when evaluated according to IEST Recommended Practice. Initial resistance to

airflow shall not exceed 1.0" w.g. at rated capacity. Filter shall be listed by Underwriters Laboratories as UL 900. The filter shall be capable of withstanding 10" w.g. without failure of the media pack. Manufacturer shall provide evidence of facility certification to ISO 9001:2000.

HEPA Performance (Standard Capacity) Table 2.5A		
Nominal Size (inches)	Airflow Capacity (cfm)	Media Area (Square Feet)
24H by 24W by 12D	1080 at 1.0" w.g.	153
24H by 12W by 12D	500 at 1.0" w.g.	33
Follow manufacturers' recommendation for change out resistance, typically double the initial.		

- D. Supporting Data: The filter shall be labeled as to tested efficiency, rated/tested cfm, pressure drop and shall be serialized for identification. The manufacturer shall supply a Certificate of Conformance for each HEPA filter supplied to the facility.

2.6 HEPA FILTERS HIGH CAPACITY V-BANK HIGH CAPACITY FILTERS (FINAL FILTER APPLICATION)

- A. Air filters shall be absolute grade HEPA filters consisting of pleated media packs assembled in a V-bank configuration, polyurethane sealant, anodized aluminum enclosure and seamless fluid sealing gasket. Sizes shall be as noted on enclosed drawings or other supporting materials.
- B. Construction: Filter media shall be micro fiber glass formed into mini-pleat pleat-in-pleat V-bank design. The media packs shall be potted into the enclosing frame with fire retardant polyurethane sealant. An enclosing frame of anodized extruded aluminum shall form a rugged and durable enclosure. A seamless sealing gasket shall be included on the downstream side of the filter to form a positive seal upon installation.
- C. Performance: Filter efficiency at 0.3 micron shall be 99.99% when evaluated according to the IEST Recommended Practice for applicable type. Each filter shall be labeled as to tested performance. Initial resistance target shall not exceed 1.0" w.g. at rated airflow.

HEPA Performance V-Bank Style (High Capacity) Table 2.5B		
Nominal Size (inches)	Airflow Capacity (cfm)	Media Area (Square Feet)
24H by 24W by 12D	2000 at 1.0" w.g.	390
24H by 12W by 12D	900 at 1.0" w.g.	174
Follow manufacturers' recommendation for change out resistance, typically double the initial.		

- D. Supporting Data: The filter shall be labeled as to tested efficiency, rated/tested cfm, pressure drop and shall be serialized for identification. The manufacturer shall supply a Certificate of Conformance for each HEPA filter supplied to the facility.
- E. Filter must be listed as UL 586 and UL 900 per Underwriters Laboratories. Manufacturer shall provide evidence of facility certification to ISO 9001:2000.

2.7 FILTER HOUSINGS/SUPPORT FRAMES

- A. Side Servicing Housings (HVAC Grade)
 - 1. Filter housing shall be two-stage filter system consisting of 16-gauge galvanized steel enclosure, aluminum filter mounting track, universal filter holding frame, insulated dual-access doors, static pressure tap, filter gaskets and seals. In-line housing depth shall not exceed 21". Sizes shall be as noted on enclosed drawings or other supporting materials.
 - 2. Construction: The housing shall be constructed of 16-gauge galvanized steel with pre-drilled standing flanges to facilitate attachment to other system components. Corner posts of Z-channel construction shall ensure dimensional adherence. Where installed outdoors, the housing shall be weatherproof and suitable for rooftop/outdoor installation. The housing shall incorporate the capability of two stages of filtration without modification to the housing. A filter track, of aluminum construction shall be an integral component of housing construction. The track shall accommodate a 2" deep prefilter, a 6" or 12" deep rigid final filter, or a pocket filter with header. Insulated dual access doors, swing-open type, shall include high-memory sponge neoprene gasket to facilitate a door-to-filter seal. Each door shall be equipped with adjustable and replaceable positive sealing UV-resistant star-style knobs and replaceable door hinges. A universal holding frame constructed of 18-gauge galvanized steel, equipped with centering dimples, multiple fastener lances, and polyurethane filter sealing gasket, shall be included to facilitate installation of high-efficiency filters. The housing shall include a pneumatic fitting to allow the installation of a static pressure gauge to evaluate pressure drop across a single filter or any combination of installed filters.

3. Performance: Leakage at rated airflow, upstream to downstream of filter, holding frame, and slide mechanism shall be less than 1% at 3.0" w.g. Leakage in to or out of the housing shall be less than one half of 1% at 3.0" w.g. Accuracy of pneumatic pressure fitting, when to evaluate a single-stage, or multiple filter stages, shall be accurate within $\pm 3\%$ at 0.6" w.g.
4. Manufacturer shall provide evidence of facility certification to ISO 9001:2000.

B. Side-Access Housing (HEPA Grade)

1. Filter housing shall be two-stage filter system consisting of 14-gauge galvanized steel enclosure, spring-loaded crank-type sealing assembly for gasket seal type final filters, insulated dual-access doors with gasketing and positive sealing doorknobs. In-line housing depth shall not exceed 25". Sizes shall be as noted on enclosed drawings or other supporting materials.
2. Construction: The housing shall be constructed of 14-gauge galvanized steel with mating flanges to facilitate attachment to other system components. All pressure boundaries shall be of all welded construction. The housing shall be weatherproof and suitable for rooftop/outdoor installation. A prefilter track to accommodate nominal 2" deep prefilters, shall be an integral component of the housing. The housing shall incorporate a spring-loaded crank-type final filter sealing mechanism. The mechanism shall be geared to exert 700 pounds of pressure against each filter. The clamping frame shall have a continuous flat surface seal to compress all four downstream gasketed surfaces of the downstream seal filter. The final filter locking mechanism shall include a 3/4" socket adapter to facilitate opening or closing the mechanism. Insulated dual access doors shall include high-memory sponge neoprene gasket to facilitate a door-to-filter seal. Each door shall be equipped with adjustable and replaceable UV-resistant positive sealing knobs. The access doors shall be both hinged for swing open operation or designed to be completely removable. The housing shall include static pressure ports (1/8" NPT male) to facilitate pressure drop measurements across prefilter, final filter, or combination thereof.
3. Performance: Manufacturer shall provide evidence of facility certification to ISO 9001:2008.

C. Bag-in/Bag-out HEPA Air Filter Housing

1. Housing shall be side-access bag-in/bag-out, fluid seal housing. The housing shall be adequately reinforced to withstand a negative or positive pressure of 15" water gage. Housing design and filter arrangement shall allow air to enter and exit housing without changing direction. The housing shall accommodate standard size filters that do not require any special attachments or devices to function properly in the housing. The housing shall accommodate fluid seal filters which require a penetrating knife edge installed on all filter sealing surfaces. The knife edge shall insert into the fluid filled perimeter channel located on the face of the filter. By engaging the filter seal/release mechanism the filter shall move (push) the fluid filled channel to the sealed position. For removal of the air filters the filter seal/release mechanism shall remove (pull) the filter free of the blade type knife edge. This entire process is performed from inside the filter change out bag.
2. Construction:
 - a. Housing shall be constructed of 14 gauge and 11 gauge T-304 stainless steel metal. All pressure retaining joints and seams shall be continuously welded with no porosities. Joints and seams requiring intermittent welds, such as reinforcement members, shall be intermittently welded. Housing shall be free of burrs and sharp edges. All weld joints and seams that are a portion of any gasket setting surface, and duct connection flanges, shall be ground smooth and flush with adjacent base metals. All welded joints and seams shall be wire brushed to remove heat discoloration. The housing shall be reinforced to withstand a positive or negative pressure of 15" w.g. The upstream and downstream ductwork connections shall have 1 1/2" outward-turned flanges.
 - b. The housing shall have a bagging ring around each filter access port that is sealed by a gasketed filter access door. The filter access door gasket shall be silicone and shall be replaceable, if necessary. The bagging ring shall have two (2) continuous formed raised ridges to secure the PVC change-out bag. The bagging ring shall be hemmed on the outer edge to prevent the change-out bag from tearing.
 - c. Ancillary hardware including filter seal/release mechanism, door handles, door studs and labels shall be 300 series stainless steel. Filter access door knobs shall be cast aluminum and designed to prevent galling of threads.

- d. One (1) PVC change-out bag shall be furnished with each filter access port. Change-out bags shall be 8-mil. thick with a yellow translucent, non-sticking, matte finish. It shall include a 1/4" diameter elastic shock cord hemmed into the opening of the bag so when stretched around the housing bagging ring flange, a secure fit is created. The bag shall include three (3) integral glove ports to assist in filter change-out. One (1) nylon security strap shall be included per filter access port to prevent the bag from sliding off the bagging flange during the change-out process. Design of components shall be such that all change-out operations shall be within the bag so there is a barrier between the worker and the filter at all times.
3. Performance: All welding procedures, welders, and welder operators shall be qualified in accordance with ASME Boiler and Pressure Vessel Code, Section IX. All production welds shall be visually inspected by qualified personnel, incorporating the workmanship acceptance criteria described in Section 5 & 6 of AWS D9.1-1990, Specification for Welding of Sheet Metal.
4. The filter housing shall be factory tested for filter fit, alignment of filter sealing knife edge and operation of filter clamping mechanism. The filter sealing surface and the complete assembly pressure boundary shall be leak tested by the pressure decay method as defined in ASME N510-1995 Reaffirmed., Testing of Nuclear Air Cleaning Systems, paragraphs 6 and 7. The filter sealing surface shall be tested at +10" water gage and have a maximum leak rate of 0.0005 cfm per cubic foot of housing volume. The overall system pressure boundary shall be leak tested at +15" water gage and have a maximum leak rate of 0.0005 cfm per cubic foot of housing volume.
5. Filter bags shall be capable of continuous operating to temperature extremes of -18°C to 66°C (0°F to 150°F).
6. Multi-wide housing shall be equipped with a filter removal rod to pull the filters to the change-out position. The removal rod shall operate from the inside of the filter change out bag.
7. Manufacturer shall provide evidence of facility certification to ISO 9001:2000.
- D. Equipment Identification: Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

2.8 INSTRUMENTATION

- A. Magnehelic Differential Pressure Filter Gages: Nominal 100 mm (four inch) diameter, zero to 500 Pa (zero to two inch water gage), three inch for HEPA) range, except for MERV 17 HEPA Final Filters, where the range shall be zero to 750 Pa (zero to three inch water gage). Gauges shall be flush-mounted in aluminum panel board, complete with static tips, copper or aluminum tubing, and accessory items to provide zero adjustment.
- B. DDC static (differential) air pressure measuring station. Refer to Specification Section 23 09 23 DIRECT DIGITAL CONTROL SYSTEM FOR HVAC
- C. Provide one DDC sensor across each extended surface filter. Provide Petcocks for each gauge or sensor.
- D. Provide one common filter gauge for two-stage filter banks with isolation valves to allow differential pressure measurement.

2.9 HVAC EQUIPMENT FACTORY FILTERS

- A. Manufacturer standard filters within fabricated packaged equipment should be specified with the equipment and should adhere to industry standard.
- B. Cleanable filters are not permitted.
- C. Automatic Roll Type filters are not permitted.

2.10 FILTER RETURN GRILLES

Refer to Section 23 37 00 AIR OUTLETS AND INLETS.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install supports, filters and gages in accordance with manufacturer's instructions.
- B. Label clearly with words "Contaminated Air" on exhaust ducts leading to the HEPA filter housing.

3.2 START-UP AND TEMPORARY USE

- A. Clean and vacuum air handling units and plenums prior to starting air handling systems.
- B. Replace Pre-filters and install clean filter units prior to final inspection as directed by the Resident Engineer.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 64 00
PACKAGED WATER CHILLERS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Scroll air-cooled chillers complete with accessories.

1.2 RELATED WORK

- A. Section 00 72 00, GENERAL CONDITIONS.
- B. Section 01 00 00, GENERAL REQUIREMENTS.
- C. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- D. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- E. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- F. Section 23 21 23, HYDRONIC PUMPS.
- G. Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
- H. Section 23 21 13, HYDRONIC PIPING.
- I. Section 23 31 00, HVAC DUCTS and CASINGS
- J. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT.
- K. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.
- L. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS
- M. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

1.3 DEFINITION

- A. Engineering Control Center (ECC): The centralized control point for the intelligent control network. The ECC comprises of personal computer and connected devices to form a single workstation.
- B. BACNET: Building Automation Control Network Protocol, ASHRAE Standard 135.
- C. Ethernet: A trademark for a system for exchanging messages between computers on a local area network using coaxial, fiber optic, or twisted-pair cables.
- D. FTT-10: Echelon Transmitter-Free Topology Transceiver.

1.4 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION, and comply with the following.
- B. Refer to PART 3 herein after and Section 01 00 00, GENERAL REQUIREMENTS for test performance.
- C. Comply with AHRI requirements for testing and certification of the chillers.

- D. Refer to paragraph, WARRANTY, Section 00 72 00, GENERAL CONDITIONS, except as noted below:
 - 1. Provide a 5-year motor and compressor warranty to include materials, parts and labor.
- E. Refer to OSHA 29 CFR 1910.95(a) and (b) for Occupational Noise Exposure Standard
- F. Refer to ASHRAE Standard 15, Safety Standard for Refrigeration System, for refrigerant vapor detectors and monitor.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Conditioning, Heating and Refrigeration Institute (AHRI):
 - 370-01Sound Rating of Large Outdoor Refrigerating and Air-Conditioning Equipment
 - 495-1999 (R2002)Refrigerant Liquid Receivers
 - 550/590-03Standard for Water Chilling Packages Using the Vapor Compression Cycle
 - 560-00Absorption Water Chilling and Water Heating Packages
 - 575-94Methods for Measuring Machinery Sound within Equipment Space
- C. American Society of Heating, Refrigerating, and Air-Conditioning Engineers (ASHRAE):
 - ANSI/ASHRAE-15-2007 ...Safety Standard for Mechanical Refrigeration Systems
 - GDL 3-1996Guidelines for Reducing Emission of Halogenated Refrigerants in Refrigeration and Air-Conditioning Equipment and Systems
- D. American Society of Mechanical Engineers (ASME):
 - 2007ASME Boiler and Pressure Vessel Code, Section VIII, "Pressure Vessels - Division 1"
- E. American Society of Testing Materials (ASTM):
 - C 534/ C 534M-2008Preformed, Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form
 - C 612-04Mineral-fiber Block and Board Thermal Insulation

- F. National Electrical Manufacturing Association (NEMA):
250-2008Enclosures for Electrical Equipment (1000 Volts
Maximum)
- G. National Fire Protection Association (NFPA):
70-2008National Electrical Code
- H. Underwriters Laboratories, Inc. (UL):
1995-2005 Heating and Cooling Equipment

1.6 SUBMITTALS

- A. Submit in accordance with Specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data.
1. Scroll water chillers, including motor starters, control panels, and vibration isolators, and remote condenser data shall include the following:
 - a. Rated capacity.
 - b. Pressure drop.
 - c. Efficiency at full load and part load WITHOUT applying any tolerance indicated in the AHRI 550/590/Standard.
 - d. Refrigerant
 - e. Fan performance (Air-Cooled Chillers only.)
 - f. Accessories.
 - g. Installation instructions.
 - h. Start up procedures.
 - i. Wiring diagrams, including factory-installed and field-installed wiring.
 - j. Sound/Noise data report. Manufacturer shall provide sound ratings. Noise warning labels shall be posted on equipment.
 - k. Refrigerant vapor detectors and monitors.
- C. Maintenance and operating manuals for each piece of equipment in accordance with Section 01 00 00, GENERAL REQUIREMENTS.
- D. Run test report for all chillers.
- E. Product Certificate: Signed by chiller manufacturer certifying that chillers furnished comply with AHRI requirements. The test report shall include calibrated curves, calibration records, and data sheets for the instrumentation used in factory tests.
- F. Provide seismic restraints for refrigeration equipment to withstand seismic forces.

PART 2 - PRODUCTS

2.1 SCROLL AIR-COOLED WATER CHILLERS

- A. General: Factory-assembled and-tested rotary-screw or scroll water chillers, complete with evaporator, compressors, motor, starters,

integral condenser, and controls mounted on a welded steel base. The chiller unit shall consist of two compressors minimum, but not more than eight, mounted on a single welded steel base. Where compressors are paralleled, not more than two shall be so connected and not less than two independent refrigerant circuits shall be provided. Chiller shall be capable of operating one of the following refrigerants: HCFC-134a or HCFC-410a.

- B. Performance: Provide the capacity as shown on the drawings. Part load and full load efficiency ratings of the chiller shall not exceed those shown on the drawings.
- C. Capacity of a single air-cooled chiller shall not exceed 250 Tons (Standard AHRI Conditions).
- D. Applicable Standard: Chillers shall be rated and certified according to AHRI 550/590, and shall be stamped in compliance with AHRI certification.
- E. Acoustics: Sound pressure levels shall not exceed the following specified levels. The manufacturer shall provide sound treatment if required to comply with the specified maximum levels. Testing shall be in accordance with AHRI requirements.

OCTAVE BAND								Overall
<u>63</u>	<u>125</u>	<u>250</u>	<u>500</u>	<u>1000</u>	<u>2000</u>	<u>4000</u>	<u>8000</u>	<u>dB(A)</u>

- F. Compressor (Scroll Type): Three dimensional, positive-displacement, hermetically sealed design, with suction and discharge valves, crankcase oil heater and suction strainer. Compressor shall be mounted on vibration isolators. Rotating parts shall be factory balanced. Lubrication system shall consist of reversible, positive displacement pump, strainer, oil level sight glass, and oil charging valve. Capacity control shall be by on-off compressor cycling of single and multiple compressors.
- G. Refrigerants Circuit: Each circuit shall contain include an expansion valve, refrigerant charging connections, hot-gas muffler, compressor suction and discharge shutoff valves, replaceable-core filter drier, sight glass with moisture indicator, liquid-line solenoid valve and insulated suction line.
- H. Refrigerant and Oil: Sufficient volume of dehydrated refrigerant and lubricating oil shall be provided to permit maximum unit capacity operation before and during tests. Replace refrigerant charge lost during the warranty period, due to equipment failure, without cost to the Government.

I. Condenser:

1. Air-cooled condenser as shown on the drawings and specified hereinafter.
2. Integral Condenser: Condenser coils shall be extended surface fin and tube type, seamless copper tubes with aluminum fins. For corrosion protection, see Paragraph 2.7 below. Condenser coils shall be factory air tested at 3105 kPa (450 psig). Condenser fans shall be propeller type, directly connected to motor shaft. Fans shall be statically and dynamically balanced, with wire safety guards. Condenser fan motors with permanently lubricated ball bearings and three-phase thermal overload protection. Unit shall start -18°C (0°F) with external damper assemblies. Units shall have grilles factory mounted to prevent damage to coil surfaces.

J. Evaporator: Brazed plate and frame type heat exchanger design. Brazed plate evaporator shall be constructed of stainless steel with copper brazing material. The evaporator shall be designed for a minimum of 1.5 times the working pressure produced by the water system, but not less than 10,350 kPa (150 psig). Refrigerant side working pressure shall comply with ASHRAE Standard 15. Evaporator for packaged air-cooled chiller units designed for outdoor installation shall be protected against freeze-up in ambient temperature down to -30 degrees C (-20 degrees F) by a resistance heater cable under insulation with thermostat set to operate below 3 degrees C (37 degrees F) ambient.

K. Insulation: Evaporator, suction piping, compressor, and all other parts subject to condensation shall be insulated with 20 mm (0.75 inch) minimum thickness of flexible-elastomeric thermal insulation, complying with ASTM C534.

L. Refrigerant Receiver: Provide a liquid receiver for chiller units when system refrigerant charge exceeds 80 percent of condenser refrigerant volume. Liquid receivers shall be horizontal-type, designed, fitted, and rated in conformance with AHRI 495. Receiver shall be constructed and tested in conformance with Section VIII D1 of the ASME Boiler and Pressure Vessel Code. Each receiver shall have a storage capacity not less than 20 percent in excess of that required for fully charged system. Each receiver shall be equipped with inlet, outlet drop pipes, drain plug, purging valve, and relief devices as required by ASHRAE Standard 15.

M. Controls: Chiller shall be furnished with unit mounted, stand-alone, microprocessor-based controls in NEMA 3R enclosure, hinged and lockable, factory wired with a single point power connection and separate control circuit. The control panel provide chiller operation, including monitoring of sensors and actuators, and shall be furnished with light emitting diodes or liquid-crystal display keypad.

1. Following shall display as a minimum on the panel:
 - a. Date and time.
 - b. Outdoor air temperature.
 - c. Operating and alarm status.
 - d. Entering and leaving water temperature-chilled water.
 - e. Operating set points-temperature and pressure.
 - f. Refrigerant temperature and pressure.
 - g. Operating hours.
 - h. Number of starts.
2. Control Functions:
 - a. Manual or automatic startup and shutdown time schedule.
 - b. Entering and leaving chilled water temperature and control set points.
3. Safety Functions: Following conditions shall shut down the chiller and require manual reset to start:
 - a. Loss of chilled water flow.
 - b. Loss of condenser water flow (for water-cooled chillers only).
 - c. Low chilled water temperature.
 - d. Compressor motor current-overload protection.
 - e. Freeze protection (for air-cooled chillers).
 - f. Starter fault.
 - g. High or low oil pressure.
 - h. Recycling pumpdown.
- N. The chiller control panel shall provide leaving chilled water temperature reset based on outdoor air temperature.
- O. Provide contacts for remote start/stop, alarm for abnormal operation or shutdown, and for Engineering Control Center (ECC).
- P. Chiller control panel shall either reside on the "LonTalk FTT-10a network", and provide data using LonMark standard network variable types and configuration properties, or BACnet interworking using ARCNET or MS/TP physical data link layer protocol for communication with building automation control system.
- Q. Auxiliary hydronic system and the chiller(s) shall be interlocked to provide time delay and start sequencing as indicated on control drawings.
- R. Motor: Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION. Compressor motor furnished with the chiller shall be in accordance with the chiller manufacturer and the electrical specification Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT. Starting torque of motors shall be suitable for driven machines.

- S. Motor Starter: Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION. Provide a starter in NEMA I enclosure, designed for floor or unit mounted chiller using multiple compressors, with the lead compressor starting at its minimum capacity may be provided with across-the-line starter. See Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS for additional requirements.

2.2 CONDENSING UNITS FOR AIR CONDITIONING SERVICE

Refer to Section 23 81 00 DECENTRALIZED UNITARY HVAC EQUIPMENT.

2.3 CONDENSERS

- A. Air-Cooled Condensers: Suitable for remote installation in a weather-protected casing. For multiple compressors chiller units, provide a separate air-cooled condenser to match the compressor:
1. Condenser coils shall be extended surface fin and tube type, seamless copper tubes with aluminum fins. See Paragraph 2.7 below for corrosion protection
 2. Fans shall be either housed-centrifugal or plenum or propeller type as best suited for application, directly connected to motor shaft or indirectly connected to motor by means of a V-belt drive. Fans shall be statically and dynamically balanced.
 3. Discharge air from each air-cooled condenser in vertical direction either directly from fan casing or by means of supplementary wind deflectors.
 4. Condenser Controls: Provide head pressure controls for operation of the system down to 5 degrees C (40 degrees F) by cycling the fans.
- B. Refrigerant Piping: Refrigerant piping shall be as specified in specification Section 23 23 00, REFRIGERANT PIPING.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in for concrete equipment bases, anchor-bolt sizes and locations, piping and electrical to verify actual locations and sizes before chiller installation and other conditions that might affect chiller performance, maintenance, and operation. Equipment locations shown on drawings are approximate. Determine exact locations before proceeding with installation.

3.2 Equipment INSTALLATION

- A. Install chiller on concrete base with isolation pads or vibration isolators.
1. Concrete base is specified in Section 03 30 00, CAST-IN-PLACE CONCRETE

2. Vibration isolator types and installation requirements are specified in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT
3. Anchor chiller to concrete base according to manufacturer's written instructions and for seismic restraint on vibration isolators.
4. Charge the chiller with refrigerant, if not factory charged.
5. Install accessories and any other equipment furnished loose by the manufacturer, including remote starter, remote control panel, and remote flow switches, according to the manufacturer written instructions and electrical requirements.
6. Chillers shall be installed in a manner as to provide easy access for tube pull and removal of compressor and motors etc.
- B. Install refrigerant monitoring and safety equipment in accordance with ASHRAE Standard 15.
- C. Install refrigerant piping as specified in Section 23 23 00, REFRIGERANT PIPING and ASHRAE Standard 15.
- D. Install thermometers and gages as recommended by the manufacturer and/or as shown on drawings.
- E. Piping Connections:
 1. Make piping connections to the chiller for chilled water, and other connections as necessary for proper operation and maintenance of the equipment.
 2. Make equipment connections with flanges and couplings for easy removal and replacement of equipment from the equipment room.

3.3 STARTUP AND TESTING

- A. Engage manufacturer's factory-trained representative to perform startup and testing service.
- B. Inspect, equipment installation, including field-assembled components, and piping and electrical connections.
- C. After complete installation startup checks, according to the manufacturers written instructions, do the following to demonstrate to the VA that the equipment operate and perform as intended.
 1. Check refrigerant charge is sufficient and chiller has been tested for refrigerant leak.
 2. Check bearing lubrication and oil levels.
 3. Verify proper motor rotation.
 4. Verify pumps associated with chillers are installed and operational.
 5. Verify thermometers and gages are installed.
 6. Verify purge system, if installed, is functional and relief piping is routed outdoor.

7. Operate chiller for run-in-period in accordance with the manufacturer's instruction and observe its performance.
 8. Check and record refrigerant pressure, water flow, water temperature, and power consumption of the chiller.
 9. Test and adjust all controls and safeties. Replace or correct all malfunctioning controls, safeties and equipment as soon as possible to avoid any delay in the use of the equipment.
 10. Prepare a written report outlining the results of tests and inspections, and submit it to the VA.
- D. Engage manufacturer's certified factory trained representative to provide training for 16 hours for the VA maintenance and operational personnel to adjust, operate and maintain equipment, including self-contained breathing apparatus.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 73 00
INDOOR CENTRAL-STATION AIR-HANDLING UNITS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Air handling units including integral components specified herein.
- B. Definitions: Air Handling Unit (AHU): A factory fabricated and tested assembly of modular sections consisting of housed-centrifugal fan with V-belt drive coils, filters, and other necessary equipment to perform one or more of the following functions of circulating, cleaning, heating, cooling, humidifying, dehumidifying, and mixing of air. Design capacities of units shall be as scheduled on the drawings.

1.2 RELATED WORK

- A. Seismic restraints for equipment: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- B. General mechanical requirements and items, which are common to more than one section of Division 23: Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
- C. Sound and vibration requirements: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- D. Piping and duct insulation: Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.
- E. Piping and valves: Section 23 21 13, HYDRONIC PIPING.
- F. Return and exhaust fans: Section 23 34 00, HVAC FANS.
- G. Requirements for flexible duct connectors, sound attenuators and sound absorbing duct lining, and air leakage: Section 23 31 00, HVAC DUCTS and CASINGS.
- H. Air filters and filters' efficiency: Section 23 40 00, HVAC AIR CLEANING DEVICES.
- I. HVAC controls: Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- J. Testing, adjusting and balancing of air and water flows: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.
- K. Types of motors: Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT.
- L. Types of motor starters: Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.
- M. General Commissioning: Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS
- N. HVAC Commissioning: Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS

1.3 QUALITY ASSURANCE

- A. Refer to Article, Quality Assurance, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

B. Air Handling Units Certification

1. Air Handling Units with Housed Centrifugal Fans: The air handling units shall be certified in accordance with AHRI 430 and tested/rated in accordance with AHRI 260.
2. Air Handling Units with Plenum Fans:
 - a. Air Handling Units with a single Plenum Fan shall be certified in accordance with AHRI 430 and tested/rated in accordance with AHRI 260.
 - b. Air handling Units with Multiple Fans in an Array shall be tested and rated in accordance with AHRI 430 and AHRI 260.

C. Heating, Cooling, and Air Handling Capacity and Performance Standards: AHRI 430, AHRI 410, ASHRAE 51, and AMCA 210.

D. Performance Criteria:

1. The fan BHP shall include all system effects for all fans and v-belt drive losses for housed centrifugal fans.
2. The fan motor shall be selected within the rated nameplate capacity, without relying upon NEMA Standard Service Factor.
3. Select the fan operating point as follows:
 - a. Forward Curve and Axial Flow Fans: Right hand side of peak pressure point.
 - b. Air Foil, Backward Inclined, or Tubular Fans Including Plenum Fans: At or near the peak static efficiency but at an appropriate distance from the stall line.
4. Operating Limits: AMCA 99 and Manufacturer's Recommendations.

E. Units shall be factory-fabricated, assembled, and tested by a manufacturer, in business of manufacturing similar air-handling units for at least five (5) years.

1.4. SUBMITTALS:

- A. The contractor shall, in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish a complete submission for all air handling units covered in the project. The submission shall include all information listed below. Partial and incomplete submissions shall be rejected without reviews.

B. Manufacturer's Literature and Data:

1. Submittals for AHUs shall include fans, drives, motors, coils, mixing box with outside/return air dampers, filter housings, and all other related accessories. The contractor shall provide custom drawings showing total air handling unit assembly including dimensions, operating weight, access sections, flexible connections, door swings, controls penetrations, electrical disconnect, lights, duplex receptacles, switches, wiring, utility connection points, unit support system, vibration isolators, drain pan, pressure drops through each component (filter, coil etc).
2. Submittal drawings of section or component only will not be acceptable. Contractor shall also submit performance data including performance test results, charts, curves or certified computer selection data; data sheets; fabrication and insulation details. If the unit cannot be shipped in one piece, the contractor shall indicate the number of pieces that each unit will have to be broken into to meet shipping and job site rigging requirements. This data shall be submitted in hard copies and in electronic version compatible to AutoCAD version used by the VA at the time of submission.
3. Submit sound power levels in each octave band for the inlet and discharge of the fan and at entrance and discharge of AHUs at scheduled conditions. In absence of sound power ratings refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
4. Provide fan curves showing Liters/Second (cubic feet per minute), static pressure, efficiency, and horsepower for design point of operation and at maximum design Liters/Second (cubic feet per minute).
5. Submit total fan static pressure, external static pressure, for AHU including total, inlet and discharge pressures, and itemized specified internal losses and unspecified internal losses. Refer to air handling unit schedule on drawings.

C. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS. Include instructions for lubrication, filter replacement, motor and drive replacement, spare part lists, and wiring diagrams.

D. Submit written test procedures two weeks prior to factory testing. Submit written results of factory tests for approval prior to shipping.

E. Submit shipping information that clearly indicates how the units will be shipped in compliance with the descriptions below.

1. Units shall be shipped in one (1) piece where possible and in shrink wrapping to protect the unit from dirt, moisture and/or road salt.
2. If not shipped in one (1) piece, provide manufacturer approved shipping splits where required for installation or to meet shipping and/or job site rigging requirements in modular sections. Indicate clearly that the shipping splits shown in the submittals have been verified to accommodate the construction constraints for rigging as required to complete installation and removal of any section for replacement through available access without adversely affecting other sections.
3. If shipping splits are provided, each component shall be individually shrink wrapped to protect the unit and all necessary hardware (e.g. bolts, gaskets etc.) will be included to assemble unit on site (see section 2.1.A4).
4. Lifting lugs will be provided to facilitate rigging on shipping splits and joining of segments. If the unit cannot be shipped in one piece, the contractor shall indicate the number of pieces that each unit will have to be broken into to meet shipping and job site rigging requirements.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air-Conditioning, Heating, and Refrigeration Institute (AHRI)/(ARI):
 - 410-01Standard for Forced-Circulation Air-Heating and Air-Cooling Coils
 - 430-09Central Station Air Handling Units
- C. Air Movement and Control Association International, Inc. (AMCA):
 - 210-07Laboratory Methods of Testing Fans for Rating
- D. American Society of Heating, Refrigerating and Air-conditioning Engineers, Inc. (ASHRAE):
 - 170-2008Ventilation of Health Care Facilities
- E. American Society for Testing and Materials (ASTM):
 - ASTM B117-07aStandard Practice for Operating Salt Spray (Fog) Apparatus
 - ASTM D1654-08Standard Test Method for Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments
 - ASTM D1735-08Standard Practice for Testing Water Resistance of Coatings Using Water Fog Apparatus

ASTM D3359-08Standard Test Methods for Measuring Adhesion by
Tape Test

F. Military Specifications (Mil. Spec.):

MIL-P-21035B-2003Paint, High Zinc Dust Content, Galvanizing
Repair (Metric)

G. National Fire Protection Association (NFPA):

NFPA 90AStandard for Installation of Air Conditioning
and Ventilating Systems, 2009

H. Energy Policy Act of 2005 (P.L.109-58)

PART 2 - PRODUCTS

2.1 AIR HANDLING UNITS

A. General:

1. AHUs shall be fabricated from insulated, solid double-wall galvanized steel without any perforations in draw-through configuration. Casing shall be fabricated as specified in section 2.1.C.2. Galvanizing shall be hot dipped conforming to ASTM A525 and shall provide a minimum of 0.275 kg of zinc per square meter (0.90 oz. of zinc per square foot) (G90). Aluminum constructed units, subject to VA approval, may be used in place of galvanized steel. The unit manufacturer shall provide published documentation confirming that the structural rigidity of aluminum air-handling units is equal or greater than the specified galvanized steel.
2. The contractor and the AHU manufacturer shall be responsible for ensuring that the unit will not exceed the allocated space shown on the drawings, including required clearances for service and future overhaul or removal of unit components. All structural, piping, wiring, and ductwork alterations of units, which are dimensionally different than those specified, shall be the responsibility of the contractor at no additional cost to the government.
3. AHUs shall be fully assembled by the manufacturer in the factory in accordance with the arrangement shown on the drawings. The unit shall be assembled into the largest sections possible subject to shipping and rigging restrictions. The correct fit of all components and casing sections shall be verified in the factory for all units prior to shipment. All units shall be fully assembled, tested, and then split to accommodate shipment and job site rigging. On units not shipped fully assembled, the manufacturer shall tag each section and include air flow direction to facilitate assembly at the job site. Lifting lugs or shipping skids shall be provided for each section to allow for field rigging and final placement of unit.
4. The AHU manufacturer shall provide the necessary gasketing, caulking, and all screws, nuts, and bolts required for assembly. The

manufacturer shall provide a factory-trained and qualified local representative at the job site to supervise the assembly and to assure that the units are assembled to meet manufacturer's recommendations and requirements noted on the drawings. Provide documentation to the Contracting Officer that the local representative has provided services of similar magnitude and complexity on jobs of comparable size. If a local representative cannot be provided, the manufacturer shall provide a factory representative.

5. Gaskets: All door and casing and panel gaskets and gaskets between air handling unit components, if joined in the field, shall be high quality which seal air tight and retain their structural integrity and sealing capability after repeated assembly and disassembly of bolted panels and opening and closing of hinged components. Bolted sections may use a more permanent gasketing method provided they are not disassembled.
6. Structural Rigidity: Provide structural reinforcement when required by span or loading so that the deflection of the assembled structure shall not exceed 1/200 of the span based on a differential static pressure of 1991 PA (8 inch WG) or higher.

B. Base:

1. Provide a heavy duty steel base for supporting all major AHU components. Bases shall be constructed of wide-flange steel I-beams, channels, or minimum 125 mm (5 inch) high 3.5 mm (10 Gauge) steel base rails. Welded or bolted cross members shall be provided as required for lateral stability. Contractor shall provide supplemental steel supports as required to obtain proper operation heights for cooling coil condensate drain trap and as shown on drawings.
2. AHUs shall be completely self supporting for installation on concrete housekeeping pad, steel support pedestals, or suspended as shown on drawings.
3. The AHU bases not constructed of galvanized steel shall be cleaned, primed with a rust inhibiting primer, and finished with rust inhibiting exterior enamel.

C. Casing (including wall, floor and roof):

1. General: AHU casing shall be constructed as solid double wall, galvanized steel insulated panels without any perforations, integral of or attached to a structural frame. The thickness of insulation, mode of application and thermal breaks shall be such that there is no visible condensation on the exterior panels of the AHU located in the non-conditioned spaces.
2. Casing Construction:

Table 2.1.C.2

Outer Panel	0.8 mm (22 Gage) Minimum
Inner Panel	0.8 mm (22 Gage) Minimum
Insulation	Foam
Thickness	50 mm (2 inch) Minimum
Density	48 kg/m ³ (3.0 lb/ft ³) Minimum
Total R Value	2.3 m ² .K/W (13.0 ft ² .°F.hr/Btu) Minimum

3. Casing Construction (Contractor's Option):

Table 2.1.C.3

Outer Panel	1.3 mm (18 Gage) Minimum
Inner Panel	1.0 mm (20 Gage) Minimum
Insulation	Fiberglass
Thickness	50 mm (2 inch) Minimum
Density	24 kg/m ³ (1.5 lb/ft ³) Minimum
Total R Value	1.4 m ² .K/W (8.0 ft ² .°F.hr/Btu) Minimum

4. Blank-Off: Provide blank-offs as required to prevent air bypass between the AHU sections, around coils, and filters.
5. Casing panels shall be secured to the support structure with stainless steel or zinc-chromate plated screws and gaskets installed around the panel perimeter. Panels shall be completely removable to allow removal of fan, coils, and other internal components for future maintenance, repair, or modifications. Welded exterior panels are not acceptable.
6. Access Doors: Provide in each access section and where shown on drawings. Show single-sided and double-sided access doors with door swings on the floor plans. Doors shall be a minimum of 50 mm (2 inch) thick with same double wall construction as the unit casing. Doors shall be a minimum of 600 mm (24 inches) wide, unless shown of different size on drawings, and shall be the full casing height up to a maximum of 1850 mm (6 feet). Doors shall be gasketed, hinged, and

latched to provide an airtight seal. The access doors for fan section, mixing box, coil section shall include a minimum 150 mm x 150 mm (6 inch x 6 inch) double thickness, with air space between the glass panes tightly sealed, reinforced glass or Plexiglas window in a gasketed frame.

- a. Hinges: Manufacturers standard, designed for door size, weight and pressure classifications. Hinges shall hold door completely rigid with minimum 45 kg (100 lb) weight hung on latch side of door.
 - b. Latches: Non-corrosive alloy construction, with operating levers for positive cam action, operable from either inside or outside. Doors that do not open against unit operating pressure shall allow the door to ajar and then require approximately 0.785 radian (45 degrees) further movement of the handle for complete opening. Latch shall be capable of restraining explosive opening of door with a force not less than 1991 Pa (8 inch WG).
 - c. Gaskets: Neoprene, continuous around door, positioned for direct compression with no sliding action between the door and gasket. Secure with high quality mastic to eliminate possibility of gasket slipping or coming loose.
7. Provide sealed sleeves, metal or plastic escutcheons or grommets for penetrations through casing for power and temperature control wiring and pneumatic tubing. Coordinate with electrical and temperature control subcontractors for number and location of penetrations. Coordinate lights, switches, and duplex receptacles and disconnect switch location and mounting. All penetrations and equipment mounting may be provided in the factory or in the field. All field penetrations shall be performed neatly by drilling or saw cutting. No cutting by torches will be allowed. Neatly seal all openings airtight.

D. Floor:

1. Unit floor shall be level without offset space or gap and designed to support a minimum of 488 kg/square meter (100 lbs per square foot) distributed load without permanent deformation or crushing of internal insulation. Provide adequate structural base members beneath floor in service access sections to support typical service foot traffic and to prevent damage to unit floor or internal insulation. Unit floors in casing sections, which may contain water or condensate, shall be watertight with drain pan.
2. Where indicated, furnish and install floor drains, flush with the floor, with nonferrous grate cover and stub through floor for external connection.

E. Condensate Drain Pan: Drain pan shall be designed to extend entire length of cooling coils including headers and return bends. Depth of drain pan shall be at least 43 mm (1.7 inches) and shall handle all condensate without overflowing. Drain pan shall be double-wall, double sloping type, and fabricated from stainless (304) with at least 50 mm (2 inch) thick insulation sandwiched between the inner and outer surfaces. Drain pan shall be continuous metal or welded watertight. No mastic sealing of joints exposed to water will be permitted. Drain pan shall be placed on top of casing floor or integrated into casing floor assembly. Drain pan shall be pitched in all directions to drain line.

1. An intermediate, stainless-steel (304) condensate drip pan with copper downspouts shall be provided on stacked cooling coils. Use of intermediate condensate drain channel on upper casing of lower coil is permissible provided it is readily cleanable. Design of intermediate condensate drain shall prevent upper coil condensate from flowing across face of lower coil.
2. Drain pan shall be piped to the exterior of the unit. Drain pan shall be readily cleanable.
3. Installation, including frame, shall be designed and sealed to prevent blow-by.

F. Housed Centrifugal Fan Sections:

1. Fans shall be minimum Class II construction, double width, double inlet centrifugal, air foil or backward inclined type as indicated on drawings, factory balanced and rated in accordance with AMCA 210 or ASHRAE 51. Provide self-aligning, pillow block, regreasable ball-type bearings selected for a B (10) life of not less than 50,000 hours and an L (50) average fatigue life of 200,000 hours per AFBMA Standard 9. Extend bearing grease lines to motor and drive side of fan section. Fan shall be located in airstream to assure proper air flow.
2. Provide internally vibration isolated fan, motor and drive, mounted on a common integral bolted or welded structural steel base with adjustable motor slide rail with locking device. Provide vibration isolators and flexible duct connections at fan discharge to completely isolate fan assembly. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT, for additional requirements.
3. Allowable vibration tolerances for fan shall not exceed a self-excited vibration maximum velocity of 0.005 m/s (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions or measured at equipment mounting feet if bearings are concealed. After field installation, compliance to this requirement shall be demonstrated with field test in accordance with Section 23 05 41,

NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT and Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC. Following fan assembly, the complete fan assembly balance shall be tested using an electronic balance analyzer with a tunable filter and stroboscope. Vibration measurements shall be taken on each motor bearing housing in the vertical, horizontal, and axial planes (5 total measurements, 2 each motor bearing and 1 axial).

G. Fan Motor, Drive, and Mounting Assembly (Housed Centrifugal Fans):

1. Fan Motor and Drive: Motors shall be premium energy efficient type, as mandated by the Energy Policy Act of 2005, with efficiencies as shown in the Specifications Section 23 05 12 (General Motor Requirements For HVAC and Steam Equipment), on drawings and suitable for use in variable frequency drive applications on AHUs where this type of drive is indicated. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, for additional motor and drive specifications. Refer to Specification Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.
2. Fan drive and belts shall be factory mounted with final alignment and belt adjustment to be made by the Contractor after installation. Drive and belts shall be as specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION. Provide additional drive(s) if required during balancing, to achieve desired airflow.

H. Plenum Fans - Single and/or Multiple Fans in an Array:

1. General: Fans shall be Class II (minimum) construction with single inlet, aluminum wheel and stamped air-foil aluminum bladed. The fan wheel shall be mounted on the directly-driven motor shaft in AMCA Arrangement 4. Fans shall be dynamically balanced and internally isolated to minimize the vibrations. Provide a steel inlet cone for each wheel to match with the fan inlet. Locate fan in the air stream to assure proper flow. The fan performance shall be rated in accordance with AMCA 210 or ASHRAE 51.
2. Allowable vibration tolerances for fan shall not exceed a self-excited vibration maximum velocity of 0.005 m/s (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions or measured at equipment mounting feet if bearings are concealed. After field installation, compliance to this requirement shall be demonstrated with field test in accordance with Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT and Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC. Following fan assembly, the complete fan assembly balance shall be tested using an

electronic balance analyzer with a tunable filter and stroboscope. Vibration measurements shall be taken on each motor bearing housing in the vertical, horizontal, and axial planes (5 total measurements, 2 each motor bearing and 1 axial).

3. The plenum fans shall be driven by variable speed drives with at least one back-up drive as shown in the design documents. Use of a drive with bypass is not permitted.
4. Multiple fans shall be installed in a pre-engineered structural frame to facilitate fan stacking. All fans shall modulate in unison, above or below the synchronous speed within the limits specified by the manufacturer, by a common control sequence. Staging of the fans is not permitted. Redundancy requirement shall be met by all operating fans in an array and without the provision of an idle standby fan.
5. Fan Accessories
 - a. Fan Isolation: Provide an automatic back draft damper to isolate the fan not in operation due to failure.
 - b. Fan Airflow Measurement: Provide an airflow measuring device integral to the fan to measure air volume within +/- 5 percent accuracy. The probing device shall not be placed in the airflow path to stay clear of turbulence and avoid loss of performance.

I. Fan Motor, Drive, and Mounting Assembly (Plenum Fans):

Fan Motor and Drive: Motors shall be premium energy efficient type, as mandated by the Energy Policy Act of 2005, with efficiencies as shown in the Specifications Section 23 05 12 (General Motor Requirements For HVAC and Steam Equipment), on drawings and suitable for use in variable frequency drive applications. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, for additional motor and drive specifications. Refer to Specification Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS

- J. Mixing Boxes: Mixing box shall consist of casing and outdoor air and return air dampers in opposed blade arrangement with damper linkage for automatic operation. Coordinate damper operator with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC. Dampers shall be of ultra-low leak design with metal compressible bronze jamb seals and extruded vinyl edge seals on all blades. Blades shall rotate on stainless steel sleeve bearings or bronze bushings. Leakage rate shall not exceed 1.6 cubic meters/min/square meter (5 CFM per square foot) at 250 Pa (1 inch WG) and 2.8 cubic meters/min/square meter (9 CFM per square foot) at 995 Pa (4 inch WG) Electronic operators shall be furnished and mounted in an accessible and easily serviceable location by the air handling unit manufacturer at the factory. Damper operators shall be of same

manufacturer as controls furnished under Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

- K. Filter Section: Refer to Section 23 40 00, HVAC AIR CLEANING DEVICES, for filter requirements.
1. Filters including one complete set for temporary use at site shall be provided independent of the AHU. The AHU manufacturer shall install filter housings and racks in filter section compatible with filters furnished. The AHU manufacturer shall be responsible for furnishing temporary filters (pre-filters and after-filters, as shown on drawings) required for AHU testing.
 2. Factory-fabricated filter section shall be of the same construction and finish as the AHU casing including filter racks and hinged double wall access doors. Filter housings shall be constructed in accordance with side service or holding frame housing requirements in Section 23 40 00, HVAC AIR CLEANING DEVICES.
- L. Diffuser Section: Furnish a diffuser segment with perforated diffuser plate immediately downstream of supply fan to assure uniform distribution of leaving air across the face of the downstream after-filters to create uniform velocity profiles across the entire opening. Bolt or weld diffuser plate to a sturdy steel support frame so that it remains rigid. Manufacturer shall include any diffuser section pressure loss in excess of diffuser plate and this value shall be included in unspecified internal losses when selecting fan.
- M. Coils: Coils shall be mounted on hot dipped galvanized steel supports to assure proper anchoring of coil and future maintenance. Coils shall be face or side removable for future replacement thru the access doors or removable panels. Each coil shall be removable without disturbing adjacent coil. Cooling coils shall be designed and installed to insure no condensate carry over. Provide factory installed extended supply, return, drain, and vent piping connections.
- N. Sound Attenuators: Refer to Drawings, Specification Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT, and Section 23 31 00, HVAC DUCTS AND CASINGS, for additional unit mounted sound attenuator requirements. AHU sound attenuators shall be factory installed as an integral part of AHU.
- O. Discharge Section:
Provide aerodynamically designed framed discharge openings or spun bellmouth fittings to minimize pressure loss.
- P. Electrical and Lighting: Wiring and equipment specifications shall conform to Division 26, ELECTRICAL.

1. Vapor-proof lights using cast aluminum base style with glass globe and cast aluminum guard shall be installed in access sections for fan, mixing box, and any section over 300 mm (12 inch) wide. A switch shall control the lights in each compartment with pilot light mounted outside the respective compartment access door. Wiring between switches and lights shall be factory installed. All wiring shall run in neatly installed electrical conduits and terminate in a junction box for field connection to the building system. Provide single point 115 volt - one phase connection at junction box.
2. Install compatible 100 watt bulb in each light fixture.
3. Provide a convenience duplex receptacle next to the light switch.
4. Disconnect switch and power wiring: Provide factory or field mounted disconnect switch. Coordinate with Division 26, ELECTRICAL.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install air handling unit in conformance with ARI 435.
- B. Assemble air handling unit components following manufacturer's instructions for handling, testing and operation. Repair damaged galvanized areas with paint in accordance with Military Spec. DOD-P-21035. Repair painted units by touch up of all scratches with finish paint material. Vacuum the interior of air handling units clean prior to operation.
- C. Install seismic restraints for roof top units. Refer to specification Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.
- D. Leakage and test requirements for air handling units shall be the same as specified for ductwork in Specification Section 23 31 00, HVAC DUCTS AND CASINGS except leakage shall not exceed Leakage Class (C_L) 12 listed in SMACNA HVAC Air Duct Leakage Test Manual when tested at 1.5 times the design static pressure. Repair casing air leaks that can be heard or felt during normal operation and to meet test requirements.
- E. Perform field mechanical (vibration) balancing in accordance with Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- F. Seal and/or fill all openings between the casing and AHU components and utility connections to prevent air leakage or bypass.

3.2 STARTUP SERVICES

- A. The air handling unit shall not be operated for any purpose, temporary or permanent, until ductwork is clean, filters are in place, bearings are lubricated and fan has been test run under observation.
- B. After the air handling unit is installed and tested, provide startup and operating instructions to VA personnel.

- C. An authorized factory representative should start up, test and certify the final installation and application specific calibration of control components. Items to be verified include fan performance over entire operating range, noise and vibration testing, verification of proper alignment, overall inspection of the installation, Owner/Operator training, etc.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

SECTION 23 82 00
CONVECTION HEATING AND COOLING UNITS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Fan-coil units and cabinet unit heaters.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic restraints for equipment.
- B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.
- C. Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT: Noise requirements.
- D. Section 23 21 13, HYDRONIC PIPING: Heating hot water and chilled water piping.
- E. Section 23 31 00, HVAC DUCTS and CASINGS: Ducts and flexible connectors.
- F. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Valve operators.
- G. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC: Flow rates adjusting and balancing.
- H. Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.
- I. Section 01 09 00 - GENERAL COMMISSIONING REQUIREMENTS

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Fan-Coil units.
- C. Certificates:
 - 1. Compliance with paragraph, QUALITY ASSURANCE.
 - 2. Compliance with specified standards.
- D. Operation and Maintenance Manuals: Submit in accordance with paragraph, INSTRUCTIONS, in Section 01 00 00, GENERAL REQUIREMENTS.

- E. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute / Air Conditioning, Heating and Refrigeration Institute (ANSI/AHRI):
 - 440-08Performance Rating of Room Fan Coils
 - National Fire Protection Association (NFPA):
 - 90A-09Standard for the Installation of Air Conditioning and Ventilating Systems
 - 70-11National Electrical Code
- C. Underwriters Laboratories, Inc. (UL):
 - 181-08Standard for Factory-Made Air Ducts and Air Connectors
 - 1995-05Heating and Cooling Equipment

1.6 GUARANTY

- A. In accordance with FAR clause 52.246-21

PART 2 - PRODUCTS

2.1 ROOM FAN-COIL UNITS

- A. Capacity Certification: AHRI 440.
- B. Safety Compliance: NEC compliant and UL listed.
- C. Noise Levels: Operating at full cooling capacity, sound power level shall not exceed by more than 5 dB the numerical value of sound pressure levels associated with noise criteria specified in Section 23 05 51, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT. Select units at intermediate speed, for compliance with the noise criteria.
- D. Chassis: Galvanized steel, acoustically and thermally insulated to attenuate noise and prevent condensation.
- E. Cabinet: Minimum 1.3 mm (18 gage) steel reinforced and braced. Arrange components and provide adequate space for installation of piping package and control valves. Finish shall be factory-baked enamel in manufacturer's standard color on all exposed surfaces.

1. Vertical Exposed Cabinet Unit: Provide 1.6 mm (16 gage) steel front panel with 13 mm (1/2-inch) thick fiberglass insulation and provide screw-type levelers.
 - a. Air outlet grilles: Adjustable four-way air deflection located in the top panel.
 - b. Provide two hinged access doors (one each side) equipped with key operated cam-lock fasteners in the unit top panel located to provide access to the unit controls.
 2. Horizontal Unit: Provide Concealed type as shown. Provide supports and vibration isolators for horizontal units as recommended by the manufacturer.
 - a. Concealed Units: Provide fully enclosed cabinet with inlet and outlet duct collars.
- F. Fans: Centrifugal, forward curved, double width type wheels, galvanized steel or polyester resin construction, statically and dynamically balanced, direct driven.
1. Motors: All motors are brushless DC (BLDC)/electronically commutated motors (ECM) factory-programmed and run-tested in assembled units. The motor controller is mounted in a touch-safe control box with a built-in integrated user interface and LED tachometer. If adjustments are needed, motor parameters can be adjusted through momentary contact switches accessible without factory service personnel on the motor control board.
 2. Provide a fan speed selector switch, with off, low, medium, and high positions. Switch shall have a set of auxiliary contacts which are open when the switch is in the "off" position and closed when the switch in any of the other positions. On vertical units, mount switch in a junction box in the cabinet of each unit. On ceiling-suspended horizontal and concealed units, switch shall be wall mounted.
- G. Cooling and Heating Coils:
1. Hydronic (two separate coils for cooling and heating): Copper tubes, 10 mm (three-eighths inch) minimum inside diameter, not less than 4.3 mm (0.017 inch) thick with copper or aluminum fins. Coils shall be pressure tested for bursting and strength in accordance with Underwriters Laboratories, Inc., requirements for pressure tested coils, and shall be designed to provide adequate heat transfer

capacity. Provide manual air vent at high point of each coil and drain at each low point.

- H. Piping Package: Factory furnished with unit by the manufacturer or field-installed by the contractor to fit control valves provided by the controls supplier. Submit manufacturer's detailed drawings of the piping in the end compartments for approval prior to fabrication of the piping packages. Provide ball stop valves on the supply and return pipes and balancing fittings on the return pipes.
- I. Drain pans: Furnish galvanized steel with solderless drain connections and molded polystyrene foam insulating liner:
 - 1. Auxiliary drain pan: Located under control valve and piping within the unit enclosure to prevent dripping.
 - 2. Secondary Drain Pan: Where the unit is located such that drain pan overflow will damage the building, provide a secondary drain pan located underneath the unit, constructed to extend a minimum of 50 mm (2 inches) beyond the edges of the unit and be a minimum of 38 mm (1-1/2 inches deep) provided with a separate drain line discharging to conspicuous point or water detection device to deactivate the cooling in the unit.
- J. Air Filter: Manufacturer's standard throwaway type, not less than 25 mm (1 inch) thick, MERV 7, supported to be concealed from sight and be tight fitting to prevent air by-pass. Filters shall have slide out frames and be easily replaced without removing enclosure or any part thereof.
- K. Control valves and remote wall mounted space thermostats are to be field installed. Provide two-way modulating control valves unless shown or specified otherwise.

2.2 CABINET UNIT HEATERS

- A. General: Vertical type for hot water heating medium, as indicated.
- B. Cabinet: Not less than 1.3 mm (18 gage) steel with front panel for vertical units and hinged front panel for horizontal units. Finish on exposed cabinet shall be factory-backed enamel in manufacturer's standard color as selected by the Architect. Provide 76 mm (3-inch) high sub-base for vertical floor mounted units.
- C. Fan: Centrifugal blower, direct driven by a single phase, two-speed, electric motor with inherent overload protection. Provide resilient motor/ fan mount.

- D. Filter: Manufacturer's standard, one inch thick, throwaway type MERV 7 filters.
- E. Hot Water Coil: Aluminum Fins bonded to seamless copper tubing by mechanical expansion of the tubing, designed for 517 kPa (75 psi) steam working pressure.
- F. Factory Mounted Controls: Manual fan starter and three-position (low, high and off) fan speed switch. Provide field installed remote wall mounted line voltage electric space thermostats to control the unit fan. Provide an aqua stat on hot water units to prevent fan operation when the heating system is off.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Work shall be installed as shown and according to the manufacturer's diagrams and recommendations.
- B. Handle and install units in accordance with manufacturer's written instructions.
- C. Support units rigidly so they remain stationary at all times. Cross-bracing or other means of stiffening shall be provided as necessary. Method of support shall be such that distortion and malfunction of units cannot occur.
- D. Install fiberglass blanket insulation with a minimum R value of 8 above hydronic radiant panels.

3.2 OPERATIONAL TEST

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

3.3 STARTUP AND TESTING

- A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the Resident Engineer and Commissioning Agent. Provide a minimum of 7 days prior notice.

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.5 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of units.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS.

- - - E N D -

SECTION 26 05 11
REQUIREMENTS FOR ELECTRICAL INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section applies to all sections of Division 26.
- B. Furnish and install electrical wiring, systems, equipment and accessories in accordance with the specifications and drawings. Capacities and ratings of motors, cable, and other items and arrangements for the specified items are shown on drawings.
- C. Wiring ampacities specified or shown on the drawings are based on copper conductors, with the conduit and raceways accordingly sized. Aluminum conductors are prohibited.

1.2 MINIMUM REQUIREMENTS

- A. References to the International Building Code (IBC), National Electrical Code (NEC), Underwriters Laboratories, Inc. (UL) and National Fire Protection Association (NFPA) are minimum installation requirement standards.
- B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.3 TEST STANDARDS

- A. All materials and equipment shall be listed, labeled or certified by a nationally recognized testing laboratory to meet Underwriters Laboratories, Inc., standards where test standards have been established. Equipment and materials which are not covered by UL Standards will be accepted provided equipment and material is listed, labeled, certified or otherwise determined to meet safety requirements of a nationally recognized testing laboratory. Equipment of a class which no nationally recognized testing laboratory accepts, certifies, lists, labels, or determines to be safe, will be considered if inspected or tested in accordance with national industrial standards, such as NEMA, or ANSI. Evidence of compliance shall include certified test reports and definitive shop drawings.
- B. Definitions:
 - 1. Listed; Equipment, materials, or services included in a list published by an organization that is acceptable to the authority having jurisdiction and concerned with evaluation of products or services, that maintains periodic inspection of production or listed equipment or materials or periodic evaluation of services, and whose listing states that the equipment, material, or services either meets appropriate designated standards or has been tested and found suitable for a specified purpose.

2. Labeled; Equipment or materials to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the authority having jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled equipment or materials, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.
3. Certified; equipment or product which:
 - a. Has been tested and found by a nationally recognized testing laboratory to meet nationally recognized standards or to be safe for use in a specified manner.
 - b. Production of equipment or product is periodically inspected by a nationally recognized testing laboratory.
 - c. Bears a label, tag, or other record of certification.
4. Nationally recognized testing laboratory; laboratory which is approved, in accordance with OSHA regulations, by the Secretary of Labor.

1.4 QUALIFICATIONS (PRODUCTS AND SERVICES)

- A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.
- B. Product Qualification:
 1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
 2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.
- C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 APPLICABLE PUBLICATIONS

- A. Applicable publications listed in all Sections of Division are the latest issue, unless otherwise noted.

1.6 MANUFACTURED PRODUCTS

- A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.

- B. When more than one unit of the same class or type of equipment is required, such units shall be the product of a single manufacturer.
- C. Equipment Assemblies and Components:
 - 1. Components of an assembled unit need not be products of the same manufacturer.
 - 2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
 - 3. Components shall be compatible with each other and with the total assembly for the intended service.
 - 4. Constituent parts which are similar shall be the product of a single manufacturer.
- D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.
- E. When Factory Testing Is Specified:
 - 1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the COTR a minimum of 15 working days prior to the manufacturers making the factory tests.
 - 2. Four copies of certified test reports containing all test data shall be furnished to the COTR prior to final inspection and not more than 90 days after completion of the tests.
 - 3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.7 EQUIPMENT REQUIREMENTS

- A. Where variations from the contract requirements are requested in accordance with Section 00 72 00, GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

1.8 EQUIPMENT PROTECTION

- A. Equipment and materials shall be protected during shipment and storage against physical damage, vermin, dirt, corrosive substances, fumes, moisture, cold and rain.
 - 1. Store equipment indoors in clean dry space with uniform temperature to prevent condensation. Equipment shall include but not be limited to switchgear, switchboards, panelboards, transformers, motor control centers, motor controllers, uninterruptible power systems, enclosures, controllers, circuit protective devices, cables, wire, light fixtures, electronic equipment, and accessories.

2. During installation, equipment shall be protected against entry of foreign matter; and be vacuum-cleaned both inside and outside before testing and operating. Compressed air shall not be used to clean equipment. Remove loose packing and flammable materials from inside equipment.
3. Damaged equipment shall be, as determined by the COTR, placed in first class operating condition or be returned to the source of supply for repair or replacement.
4. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
5. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.9 WORK PERFORMANCE

- A. All electrical work must comply with the requirements of NFPA 70 (NEC), NFPA 70B, NFPA 70E, OSHA Part 1910 subpart J, OSHA Part 1910 subpart S and OSHA Part 1910 subpart K in addition to other references required by contract.
- B. Job site safety and worker safety is the responsibility of the contractor.
- C. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished in this manner for the required work, the following requirements are mandatory:
 1. Electricians must use full protective equipment (i.e., certified and tested insulating material to cover exposed energized electrical components, certified and tested insulated tools, etc.) while working on energized systems in accordance with NFPA 70E.
 2. Electricians must wear personal protective equipment while working on energized systems in accordance with NFPA 70E.
 3. Before initiating any work, a job specific work plan must be developed by the contractor with a peer review conducted and documented by the COTR and Medical Center staff. The work plan must include procedures to be used on and near the live electrical equipment, barriers to be installed, safety equipment to be used and exit pathways.
 4. Work on energized circuits or equipment cannot begin until prior written approval is obtained from the COTR.

- D. For work on existing stations, arrange, phase and perform work to assure electrical service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- E. New work shall be installed and connected to existing work neatly, safely and professionally. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- F. Coordinate location of equipment and conduit with other trades to minimize interferences.

1.10 EQUIPMENT INSTALLATION AND REQUIREMENTS

- A. Equipment location shall be as close as practical to locations shown on the drawings.
- B. Working spaces shall not be less than specified in the NEC for all voltages specified.
- C. Inaccessible Equipment:
 - 1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
 - 2. "Conveniently accessible" is defined as being capable of being reached quickly for operation, maintenance, or inspections without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

1.11 EQUIPMENT IDENTIFICATION

- A. In addition to the requirements of the NEC, install an identification sign which clearly indicates information required for use and maintenance of items such as switchboards and switchgear, panelboards, cabinets, motor controllers (starters), fused and unfused safety switches, automatic transfer switches, separately enclosed circuit breakers, individual breakers and controllers in switchboards, switchgear and motor control assemblies, control devices and other significant equipment.
- B. Nameplates for Normal Power System equipment shall be laminated black phenolic resin with a white core with engraved lettering. Nameplates for Essential Electrical System (EES) equipment, as defined in the NEC, shall be laminated red phenolic resin with a white core with engraved lettering. Lettering shall be a minimum of 1/2 inch [12mm] high. Nameplates shall indicate equipment designation, rated bus amperage, voltage, number of phases, number of wires, and type of EES power branch as applicable. Secure nameplates with screws.

- C. Install adhesive arc flash warning labels on all equipment as required by NFPA 70E. Label shall indicate the arc hazard boundary (inches), working distance (inches), arc flash incident energy at the working distance (calories/cm²), required PPE category and description including the glove rating, voltage rating of the equipment, limited approach distance (inches), restricted approach distance (inches), prohibited approach distance (inches), equipment/bus name, date prepared, and manufacturer name and address.

1.12 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage or installation of equipment or material which has not had prior approval will not be permitted at the job site.
- C. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted.
- D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
 - 1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
 - 2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
 - 3. Submit each section separately.
- E. The submittals shall include the following:
 - 1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.
 - 2. Elementary and interconnection wiring diagrams for communication and signal systems, control systems and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
 - 3. Parts list which shall include those replacement parts recommended by the equipment manufacturer.

F. Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1. Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.
 2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.
 3. Provide a "Table of Contents" and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
 4. The manuals shall include:
 - a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
 - b. A control sequence describing start-up, operation, and shutdown.
 - c. Description of the function of each principal item of equipment.
 - d. Installation instructions.
 - e. Safety precautions for operation and maintenance.
 - f. Diagrams and illustrations.
 - g. Periodic maintenance and testing procedures and frequencies, including replacement parts numbers and replacement frequencies.
 - h. Performance data.
 - i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.
 - j. List of factory approved or qualified permanent servicing organizations for equipment repair and periodic testing and maintenance, including addresses and factory certification qualifications.
- G. Approvals will be based on complete submission of manuals together with shop drawings.

- H. After approval and prior to installation, furnish the COTR with one sample of each of the following:
1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
 2. Each type of conduit coupling, bushing and termination fitting.
 3. Conduit hangers, clamps and supports.
 4. Duct sealing compound.
 5. Each type of receptacle, toggle switch, occupancy sensor, outlet box, manual motor starter, device wall plate, engraved nameplate, wire and cable splicing and terminating material, and branch circuit single pole molded case circuit breaker.

1.13 SINGULAR NUMBER

- A. Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

1.14 ACCEPTANCE CHECKS AND TESTS

- A. The contractor shall furnish the instruments, materials and labor for field tests.

1.15 TRAINING

- A. Training shall be provided in accordance with Article 1.25, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
- B. Training shall be provided for the particular equipment or system as required in each associated specification.
- C. A training schedule shall be developed and submitted by the contractor and approved by the COTR at least 30 days prior to the planned training.

- - - E N D - - -

SECTION 26 05 21
LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW)

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, and connection of the low voltage power and lighting wiring.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-rated construction.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for cables and wiring.

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 FACTORY TESTS

- A. Low voltage cables shall be thoroughly tested at the factory per NEMA WC-70 to ensure that there are no electrical defects. Factory tests shall be certified.

1.5 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
 - 1. Manufacturer's Literature and Data: Showing each cable type and rating.
 - 2. Certifications: Two weeks prior to the final inspection, submit four copies of the following certifications to the COTR:
 - a. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
 - b. Certification by the contractor that the materials have been properly installed, connected, and tested.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by designation only.

- B. American Society of Testing Material (ASTM):
 - D2301-04Standard Specification for Vinyl Chloride
Plastic Pressure-Sensitive Electrical Insulating
Tape
- C. National Fire Protection Association (NFPA):
 - 70-08National Electrical Code (NEC)
- D. National Electrical Manufacturers Association (NEMA):
 - WC 70-09Power Cables Rated 2000 Volts or Less for the
Distribution of Electrical Energy
- E. Underwriters Laboratories, Inc. (UL):
 - 44-05Thermoset-Insulated Wires and Cables
 - 83-08Thermoplastic-Insulated Wires and Cables
 - 467-071Electrical Grounding and Bonding Equipment
 - 486A-486B-03Wire Connectors
 - 486C-04Splicing Wire Connectors
 - 486D-05Sealed Wire Connector Systems
 - 486E-94Equipment Wiring Terminals for Use with Aluminum
and/or Copper Conductors
 - 493-07Thermoplastic-Insulated Underground Feeder and
Branch Circuit Cable
 - 514B-04Conduit, Tubing, and Cable Fittings
 - 1479-03Fire Tests of Through-Penetration Fire Stops

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

- A. Conductors and cables shall be in accordance with NEMA WC-70 and as specified herein.
- B. Single Conductor:
 - 1. Shall be annealed copper.
 - 2. Shall be stranded for sizes No. 12 AWG and larger.
 - 3. Shall be minimum size No. 12 AWG, except where smaller sizes are allowed herein.
- C. Insulation:
 - 1. XHHW-2 or THHN-THWN shall be in accordance with NEMA WC-70, UL 44, and UL 83.

D. Color Code:

1. Secondary service feeder and branch circuit conductors shall be color-coded as follows:

208/120 volt	Phase	480/277 volt
Black	A	Brown
Red	B	Orange
Blue	C	Yellow
White	Neutral	Gray *
* or white with colored (other than green) tracer.		

- a. Lighting circuit "switch legs" and 3-way switch "traveling wires" shall have color coding that is unique and distinct (e.g., pink and purple) from the color coding indicated above. The unique color codes shall be solid and in accordance with the NEC.
Coordinate color coding in the field with the COTR.
2. Use solid color insulation or solid color coating for No. 12 AWG and No. 10 AWG branch circuit phase, neutral, and ground conductors.
3. Conductors No. 8 AWG and larger shall be color-coded using one of the following methods:
 - a. Solid color insulation or solid color coating.
 - b. Stripes, bands, or hash marks of color specified above.
 - c. Color as specified using 0.75 in [19 mm] wide tape. Apply tape in half-overlapping turns for a minimum of 3 in [75 mm] for terminal points, and in junction boxes, pull-boxes, troughs, and manholes. Apply the last two laps of tape with no tension to prevent possible unwinding. Where cable markings are covered by tape, apply tags to cable, stating size and insulation type.
4. For modifications and additions to existing wiring systems, color coding shall conform to the existing wiring system.

2.2 SPLICES AND JOINTS

- A. In accordance with UL 486A, C, D, E, and NEC.
- B. Aboveground Circuits (No. 10 AWG and smaller):
 1. Connectors: Solderless, screw-on, reusable pressure cable type, rated 600 V, 220° F [105° C], with integral insulation, approved for copper and aluminum conductors.
 2. The integral insulator shall have a skirt to completely cover the stripped wires.
 3. The number, size, and combination of conductors, as listed on the manufacturer's packaging, shall be strictly followed.

C. Aboveground Circuits (No. 8 AWG and larger):

1. Connectors shall be indent, hex screw, or bolt clamp-type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.
2. Field-installed compression connectors for cable sizes 250 kcmil and larger shall have not fewer than two clamping elements or compression indents per wire.
3. Insulate splices and joints with materials approved for the particular use, location, voltage, and temperature. Splice and joint insulation level shall be not less than the insulation level of the conductors being joined.
4. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

D. Underground Branch Circuits and Feeders:

1. Submersible connectors in accordance with UL 486D, rated 600 V, 190• F [90• C], with integral insulation.

2.3 CONTROL WIRING

- A. Unless otherwise specified elsewhere in these specifications, control wiring shall be as specified for power and lighting wiring, except that the minimum size shall be not less than No. 14 AWG.
- B. Control wiring shall be large enough such that the voltage drop under in-rush conditions does not adversely affect operation of the controls.

2.4 WIRE LUBRICATING COMPOUND

- A. Lubricating compound shall be suitable for the wire insulation and conduit, and shall not harden or become adhesive.

PART 3 - EXECUTION

3.1 GENERAL

- A. Install in accordance with the NEC, and as specified.
- B. Provide a separate neutral for each 120 and 277 volt circuit. The use of "Edison Circuits", one neutral servicing more than one circuit, is not allowed.
- C. Install all wiring in raceway systems.
- D. Splice cables and wires only in outlet boxes, junction boxes, pull-boxes, manholes, or handholes.
- E. Wires of different systems (e.g., 120 V, 277 V) shall not be installed in the same conduit or junction box system.
- F. Install cable supports for all vertical feeders in accordance with the NEC. Provide split wedge type which firmly clamps each individual cable and tightens due to cable weight.

- G. For panel boards, cabinets, wireways, switches, and equipment assemblies, neatly form, train, and tie the cables in individual circuits.
- H. Seal cable and wire entering a building from underground between the wire and conduit where the cable exits the conduit, with a non-hardening approved compound.
- I. Wire Pulling:
 - 1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling of cables. Use lubricants approved for the cable.
 - 2. Use nonmetallic ropes for pulling feeders.
 - 3. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached directly to the conductors, as approved by the COTR.
 - 4. All cables in a single conduit shall be pulled simultaneously.
 - 5. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.
- J. No more than three single-phase branch circuits shall be installed in any one conduit.

3.2 SPLICE INSTALLATION

- A. Splices and terminations shall be mechanically and electrically secure.
- B. Tighten electrical connectors and terminals according to manufacturer's published torque values.
- C. Where the Government determines that unsatisfactory splices or terminations have been installed, remove the devices and install approved devices at no additional cost to the Government.

3.3 EXISTING WIRING

- A. Unless specifically indicated on the plans, existing wiring shall not be reused for a new installation.

3.4 CONTROL AND SIGNAL WIRING INSTALLATION

- A. Unless otherwise specified in other sections, install wiring and connect to equipment/devices to perform the required functions as shown and specified.
- B. Except where otherwise required, install a separate power supply circuit for each system so that malfunctions in any system will not affect other systems.
- C. Where separate power supply circuits are not shown, connect the systems to the nearest panel boards of suitable voltages, which are intended to supply such systems and have suitable spare circuit breakers or space for installation.

3.5 CONTROL AND SIGNAL SYSTEM WIRING IDENTIFICATION

- A. Install a permanent wire marker on each wire at each termination.
- B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.
- C. Wire markers shall retain their markings after cleaning.

3.6 ACCEPTANCE CHECKS AND TESTS

- A. Feeders and branch circuits shall have their insulation tested after installation and before connection to utilization devices, such as fixtures, motors, or appliances. Test each conductor with respect to adjacent conductors and to ground. Existing conductors to be reused shall also be tested.
- B. Applied voltage shall be 500VDC for 300-volt rated cable, and 1000VDC for 600-volt rated cable. Apply test for one minute or until reading is constant for 15 seconds, whichever is longer. Minimum insulation resistance values shall not be less than 25 megohms for 300-volt rated cable and 100 megohms for 600-volt rated cable.
- C. Perform phase rotation test on all three-phase circuits.
- D. The contractor shall furnish the instruments, materials, and labor for all tests.

- - - E N D - - -

SECTION 26 05 26
GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the general grounding and bonding requirements for electrical equipment and operations to provide a low impedance path for possible ground fault currents.
- B. "Grounding electrode system" refers to all electrodes required by NEC, as well as made and supplementary grounding electrodes.
- C. The terms "connect" and "bond" are used interchangeably in this specification and have the same meaning.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low Voltage power and lighting wiring.

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. Shop Drawings:
 - 1. Clearly present enough information to determine compliance with drawings and specifications.
 - 2. Include the location of system grounding electrode connections and the routing of aboveground and underground grounding electrode conductors.
- C. Test Reports: Provide certified test reports of ground resistance.
- D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the COTR:
 - 1. Certification that the materials and installation are in accordance with the drawings and specifications.
 - 2. Certification by the contractor that the complete installation has been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

A. American Society for Testing and Materials (ASTM):

B1-07Standard Specification for Hard-Drawn Copper Wire

B3-07Standard Specification for Soft or Annealed Copper Wire

B8-04Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

B. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

81-1983IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

C2-07National Electrical Safety Code

C. National Fire Protection Association (NFPA):

70-08National Electrical Code (NEC)

99-2005Health Care Facilities

D. Underwriters Laboratories, Inc. (UL):

44-05Thermoset-Insulated Wires and Cables

83-08Thermoplastic-Insulated Wires and Cables

467-07Grounding and Bonding Equipment

486A-486B-03Wire Connectors

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

- A. Equipment grounding conductors #12 and larger, shall be UL 44 or UL 83 insulated stranded copper. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes No. 4 AWG [25 mm²] and larger shall be identified per NEC.
- B. Bonding conductors shall be ASTM B8 bare stranded copper, except that sizes No. 10 AWG [6 mm²] and smaller shall be ASTM B1 solid bare copper wire.
- C. Conductor sizes shall not be less than shown on the drawings, or not less than required by the NEC, whichever is greater.

2.2 EQUIPMENT RACK AND CABINET GROUND BARS

- A. Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks with minimum dimensions of 0.375 in [4 mm] thick x 0.75 in [19 mm] wide.

2.3 GROUND TERMINAL BLOCKS

- A. At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide screw lug-type terminal blocks.

2.4 GROUNDING BUS

- A. Pre-drilled rectangular copper bar with stand-off insulators, minimum 0.25 in [6.3 mm] thick x 4 in [100 mm] high in cross-section, length as shown on drawings, with 0.281 in [7.1 mm] holes spaced 1.125 in [28 mm] apart.

PART 3 - EXECUTION

3.1 GENERAL

- A. Ground in accordance with the NEC, as shown on drawings, and as specified herein.
- B. Equipment Ground: A green ground wire shall be installed in all raceways.
- C. System Grounding:
 - 1. Secondary service neutrals: Ground at the supply side of the secondary disconnecting means and at the related transformers.
 - 2. Separately derived systems (transformers downstream from the service entrance): Ground the secondary neutral.
- D. Equipment Grounding: Metallic structures, including ductwork and building steel, enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.
- E. Special Grounding: For patient care area electrical power system grounding, conform to NFPA 99 and NEC.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

- A. Make grounding connections, which are normally buried or otherwise inaccessible (except connections for which access for periodic testing is required), by exothermic weld.

3.3 SECONDARY VOLTAGE EQUIPMENT AND CIRCUITS

- A. Ground lighting fixtures to the green grounding conductor of the wiring system.

3.4 RACEWAY

A. Conduit Systems:

1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.
2. Non-metallic conduit systems, except non-metallic feeder conduits that carry a grounded conductor from exterior transformers to interior or building-mounted service entrance equipment, shall contain an equipment grounding conductor.
3. Conduit that only contains a grounding conductor, and is provided for its mechanical protection, shall be bonded to that conductor at the entrance and exit from the conduit.
4. Metallic conduits which terminate without mechanical connection to an electrical equipment housing by means of locknut and bushings or adapters, shall be provided with grounding bushings. Connect bushings with a bare grounding conductor to the equipment ground bus.

B. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders and power and lighting branch circuits.

C. Boxes, Cabinets, Enclosures, and Panelboards:

1. Bond the equipment grounding conductor to each pullbox, junction box, outlet box, device box, cabinets, and other enclosures through which the conductor passes (except for special grounding systems for intensive care units and other critical units shown).
2. Provide lugs in each box and enclosure for equipment grounding conductor termination.

D. Wireway Systems:

1. Bond the metallic structures of wireway to provide 100% electrical continuity throughout the wireway system, by connecting a No. 6 AWG [16 mm²] bonding jumper at all intermediate metallic enclosures and across all section junctions.
2. Install insulated No. 6 AWG [16 mm²] bonding jumpers between the wireway system, bonded as required above, and the closest building ground at each end and approximately every 50 ft [16 M].
3. Use insulated No. 6 AWG [16 mm²] bonding jumpers to ground or bond metallic wireway at each end for all intermediate metallic enclosures and across all section junctions.

4. Use insulated No. 6 AWG [16 mm²] bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 49 ft [15 M].
- E. Receptacles shall not be grounded through their mounting screws. Ground receptacles with a jumper from the receptacle green ground terminal to the device box ground screw and a jumper to the branch circuit equipment grounding conductor.
- F. Ground lighting fixtures to the equipment grounding conductor of the wiring system when the green ground is provided; otherwise, ground the fixtures through the conduit systems. Fixtures connected with flexible conduit shall have a green ground wire included with the power wires from the fixture through the flexible conduit to the first outlet box.
- G. Fixed electrical appliances and equipment shall be provided with a ground lug for termination of the equipment grounding conductor.
- H. Panelboard Bonding in Patient Care Areas: The equipment grounding terminal buses of the normal and essential branch circuit panel boards serving the same individual patient vicinity shall be bonded together with an insulated continuous copper conductor not less than No. 10 AWG [16 mm²]. These conductors shall be installed in rigid metal conduit.

3.5 CORROSION INHIBITORS

- A. When making ground and ground bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.6 CONDUCTIVE PIPING

- A. Bond all conductive piping systems, interior and exterior, to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.
- B. In operating rooms and at intensive care and coronary care type beds, bond the gases and suction piping at the outlets directly to the room or patient ground bus.

3.7 GROUND RESISTANCE

- A. Grounding system resistance to ground shall not exceed 5 ohms. Make any modifications or additions to the grounding electrode system necessary for compliance without additional cost to the Government. Final tests shall ensure that this requirement is met.

B. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized and shall be made in normally dry conditions not fewer than 48 hours after the last rainfall. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together below grade. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

- - - E N D - - -

SECTION 26 05 33
RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes, to form complete, coordinated, grounded raceway systems. Raceways are required for all wiring unless shown or specified otherwise.
- B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

- A. Section 06 10 00, ROUGH CARPENTRY: Mounting board for telephone closets.
- B. Section 07 60 00, FLASHING AND SHEET METAL: Fabrications for the deflection of water away from the building envelope at penetrations.
- C. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire rated construction.
- D. Section 07 92 00, JOINT SEALANTS: Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.
- E. Section 09 91 00, PAINTING: Identification and painting of conduit and other devices.
- F. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- G. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

- A. Manufacturer's Literature and Data: Showing each cable type and rating. The specific item proposed and its area of application shall be identified on the catalog cuts.
- B. Shop Drawings:
 - 1. Size and location of main feeders.
 - 2. Size and location of panels and pull-boxes.
 - 3. Layout of required conduit penetrations through structural elements.

C. Certifications:

1. Two weeks prior to the final inspection, submit four copies of the following certifications to the COTR:
 - a. Certification by the manufacturer that the material conforms to the requirements of the drawings and specifications.
 - b. Certification by the contractor that the material has been properly installed.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. American National Standards Institute (ANSI):
 - C80.1-05Electrical Rigid Steel Conduit
 - C80.3-05Steel Electrical Metal Tubing
 - C80.6-05Electrical Intermediate Metal Conduit
- C. National Fire Protection Association (NFPA):
 - 70-08National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
 - 1-05Flexible Metal Conduit
 - 5-04Surface Metal Raceway and Fittings
 - 6-07Electrical Rigid Metal Conduit - Steel
 - 50-95Enclosures for Electrical Equipment
 - 360-093Liquid-Tight Flexible Steel Conduit
 - 467-07Grounding and Bonding Equipment
 - 514A-04Metallic Outlet Boxes
 - 514B-04Conduit, Tubing, and Cable Fittings
 - 514C-96Nonmetallic Outlet Boxes, Flush-Device Boxes and
Covers
 - 651-05Schedule 40 and 80 Rigid PVC Conduit and
Fittings
 - 651A-00Type EB and A Rigid PVC Conduit and HDPE Conduit
 - 797-07Electrical Metallic Tubing
 - 1242-06Electrical Intermediate Metal Conduit - Steel
- E. National Electrical Manufacturers Association (NEMA):
 - TC-2-03Electrical Polyvinyl Chloride (PVC) Tubing and
Conduit
 - TC-3-04PVC Fittings for Use with Rigid PVC Conduit and
Tubing
 - FB1-07Fittings, Cast Metal Boxes and Conduit Bodies
for Conduit, Electrical Metallic Tubing and
Cable

PART 2 - PRODUCTS**2.1 MATERIAL**

- A. Conduit Size: In accordance with the NEC, but not less than 3/4 in [21 mm] unless otherwise shown. Where permitted by the NEC, 3/4 in [21 mm] flexible conduit may be used for tap connections to recessed lighting fixtures.
- B. Conduit:
 - 1. Rigid steel: Shall conform to UL 6 and ANSI C80.1.
 - 2. Aluminum conduit not allowed.
 - 3. Rigid intermediate steel conduit (IMC): Shall conform to UL 1242 and ANSI C80.6.
 - 4. Electrical metallic tubing (EMT): Shall conform to UL 797 and ANSI C80.3. Maximum size not to exceed 4 in [105 mm] and shall be permitted only with cable rated 600 V or less.
 - 5. Flexible galvanized steel conduit: Shall conform to UL 1.
 - 6. Liquid-tight flexible metal conduit: Shall conform to UL 360.
 - 7. Direct burial plastic conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high density polyethylene (PE).
 - 8. Surface metal raceway: Shall conform to UL 5.
- C. Conduit Fittings:
 - 1. Rigid steel and IMC conduit fittings:
 - a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
 - b. Standard threaded couplings, locknuts, bushings, conduit bodies, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
 - c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
 - d. Bushings: Metallic insulating type, consisting of an insulating insert, molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
 - e. Sealing fittings: Threaded cast iron type. Use continuous drain-type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.

2. Electrical metallic tubing fittings:
 - a. Fittings and conduit bodies shall meet the requirements of UL 514B, ANSI C80.3, and NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Compression couplings and connectors: Concrete-tight and rain-tight, with connectors having insulated throats.
 - d. Indent-type connectors or couplings are prohibited.
 - e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
3. Flexible steel conduit fittings:
 - a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
 - b. Clamp-type, with insulated throat.
4. Liquid-tight flexible metal conduit fittings:
 - a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
5. Direct burial plastic conduit fittings:

Fittings shall meet the requirements of UL 514C and NEMA TC3.
6. Surface metal raceway fittings: As recommended by the raceway manufacturer. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, conduit entry fittings, accessories, and other fittings as required for complete system.
7. Expansion and deflection couplings:
 - a. Conform to UL 467 and UL 514B.
 - b. Accommodate a 0.75 in [19 mm] deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
 - c. Include internal flexible metal braid, sized to guarantee conduit ground continuity and a low-impedance path for fault currents, in accordance with UL 467 and the NEC tables for equipment grounding conductors.
 - d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat-resistant molded rubber material with stainless steel jacket clamps.

D. Conduit Supports:

1. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.
2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
3. Multiple conduit (trapeze) hangers: Not less than 1.5 x 1.5 in [38 mm x 38 mm], 12-gauge steel, cold-formed, lipped channels; with not less than 0.375 in [9 mm] diameter steel hanger rods.
4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

E. Outlet, Junction, and Pull Boxes:

1. UL-50 and UL-514A.
2. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.
3. Sheet metal boxes: Galvanized steel, except where otherwise shown.
4. Flush-mounted wall or ceiling boxes shall be installed with raised covers so that the front face of raised cover is flush with the wall. Surface-mounted wall or ceiling boxes shall be installed with surface-style flat or raised covers.

F. Wireways: Equip with hinged covers, except where removable covers are shown. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for a complete system.

PART 3 - EXECUTION**3.1 PENETRATIONS****A. Cutting or Holes:**

1. Cut holes in advance where they should be placed in the structural elements, such as ribs or beams. Obtain the approval of the COTR prior to drilling through structural elements.
2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammers, impact electric, hand, or manual hammer-type drills are not allowed, except where permitted by the COTR as required by limited working space.

B. Firestop: Where conduits, wireways, and other electrical raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

- C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight, as specified in Section 07 92 00, JOINT SEALANTS.

3.2 INSTALLATION, GENERAL

- A. In accordance with UL, NEC, as shown, and as specified herein.
- B. Essential (Emergency) raceway systems shall be entirely independent of other raceway systems, except where shown on drawings.
- C. Install conduit as follows:
 1. In complete mechanically and electrically continuous runs before pulling in cables or wires.
 2. Unless otherwise indicated on the drawings or specified herein, installation of all conduits shall be concealed within finished walls, floors, and ceilings.
 3. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
 4. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
 5. Cut square, ream, remove burrs, and draw up tight.
 6. Independently support conduit at 8 ft [2.4 M] on centers. Do not use other supports, i.e., suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts.
 7. Support within 12 in [300 mm] of changes of direction, and within 12 in [300 mm] of each enclosure to which connected.
 8. Close ends of empty conduit with plugs or caps at the rough-in stage until wires are pulled in, to prevent entry of debris.
 9. Conduit installations under fume and vent hoods are prohibited.
 10. Secure conduits to cabinets, junction boxes, pull-boxes, and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
 11. Flashing of penetrations of the roof membrane is specified in Section 07 60 00, FLASHING AND SHEET METAL.
 12. Conduit bodies shall only be used for changes in direction, and shall not contain splices.
- D. Conduit Bends:
 1. Make bends with standard conduit bending machines.
 2. Conduit hickey may be used for slight offsets and for straightening stubbed out conduits.
 3. Bending of conduits with a pipe tee or vise is prohibited.

E. Layout and Homeruns:

1. Install conduit with wiring, including homeruns, as developed through coordination meeting with COTR.
2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the COTR.

3.3 CONCEALED WORK INSTALLATION

A. In Concrete:

1. Conduit: Rigid steel, IMC, or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel, or vapor barriers.
2. Align and run conduit in direct lines.
3. Install conduit through concrete beams only:
 - a. Where shown on the structural drawings.
 - b. As approved by the COTR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 3 in [75 mm] thick is prohibited.
 - a. Conduit outside diameter larger than one-third of the slab thickness is prohibited.
 - b. Space between conduits in slabs: Approximately six conduit diameters apart, and one conduit diameter at conduit crossings.
 - c. Install conduits approximately in the center of the slab so that there will be a minimum of 0.75 in [19 mm] of concrete around the conduits.
5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to ensure low resistance ground continuity through the conduits. Tightening setscrews with pliers is prohibited.

B. Above Furred or Suspended Ceilings and in Walls:

1. Conduit for conductors 600 V and below: Rigid steel, IMC, or EMT. Mixing different types of conduits indiscriminately in the same system is prohibited.
2. Align and run conduit parallel or perpendicular to the building lines.
3. Connect recessed lighting fixtures to conduit runs with maximum 6 ft [1.8 M] of flexible metal conduit extending from a junction box to the fixture.

3.4 EXPOSED WORK INSTALLATION

- A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.

- B. Conduit for Conductors 600 V and Below: Rigid steel, IMC, EMT. Mixing different types of conduits indiscriminately in the system is prohibited.
- C. Align and run conduit parallel or perpendicular to the building lines.
- D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
- E. Support horizontal or vertical runs at not over 8 ft [2.4 M] intervals.
- F. Surface metal raceways: Use only where shown.
- G. Painting:
 - 1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
 - 2. Paint all conduits containing cables rated over 600 V safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 2 in [50 mm] high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 20 ft [6 M] intervals in between.

3.5 DIRECT BURIAL INSTALLATION

- A. Refer to Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION.

3.6 HAZARDOUS LOCATIONS

- A. Use rigid steel conduit only, notwithstanding requirements otherwise specified in this or other sections of these specifications.
- B. Install UL approved sealing fittings that prevent passage of explosive vapors in hazardous areas equipped with explosion-proof lighting fixtures, switches, and receptacles, as required by the NEC.

3.7 WET OR DAMP LOCATIONS

- A. Unless otherwise shown, use conduits of rigid steel or IMC.
- B. Provide sealing fittings to prevent passage of water vapor where conduits pass from warm to cold locations, i.e., refrigerated spaces, constant-temperature rooms, air-conditioned spaces, building exterior walls, roofs, or similar spaces.
- C. Unless otherwise shown, use rigid steel or IMC conduit within 5 ft [1.5 M] of the exterior and below concrete building slabs in contact with soil, gravel, or vapor barriers. Conduit shall be half-lapped with 10 mil PVC tape before installation. After installation, completely recoat or retape any damaged areas of coating.

3.8 MOTORS AND VIBRATING EQUIPMENT

- A. Use flexible metal conduit for connections to motors and other electrical equipment subject to movement, vibration, misalignment, cramped quarters, or noise transmission.

- B. Use liquid-tight flexible metal conduit for installation in exterior locations, moisture or humidity laden atmosphere, corrosive atmosphere, water or spray wash-down operations, inside airstream of HVAC units, and locations subject to seepage or dripping of oil, grease, or water. Provide a green equipment grounding conductor with flexible metal conduit.

3.9 EXPANSION JOINTS

- A. Conduits 3 in [75 mm] and larger that are secured to the building structure on opposite sides of a building expansion joint require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.
- B. Provide conduits smaller than 3 in [75 mm] with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 5 in [125 mm] vertical drop midway between the ends. Flexible conduit shall have a bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for conduits 15 in [375 mm] and larger are acceptable.
- C. Install expansion and deflection couplings where shown.
- D. Seismic Areas: In seismic areas, provide conduits rigidly secured to the building structure on opposite sides of a building expansion joint with junction boxes on both sides of the joint. Connect conduits to junction boxes with 15 in [375 mm] of slack flexible conduit. Flexible conduit shall have a copper green ground bonding jumper installed.

3.10 CONDUIT SUPPORTS, INSTALLATION

- A. Safe working load shall not exceed one-quarter of proof test load of fastening devices.
- B. Use pipe straps or individual conduit hangers for supporting individual conduits.
- C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 200 lbs [90 kg]. Attach each conduit with U-bolts or other approved fasteners.
- D. Support conduit independently of junction boxes, pull-boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.
- E. Fasteners and Supports in Solid Masonry and Concrete:
 - 1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
 - 2. Existing Construction:
 - a. Steel expansion anchors not less than 0.25 in [6 mm] bolt size and not less than 1.125 in [28 mm] embedment.
 - b. Power set fasteners not less than 0.25 in [6 mm] diameter with depth of penetration not less than 3 in [75 mm].
 - c. Use vibration and shock-resistant anchors and fasteners for attaching to concrete ceilings.

- F. Hollow Masonry: Toggle bolts.
- G. Bolts supported only by plaster or gypsum wallboard are not acceptable.
- H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
- I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
- J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.
- K. Spring steel type supports or fasteners are prohibited for all uses except horizontal and vertical supports/fasteners within walls.
- L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.11 BOX INSTALLATION

- A. Boxes for Concealed Conduits:
 - 1. Flush-mounted.
 - 2. Provide raised covers for boxes to suit the wall or ceiling, construction, and finish.
- B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling-in operations.
- C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
- D. Outlet boxes mounted back-to-back in the same wall are prohibited. A minimum 24 in [600 mm] center-to-center lateral spacing shall be maintained between boxes.
- E. Minimum size of outlet boxes for ground fault interrupter (GFI) receptacles is 4 in [100 mm] square x 2.125 in [55 mm] deep, with device covers for the wall material and thickness involved.
- F. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1."
- G. On all branch circuit junction box covers, identify the circuits with black marker.
- H. For boxes installed in metal stud construction, use rigid support metal bar hangars or metal bar fasteners attached to two studs. Screwing boxes directly to joists or studs is not acceptable.
- I. Label all covers of electrical boxes with the panel name and circuits contained in the box. For example L2S 15, 17, 19.

- - - E N D - - -

SECTION 26 24 16
PANELBOARDS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation, and connection of panelboards.

1.2 RELATED WORK

- A. Section 09 91 00, PAINTING: Identification and painting of panelboards.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one Section of Division 26.
- C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- E. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits and outlet boxes.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. Shop Drawings:
 - 1. Sufficient information, shall be clearly presented to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, dimensions, mounting details, materials, wiring diagrams, accessories, and weights of equipment. Complete nameplate data, including manufacturer's name and catalog number.
- C. Manuals:
 - 1. When submitting the shop drawings, submit companion copies of complete maintenance and operating manuals, including technical data sheets and wiring diagrams.

2. If changes have been made to the maintenance and operating manuals that were originally submitted, then submit four copies of updated maintenance and operating manuals to the COTR two weeks prior to final inspection.
- D. Certification: Two weeks prior to final inspection, submit four copies of the following to the COTR:
 1. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
 2. Certification by the contractor that the materials have been properly installed, connected, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. National Electrical Manufacturers Association (NEMA):
 - PB-1-06Panelboards
 - 250-08Enclosures for Electrical Equipment (1000V Maximum)
- C. National Fire Protection Association (NFPA):
 - 70-2005National Electrical Code (NEC)
 - 70E-2004Standard for Electrical Life Safety in the Workplace
- D. Underwriters Laboratories, Inc. (UL):
 - 50-95Enclosures for Electrical Equipment
 - 67-09Panelboards
 - 489-09Molded Case Circuit Breakers and Circuit Breaker Enclosures

PART 2 - PRODUCTS

2.1 PANELBOARDS

- A. Panelboards shall be in accordance with UL, NEMA, NEC, and as shown on the drawings.
- B. Panelboards shall be standard manufactured products.
- C. All panelboards shall be lockable, hinged "door in door" type with:
 1. Interior hinged door with hand-operated latch or latches, as required to provide access only to circuit breaker operating handles, not to energized parts.

2. Outer hinged door shall be securely mounted to the panelboard box with factory bolts, screws, clips, or other fasteners, requiring a tool for entry. Hand-operated latches are not acceptable.
 3. Push inner and outer doors shall open left to right.
- D. All panelboards shall be completely factory-assembled with molded case circuit breakers and integral accessories, as scheduled on the drawings or specified herein. Include one-piece removable, inner dead front cover, independent of the panelboard cover.
- E. Panelboards shall have main breaker or main lugs, bus size, voltage, phase, top or bottom feed, and flush or surface mounting as scheduled on the drawings.
- F. Panelboards shall conform to NEMA PB-1, NEMA AB-1, and UL 67 and have the following features:
1. Non-reduced size copper bus bars with current ratings as shown on the panel schedules, rigidly supported on molded insulators.
 2. Bus bar connections to the branch circuit breakers shall be the "distributed phase" or "phase sequence" type.
 3. Mechanical lugs furnished with panelboards shall be cast, stamped, or machined metal alloys of sizes suitable for the conductors to which they will be connected.
 4. Neutral bus shall be 100% rated, mounted on insulated supports.
 5. Grounding bus bar shall be equipped with screws or lugs for the connection of grounding wires.
 6. Buses shall be braced for the available short-circuit current. Bracing shall not be less than 10,000 A symmetrical for 120/208 V and 120/240 V panelboards.
 7. Branch circuit panelboards shall have buses fabricated for bolt-on type circuit breakers.
 8. Protective devices shall be designed so that they can easily be replaced.
 9. Where designated on panel schedule "spaces," include all necessary bussing, device support, and connections. Provide blank cover for each space.

10. In two section panelboards, the main bus in each section shall be full size. The first section shall be furnished with subfeed lugs on the line side of main lugs only, or through-feed lugs for main breaker type panelboards, and have cable connections to the second section. Panelboard sections with tapped bus or crossover bus are not acceptable.
11. Series-rated panelboards are not permitted.

2.2 CABINETS AND TRIMS

A. Cabinets:

1. Provide galvanized steel cabinets to house panelboards. Cabinets for outdoor panelboards shall be factory primed and suitably treated with a corrosion-resisting paint finish meeting UL 50 and UL 67.
2. Cabinet enclosure shall not have ventilating openings.
3. Cabinets for panelboards may be of one-piece formed steel or of formed sheet steel with end and side panels welded, riveted, or bolted as required.

2.3 MOLDED CASE CIRCUIT BREAKERS FOR PANELBOARDS

- A. Circuit breakers shall be per UL 489, in accordance with the NEC, as shown on the drawings, and as specified.
- B. Circuit breakers in panelboards shall be bolt-on type.
- C. Molded case circuit breakers shall have minimum interrupting rating as required to withstand the available fault current, but not less than:
 1. 120/208 V Panelboard: 10,000 A symmetrical.
- D. Molded case circuit breakers shall have automatic, trip free, non-adjustable, inverse time, and instantaneous magnetic trips for 100 A frame or lower.
- E. Breaker features shall be as follows:
 1. A rugged, integral housing of molded insulating material.
 2. Silver alloy contacts.
 3. Arc quenchers and phase barriers for each pole.
 4. Quick-make, quick-break, operating mechanisms.
 5. A trip element for each pole, thermal magnetic type with long time delay and instantaneous characteristics, a common trip bar for all poles and a single operator.
 6. Electrically and mechanically trip free.
 7. An operating handle which indicates ON, TRIPPED, and OFF positions.
 8. An overload on one pole of a multipole breaker shall automatically cause all the poles of the breaker to open.

9. Ground fault current interrupting breakers, shunt trip breakers, or other accessory devices or functions shall be provided where indicated.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation shall be in accordance with the manufacturer's instructions, the NEC, as shown on the drawings, and as specified.
- B. Locate panelboards so that the present and future conduits can be conveniently connected.
- C. Install a printed schedule of circuits in each panelboard after approval by the COTR. Schedules shall be printed on the panelboard directory cards, installed in the appropriate panelboards, and incorporate all applicable contract changes. Information shall indicate outlets, lights, devices, or other equipment controlled by each circuit, and the final room numbers served by each circuit.
- D. Mount the fully-aligned panelboard such that the maximum height of the top circuit breaker above the finished floor shall not exceed 78 in [1980 mm]. Mount panelboards that are too high such that the bottom of the cabinets will not be less than 6 in [150 mm] above the finished floor.
- E. For panelboards located in areas accessible to the public, paint the exposed surfaces of the trims, doors, and boxes with finishes to match surrounding surfaces after the panelboards have been installed.
- F. Rust and scale shall be removed from the inside of existing backboxes where new panelboards are to be installed. Paint inside of backboxes with rust-preventive paint before the new panelboard interior is installed. Provide new trim and doors for these panelboards. Covers shall fit tight to the box with no gaps between the cover and the box.

3.2 ACCEPTANCE CHECKS AND TESTS

- A. Perform in accordance with the manufacturer's recommendations. Include the following visual and mechanical inspections and electrical tests:
 1. Visual and Mechanical Inspection
 - a. Compare equipment nameplate data with specifications and approved shop drawings.
 - b. Inspect physical, electrical, and mechanical condition.
 - c. Verify appropriate anchorage and required area clearances.
 - d. Verify that circuit breaker sizes and types correspond to approved shop drawings.

- e. To verify tightness of accessible bolted electrical connections, use the calibrated torque-wrench method or perform thermographic survey after energization.

- f. Clean panelboard.

3.3 FOLLOW-UP VERIFICATION

Upon completion of acceptance checks, settings, and tests, the contractor shall demonstrate that the panelboards are in good operating condition and properly performing the intended function.

- - - E N D - - -

SECTION 26 27 26
WIRING DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation and connection of wiring devices.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.
- B. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits and outlets boxes.
- C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Shop Drawings:
1. Sufficient information, clearly presented, shall be included to determine compliance with drawings and specifications.
 2. Include electrical ratings, dimensions, mounting details, construction materials, grade and termination information.
- C. Manuals: Two weeks prior to final inspection, deliver four copies of the following to the COTR: Technical data sheets and information for ordering replacement units.
- D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the COTR: Certification by the Contractor that the devices comply with the drawings and specifications, and have been properly installed, aligned, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. National Fire Protection Association (NFPA):
 - 70National Electrical Code (NEC)
- C. National Electrical Manufacturers Association (NEMA):
 - WD 1General Color Requirements for Wiring Devices
 - WD 6Wiring Devices - Dimensional Requirements
- D. Underwriter's Laboratories, Inc. (UL):
 - 5Surface Metal Raceways and Fittings
 - 20General-Use Snap Switches
 - 231Power Outlets
 - 467Grounding and Bonding Equipment
 - 498Attachment Plugs and Receptacles
 - 943Ground-Fault Circuit-Interrupters

PART 2 - PRODUCTS

2.1 RECEPTACLES

- A. General: All receptacles shall be listed by Underwriters Laboratories, Inc., and conform to NEMA WD 6.
 - 1. Mounting straps shall be plated steel, with break-off plaster ears and shall include a self-grounding feature. Terminal screws shall be brass, brass plated or a copper alloy metal.
 - 2. Receptacles shall have provisions for back wiring with separate metal clamp type terminals (four min.) and side wiring from four captively held binding screws.
- B. Duplex Receptacles: Hospital-grade, single phase, 20 ampere, 120 volts, 2-pole, 3-wire, and conform to the NEMA 5-20R configuration in NEMA WD 6. The duplex type shall have break-off feature for two-circuit operation. The ungrounded pole of each receptacle shall be provided with a separate terminal.
 - 1. Bodies shall be ivory in color.
 - 2. Switched duplex receptacles shall be wired so that only the top receptacle is switched. The remaining receptacle shall be unswitched.
 - 3. Duplex Receptacles on Emergency Circuit:
 - a. Bodies shall be red in color.
 - b. In rooms without emergency powered general lighting, the emergency receptacles shall be of the self-illuminated type.

4. Ground Fault Interrupter Duplex Receptacles: Shall be an integral unit, hospital-grade, suitable for mounting in a standard outlet box.
 - a. Ground fault interrupter shall consist of a differential current transformer, solid state sensing circuitry and a circuit interrupter switch. Device shall have nominal sensitivity to ground leakage current of five milliamperes and shall function to interrupt the current supply for any value of ground leakage current above five milliamperes (+ or - 1 milliamp) on the load side of the device. Device shall have a minimum nominal tripping time of 1/30th of a second.
 - b. Ground Fault Interrupter Duplex Receptacles (not hospital-grade) shall be the same as ground fault interrupter hospital-grade receptacles except for the "hospital-grade" listing.
5. Safety Type Duplex Receptacles:
 - a. Bodies shall be gray in color.
 - 1) Shall permit current to flow only while a standard plug is in the proper position in the receptacle.
 - 2) Screws exposed while the wall plates are in place shall be the tamperproof type.
- C. Receptacles; 20, 30 and 50 ampere, 250 volts: Shall be complete with appropriate cord grip plug. Devices shall meet UL 231.

2.2 TOGGLE SWITCHES

- A. Toggle Switches: Shall be totally enclosed tumbler type with bodies of phenolic compound. Toggle handles shall be ivory in color unless otherwise specified. The rocker type switch is not acceptable and will not be approved.
 1. Switches installed in hazardous areas shall be explosion proof type in accordance with the NEC and as shown on the drawings.
 2. Shall be single unit toggle, butt contact, quiet AC type, heavy-duty general-purpose use with an integral self grounding mounting strap with break-off plaster ears and provisions for back wiring with separate metal wiring clamps and side wiring with captively held binding screws.
3. Ratings:
 - a. 120 volt circuits: 20 amperes at 120-277 volts AC.
 - b. 277 volt circuits: 20 amperes at 120-277 volts AC.

2.3 MANUAL DIMMING CONTROL

- A. slide dimmer with on/off control, single-pole or three-way as shown on plans. Faceplates shall be ivory in color unless otherwise specified.

- B. Manual dimming controls shall be fully compatible with electronic dimming ballasts and approved by the ballast manufacturer, shall operate over full specified dimming range, and shall not degrade the performance or rated life of the electronic dimming ballast and lamp.

2.4 WALL PLATES

- A. Wall plates for switches and receptacles shall be type 302 stainless steel. Oversize plates are not acceptable.
- B. Standard NEMA design, so that products of different manufacturers will be interchangeable. Dimensions for openings in wall plates shall be accordance with NEMA WD 6.
- C. For receptacles or switches mounted adjacent to each other, wall plates shall be common for each group of receptacles or switches.
- D. In psychiatric areas, wall plates shall be 302 stainless steel, have tamperproof screws and beveled edges.
- E. Wall plates for data, telephone or other communication outlets shall be as specified in the associated specification.
- F. Duplex Receptacles on Emergency Circuit:
 - 1. Bodies shall be red in color. Wall plates shall be stainless steel with the word "EMERGENCY" engraved in 6 mm, (1/4 inch) red letters.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation shall be in accordance with the NEC and as shown as on the drawings.
- B. Ground terminal of each receptacle shall be bonded to the outlet box with an approved green bonding jumper, and also connected to the green equipment grounding conductor.
- C. Outlet boxes for light and dimmer switches shall be mounted on the strike side of doors.
- D. Provide barriers in multigang outlet boxes to separate systems of different voltages, Normal Power and Emergency Power systems, and in compliance with the NEC.
- E. Coordinate with other work, including painting, electrical boxes and wiring installations, as necessary to interface installation of wiring devices with other work. Coordinate the electrical work with the work of other trades to ensure that wiring device flush outlets are positioned with box openings aligned with the face of the surrounding finish material. Pay special attention to installations in cabinet work, and in connection with laboratory equipment.

- F. Exact field locations of floors, walls, partitions, doors, windows, and equipment may vary from locations shown on the drawings. Prior to locating sleeves, boxes and chases for roughing-in of conduit and equipment, the Contractor shall coordinate exact field location of the above items with other trades. In addition, check for exact direction of door swings so that local switches are properly located on the strike side.
- G. Install wall switches 48 inches [1200mm] above floor, OFF position down.
- H. Install wall dimmers 48 inches [1200mm] above floor; derate ganged dimmers as instructed by manufacturer; do not use common neutral.
- I. Install convenience receptacles 18 inches [450mm] above floor, and 6 inches [152mm] above counter backsplash or workbenches. Install specific-use receptacles at heights shown on the drawings.
- J. Label device plates with a permanent adhesive label listing panel and circuit feeding the wiring device.
- K. Test wiring devices for damaged conductors, high circuit resistance, poor connections, inadequate fault current path, defective devices, or similar problems using a portable receptacle tester. Correct circuit conditions, remove malfunctioning units and replace with new, and retest as specified above.
- L. Test GFCI devices for tripping values specified in UL 1436 and UL 943.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 29 11
MOTOR STARTERS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. All motor starters and variable speed motor controllers, including installation and connection (whether furnished with the equipment specified in other Divisions or otherwise), shall meet these specifications.

1.2 RELATED WORK

- A. Other sections which specify motor driven equipment, except elevator motor controllers.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one Section of Division 26.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS:
- B. Shop Drawings:
 - 1. Sufficient information, clearly presented, shall be included to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, dimensions, weights, mounting details, materials, running over current protection, size of enclosure, over current protection, wiring diagrams, starting characteristics, interlocking and accessories.
- C. Manuals:
 - 1. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets, wiring diagrams and information for ordering replacement parts.
 - a. Wiring diagrams shall have their terminals identified to facilitate installation, maintenance and operation.
 - b. Wiring diagrams shall indicate internal wiring for each item of equipment and interconnections between the items of equipment.
 - c. Elementary schematic diagrams shall be provided for clarity of operation.
 - 2. Two weeks prior to the project final inspection, submit four copies of the final updated maintenance and operating manual to the COTR.

- D. Certification: Two weeks prior to final inspection, unless otherwise noted, submit four copies of the following certifications to the COTR:
1. Certification that the equipment has been properly installed, adjusted, and tested.
 2. Certification by the manufacturer that medium voltage motor controller(s) conforms to the requirements of the drawings and specifications. This certification must be furnished to the COTR prior to shipping the controller(s) to the job site.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. Institute of Electrical and Electronic Engineers (IEEE):
- 519Recommended Practices and Requirements for
Harmonic Control in Electrical Power Systems
- C37.90.1Standard Surge Withstand Capability (SWC) Tests
for Protective Relays and Relay Systems
- C. National Electrical Manufacturers Association (NEMA):
- ICS 1Industrial Control and Systems General
Requirements
- ICS 1.1Safety Guidelines for the Application,
Installation and Maintenance of Solid State
Control
- ICS 2Industrial Control and Systems, Controllers,
Contactors and Overload Relays Rated 600 Volts
DC
- ICS 6Industrial Control and Systems Enclosures
- ICS 7Industrial Control and Systems Adjustable-Speed
Drives
- ICS 7.1Safety Standards for Construction and Guide for
Selection, Installation and Operation of
Adjustable-Speed Drive Systems
- D. National Fire Protection Association (NFPA):
- 70National Electrical Code (NEC)
- E. Underwriters Laboratories Inc. (UL):
- 508Industrial Control Equipment

PART 2 - PRODUCTS

2.1 MOTOR STARTERS, GENERAL

- A. Shall be in accordance with the requirements of the IEEE, NEC, NEMA (ICS 1, ICS 1.1, ICS 2, ICS 6, ICS 7 and ICS 7.1) and UL.

B. Shall have the following features:

1. Separately enclosed unless part of another assembly.
2. Circuit breakers and safety switches within the motor controller enclosures shall have external operating handles with lock-open padlocking provisions and shall indicate the ON and OFF positions.
3. Motor control circuits:
 - a. Shall operate at not more than 120 volts.
 - b. Shall be grounded except as follows:
 - 1) Where isolated control circuits are shown.
 - 2) Where manufacturers of equipment assemblies recommend that the control circuits be isolated.
 - c. Incorporate a separate, heavy duty, control transformer within each motor controller enclosure to provide the control voltage for each motor operating over 120 volts.
 - d. Incorporate over current protection for both primary and secondary windings of the control power transformers in accordance with the NEC.
4. Overload current protective devices:
 - a. Overload relay (solid state type).
 - b. One for each pole.
 - c. Manual reset on the door of each motor controller enclosure.
 - d. Correctly sized for the associated motor's rated full load current.
 - e. Check every motor controller after installation and verify that correct sizes of protective devices have been installed.
 - f. Deliver four copies of a summarized list to the COTR, which indicates and adequately identifies every motor controller installed. Include the catalog numbers for the correct sizes of protective devices for the motor controllers.
5. Hand-Off-Automatic (H-O-A) switch is required unless specifically stated on the drawings as not required for a particular starter. H-O-A switch is not required for manual motor starters.
6. Incorporate into each control circuit a 120-volt, solid state time delay relay (ON delay), minimum adjustable range from 0.3 to 10 minutes, with transient protection. Time delay relay is not required where H-O-A switch is not required.
7. Unless noted otherwise, equip with not less than two normally open and two normally closed auxiliary contacts. Provide green run pilot lights and H-O-A control devices as indicated, operable at front of enclosure without opening enclosure. Push buttons, selector switches, pilot lights, etc., shall be interchangeable.

8. Enclosures:

- a. Shall be the NEMA types shown on the drawings for the motor controllers and shall be the NEMA types which are the most suitable for the environmental conditions where the motor controllers are being installed.
- b. Doors mechanically interlocked to prevent opening unless the breaker or switch within the enclosure is open. Provision for padlock must be provided.
- c. Enclosures shall be primed and finish coated at the factory with the manufacturer's prime coat and standard finish.
- C. Motor controllers incorporated with equipment assemblies shall also be designed for the specific requirements of the assemblies.
- D. Additional requirements for specific motor controllers, as indicated in other sections, shall also apply.
- E. Provide a disconnecting means or safety switch near and within sight of each motor. Provide all wiring and conduit required to facilitate a complete installation.

2.2 MANUAL MOTOR STARTERS

- A. Shall be in accordance with applicable requirements of 2.1 above.
- B. Manual motor starters.
 - 1. Starters shall be general-purpose Class A, manually operated type with full voltage controller for induction motors, rated in horsepower.
 - 2. Units shall include overload and low voltage protection, red pilot light, NO auxiliary contact and toggle operator.
- C. Fractional horsepower manual motor starters.
 - 1. Starters shall be general-purpose Class A, manually operated with full voltage controller for fractional horsepower induction motors.
 - 2. Units shall include thermal overload protection, red pilot light and toggle operator.
- D. Motor starting switches.
 - 1. Switches shall be general-purpose Class A, manually operated type with full voltage controller for fractional horsepower induction motors.
 - 2. Units shall include thermal overload protection, red pilot light low voltage protection, NO auxiliary contact and toggle operator.

2.3 MAGNETIC MOTOR STARTERS

- A. Shall be in accordance with applicable requirements of 2.1 above.
- B. Starters shall be general-purpose, Class A magnetic controllers for induction motors rated in horsepower. Minimum size 0.

- C. Where combination motor starters are used, combine starter with protective or disconnect device in a common enclosure.
- D. Provide phase loss protection for each starter, with contacts to de-energize the starter upon loss of any phase.
- E. Unless otherwise indicated, provide full voltage non-reversing across-the-line mechanisms for motors less than 75 HP, closed by coil action and opened by gravity. For motors 75 HP and larger, provide reduced voltage starters. Equip starters with 120V AC coils and individual control transformer unless otherwise noted. Locate "reset" button to be accessible without opening the enclosure.

2.4 REDUCED VOLTAGE MOTOR CONTROLLERS

- A. Shall be in accordance with applicable portions of 2.1 above.
- B. Shall be installed as shown for motors on the contract drawings.
- C. Shall have closed circuit transition for the types which can incorporate such transition.
- D. Shall limit inrush currents to not more than 70 percent of the locked rotor currents.
- E. Provide phase loss protection for each starter, with contacts to de-energize the starter upon loss of any phase.
- F. Interrupting ratings shall be not less than the maximum short circuit currents available where the controllers are being installed or as indicated on the drawings.

2.5 VARIABLE SPEED MOTOR CONTROLLERS

- A. Shall be in accordance with applicable portions of 2.1 above.
- B. Shall be solid state, micro processor-based with adjustable frequency and voltage, three phase output capable of driving standard NEMA B design, three phase alternating current induction motors at full rated speed. The drives shall utilize a full wave bridge design incorporating diode rectifier circuitry with pulse width modulation (PWM). Other control techniques are not acceptable. Silicon controlled rectifiers (SCR) shall not be used in the rectifying circuitry. The drives shall be designed to be used on variable torque loads and shall be capable of providing sufficient torque to allow the motor to break away from rest upon first application of power.
- C. Unit shall be capable of operating within voltage parameters of plus 10 to minus 10 percent of line voltage, and be suitably rated for the full load amps of the maximum watts (HP) within its class.

D. Operating and Design Conditions:

1. Elevation: 2800 feet AMSL
2. Temperatures: Maximum +90°F Minimum -10°F
3. Relative Humidity: 95%
4. Drive Location: Non-air conditioned Building

E. Controllers shall have the following features:

1. Isolated power for control circuits.
2. Manually re-settable motor overload protection for each phase.
3. Adjustable current limiting circuitry to provide soft motor starting. Maximum starting current shall not exceed 200 percent of motor full load current.
4. Independent acceleration and deceleration time adjustment, manually adjustable from 2 to 30 seconds. (Set timers to the equipment manufacturer's recommended time in the above range.)
5. Provide 4 to 20 ma current follower circuitry for interface with mechanical sensor devices.
6. Automatic frequency adjustment from 20 Hz to 60 Hz.
7. Provide circuitry to initiate an orderly shutdown when any of the conditions listed below occur. The controller shall not be damaged by any of these electrical disturbances and shall automatically restart when the conditions are corrected. The drive shall be able to restart into a rotating motor operating in either the forward or reverse direction and matching that frequency.
 - a. Incorrect phase sequence.
 - b. Single phasing.
 - c. Over voltage in excess of 10 percent.
 - d. Under voltage in excess of 10 percent.
 - e. Running over current above 110 percent (shall not automatically reset for this condition.)
 - f. Instantaneous overcurrent above 150 percent (shall not automatically reset for this condition).
 - g. Surge voltage in excess of 1000 volts.
 - h. Short duration power outages of 12 cycles or less (i.e., distribution line switching, generator testing, and automatic transfer switch operations.)
8. Automatic Reset/Restart: Attempt three restarts after drive fault or on return of power after an interruption and before shutting down for manual reset or fault correction; adjustable delay time between restart attempts.

9. Power-Interruption Protection: To prevent motor from re-energizing after a power interruption until motor has stopped, unless "Bidirectional Autospeed Search" feature is available and engaged.
 10. Bidirectional Autospeed Search: Capable of starting VFC into rotating loads spinning in either direction and returning motor to set speed in proper direction, without causing damage to drive, motor, or load.
- F. Minimum efficiency shall be 95 percent at 100 percent speed and 85percent at 50 percent speed.
- G. The displacement power factor of the controller shall not be less than 95 percent under any speed or load condition.
- H. Controllers shall include a door interlocked fused safety disconnect switch or door interlocked circuit breaker switch which will disconnect all input power.
- I. Controller shall include a 3% line reactor, and RFI/EMI filter.
- J. The following accessories are to be door mounted:
1. AC Power on light.
 2. Ammeter (RMS motor current).
 3. HAND-OFF-AUTOMATIC switch.
 4. Manual speed control in HAND mode.
 5. System protection lights indicating that the system has shutdown and will not automatically restart.
 6. System protection light indicating that the system has shutdown but will restart when conditions return to normal.
 7. Manual variable speed controller by-pass switch.
 8. Diagnostic shutdown indicator lights for each shutdown condition.
 9. Provide two N.O. and two N.C. dry contacts rated 120 volts, 10 amperes, 60 HZ for remote indication of the following:
 - a. System shutdown with auto restart.
 - b. System shutdown without auto restart.
 - c. System running.
 10. Incorporate into each control circuit a 120-volt, time delay relay (ON delay), adjustable from 0.3-10 minutes, with transient protection. Provide transformer/s for the control circuit/s.
 11. Controller shall not add any current or voltage transients to the input AC power distribution system nor shall transients from other devices on the AC power distribution system affect the controller. Controllers shall be protected to comply with IEEE C37.90.1 and UL-508. Line noise and harmonic voltage distortion shall not exceed the values allowed by IEEE 519.

- K. Hardware and software to enable the BAS to monitor, control, and display controller status and alarms.
- L. Network Communications Ports: Ethernet and RS-422/485.
- M. Embedded BAS Protocols for Network Communications: As specified in Division 22.
- N. Bypass Operation: Manually transfers motor between power converter output and bypass circuit, manually, automatically, or both. Unit is capable of stable operation (starting, stopping, and running) with motor completely disconnected from power converter. Transfer between power converter and bypass contactor and retransfer shall only be allowed with the motor at zero speed.
- O. Bypass Controller: Provide contactor-style bypass, arranged to isolate the power converter input and output and permit safe testing of the power converter, both energized and de-energized, while motor is operating in bypass mode. Motor overload protection shall be provided.
 - 1. Bypass Contactor: Load-break NEMA-rated contactor.
 - 2. Isolating Switch: Non-load-break switch arranged to isolate power converter and permit safe troubleshooting and testing of the power converter, both energized and de-energized, while motor is operating in bypass mode; pad-lockable, door-mounted handle mechanism.

2.6 MOTOR CONTROL STATIONS

- A. Shall have the following features:
 - 1. Designed for suitably fulfilling the specific control functions for which each station is being installed.
 - 2. Coordinate the use of momentary contacts and maintained contacts with the complete motor control systems to insure safety for people and equipment.
 - 3. Each station shall have two pilot lights behind red and green jewels and a circuit to its motor controller. Connect the lamps so they will be energized as follows:
 - a. Red while the motor is running.
 - b. Green while the motor is stopped.
 - 4. Where two or more stations are mounted adjacent to each other, install a common wall plate, except where the designs of the stations make such common plates impracticable.
 - 5. Identify each station with a permanently attached individual nameplate, of laminated black phenolic resin with a white core and engraved lettering not less than 6 mm (1/4-inch) high. Identify the motor by its number or other designation and indicate the function fulfilled by the motor.

B. Components of Motor Control Circuits:

1. Shall also be designed and arranged so that accidental faulting or grounding of the control conductors will not be able to start the motors.
2. Use of locking type STOP pushbuttons or switches, which cause motors to restart automatically when the pushbuttons or switches are released, will not be permitted.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install motor control equipment in accordance with manufacturer's recommendations, the NEC, NEMA and as shown on the drawings.
- B. Furnish and install heater elements in motor starters and to match the installed motor characteristics. Submit a list of all motors listing motor nameplate rating and heater element installed.
- C. Motor Data: Provide neatly-typed label inside each motor starter enclosure door identifying motor served, nameplate horsepower, full load amperes, code letter, service factor, voltage/phase rating and heater element installed.
- D. Connect hand-off auto selector switches so that automatic control only is by-passed in "manual" position and any safety controls are not by-passed.
- E. Install manual motor starters in flush enclosures in finished areas.
- F. Examine control diagrams indicated before ordering motor controllers. Should conflicting data exist in specifications, drawings and diagrams, request corrected data prior to placing orders.

3.2 ADJUSTING

- A. Set field-adjustable switches, auxiliary relays, time-delay relays, timers, and overload-relay pickup and trip ranges.
- B. Adjust overload-relay heaters or settings if power factor correction capacitors are connected to the load side of the overload relays.
- C. Adjust trip settings of MCPs and thermal-magnetic circuit breakers with adjustable instantaneous trip elements. Initially adjust at six times the motor nameplate full-load ampere ratings and attempt to start motors several times, allowing for motor cooldown between starts. If tripping occurs on motor inrush, adjust settings in increments until motors start without tripping. Do not exceed eight times the motor full-load amperes (or 11 times for NEMA Premium Efficient motors if required). Where these maximum settings do not allow starting of a motor, notify COTR before increasing settings.
- D. Set the taps on reduced-voltage autotransformer controllers at 50 percent.

- E. In reduced-voltage solid-state controllers, set field-adjustable switches and program microprocessors for required start and stop sequences.

3.3 ACCEPTANCE CHECKS AND TESTS

- A. Perform in accordance with the manufacturer's recommendations. Include the following visual and mechanical inspections and electrical tests:
 - 1. Visual and Mechanical Inspection
 - a. Compare equipment nameplate data with specifications and approved shop drawings.
 - b. Inspect physical, electrical, and mechanical condition.
 - c. Inspect contactors.
 - d. Clean motor starters and variable speed motor controllers.
 - e. Verify overload element ratings are correct for their applications.
 - f. If motor-running protection is provided by fuses, verify correct fuse rating.
 - g. Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer's published data.
 - 2. Variable speed motor controllers:
 - a. Final programming and connections to variable speed motor controllers shall be by a factory-trained technician. Set all programmable functions of the variable speed motor controllers to meet the requirements and conditions of use.
 - b. Test all control and safety features of the variable frequency drive.

3.4 FOLLOW-UP VERIFICATION

- A. Upon completion of acceptance checks, settings, and tests, the Contractor shall show by demonstration in service that the motor starters and variable speed motor controllers are in good operating condition and properly performing the intended functions.

3.5 SPARE PARTS

- A. Two weeks prior to the final inspection, provide one complete set of spare fuses (including heater elements) for each starter/controller installed on this project.

- - - E N D - - -

SECTION 26 29 21
DISCONNECT SWITCHES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, and connection of low voltage disconnect switches.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES 600 VOLTS AND BELOW: Cables and wiring.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground faults.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for cables and wiring.
- E. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS: Motor rated toggle switches.

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. Shop Drawings:
 - 1. Clearly present sufficient information to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, dimensions, mounting details, materials, enclosure types, and fuse types and classes.
 - 3. Show the specific switch and fuse proposed for each specific piece of equipment or circuit.
- C. Manuals:
 - 1. Provide complete maintenance and operating manuals for disconnect switches, including technical data sheets, wiring diagrams, and information for ordering replacement parts. Deliver four copies to the COTR two weeks prior to final inspection.
 - 2. Terminals on wiring diagrams shall be identified to facilitate maintenance and operation.
 - 3. Wiring diagrams shall indicate internal wiring and any interlocking.

- D. Certifications: Two weeks prior to the final inspection, submit four copies of the following certifications to the COTR:
1. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
 2. Certification by the contractor that the materials have been properly installed, connected, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. National Electrical Manufacturers Association (NEMA):
- FU 1-07Low Voltage Cartridge Fuses
- KS 1-06Enclosed and Miscellaneous Distribution
Equipment Switches (600 Volts Maximum)
- C. National Fire Protection Association (NFPA):
- 70-08National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
- 98-04Enclosed and Dead-Front Switches
- 248-00Low Voltage Fuses
- 977-94Fused Power-Circuit Devices

PART 2 - PRODUCTS

2.1 LOW VOLTAGE FUSIBLE SWITCHES RATED 600 AMPERES AND LESS

- A. In accordance with UL 98, NEMA KS1, and NEC.
- B. Shall have NEMA classification General Duty (GD) for 240 V switches and NEMA classification Heavy Duty (HD) for 480 V switches.
- C. Shall be HP rated.
- D. Shall have the following features:
 1. Switch mechanism shall be the quick-make, quick-break type.
 2. Copper blades, visible in the OFF position.
 3. An arc chute for each pole.
 4. External operating handle shall indicate ON and OFF position and have lock-open padlocking provisions.
 5. Mechanical interlock shall permit opening of the door only when the switch is in the OFF position, defeatable to permit inspection.
 6. Fuse holders for the sizes and types of fuses specified.
 7. Solid neutral for each switch being installed in a circuit which includes a neutral conductor.
 8. Ground lugs for each ground conductor.

9. Enclosures:

- a. Shall be the NEMA types shown on the drawings for the switches.
- b. Where the types of switch enclosures are not shown, they shall be the NEMA types most suitable for the ambient environmental conditions. Unless otherwise indicated on the plans, all outdoor switches shall be NEMA 3R.
- c. Shall be finished with manufacturer's standard gray baked enamel paint over pretreated steel (for the type of enclosure required).

2.2 LOW VOLTAGE UNFUSED SWITCHES RATED 600 AMPERES AND LESS

- A. Shall be the same as Low Voltage Fusible Switches Rated 600 Amperes and Less, but without provisions for fuses.

2.3 MOTOR RATED TOGGLE SWITCHES

- A. Refer to Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.

2.4 LOW VOLTAGE CARTRIDGE FUSES

- A. In accordance with NEMA FU1.
- B. Motor Branch Circuits: Class RK1, time delay.
- C. Other Branch Circuits: Class RK5, time delay.
- D. Control Circuits: Class CC, fast acting.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install disconnect switches in accordance with the NEC and as shown on the drawings.
- B. Fusible disconnect switches shall be furnished complete with fuses. Arrange fuses such that rating information is readable without removing the fuse.

3.2 SPARE PARTS

Two weeks prior to the final inspection, furnish one complete set of spare fuses for each fusible disconnect switch installed on the project. Deliver the spare fuses to the COTR.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 51 00
INTERIOR LIGHTING

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies the furnishing, installation and connection of the interior lighting systems.

1.2 RELATED WORK

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Requirement for seismic restraint for nonstructural Components.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.
- C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.
- E. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

1.3 QUALITY ASSURANCE

- A. Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Product Data: For each type of lighting fixture (luminaire) designated on the LIGHTING FIXTURE SCHEDULE, arranged in order of fixture designation, submit the following information.
 - 1. Material and construction details include information on housing, optics system and lens/diffuser.
 - 2. Physical dimensions and description.
 - 3. Wiring schematic and connection diagram.
 - 4. Installation details.
 - 5. Energy efficiency data.
 - 6. Photometric data based on laboratory tests complying with IESNA Lighting Measurements, testing and calculation guides.
 - 7. Lamp data including lumen output (initial and mean), color rendition index (CRI), rated life (hours) and color temperature (degrees Kelvin).

8. Ballast data including ballast type, starting method, ambient temperature, ballast factor, sound rating, system watts and total harmonic distortion (THD).

C. Manuals:

1. Submit, simultaneously with the shop drawings companion copies of complete maintenance and operating manuals including technical data sheets, and information for ordering replacement parts.
2. Two weeks prior to the final inspection, submit four copies of the final updated maintenance and operating manuals, including any changes, to the COTR.

D. Certifications:

1. Two weeks prior to final inspection, submit four copies of the following certifications to the COTR:
 - a. Certification by the Contractor that the equipment has been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. Institute of Electrical and Electronic Engineers (IEEE):
 - C62.41-91Guide on the Surge Environment in Low Voltage (1000V and less) AC Power Circuits
- C. National Fire Protection Association (NFPA):
 - 70National Electrical Code (NEC)
 - 101Life Safety Code
- D. National Electrical Manufacturer's Association (NEMA):
 - C82.1-97Ballasts for Fluorescent Lamps - Specifications
 - C82.2-02Method of Measurement of Fluorescent Lamp Ballasts
 - C82.4-02Ballasts for High-Intensity-Discharge and Low-Pressure Sodium Lamps
 - C82.11-02High Frequency Fluorescent Lamp Ballasts
- E. Underwriters Laboratories, Inc. (UL):
 - 496-96Edison-Base Lampholders
 - 542-99Lampholders, Starters, and Starter Holders for Fluorescent Lamps
 - 844-95Electric Lighting Fixtures for Use in Hazardous (Classified) Locations
 - 924-95Emergency Lighting and Power Equipment
 - 935-01Fluorescent-Lamp Ballasts
 - 1029-94High-Intensity-Discharge Lamp Ballasts

1029A-06.....	Ignitors and Related Auxiliaries for HID Lamp Ballasts
1598-00	Luminaires
1574-04.....	Standard for Track Lighting Systems
2108-04.....	Standard for Low-Voltage Lighting Systems
8750-08.....	Light Emitting Diode (LED) Light Sources for Use in Lighting Products

F. Federal Communications Commission (FCC):

Code of Federal Regulations (CFR), Title 47, Part 18

PART 2 - PRODUCTS

2.1 LIGHTING FIXTURES (LUMINAIRES)

- A. Shall be in accordance with NFPA 70 and UL 1598, as shown on drawings, and as specified.
- B. Sheet Metal:
 - 1. Shall be formed to prevent warping and sagging. Housing, trim and lens frame shall be true, straight (unless intentionally curved) and parallel to each other as designed.
 - 2. Wireways and fittings shall be free of burrs and sharp edges and shall accommodate internal and branch circuit wiring without damage to the wiring.
 - 3. When installed, any exposed fixture housing surface, trim frame, door frame and lens frame shall be free of light leaks; lens doors shall close in a light tight manner.
 - 4. Hinged door closure frames shall operate smoothly without binding when the fixture is in the installed position, latches shall function easily by finger action without the use of tools.
- C. Ballasts shall be serviceable while the fixture is in its normally installed position, and shall not be mounted to removable reflectors or wireway covers unless so specified.
- D. Lamp Sockets:
 - 1. Fluorescent: Lampholder contacts shall be the biting edge type or phosphorous-bronze with silver flash contact surface type and shall conform to the applicable requirements of UL 542. Lamp holders for bi-pin lamps shall be of the telescoping compression type, or of the single slot entry type requiring a one-quarter turn of the lamp after insertion.
 - 2. High Intensity Discharge (H.I.D.): Shall have porcelain enclosures.
- E. Recessed fixtures mounted in an insulated ceiling shall be listed for use in insulated ceilings.

- F. Mechanical Safety: Lighting fixture closures (lens doors, trim frame, hinged housings, etc.) shall be retained in a secure manner by captive screws, chains, captive hinges or fasteners such that they cannot be accidentally dislodged during normal operation or routine maintenance.
- G. Metal Finishes:
1. The manufacturer shall apply standard finish (unless otherwise specified) over a corrosion resistant primer, after cleaning to free the metal surfaces of rust, grease, dirt and other deposits. Edges of pre-finished sheet metal exposed during forming, stamping or shearing processes shall be finished in a similar corrosion resistant manner to match the adjacent surface(s). Fixture finish shall be free of stains or evidence of rusting, blistering, or flaking, and shall be applied after fabrication.
 2. Interior light reflecting finishes shall be white with not less than 85 percent reflectances, except where otherwise shown on the drawing.
 3. Exterior finishes shall be as shown on the drawings.
- H. Lighting fixtures shall have a specific means for grounding metallic wireways and housings to an equipment grounding conductor.
- I. Light Transmitting Components for Fluorescent Fixtures:
1. Shall be 100 percent virgin acrylic.
 2. Flat lens panels shall have not less than 1/8 inch [3.2mm] of average thickness. The average thickness shall be determined by adding the maximum thickness to the minimum unpenetrated thickness and dividing the sum by 2.
 3. Unless otherwise specified, lenses, diffusers and louvers shall be retained firmly in a metal frame by clips or clamping ring in such a manner as to allow expansion and contraction of the lens without distortion or cracking.
- J. Lighting fixtures in hazardous areas shall be suitable for installation in Class and Group areas as defined in NFPA 70, and shall comply with UL 844.
- K. Compact fluorescent fixtures shall be manufactured specifically for compact fluorescent lamps with ballast integral to the fixture. Assemblies designed to retrofit incandescent fixtures are prohibited except when specifically indicated for renovation of existing fixtures (not the lamp). Fixtures shall be designed for lamps as specified.

2.2 BALLASTS

- A. Linear Fluorescent Lamp Ballasts: Multi-voltage (120 - 277V) electronic programmed-start type, complying with UL 935 and with ANSI C 82.11, designed for type and quantity of lamps indicated. Ballast shall be designed for full light output unless dimmer or bi-level control is indicated; including the following features:
1. Lamp end-of-life detection and shutdown circuit (T5 lamps only).
 2. Automatic lamp starting after lamp replacement.
 3. Sound Rating: Class A.
 4. Total Harmonic Distortion Rating: 10 percent or less.
 5. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
 6. Operating Frequency: 20 kHz or higher.
 7. Lamp Current Crest Factor: 1.7 or less.
 8. Ballast Factor: 0.87 or higher unless otherwise indicated.
 9. Power Factor: 0.98 or higher.
 10. Interference: Comply with 47 CFT 18, Ch.1, Subpart C, for limitations on electromagnetic and radio-frequency interference for non-consumer equipment.
 11. To facilitate multi-level lamp switching, lamps within fixture shall be wired with the outermost lamp at both sides of the fixture on the same ballast, the next inward pair on another ballast and so on to the innermost lamp (or pair of lamps). Within a given room, each switch shall uniformly control the same corresponding lamp (or lamp pairs) in all fixture units that are being controlled.
 12. Where three-lamp fixtures are indicated, unless switching arrangements dictate otherwise, utilize a common two-lamp ballast to operate the center lamp in pairs of adjacent units that are mounted in a continuous row. The ballast fixture and slave-lamp fixture shall be factory wired with leads or plug devices to facilitate this circuiting. Individually mounted fixtures and the odd fixture in a row shall utilize a single-lamp ballast for operation of the center lamp.
 13. Dimming ballasts shall be as per above, except dimmable from 100% to 10% of rated lamp lumens.

- B. Compact Fluorescent Lamp Ballasts:** Multi-voltage (120 - 277V), electronic-programmed rapid-start type, complying with UL 935 and with ANSI C 82.11, designed for type and quantity of lamps indicated. Ballast shall be designed for full light output unless dimmer or bi-level control is indicated; including the following features:
1. Lamp end-of-life detection and shutdown circuit.
 2. Automatic lamp starting after lamp replacement.
 3. Sound Rating: Class A.
 4. Total Harmonic Distortion Rating: 10 percent or less.
 5. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
 6. Operating Frequency: 20 kHz or higher.
 7. Lamp Current Crest Factor: 1.7 or less.
 8. Ballast Factor: 0.95 or higher unless otherwise indicated.
 9. Power Factor: 0.98 or higher.
 10. Interference: Comply with 47 CFR 18, Ch. 1, Subpart C, for limitations on electromagnetic and radio-frequency interference for non-consumer equipment.
 11. Dimming ballasts shall be as per above, except dimmable from 100% to 10% of rated lamp lumens.

2.3 LAMPS

- A. Linear and U-shaped T5 and T8 Fluorescent Lamps:**
1. Rapid start fluorescent lamps shall comply with ANSI C78.1; and instant-start lamps shall comply with ANSI C78.3.
 2. Chromacity of fluorescent lamps shall comply with ANSI C78.376.
 3. Except as indicated below, lamps shall be low-mercury energy saving type, have a color temperature between 3500° and 4100°K, a Color Rendering Index (CRI) of greater than 70, average rated life of 20,000 hours, and be suitable for use with dimming ballasts, unless otherwise indicated. Low mercury lamps shall have passed the EPA Toxicity Characteristic Leachate Procedure (TCLP) for mercury by using the lamp sample preparation procedure described in NEMA LL 1.
 - a. Over the beds in Intensive Care, Coronary Care, Recovery, Life Support, and Observation and Treatment areas; Electromyographic, Autopsy (Necropsy), Surgery, and certain dental rooms (Examination, Oral Hygiene, Oral Surgery, Recovery, Labs, Treatment, and X-Ray) use color corrected lamps having a CRI of 85 or above and a correlated color temperature between 5000 and 6000°K.
 - b. Other areas as indicated on the drawings.

B. Compact Fluorescent Lamps:

1. T4, CRI 80 (minimum), color temperature 3500 K, and suitable for use with dimming ballasts, unless otherwise indicated.

C. Long Twin-Tube Fluorescent Lamps:

1. T5, CRI 80 (minimum), color temperature between 3500° and 4100°K, 20,000 hours average rated life.

2.4 EXIT LIGHT FIXTURES

A. Exit light fixtures shall meet applicable requirements of NFPA 101 and UL 924.

B. Housing and Canopy:

1. Shall be made of die-cast aluminum.
2. Optional steel housing shall be a minimum 20 gauge thick or equivalent strength aluminum.
3. Steel housing shall have baked enamel over corrosion resistant, matte black or ivory white primer.

C. Door frame shall be cast or extruded aluminum, and hinged with latch.

D. Finish shall be satin or fine-grain brushed aluminum.

E. There shall be no radioactive material used in the fixtures.

F. Fixtures:

1. Maximum fixture wattage shall be 1 watt or less.
2. Inscription panels shall be cast or stamped aluminum a minimum of 0.090 inch [2.25mm] thick, stenciled with 6 inch [150mm] high letters, baked with red color stable plastic or fiberglass. Lamps shall be luminous Light Emitting Diodes (LED) mounted in center of letters on red color stable plastic or fiberglass. The LED shall be rated minimum 25 years life.
3. Double-Faced Fixtures: Provide double-faced fixtures where required or as shown on drawings.
4. Directional Arrows: Provide directional arrows as part of the inscription panel where required or as shown on drawings. Directional arrows shall be the "chevron-type" of similar size and width as the letters and meet the requirements of NFPA 101.

G. Voltages: Refer to Lighting Fixture Schedule.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, manufacturer's instructions and as shown on the drawings or specified.

B. Align, mount and level the lighting fixtures uniformly.

C. Lighting Fixture Supports:

1. Shall provide support for all of the fixtures. Supports may be anchored to channels of the ceiling construction, to the structural slab or to structural members within a partition, or above a suspended ceiling.
2. Shall maintain the fixture positions after cleaning and relamping.
3. Shall support the lighting fixtures without causing the ceiling or partition to deflect.
4. Hardware for recessed fluorescent fixtures:
 - a. Where the suspended ceiling system is supported at the four corners of the fixture opening, hardware devices shall clamp the fixture to the ceiling system structural members, or plaster frame at not less than four points in such a manner as to resist spreading of the support members and safely lock the fixture into the ceiling system.
 - b. Where the suspended ceiling system is not supported at the four corners of the fixture opening, hardware devices shall independently support the fixture from the building structure at four points.
5. Hardware for surface mounting fluorescent fixtures to suspended ceilings:
 - a. In addition to being secured to any required outlet box, fixtures shall be bolted to a grid ceiling system at four points spaced near the corners of each fixture. The bolts shall be not less than 1/4 inch [6mm] secured to channel members attached to and spanning the tops of the ceiling structural grid members. Non-turning studs may be attached to the ceiling structural grid members or spanning channels by special clips designed for the purpose, provided they lock into place and require simple tools for removal.
 - b. In addition to being secured to any required outlet box, fixtures shall be bolted to ceiling structural members at four points spaced near the corners of each fixture. Pre-positioned 1/4 inch [6mm] studs or threaded plaster inserts secured to ceiling structural members shall be used to bolt the fixtures to the ceiling. In lieu of the above, 1/4 inch [6mm] toggle bolts may be used on new or existing ceiling provided the plaster and lath can safely support the fixtures without sagging or cracking.

D. Furnish and install the specified lamps for all lighting fixtures installed and all existing lighting fixtures reinstalled under this project.

- E. Coordinate between the electrical and ceiling trades to ascertain that approved lighting fixtures are furnished in the proper sizes and installed with the proper devices (hangers, clips, trim frames, flanges), to match the ceiling system being installed.
- F. Bond lighting fixtures and metal accessories to the grounding system as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.
- G. Exercise electronic dimming ballasts over full range of dimming capability by operating the control devices(s) in the presence of the COTR. Observe for visually detectable flicker over full dimming range.
- H. Burn-in all lamps that require specific aging period to operate properly, prior to occupancy by Government. Burn-in period to be 40 hours minimum, unless a lesser period is specifically recommended by lamp manufacturer. Burn-in fluorescent and compact fluorescent lamps intended to be dimmed, for at least 100 hours at full voltage. Replace any lamps and ballasts which fail during burn-in.
- I. At completion of project, relamp/reballast fixtures which have failed lamps/ballasts. Clean fixtures, lenses, diffusers and louvers that have accumulated dust/dirt/fingerprints during construction. Replace damaged lenses, diffusers and louvers with new.
- J. Dispose of lamps per requirements of Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 27 05 11
REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This Section, Requirements for Communications Installations, applies to all sections of Division 27.
- B. Furnish and install communications cabling, systems, equipment, and accessories in accordance with the specifications and drawings. Capacities and ratings of transformers, cable, and other items and arrangements for the specified items are shown on drawings.

1.2 MINIMUM REQUIREMENTS

- A. References to industry and trade association standards and codes are minimum installation requirement standards.
- B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.3 QUALIFICATIONS (PRODUCTS AND SERVICES)

- A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.
- B. Product Qualification:
 - 1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
 - 2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.
- C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.4 MANUFACTURED PRODUCTS

- A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.
- B. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.
- C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
 2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
 3. Components shall be compatible with each other and with the total assembly for the intended service.
 4. Constituent parts which are similar shall be the product of a single manufacturer.
- D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.
- E. When Factory Testing Is Specified:
1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the COTR a minimum of 15 working days prior to the manufacturers making the factory tests.
 2. Four copies of certified test reports containing all test data shall be furnished to the COTR prior to final inspection and not more than 90 days after completion of the tests.
 3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.5 EQUIPMENT REQUIREMENTS

Where variations from the contract requirements are requested in accordance with the GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

1.6 EQUIPMENT PROTECTION

- A. Equipment and materials shall be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:
1. During installation, enclosures, equipment, controls, controllers, circuit protective devices, and other like items, shall be protected against entry of foreign matter; and be vacuum cleaned both inside and outside before testing and operating and repainting if required.
 2. Damaged equipment shall be, as determined by the COTR, placed in first class operating condition or be returned to the source of supply for repair or replacement.
 3. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.

4. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.7 WORK PERFORMANCE

- A. Job site safety and worker safety is the responsibility of the contractor.
- B. For work on existing stations, arrange, phase and perform work to assure communications service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- C. New work shall be installed and connected to existing work neatly and carefully. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- D. Coordinate location of equipment and pathways with other trades to minimize interferences. See the GENERAL CONDITIONS.

1.8 EQUIPMENT INSTALLATION AND REQUIREMENTS

- A. Equipment location shall be as close as practical to locations shown on the drawings.
- B. Inaccessible Equipment:
 1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
 2. "Conveniently accessible" is defined as being capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

1.9 EQUIPMENT IDENTIFICATION

- A. Install an identification sign which clearly indicates information required for use and maintenance of equipment.
- B. Nameplates shall be laminated black phenolic resin with a white core with engraved lettering, a minimum of 6 mm (1/4 inch) high. Secure nameplates with screws. Nameplates that are furnished by manufacturer as a standard catalog item, or where other method of identification is herein specified, are exceptions.

1.10 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

- B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage, or installation of equipment or material which has not had prior approval will not be permitted at the job site.
- C. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings, and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted.
- D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
 - 1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
 - 2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
 - 3. Submit each section separately.
- E. The submittals shall include the following:
 - 1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.
 - 2. Elementary and interconnection wiring diagrams for communication and signal systems, control system and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
 - 3. Parts list which shall include those replacement parts recommended by the equipment manufacturer, quantity of parts, current price and availability of each part.
- F. Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.
 - 1. Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.
 - 2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of

- each subcontractor installing the system or equipment and the local representatives for the system or equipment.
3. Provide a "Table of Contents" and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
 4. The manuals shall include:
 - a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
 - b. A control sequence describing start-up, operation, and shutdown.
 - c. Description of the function of each principal item of equipment.
 - d. Installation and maintenance instructions.
 - e. Safety precautions.
 - f. Diagrams and illustrations.
 - g. Testing methods.
 - h. Performance data.
 - i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.
 - j. Appendix; list qualified permanent servicing organizations for support of the equipment, including addresses and certified qualifications.
 - G. Approvals will be based on complete submission of manuals together with shop drawings.
 - H. After approval and prior to installation, furnish the COTR with one sample of each of the following:
 1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
 2. Each type of conduit and pathway coupling, bushing and termination fitting.
 3. Raceway and pathway hangers, clamps and supports.
 4. Duct sealing compound.
 - I. In addition to the requirement of SUBMITTALS, the VA reserves the right to request the manufacturer to arrange for a VA representative to see typical active systems in operation, when there has been no prior experience with the manufacturer or the type of equipment being submitted.

1.11 SINGULAR NUMBER

Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

1.12 TRAINING

- A. Training shall be provided in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
- B. Training shall be provided for the particular equipment or system as required in each associated specification.
- C. A training schedule shall be developed and submitted by the contractor and approved by the Resident Engineer at least 30 days prior to the planned training.

- - - E N D - - -

SECTION 27 05 26
GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies general grounding and bonding requirements of telecommunication installations for equipment operations.
- B. "Grounding electrode system" refers to all electrodes required by NEC, as well as including made, supplementary, telecommunications system grounding electrodes.
- C. The terms "connect" and "bond" are used interchangeably in this specification and have the same meaning.

1.2 RELATED WORK

- A. Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 27.
- B. Section 27 10 00, STRUCTURED CABLING: Low Voltage power and lighting wiring.

1.3 SUBMITTALS

- A. Submit in accordance with Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.
- B. Shop Drawings:
 - 1. Sufficient information, clearly presented, shall be included to determine compliance with drawings and specifications.
 - 2. Include the location of system grounding electrode connections and the routing of aboveground and underground grounding electrode conductors.
- C. Test Reports: Provide certified test reports of ground resistance.
- D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the COTR:
 - 1. Certification that the materials and installation is in accordance with the drawings and specifications.
 - 2. Certification, by the Contractor, that the complete installation has been properly installed and tested.

1.4 APPLICABLE PUBLICATIONS

Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

- A. American Society for Testing and Materials (ASTM):
 - B1-2001Standard Specification for Hard-Drawn Copper Wire
 - B8-2004Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
- B. Institute of Electrical and Electronics Engineers, Inc. (IEEE):
 - 81-1983IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System
- C. National Fire Protection Association (NFPA):
 - 70-2005National Electrical Code (NEC)
- D. Telecommunications Industry Association, (TIA)
 - J-STD-607-A-2002Commercial Building Grounding (Earthing) and Bonding Requirements for Telecommunications
- E. Underwriters Laboratories, Inc. (UL):
 - 44-2005Thermoset-Insulated Wires and Cables
 - 83-2003Thermoplastic-Insulated Wires and Cables
 - 467-2004Grounding and Bonding Equipment
 - 486A-486B-2003Wire Connectors

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

- A. For equipment grounding conductors, stranded wire is required for sizes #12 and larger. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes 25 mm² (4 AWG) and larger shall be permitted to be identified per NEC.
- B. Stranded wire is required for sizes #12 and larger.
- C. Isolated Power System: Type XHHW-2 insulation with a dielectric constant of 3.5 or less.
- D. Telecom System Grounding Riser Conductor: Telecommunications Grounding Riser shall be in accordance with J STD-607A. Use a minimum 50mm² (1/0 AWG) insulated stranded copper grounding conductor unless indicated otherwise.

2.2 GROUND RODS

- A. Copper clad steel, 19 mm (3/4-inch) diameter by 3000 mm (10 feet) long, conforming to UL 467.
- B. Quantity of rods shall be as required to obtain the specified ground resistance.

2.3 SPLICES AND TERMINATION COMPONENTS

Components shall meet or exceed UL 467 and be clearly marked with the manufacturer, catalog number, and permitted conductor size(s).

2.4 TELECOMMUNICATION SYSTEM GROUND BUSBARS

- A. Provide solid copper busbar, pre-drilled from two-hole lug connections with a minimum thickness of 6 mm (1/4 inch) for wall and backboard mounting using standard insulators sized as follows:
 - 1. Room Signal Grounding: 300 mm x 100 mm (12 inches x 4 inch).
 - 2. Master Signal Ground: 600 mm x 100 mm (24 inches x 4 inch).

2.5 GROUND CONNECTIONS

- A. Below Grade: Exothermic-welded type connectors.
- B. Above Grade:
 - 1. Bonding Jumpers: compression type connectors, using zinc-plated fasteners and external tooth lockwashers.
 - 2. Ground Busbars: Two-hole compression type lugs using tin-plated copper or copper alloy bolts and nuts.
 - 3. Rack and Cabinet Ground Bars: one-hole compression-type lugs using zinc-plated or copper alloy fasteners.
- C. Cable Shields: Make ground connections to multipair communications cables with metallic shields using shield bonding connectors with screw stud connection.

2.6 EQUIPMENT RACK AND CABINET GROUND BARS

Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks with minimum dimensions of 4 mm thick by 19 mm wide (3/8 inch x 3/4 inch).

2.7 GROUND TERMINAL BLOCKS

At any equipment mounting location (e.g. backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide screw lug-type terminal blocks.

PART 3 - EXECUTION

3.1 GENERAL

- A. Ground in accordance with the NEC, as shown on drawings, and as hereinafter specified.
- B. Equipment Grounding: Metallic structures (including ductwork and building steel), enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits shall be bonded and grounded.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

Make grounding connections, which are buried or otherwise normally inaccessible (except connections for which periodic testing access is required) by exothermic weld.

3.3 SECONDARY EQUIPMENT AND CIRCUITS

- A. Main Bonding Jumper: Bond the secondary service neutral to the ground bus in the service equipment.
- B. Metallic Piping, Building Steel, and Supplemental Electrode(s):
 - 1. Provide a grounding electrode conductor sized per NEC between the service equipment ground bus and all metallic water and gas pipe systems, building steel, and supplemental or made electrodes. Jumper insulating joints in the metallic piping. All connections to electrodes shall be made with fittings that conform to UL 467.
 - 2. Provide a supplemental ground electrode and bond to the grounding electrode system.
- C. Conduit Systems:
 - 1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.
 - 2. Non-metallic conduit systems shall contain an equipment grounding conductor, except that non-metallic feeder conduits which carry a grounded conductor from exterior transformers to interior or building-mounted service entrance equipment need not contain an equipment grounding conductor.
 - 3. Conduit containing only a grounding conductor, and which is provided for mechanical protection of the conductor, shall be bonded to that conductor at the entrance and exit from the conduit.
- D. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders and power and lighting branch circuits.
- E. Boxes, Cabinets, Enclosures, and Panelboards:
 - 1. Bond the equipment grounding conductor to each pullbox, junction box, outlet box, device box, cabinets, and other enclosures through which the conductor passes (except for special grounding systems for intensive care units and other critical units shown).
 - 2. Provide lugs in each box and enclosure for equipment grounding conductor termination.
 - 3. Provide ground bars in panelboards, bolted to the housing, with sufficient lugs to terminate the equipment grounding conductors.

- F. Receptacles shall not be grounded through their mounting screws. Ground with a jumper from the receptacle green ground terminal to the device box ground screw and the branch circuit equipment grounding conductor.

3.4 CORROSION INHIBITORS

When making ground and ground bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.5 CONDUCTIVE PIPING

- A. Bond all conductive piping systems, interior and exterior, to the building to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.
- B. In operating rooms and at intensive care and coronary care type beds, bond the gases and suction piping, at the outlets, directly to the room or patient ground bus.

3.6 TELECOMMUNICATIONS SYSTEM

- A. Bond telecommunications system grounding equipment to the electrical grounding electrode system.
- B. Furnish and install all wire and hardware required to properly ground, bond and connect communications raceway, cable tray, metallic cable shields, and equipment to a ground source.
- C. Ground bonding jumpers shall be continuous with no splices. Use the shortest length of bonding jumper possible.
- D. Provide ground paths that are permanent and continuous with a resistance of 1 ohm or less from raceway, cable tray, and equipment connections to the building grounding electrode. The resistance across individual bonding connections shall be 10 milli ohms or less.
- E. Below-Grade Grounding Connections: When making exothermic welds, wire brush or file the point of contact to a bare metal surface. Use exothermic welding cartridges and molds in accordance with the manufacturer's recommendations. After welds have been made and cooled, brush slag from the weld area and thoroughly cleaned the joint area. Notify the Resident Engineer prior to backfilling any ground connections.
- F. Above-Grade Grounding Connections: When making bolted or screwed connections to attach bonding jumpers, remove paint to expose the entire contact surface by grinding where necessary; thoroughly clean all connector, plate and other contact surfaces; and apply an appropriate corrosion inhibitor to all surfaces before joining.

G. Bonding Jumpers:

1. Use insulated ground wire of the size and type shown on the Drawings or use a minimum of 16 mm² (6 AWG) insulated copper wire.
2. Assemble bonding jumpers using insulated ground wire terminated with compression connectors.
3. Use compression connectors of proper size for conductors specified. Use connector manufacturer's compression tool.

H. Bonding Jumper Fasteners:

1. Conduit: Fasten bonding jumpers using screw lugs on grounding bushings or conduit strut clamps, or the clamp pads on push-type conduit fasteners. When screw lug connection to a conduit strut clamp is not possible, fasten the plain end of a bonding jumper wire by slipping the plain end under the conduit strut clamp pad; tighten the clamp screw firmly. Where appropriate, use zinc-plated external tooth lockwashers.
2. Wireway and Cable Tray: Fasten bonding jumpers using zinc-plated bolts, external tooth lockwashers, and nuts. Install protective cover, e.g., zinc-plated acorn nuts on any bolts extending into wireway or cable tray to prevent cable damage.
3. Ground Plates and Busbars: Fasten bonding jumpers using two-hole compression lugs. Use tin-plated copper or copper alloy bolts, external tooth lockwashers, and nuts.
4. Unistrut and Raised Floor Stringers: Fasten bonding jumpers using zinc-plated, self-drill screws and external tooth lockwashers.

3.7 COMMUNICATION ROOM GROUNDING**A. Telecommunications Ground Busbars:**

1. Provide communications room telecommunications ground busbar hardware at 950 mm (18 inches) at locations indicated on the Drawings.
2. Connect the telecommunications room ground busbars to other room grounding busbars as indicated on the Grounding Riser diagram.

B. Telephone-Type Cable Rack Systems: aluminum pan installed on telephone-type cable rack serves as the primary ground conductor within the communications room. Make ground connections by installing the following bonding jumpers:

1. Install a 16 mm² (6 AWG) bonding between the telecommunications ground busbar and the nearest access to the aluminum pan installed on the cable rack.
 2. Use 16 mm² (6 AWG) bonding jumpers across aluminum pan junctions.
- C. Self-Supporting and Cabinet-Mounted Equipment Rack Ground Bars:
1. When ground bars are provided at the rear of lineup of bolted together equipment racks, bond the copper ground bars together using solid copper splice plates supplied by the ground bar manufacturer.
 2. Bond together nonadjacent ground bars on equipment racks and cabinets with 16 mm² (6 AWG) insulated copper wire bonding jumpers attached at each end with compression-type connectors and mounting bolts.
 3. Provide a 16 mm² (6 AWG) bonding jumper between the rack and/or cabinet ground busbar and the aluminum pan of an overhead cable tray or the raised floor stringer as appropriate.
- D. Backboards: Provide a screw lug-type terminal block or drilled and tapped copper strip near the top of backboards used for communications cross-connect systems. Connect backboard ground terminals to the aluminum pan in the telephone-type cable tray using an insulated 16 mm² (16 AWG) bonding jumper.
- E. Other Communication Room Ground Systems: Ground all metallic conduit, wireways, and other metallic equipment located away from equipment racks or cabinets to the cable tray pan or the telecommunications ground busbar, whichever is closer, using insulated 16 mm² (6 AWG) ground wire bonding jumpers.

3.8 COMMUNICATIONS CABLE GROUNDING

- A. Bond all metallic cable sheaths in multipair communications cables together at each splicing and/or terminating location to provide 100 percent metallic sheath continuity throughout the communications distribution system.
1. At terminal points, install a cable shield bonding connector provide a screw stud connection for ground wire. Use a bonding jumper to connect the cable shield connector to an appropriate ground source like the rack or cabinet ground bar.
 2. Bond all metallic cable shields together within splice closures using cable shield bonding connectors or the splice case grounding and bonding accessories provided by the splice case manufacturer. When an external ground connection is provided as part of splice

closure, connect to an approved ground source and all other metallic components and equipment at that location.

3.9 COMMUNICATIONS CABLE TRAY SYSTEMS:

- A. Bond the metallic structures of one cable tray in each tray run following the same path to provide 100 percent electrical continuity throughout this cable tray systems as follows:
 - 1. Splice plates provided by the cable tray manufacturer can be used for providing a ground bonding connection between cable tray sections when the resistance across a bolted connection is 10 milliohms or less. The Subcontractor shall verify this loss by testing across one splice plate connection in the presence of the Contractor.
 - 2. Install a 16 mm² (6 AWG) bonding jumper across each cable tray splice or junction where splice plates cannot be used.
 - 3. When cable tray terminations to cable rack, install 16 mm² (6 AWG) bonding jumper between cable tray and cable rack pan.

3.10 COMMUNICATIONS RACEWAY GROUNDING

- A. Conduit: Use insulated 16 mm² (6 AWG) bonding jumpers to ground metallic conduit at each end and to bond at all intermediate metallic enclosures.
- B. Wireway: use insulated 16 mm² (6 AWG) bonding jumpers to ground or bond metallic wireway at each end at all intermediate metallic enclosures and across all section junctions.
- C. Cable Tray Systems: Use insulated 16 mm² (6 AWG) bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 16 meters (50 feet).

3.11 GROUND RESISTANCE

- A. Grounding system resistance to ground shall not exceed 5 ohms. Make necessary modifications or additions to the grounding electrode system for compliance without additional cost to the Government. Final tests shall assure that this requirement is met.
- B. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized and shall be made in normally dry conditions not less than 48 hours after the last rainfall. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together below grade. The combined

resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

- C. Services at power company interface points shall comply with the power company ground resistance requirements.
- D. Below-grade connections shall be visually inspected by the Resident Engineer prior to backfilling. The Contractor shall notify the Resident Engineer 24 hours before the connections are ready for inspection.

3.12 GROUND ROD INSTALLATION

- A. Drive each rod vertically in the earth, not less than 3000 mm (10 feet) in depth.
- B. Where permanently concealed ground connections are required, make the connections by the exothermic process to form solid metal joints. Make accessible ground connections with mechanical pressure type ground connectors.
- C. Where rock prevents the driving of vertical ground rods, install angled ground rods or grounding electrodes in horizontal trenches to achieve the specified resistance.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 27 05 33
RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes to form complete, coordinated, raceway systems. Raceways are required for all communications cabling unless shown or specified otherwise.
- B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

- A. Sealing around penetrations to maintain the integrity of fire rated construction: Section 07 84 00, FIRESTOPPING.
- B. Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building: Section 07 92 00, JOINT SEALANTS.
- C. Identification and painting of conduit and other devices: Section 09 91 00, PAINTING.
- D. General electrical requirements and items that are common to more than one section of Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.
- E. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.3 SUBMITTALS

In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

- A. Shop Drawings:
 - 1. Size and location of panels and pull boxes
 - 2. Layout of required conduit penetrations through structural elements.
 - 3. The specific item proposed and its area of application shall be identified on the catalog cuts.
- B. Certification: Prior to final inspection, deliver to the COTR four copies of the certification that the material is in accordance with the drawings and specifications and has been properly installed.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. National Fire Protection Association (NFPA):

70-05National Electrical Code (NEC)

C. Underwriters Laboratories, Inc. (UL):

1-03Flexible Metal Conduit

5-01Surface Metal Raceway and Fittings

6-03Rigid Metal Conduit

50-03Enclosures for Electrical Equipment

360-03Liquid-Tight Flexible Steel Conduit

467-01Grounding and Bonding Equipment

514A-01Metallic Outlet Boxes

514B-02Fittings for Cable and Conduit

514C-05Nonmetallic Outlet Boxes, Flush-Device Boxes and
Covers

651-02Schedule 40 and 80 Rigid PVC Conduit

651A-03Type EB and A Rigid PVC Conduit and HDPE Conduit

797-03Electrical Metallic Tubing

1242-00Intermediate Metal Conduit

D. National Electrical Manufacturers Association (NEMA):

TC-3-04PVC Fittings for Use with Rigid PVC Conduit and
TubingFB1-03Fittings, Cast Metal Boxes and Conduit Bodies
for Conduit, Electrical Metallic Tubing and
Cable**PART 2 - PRODUCTS****2.1 MATERIAL**A. Conduit Size: In accordance with the NEC, but not less than 25 mm
(1 inch) unless otherwise shown.

B. Conduit:

1. Rigid galvanized steel: Shall Conform to UL 6, ANSI C80.1.

2. Aluminum conduit shall not be used.

3. Rigid intermediate steel conduit (IMC): Shall Conform to UL 1242,
ANSI C80.6.4. Electrical metallic tubing (EMT): Shall Conform to UL 797, ANSI
C80.3. Maximum size not to exceed 105 mm (4 inch) and shall be
permitted only with cable rated 600 volts or less.

5. Flexible galvanized steel conduit: Shall Conform to UL 1.

6. Liquid-tight flexible metal conduit: Shall Conform to UL 360.

7. Direct burial plastic conduit: Shall conform to UL 651 and UL 651A,
heavy wall PVC or high density polyethylene (PE).

8. Surface metal raceway: Shall Conform to UL 5.

C. Conduit Fittings:

1. Rigid steel and IMC conduit fittings:
 - a. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
 - b. Standard threaded couplings, locknuts, bushings, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
 - c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
 - d. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
 - e. Sealing fittings: Threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.
2. Electrical metallic tubing fittings:
 - a. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Couplings and connectors: Concrete tight and rain tight, with connectors having insulated throats. Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller. Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches). Use set screws of case-hardened steel with hex head and cup point to firmly seat in wall of conduit for positive grounding.
 - d. Indent type connectors or couplings are prohibited.
 - e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
3. Flexible steel conduit fittings:
 - a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
 - b. Clamp type, with insulated throat.
4. Liquid-tight flexible metal conduit fittings:
 - a. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.

- c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
- 5. Direct burial plastic conduit fittings:
 - a. Fittings shall meet the requirements of UL 514C and NEMA TC3.
 - b. As recommended by the conduit manufacturer.
- 6. Surface metal raceway fittings: As recommended by the raceway manufacturer.
- 7. Expansion and deflection couplings:
 - a. Conform to UL 467 and UL 514B.
 - b. Accommodate, 19 mm (0.75 inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
 - c. Include internal flexible metal braid sized to guarantee conduit ground continuity and fault currents in accordance with UL 467, and the NEC code tables for ground conductors.
 - d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.
- D. Conduit Supports:
 - 1. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.
 - 2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
 - 3. Multiple conduit (trapeze) hangers: Not less than 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 12 gage steel, cold formed, lipped channels; with not less than 9 mm (3/8 inch) diameter steel hanger rods.
 - 4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.
- E. Outlet, Junction, and Pull Boxes:
 - 1. UL-50 and UL-514A.
 - 2. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.
 - 3. Sheet metal boxes: Galvanized steel, except where otherwise shown.
 - 4. Flush mounted wall or ceiling boxes shall be installed with raised covers so that front face of raised cover is flush with the wall. Surface mounted wall or ceiling boxes shall be installed with surface style flat or raised covers.
- F. Wireways: Equip with hinged covers, except where removable covers are shown.

PART 3 - EXECUTION

3.1 PENETRATIONS

A. Cutting or Holes:

1. Locate holes in advance where they are proposed in the structural sections such as ribs or beams. Obtain the approval of the COTR prior to drilling through structural sections.
2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not allowed, except where permitted by the COTR as required by limited working space.

B. Fire Stop: Where conduits, wireways, and other communications raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING, with rock wool fiber or silicone foam sealant only. Completely fill and seal clearances between raceways and openings with the fire stop material.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight as specified in Section 07 92 00, JOINT SEALANTS.

3.2 INSTALLATION, GENERAL

A. Install conduit as follows:

1. In complete runs before pulling in cables or wires.
2. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
3. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
4. Cut square with a hacksaw, ream, remove burrs, and draw up tight.
5. Mechanically continuous.
6. Independently support conduit at 8'0" on center. Do not use other supports i.e., (suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts).
7. Support within 300 mm (1 foot) of changes of direction, and within 300 mm (1 foot) of each enclosure to which connected.
8. Close ends of empty conduit with plugs or caps at the rough-in stage to prevent entry of debris, until wires are pulled in.
9. Conduit installations under fume and vent hoods are prohibited.
10. Secure conduits to cabinets, junction boxes, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made

up wrench tight. Do not make conduit connections to junction box covers.

11. Unless otherwise indicated on the drawings or specified herein, all conduits shall be installed concealed within finished walls, floors and ceilings.

B. Conduit Bends:

1. Make bends with standard conduit bending machines.
2. Conduit hickey may be used for slight offsets, and for straightening stubbed out conduits.
3. Bending of conduits with a pipe tee or vise is prohibited.

C. Layout and Homeruns:

1. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the COTR.

3.3 CONCEALED WORK INSTALLATION

A. In Concrete:

1. Conduit: Rigid steel, IMC or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel or vapor barriers.
2. Align and run conduit in direct lines.
3. Install conduit through concrete beams only when the following occurs:
 - a. Where shown on the structural drawings.
 - b. As approved by the COTR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.
 - a. Conduit outside diameter larger than 1/3 of the slab thickness is prohibited.
 - b. Space between conduits in slabs: Approximately six conduit diameters apart, except one conduit diameter at conduit crossings.
 - c. Install conduits approximately in the center of the slab so that there will be a minimum of 19 mm (3/4 inch) of concrete around the conduits.
5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to insure low resistance ground continuity through the conduits. Tightening set screws with pliers is prohibited.

B. Furred or Suspended Ceilings and in Walls:

1. Conduit for conductors 600 volts and below:

- a. Rigid steel, IMC, or EMT. Different type conduits mixed indiscriminately in the same system is prohibited.
- 2. Align and run conduit parallel or perpendicular to the building lines.
- 3. Tightening set screws with pliers is prohibited.

3.4 EXPOSED WORK INSTALLATION

- A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.
- B. Conduit for Conductors 600 volts and below:
 - 1. Rigid steel, IMC, rigid aluminum, or EMT. Different type of conduits mixed indiscriminately in the system is prohibited.
- C. Align and run conduit parallel or perpendicular to the building lines.
- D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
- E. Support horizontal or vertical runs at not over 2400 mm (eight foot) intervals.
- F. Surface metal raceways: Use only where shown.
- G. Painting:
 - 1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
 - 2. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (two inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

3.5 EXPANSION JOINTS

- A. Conduits 75 mm (3 inches) and larger, that are secured to the building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.
- B. Provide conduits smaller than 75 mm (3 inches) with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 125 mm (5 inch) vertical drop midway between the ends. Flexible conduit shall have a copper green ground bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for 375 mm (15 inches) and larger conduits are acceptable.
- C. Install expansion and deflection couplings where shown.

3.6 CONDUIT SUPPORTS, INSTALLATION

- A. Safe working load shall not exceed 1/4 of proof test load of fastening devices.

- B. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.
- C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 90 kg (200 pounds). Attach each conduit with U-bolts or other approved fasteners.
- D. Support conduit independently of junction boxes, pull boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.
- E. Fasteners and Supports in Solid Masonry and Concrete:
 - 1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
 - 2. Existing Construction:
 - a. Steel expansion anchors not less than 6 mm (1/4 inch) bolt size and not less than 28 mm (1-1/8 inch) embedment.
 - b. Power set fasteners not less than 6 mm (1/4 inch) diameter with depth of penetration not less than 75 mm (3 inches).
 - c. Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.
- F. Hollow Masonry: Toggle bolts are permitted.
- G. Bolts supported only by plaster or gypsum wallboard are not acceptable.
- H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
- I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
- J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.
- K. Spring steel type supports or fasteners are prohibited for all uses except: Horizontal and vertical supports/fasteners within walls.
- L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.7 BOX INSTALLATION

- A. Boxes for Concealed Conduits:
 - 1. Flush mounted.
 - 2. Provide raised covers for boxes to suit the wall or ceiling, construction and finish.
- B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling in operations.

- C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
- D. Label all covers of signal boxes with the room name where the telecommunication conduits terminate.
- E. For boxes installed in metal stud construction use rigid support metal bar hangers or metal bar fasteners attached to two studs. Screwing boxes directly to joists or studs is not acceptable.

3.8 COMMUNICATION SYSTEM CONDUIT

- A. Install the communication raceway system as shown on drawings.
- B. Minimum conduit size of 25 mm (1 inch), but not less than the size shown on the drawings.
- C. All conduit ends shall be equipped with insulated bushings.
- D. All 100 mm (four inch) conduits within buildings shall include pull boxes after every two 90 degree bends. Size boxes per the NEC.
- E. Vertical conduits/sleeves through closets floors shall terminate not less than 75 mm (3 inches) above the floor and not less than 75 mm (3 inches) below the ceiling of the floor below.
- F. Terminate conduit runs to/from a backboard in a closet or interstitial space at the top or bottom of the backboard. Conduits shall enter communication closets next to the wall and be flush with the backboard.
- G. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections such as ribs or beams.
- H. All empty conduits located in communication closets or on backboards shall be sealed with a standard non-hardening duct seal compound to prevent the entrance of moisture and gases and to meet fire resistance requirements.
- I. Conduit runs shall contain no more than four quarter turns (90 degree bends) between pull boxes/backboards. Minimum radius of communication conduit bends shall be as follows (special long radius):

Sizes of Conduit Trade Size	Radius of Conduit Bends mm, Inches
1	230 (9)
1-1/4	350 (14)
1-1/2	430 (17)
2	525 (21)
2-1/2	635 (25)
3	775 (31)
3-1/2	900 (36)
4	1125 (45)

- J. Furnish and install 19 mm (3/4 inch) thick fire retardant plywood specified in Section 06 10 00, ROUGH CARPENTRY on the wall of communication closets where shown on drawings . Mount the plywood with the bottom edge 300 mm (one foot) above the finished floor.
- K. Furnish and pull wire in all empty conduits. (Sleeves through floor are exceptions).
- L. For boxes installed in metal stud construction, use rigid support metal bar hangers or metal bar fasteners attached to two studs. Screwing boxes directly to joists or studs is not acceptable.

- - - E N D - - -

**SECTION 27 10 00
STRUCTURED CABLING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, and connection of the structured cabling system to provide a comprehensive telecommunications infrastructure.

1.2 RELATED WORK

- A. Sealing around penetrations to maintain the integrity of time rated construction: Section 07 84 00, FIRESTOPPING.
- B. General electrical requirements that are common to more than one section in Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.
- C. Conduits for cables and wiring: Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.
- D. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.3 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
 - 1. Manufacturer's Literature and Data: Showing each cable type and rating.
 - 2. Certificates: Two weeks prior to final inspection, deliver to the COTR four copies of the certification that the material is in accordance with the drawings and specifications and has been properly installed.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by the basic designation only.
- B. American Society of Testing Material (ASTM):
 - D2301-04Standard Specification for Vinyl Chloride
Plastic Pressure Sensitive Electrical Insulating
Tape
- C. Federal Specifications (Fed. Spec.):
 - A-A-59544-00Cable and Wire, Electrical (Power, Fixed
Installation)
- D. National Fire Protection Association (NFPA):

- 70-05National Electrical Code (NEC)
- E. Underwriters Laboratories, Inc. (UL):
 - 44-02Thermoset-Insulated Wires and Cables
 - 83-03Thermoplastic-Insulated Wires and Cables
 - 467-01Electrical Grounding and Bonding Equipment
 - 486A-01Wire Connectors and Soldering Lugs for Use with
Copper Conductors
 - 486C-02Splicing Wire Connectors
 - 486D-02Insulated Wire Connector Systems for Underground
Use or in Damp or Wet Locations
 - 486E-00Equipment Wiring Terminals for Use with Aluminum
and/or Copper Conductors
 - 493-01Thermoplastic-Insulated Underground Feeder and
Branch Circuit Cable
 - 514B-02Fittings for Cable and Conduit
 - 1479-03Fire Tests of Through-Penetration Fire Stops

PART 2 - PRODUCTS

2.1 CONTROL WIRING

- A. Unless otherwise specified in other sections of these specifications, control wiring shall be as specified for power and lighting wiring, except the minimum size shall be not less than No. 14 AWG.
- B. Control wiring shall be large enough so that the voltage drop under inrush conditions does not adversely affect operation of the controls.

2.2 COMMUNICATION AND SIGNAL WIRING

- A. Shall conform to the recommendations of the manufacturers of the communication and signal systems; however, not less than what is shown.
- B. Wiring shown is for typical systems. Provide wiring as required for the systems being furnished.
- C. Multi-conductor cables shall have the conductors color coded.

2.3 WIRE LUBRICATING COMPOUND

- A. Suitable for the wire insulation and conduit it is used with, and shall not harden or become adhesive.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Install all wiring in raceway systems.
- B. Seal cable and wire entering a building from underground, between the wire and conduit where the cable exits the conduit, with a non-hardening approved compound.
- C. Wire Pulling:

1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling of cables.
2. Use ropes made of nonmetallic material for pulling feeders.
3. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached directly to the conductors, as approved by the Resident Engineer.
4. Pull in multiple cables together in a single conduit.

3.2 INSTALLATION IN MANHOLES

- A. Install and support cables in manholes on the steel racks. Train the cables around the manhole walls, but do not bend to a radius less than ten times the overall cable diameter.

3.3 CONTROL, COMMUNICATION AND SIGNAL WIRING INSTALLATION

- A. Unless otherwise specified in other sections, install wiring and connect to equipment/devices to perform the required functions as shown and specified.
- B. Except where otherwise required, install a separate power supply circuit for each system so that malfunctions in any system will not affect other systems.
- C. Where separate power supply circuits are not shown, connect the systems to the nearest panelboards of suitable voltages, which are intended to supply such systems and have suitable spare circuit breakers or space for installation.
- D. Install a red warning indicator on the handle of the branch circuit breaker for the power supply circuit for each system to prevent accidental de-energizing of the systems.
- E. System voltages shall be 120 volts or lower where shown on the drawings or as required by the NEC.

3.4 CONTROL, COMMUNICATION AND SIGNAL SYSTEM IDENTIFICATION

- A. Install a permanent wire marker on each wire at each termination.
- B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.
- C. Wire markers shall retain their markings after cleaning.
- D. In each manhole and handhole, install embossed brass tags to identify the system served and function.

3.5 EXISITNG WIRING

Unless specifically indicated on the plans, existing wiring shall not be reused for the new installation. Only wiring that conforms to the specifications and applicable codes may be reused. If existing wiring does not meet these requirements, existing wiring may not be reused and new wires shall be installed.

- - - E N D - - -

SECTION 27 11 00
COMMUNICATIONS EQUIPMENT ROOM FITTINGS

(IT IS REQUIRED THAT ALL VETERANS HEALTH ADMINISTRATION (VHA) TELECOMMUNICATION CABLE DISTRIBUTION (AND/OR SIGNAL) PLANTS AND/OR SYSTEMS CONFORM TO THIS DOCUMENT. IT IS THE RESPONSIBILITY OF THE SPEC WRITER TO SELECT, EDIT, DELETE, AND RENUMBER THE APPROPRIATE PORTIONS OF IN THIS DOCUMENT TO CONFORM TO THE RESPECTIVE DISTRIBUTION SYSTEM WHERE DEVIATIONS OCCUR IN ORDER TO PROVIDE THE RESPECTIVE SYSTEM. THE SPEC WRITER SHALL CONTACT THE APPROPRIATE AUTHORITIES BELOW FOR TECHNICAL ASSISTANCE AND APPROVAL BEFORE THE FINAL CONTRACT DOCUMENT CAN BE APPROVED)

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This Section specifies the furnishing, installing, certification, testing, and guaranty of a complete and operating Voice and Digital Cable Distribution System (here-in-after referred to as "*the System*"), and associated equipment and hardware to be installed in the VA Medical Center here-in-after referred to as "*the Facility*". The System shall include, but not be limited to: equipment cabinets, interface enclosures, and relay racks; necessary combiners, traps, and filters; and necessary passive devices such as: splitters, couplers, cable "patch", "punch down", and cross-connector blocks or devices, voice and data distribution sub-systems, and associated hardware. The System shall additionally include, but not be limited to: telecommunication closets (TC); telecommunications outlets (TCO); copper and fiber optic, and analog radio frequency (RF) systems coaxial distribution cables, connectors, "patch" cables, and/or "break out" devices.
- B. The System shall be delivered free of engineering, manufacturing, installation, and functional defects. It shall be designed, engineered and installed for ease of operation, maintenance, and testing.
- C. The term "provide", as used herein, shall be defined as: designed, engineered, furnished, installed, certified, and tested, by the Contractor.
- D. The Voice and Digital and Analog Telecommunication Distribution Cable Equipment and System provides the media which voice and data information travels over and connects to the Telephone System which is defined as an Emergency Critical Care Communication System by the National Fire Protection Association (NFPA). Therefore, since the System connects to or extends the telephone system, the System's

installation and operation shall adhere to all appropriate National, Government, and/or Local Life Safety and/or Support Codes, which ever are the more stringent for this Facility. At a minimum , the System shall be installed according to NFPA, Section 70, National Electrical Code (NEC), Article 517 and Chapter 7; NFPA, Section 99, Health Care Facilities, Chapter 3-4; NFPA, Section 101, Life Safety Code, Chapters 7, 12, and/or 13; Joint Commission on Accreditation of Health Care Organization (JCAHCO), Manual for Health Care Facilities, all necessary Life Safety and/or Support guidelines; this specification; and the original equipment manufacturer's (OEM) suggested installation design, recommendations, and instructions. The OEM and Contractor shall ensure that all management, sales, engineering, and installation personnel have read and understand the requirements of this specification before the System is designed, engineered, delivered, and provided.

E. The VA COTR is the approving authorities for all contractual and mechanical changes to the System. The Contractor is cautioned to obtain in writing, all approvals for system changes relating to the published contract specifications and drawings, from the COTR before proceeding with the change.

F. System Performance:

1. At a minimum, the System shall be able to support the following voice and data and analog RF operations for Category 6 Certified Telecommunication Service:
 - a. Provide the following interchange (or interface) capabilities:
 - 1) Basic Rate (BRI).
 - 2) Primary Rate (PRI).
 - b. ISDN measured at TCO:
 - 1) Narrow Band BRI:
 - a) B Channel: 64 kilo-Bits per second (kBps), minimum.
 - b) D Channel: 16 kBps, minimum.
 - c) H Channel: 384 kBps, minimum.
 - 2) Narrow Band PRI:
 - a) B Channel: 64 kBps, minimum.
 - b) D Channel: 64 kBps, minimum.
 - c) H Channel: 1,920 kBps, minimum.
 - 3) Wide (or Broad) Band: All channels: 140 mega(m)-Bps, minimum, capable to 565 mBps at "T" reference.
 - c. ATM operation and interface: ATM 155 mBps measured at TCO.

- d. Frame Relay: All stated compliance's measured at TCO.
 - e. Integrated Data Communications Utility (IDCU) operation and interface: Measured at TCO.
 - f. Government Open Systems Interconnection Profile (GOSSIP) compliant: Measured at TCO.
 - g. Fiberoptic Distributed Data Interface (FDDI): A minimum 100 mBps to a maximum of 1.8 giga(g)-Bps data bit stream speed measured at TC (shall be Synchronous Optical Network [SONET] compliant).
 - h. System Sensitivity: Satisfactory service shall be provided for at least 3,000 feet for all voice and data and analog RF locations.
 - i. Other 1 Gb/s, 10G Baset at TCO.
2. At a minimum the System shall support the following operating parameters:
- a. EPBX connection:
 - 1) System speed: 1.0 gBps per second, minimum.
 - 2) Impedance: 600 Ohms.
 - 3) Cross Modulation: -60 deci-Bel (dB).
 - 4) Hum Modulation: -55 dB.
 - 5) System data error: 10 to the -10 Bps, minimum.
 - 6) Loss: Measured at the frame output with reference Zero (0) deciBel measured (dBm) at 1,000 Hertz (Hz) applied to the frame input.
 - a) Trunk to station: 1.5 dB, maximum.
 - b) Station to station: 3.0 dB, maximum.
 - c) Internal switch crosstalk: -60 dB when a signal of ± 10 deciBel measured (dBm), 500-2,500 Hz range is applied to the primary path.
 - d) Idle channel noise: 25 dBm "C" or 3.0 dBm "O" above reference (terminated) ground noise, whichever is greater.
 - e) Traffic Grade of Service for Voice and Data:
 - (1) A minimum grade of service of P-01 with an average traffic load of 7.0 CCS per station per hour and a traffic overload in the data circuits will not interfere with, or degrade, the voice service.
 - (2) Average CCS per voice station: The average CCS capacity per voice station shall be maintained at 7.0 CCS when the EPBX is expanded up to the projected maximum growth as stated herein.

b. Telecommunications Outlet (TCO):

1) Voice:

- a) Isolation (outlet-outlet): 24 dB.
- b) Impedance: 600 Ohms, balanced (BAL).
- c) Signal Level: 0 deciBel per mili-Volt (dBmV) \pm 0.1 dBmV.
- d) System speed: 100 mBps, minimum.
- e) System data error: 10 to the -6 Bps, minimum.

2) Data:

- a) Isolation (outlet-outlet): 24 dB.
- b) Impedance: 600 Ohms, BAL.
- c) Signal Level: 0 dBmV \pm 0.1 dBmV.
- d) System speed: 120 mBps, minimum.
- e) System data error: 10 to the -8 Bps, minimum.

3) Analog RF Service:

- a) Broadcast or "off air" RF (or television) analog service is considered to be at RF (below 900 mHz in frequency bandwidth). Usually a RF television circuits require a single coaxial cable plant from the headend to each TC location.
- b) Isolation (outlet-outlet): 14 dB.
- c) Impedance: 75 Ohms, Unbalanced (UNBAL).
- d) Signal Level: 10 dBmV \pm 5.0 dBmV.
- e) Bandwidth: 6.0 mHz per channel, fully loaded.

1.2 RELATED WORK

- A. Specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Specification Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.
- C. Specification Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.
- D. Specification Section 27 10 00, STRUCTURED CABLING.
- E. Specification Section 26 27 26, WIRING DEVICES.
- F. Specification Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.
- G. Specification Section 27 41 31, MASTER ANTENNA TV EQUIPMENT AND SYSTEMS.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in text by basic designation only. Except for a specific date given the issue in effect

(including amendments, addenda, revisions, supplements, and errata) on the date the system's submittal is technically approved by VA, shall be enforced.

B. National Fire Protection Association (NFPA):

70	NATIONAL ELECTRICAL CODE (NEC)
75	Protection of Electronic Computer/Data Processing Equipment
77	Recommended Practice on Static Electricity
	Standard for Health Care Facilities
101	Life Safety Code
1221	Emergency Services Communication Systems

C. Underwriters Laboratories, Inc. (UL):

65	Wired Cabinets
96	Lightning Protection Components
96A	INSTALLATION REQUIREMENTS FOR LIGHTNING PROTECTION SYSTEMS
467	Grounding and Bonding Equipment
497/497A/497B	PROTECTORS FOR PAIRED CONDUCTORS/ COMMUNICATIONS CIRCUITS/DATA COMMUNICATIONS AND FIRE ALARM CIRCUITS
884	Underfloor Raceways and Fittings

D. ANSI/EIA/TIA Publications:

568C	Commercial Building Telecommunications Wiring Standard
569C	Commercial Building Standard for Telecommunications Pathways and Spaces
606B	ADMINISTRATION STANDARD FOR THE TELECOMMUNICATIONS INFRASTRUCTURE OF COMMERCIAL BUILDINGS
607B	Grounding and Bonding Requirements for Telecommunications in Commercial Buildings

E. International Telecommunication Union - Telecommunication Standardization Sector (ITU-T).

F. Federal Information Processing Standards (FIPS) Publications.

G. United States Air Force: Technical Order 33K-1-100 Test Measurement and Diagnostic Equipment (TMDE) Interval Reference Guide.

- H. Joint Commission on Accreditation of Health Care Organization (JCAHO): Comprehensive Accreditation Manual for Hospitals.
- I. National and/or Government Life Safety Code(s): The more stringent of each listed code.

1.4 QUALITY ASSURANCE

- A. The authorized representative of the OEM, shall be responsible for the design, satisfactory total operation of the System, and its certification.
- B. The OEM shall meet the minimum requirements identified in Paragraph 2.1.A. Additionally, the Contractor shall have had experience with three or more installations of systems of comparable size and complexity with regards to coordinating, engineering, testing, certifying, supervising, training, and documentation. Identification of these installations shall be provided as a part of the submittal as identified in Paragraph 1.5.
- C. The System Contractor shall submit certified documentation that they have been an authorized distributor and service organization for the OEM for a minimum of three (3) years. The System Contractor shall be authorized by the OEM to certify and warranty the installed equipment. In addition, the OEM and System Contractor shall accept complete responsibility for the design, installation, certification, operation, and physical support for the System. This documentation, along with the System Contractor and OEM certification must be provided in writing as part of the Contractor's Technical Submittal.
- D. All equipment, cabling, terminating hardware, TCOs, and patch cords shall be sourced from the certifying OEM or at the OEM's direction, and support the System design, the OEM's quality control and validity of the OEM's warranty.
- E. The Contractor's Telecommunications Technicians assigned to the System shall be fully trained, qualified, and certified by the OEM on the engineering, installation, and testing of the System. The Contractor shall provide formal written evidence of current OEM certification(s) for the installer(s) as a part of the submittal or to the COTR before being allowed to commence work on the System.

1.5 SUBMITTALS

- A. Provide submittals in accordance with Specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. The COTR shall retain one copy for review and approval.

1. If the submittal is approved the COTR shall retain one copy for Official Records and return three (3) copies to the Contractor.
 2. If the submittal is disapproved, three (3) copies will be returned to the Contractor with a written explanation attached that indicates the areas the submittal deviated from the System specifications. The COTR shall retain one copy for Official Records.
- B. Environmental Requirements: Technical submittals shall confirm the environmental specifications for physical TC areas occupied by the System. These environmental specifications shall identify the requirements for initial and expanded system configurations for:
1. Floor loading for batteries and cabinets.
 2. Minimum floor space and ceiling heights.
 3. Minimum size of doors for equipment passage.
 4. Power requirements: The Contractor shall provide the specific voltage, amperage, phases, and quantities of circuits required.
 5. Air conditioning, heating, and humidity requirements. The Contractor shall identify the ambient temperature and relative humidity operating ranges required preventing equipment damage.
 6. Air conditioning requirements (expressed in BTU per hour, based on adequate dissipation of generated heat to maintain required room and equipment standards).
 7. Proposed floor plan, based on the expanded system configuration for this FACILITY.
 8. Conduit size requirement (between main TC, computer, and console rooms).
 9. Main trunk line and riser pathways, cable duct, and conduit requirements between each MTC, TC, and TCO.
- C. Documents: The submittal shall be separated into sections for each subsystem and shall contain the following:
1. Title page to include:
 - a. VA Medical Center.
 - b. Contractor's name, address, and telephone (including FAX) numbers.
 - c. Date of Submittal.
 - d. VA Project No.
 2. List containing a minimum of three locations of installations of similar size and complexity as identified herein. These locations shall contain the following:

- a. Installation Location and Name.
 - b. Owner's or User's name, address, and telephone (including FAX) numbers.
 - c. Date of Project Start and Date of Final Acceptance by Owner.
 - d. System Project Number.
 - e. Brief (three paragraphs minimum) description of each system's function, operation, and installation.
3. Narrative Description of the system.
 4. A List of the equipment to be furnished. The quantity, make, and model number of each item is required. Indicate the required equipment items quantities that will satisfy the needs of the system. Delete equipment items that are not required add additional items required, and renumber section as per system design. The following is the minimum equipment required by the system:

QUANTITY	UNIT
//As required//	Equipment (Radio Relay) Rack
//As required//	Cross Connection (CCS) Systems
//As required//	Wire Management System/Equipment
//As required//	Telecommunications Outlets (TCO)
//As Required//	Distribution Cables
//As required//	System Connectors
//As required//	Terminators
//As required//	Distribution Frames
//As required//	Telecommunications Closets (TC)
//As required//	Environmental Requirements
1 ea.	Installation Kit
//As-required//	Separate List Containing Each Equipment Spare(s)

5. Pictorial layouts of each MTC, IMTC, and RTCs; MCCS, IMCCS, VCCS, and HCCS termination cabinet(s), each distribution cabinet layout drawing, and TCO as each is expected to be installed and configured.
6. Equipment technical literature detailing the electrical and technical characteristics of each item of equipment to be furnished.
7. Engineering drawings of the System, showing calculated signal levels at each coaxial cable jack.
8. List of test equipment as per paragraph 1.5.D. below.

9. Letter certifying that the Contractor understands the requirements of the SAMPLES Paragraph 1.5.E.
10. Letter certifying that the Contractor understands the requirements of Section 3.2 concerning acceptance tests.

D. Test Equipment List:

1. The Contractor is responsible for furnishing all test equipment required to test the system in accordance with the parameters specified. Unless otherwise stated, the test equipment shall not be considered part of the system. The Contractor shall furnish test equipment of accuracy better than the parameters to be tested.
 2. The test equipment furnished by the Contractor shall have a calibration tag of an acceptable calibration service dated not more than 12 months prior to the test. As part of the submittal, a test equipment list shall be furnished that includes the make and model number of the following type of equipment as a minimum:
 - a. Spectrum Analyzer.
 - b. Signal Level Meter.
 - c. Volt-Ohm Meter.
 - d. Time Domain Reflectometer (TDR) with strip chart recorder (Data and Optical Measuring).
 - e. Bit Error Test Set (BERT).
 - f. Camera with a minimum of 60 pictures to that will develop immediately to include appropriate test equipment adapters. A video camera in VHS format is an acceptable alternate.
 - g. Video Waveform Monitor.
 - h. Video Vector Scope.
 - i. Color Video Monitor with audio capability.
 - j. 100 mHz Oscilloscope with video adapters.
- E. Samples: A sample of each of the following items shall be furnished to the COTR for approval prior to installation.
1. TCO Wall Outlet Box 4" x 4"x 2.5" with:
 - a. One each telephone (or voice) rj45 jack installed.
 - b. Two each multi pin data rj45 jacks installed.
 - c. Cover Plate installed.
 - d. RF (F)/video.
 2. Data CCS patch panel, punch block or connection device with RJ45 connectors installed.

3. Telephone CCS system with IDC and/or RJ45 connectors and cable terminal equipment installed.
4. 610 mm (2 ft.) section of each copper cable to be used with cable sweep tags as specified in paragraph 2.4.H and connectors installed.
5. 610 mm (2 ft.) section of each analog RF, video coaxial and audio cable to be used with cable sweep tags as specified in paragraph 2.4.H and connectors installed.
6. Analog RF patch panel or breakout box with cable management equipment and "F" connectors installed.

F. Certifications:

1. Submit written certification from the OEM indicating that the proposed supervisor of the installation and the proposed provider of the contract maintenance are authorized representatives of the OEM. Include the individual's exact name and address and OEM credentials in the certification.
2. Submit written certification from the OEM that the wiring and connection diagrams meet National and/or Government Life Safety Guidelines, NFPA, NEC, UL, this specification, and JCAHCO requirements and instructions, requirements, recommendations, and guidance set forth by the OEM for the proper performance of the System as described herein. The VA will not approve any submittal without this certification.
3. Preacceptance Certification: This certification shall be made in accordance with the test procedure outlined in paragraph 3.2.B.

G. Equipment Manuals: Fifteen (15) working days prior to the scheduled acceptance test, the Contractor shall deliver four complete sets of commercial operation and maintenance manuals for each item of equipment furnished as part of the System to the COTR. The manuals shall detail the theory of operation and shall include narrative descriptions, pictorial illustrations, block and schematic diagrams, and parts list.

H. Record Wiring Diagrams:

1. Fifteen (15) working days prior to the acceptance test, the Contractor shall deliver four complete sets of the Record Wiring Diagrams of the System to the COTR. The diagrams shall show all inputs and outputs of electronic and passive equipment correctly identified according to the markers installed on the interconnecting cables, Equipment and room/area locations.

2. The Record Wiring Diagrams shall be in hard copy and two compact disk (CD) copies properly formatted to match the Facility's current operating version of Computer Aided Drafting (AutoCAD) system. The COTR shall verify and inform the Contractor of the version of AutoCAD being used by the Facility.

I. Surveys Required As A Part Of The Technical Submittal: The Contractor shall provide the following surveys that depict various system features and capacities are required in addition to the on site survey requirements described herein. Each survey shall be in writing and contain the following information (the formats are suggestions and may be used for the initial Technical Submittal survey requirements), as a minimum:

1. The required EPBX connections (each CSU shall be compatible with) shall be compatible with the following:
 - a. Initially connect:

<u>EQUIPPED ITEM</u>	<u>CAPACITY</u>	<u>WIREDCAPACITY</u>
Single Line		
Conference		
Audio Paging Access		

- b. Projected Maximum Growth: The Contractor shall clearly and fully indicate this category for each item identified in Paragraph 1.4.H.1.a. as a part of the technical submittal. For this purpose, the following definitions and sample connections are provided to detail the system's capability:

<u>EQUIPPED ITEM</u>	<u>CAPACITY</u>	<u>WIRED CAPACITY</u>
Servers		
PC's		
Projected Maximum Growth		

The Contractor shall clearly and fully indicate this category for each item identified in Paragraph 1.4.H.2.a. as a part of the technical submittal.

2. Cable Distribution System Design Plan: A design plan for the entire cable distribution systems requirements shall be provided with this

document. A specific cable count shall coincide with the total growth items as described herein. It is the Contractor's responsibility to provide the Systems entire cable requirements and engineer a distribution system requirement plan using the format of the following paragraph(s), at a minimum:

a. UTP (and/or STP) Requirements/Column Explanation:

Column	Explanation
FROM BUILDING	Identifies the building by number, title, or location, and main signal closet or intermediate signal closet cabling is provided from
BUILDING	Identifies the building by number, title, or location cabling is to be provided in
TO BUILDING IMC	Identifies building main terminal signal closet, by room number or location, to which cabling is provided too, in, and from
FLOOR	Identifies the floor by number (i.e. 1st, 2nd, etc.) cabling and TCOs are to be provided
TC ROOM NUMBER	Identifies the floor signal closet room, by room number, which cabling shall be provided
ROOM NUMBER	Identifies the room, by number, from which cabling and TCOs shall be provided
NUMBER OF CABLE PAIR	Identifies the number of cable pair required to be provided on each floor designated OR the number of cable pair (VA Owned) to be retained
NUMBER OF STRANDS USED/SPARE	Identifies the number of strands provided in each run

b. Analog RF Cabling Requirements/Column Explanation:

Column	Explanation
FLOOR	Identifies the floor by number (i.e. 1st, 2nd, etc.)
TC ROOM NUMBER	Identifies the room, by number, from which cabling shall be installed
TO FLOOR TC	Identifies building, by number or location, to which cabling is installed
NUMBER OF STRANDS	Identifies the number of strands in each run of RF cable

INSTALLED METHOD	Identifies the method of installation in accordance with as designated herein
NOTES	Identifies a note number for a special feature or equipment
BUILDING MTC	Identifies the building by number or title

3. Telecommunication Outlets: The Contractor shall clearly and fully indicate this category for each outlet location and compare the total count to the locations identified above as a part of the technical submittal. Additionally, the Contractor shall indicate the total number of spares.

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIALS

A. System Requirements:

1. The System shall provide the following minimum services that are designed in accordance with and supported by an Original Equipment Manufacturer (OEM), and as specified herein. The System shall provide continuous inter and/or intra-Facility voice and data, and analog RE service. The System shall be capacity sized so that loss of connectivity to external telephone systems shall not affect the Facilities operation in specific designated locations. The System shall:
 - a. Be capable of inter-connecting and functioning fully with the existing Local Telephone Exchange (LEC) Network(s), Federal Telephone System (FTS) Inter-city Network(s), Inter-exchange Carriers, Integrated Services Digital Network (ISDN), Electronic Private Branch Exchange (EPBX) switches, asynchronous/synchronous data terminals and circuits including Automatic Transfer Mode (ATM), Frame Relay, and local area networks (LAN), at a minimum.
 - b. Be a voice and data cable distribution system that is based on a physical "Star" Topology. An Analog RF coaxial cable distribution system shall be provided in a "home run" configuration from each associated riser TC to identified locations and as shown on the drawings.
 - c. Be compatible with and able to provide direct digital connection to trunk level equipment including, but, not limited to: directly accessing trunk level equipment including the telephone system, audio paging, Industry Standard "T" and/or "DS" carrier services

and external protocol converters. Additionally, connections to "T" and/or "DS" access/equipment or Customer Service Units (CSU) that are used in FTS and other trunk applications shall be included in the System design. Provide T-1 access/equipment (or CSU), as required for use, in FTS and other trunk applications by system design if this equipment is not provided by the existing telephone system and/or will be deactivated by the installation of the System. The Contractor shall provide all T-1 equipment necessary to terminate and make operational the quantity of circuits designated. The CSU's shall be connected to the System's emergency battery power supply. The System shall be fully capable of operating in the Industry Standard "DS" protocol and provide that service when required.

2. Specific Subsystem Requirements: The System shall consist, as a minimum, of the following independent sub-systems to comprise a complete and functional voice and digital and analog RF telecommunications cabling system: "Main" (MTC), "intermediate" (IMTC), and "riser" (RTC) TC's; "vertical" (or "riser") trunk cabling system; vertical cross-connection (VCC) cabling systems, and TCO's with a minimum of three (3) RJ-45 jacks for the appropriate telephone, Data connections, and additional jacks, connectors, drop and patch cords, terminators, and adapters provided.

a. Telecommunication Closet (TC):

- 1) There shall be a minimum of one TC for the MTC, each building IMTC, and each RTC per building floor location. However, in large building(s), where the horizontal distance to the farthest voice and digital work area may exceed 90 Meters (M) (or 295 feet [ft]), additional TC's shall be provided as described herein. The maximum DC resistance per cable pair shall be no more than 28.6 Ohms per 305 M (1,000 feet). Each TC shall be centrally located to cover the maximum amount of local floor space. The TC's house in cabinets or enclosures, on relay racks, and/or on backboards, various telecommunication data equipment, controllers, multiplexers, bridges, routers, LAN hub(s), telephone cross-connecting, active and passive equipment.
- 2) Additionally, the TC's may house fire alarm, video, public address, radio entertainment, intercom, and radio paging

equipment. Regardless of the method of installation, mounting, termination, or cross-connecting used, all vertical copper and fiber optic and analog RF coaxial cables shall be terminated on appropriate cross-connection systems (CCS) containing patch panel(s), punch blocks, and/or breakout devices provided in enclosures and tested as described herein. A cable and/or wire management system shall be a part of each CCS.

a) A minimum of three 110-120 VAC active quad outlets shall be provided, each with "U" grounded receptacles at a minimum of one outlet for each front, side and back wall. These outlets shall be separately protected by an AC circuit breaker provided in the designated Government Emergency Critical Care AC power panel, that is connected to the Facilities Emergency AC Power Distribution System. For larger building TC applications, a minimum of one additional quad AC outlet shall be provided for every 800M² (or 8,000 ft²) of useable floor space. Additional outlets shall be equally spaced along the wall.

b) Climate control shall be provided in each TC 24 hours a day, seven days per week and 52 week per year to prevent failure of electronic components and for mission critical functional applications. The COTR is responsible for informing the Contractor regarding the minimum climate control requirements. In identified hostile TC locations where it has been determined that proper TC climate or external signal radiation cannot be properly maintained or controlled, the Contractor may, at his/her option, provide a minimum of two individual and properly sized self contained climate controlled equipment cabinet enclosures; one designated for voice, and one designated for data, and one additional cabinet designated for analog RF service, in each TC location identified on the drawings, in lieu of providing additional required TC air handling capability.

3) Nurse call and code blue system shall not be installed in the TC.

B. General:

1. All equipment to be supplied under this specification shall be new and the current model of a standard product of an OEM or record. An

- OEM of record shall be defined as a company whose main occupation is the manufacture for sale of the items of equipment supplied and which:
- a. Maintains a stock of replacement parts for the item submitted.
 - b. Maintains engineering drawings, specifications, and operating manuals for the items submitted.
 - c. Has published and distributed descriptive literature and equipment specifications on the items of equipment submitted at least 30 days prior to the Invitation for Bid.
2. Specifications of equipment as set forth in this document are minimum requirements, unless otherwise stated, and shall not be construed as limiting the overall quality, quantity, or performance characteristics of items furnished in the System. When the Contractor furnishes an item of equipment for which there is a specification contained herein, the item of equipment shall meet or exceed the specification for that item of equipment.
 3. The Contractor shall provide written verification, in writing to the COTR at time of installation, that the type of wire/cable being provided is recommended and approved by the OEM. The Contractor is responsible for providing the proper size and type of cable duct and/or conduit and wiring even though the actual installation may be by another subcontractor.
 4. The Telephone Contractor is responsible for providing interfacing cable connections for the telephone, and CATV systems with the System.
 5. Active electronic component equipment shall consist of solid state components, be rated for continuous duty service, comply with the requirements of FCC standards for telephone equipment, systems, and service.
 6. All passive distribution equipment shall meet or exceed -80 dB radiation shielding specifications.
 7. All interconnecting twisted pair, fiber-optic or coaxial cables shall be terminated on equipment terminal boards, punch blocks, breakout boxes, splice blocks, and unused equipment ports/taps shall be terminated according to the OEM's instructions for telephone cable systems without adapters. The Contractor shall not leave unused or spare twisted pair wire, fiber-optic, or coaxial cable unterminated, unconnected, loose or unsecured.

8. Color code all distribution wiring to conform to the Telephone Industry standard, EIA/TIA, and this document, which ever is the more stringent. At a minimum, all equipment, cable duct and/or conduit, enclosures, wiring, terminals, and cables shall be clearly and permanently labeled according to and using the provided record drawings, to facilitate installation and maintenance. Reference Specification Section 27 10 00, STRUCTURED CABLING and Section 27 31 00, VOICE COMMUNICATIONS SWITCHING AND ROUTING EQUIPMENT.
 9. Connect the System's primary input AC power to the Facility's Critical Branch of the Emergency AC power distribution system as shown on the plans or if not shown on the plans consult with COTR regarding a suitable circuit location prior to bidding.
 10. Plug-in connectors shall be provided to connect all equipment, except coaxial cables and interface points. Coaxial cable distribution points and RF transmission lines shall use coaxial cable connections recommended by the cable OEM and approved by the System OEM. Base- band cable systems shall utilize barrier terminal screw type connectors, at a minimum. Crimp type connectors installed with a ratchet type installation tool are and acceptable alternate as long as the cable dress, pairs, shielding, grounding, and connections and labeling are provided the same as the barrier terminal strip connectors. Tape of any type, wire nuts, or solder type connections are unacceptable and will not be approved.
 11. All equipment faceplates utilized in the System shall be stainless steel, anodized aluminum, or UL approved cycolac plastic for the areas where provided.
 12. Noise filters and surge protectors shall be provided for each equipment interface cabinet, switch equipment cabinet, control console, local, and remote active equipment locations to ensure protection from input primary AC power surges and noise glitches are not induced into low Voltage data circuits.
- D. Equipment Functional Characteristics:

FUNCTIONS	CHARACTERISTICS
Input Voltage	105 to 130 VAC
POWER LINE FREQUENCY	60 HZ \pm 2.0 HZ
Operating Temperature	0 to 50 degrees (°) Centigrade (C)

Humidity	80 percent (%) minimum rating
----------	-------------------------------

E. Equipment Standards and Testing:

1. The System has been defined herein as connected to systems identified as Critical Care performing Life Support Functions. Therefore, at a minimum, the system shall conform to all aforementioned National and/or Local Life Safety Codes (which ever are the more stringent), NFPA, NEC, this specification, JCAHCO Life Safety Accreditation requirements, and the OEM recommendations, instructions, and guidelines.
2. All supplies and materials shall be listed, labeled or certified by UL or a nationally recognized testing laboratory where such standards have been established for the supplies, materials or equipment. See paragraph minimum requirements Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS, and the guidelines listed in paragraph 2.J.2.
3. The provided active and passive equipment required by the System design and approved technical submittal must conform with each UL standard in effect for the equipment, as of the date of the technical submittal (or the date when the RE approved system equipment necessary to be replaced) was technically reviewed and approved by VA. Where a UL standard is in existence for equipment to be used in completion of this contract, the equipment must bear the approved UL seal.
4. Each item of electronic equipment to be provided under this contract must bear the approved UL seal or the seal of the testing laboratory that warrants the equipment has been tested in accordance with, and conforms to the specified standards.

2.2 EQUIPMENT ITEMS

A. Environmental Cabinet (if selected):

1. The Contractor shall provide this enclosure in lieu of a standard equipment cabinet identified in Paragraph 2.3.A to meet system design in hostile TC locations as identified on the drawings. The enclosure shall fully sustain the installed, including electronic, equipment in the same manner as the standard cabinet identified in Paragraph 2.3.A. Additionally, the enclosure shall fully support all installed equipment as if they were in a stand alone air handling area regardless of the local area's air handling capabilities. The

enclosure shall be a OEM's fully assembled unit. If more than two enclosures are required in any system location, those enclosures shall be OEM assembled for consolidating or combining two or more enclosures in a single unit to meet system space and equipment handling designs.

2. Technical Characteristics:

Environmental control	Automatic, heating and/or cooling, as required
Temperature conditions (rated at 1,300 W of install equipment heat generation):	
Internal Range	Maintains 80° to 105° of internal heat conditions, maximum
External Range	100° \pm 25°, maximum
Forced air unit	Required with non disposable air filter unobstructed and uninterruptible
Air conditioning	As required, fully internal mounted
Heater	As required, fully internal mounted
Uninterruptible power supply	As required, fully internal mounted
Front door	Full length, see through, EMI resistant, and lockable
Rear door	Full length, non-see through, EMI resistant, and lockable
Conduit wiring entrance	TOP AND/OR BOTTOM, FULLY SEALED
Input power	2 ea. minimum 120 VAC @ 20A, maximum, independent circuit, conduit for fixed or armored cable for moveable installations
Dimensions:	
Height	1980 mm (78in.), maximum
Width	635 mm (25in.), maximum
Depth	965 mm (38in.), maximum
Front panel opening	480 mm (19in.), w/ EIA mounting hole spacing

B. Distribution or System Interface Cabinet:

1. The cabinet shall be constructed of heavy 16 gauge cold rolled steel, have top and side panels and hinged front and rear (front door only if wall mounted) doors. It shall have baked-on iron phosphate primer and baked enamel paint finish in a color to be

selected by the using Facility Service Chief or the RE, contain integral and adjustable predrilled rack mounting rails or frame that allows front panel equipment mounting and access. When all equipment, doors and panels are installed, snap-in-place chrome trim strip covers are required to be installed that will cover all front panel screw fasteners. It shall be equipped the same as the equipment cabinet.

2. Technical Characteristics:

Overall height	2180 mm (85 7/8in.), maximum
Overall depth	650 mm (25 1/2in.), maximum
Overall width	535 mm (21 1/16in.), maximum
Equipment vertical mounting space	1960 mm (77 1/8in.), maximum
Front panel horizontal	484 mm (19 1/16in.), maximum width

C. Stand Alone Equipment (or sometimes called Radio Relay) Rack:

1. The rack shall be constructed of heavy 16 gauge cold rolled steel and have fully adjustable equipment front mounting rails that allows front panel equipment mounting and access. It shall have baked-on iron phosphate primer and baked enamel paint finish in a color to be selected by the COTR. It shall be floor or wall mounted or mounted on casters as directed by the COTR.

2. Technical Characteristics:

Overall Height	2180 mm (85 7/8in.), maximum
Overall Depth	650 mm (25 1/2in.), maximum
Overall Width	535 mm (21 1/16in.), maximum
Front Panel Opening	480 mm (19in.), EIA horizontal width
Hole Spacing	per EIA and Industry Standards

D. Cross-Connection System (CCS) Equipment Breakout, Termination Connector (or Bulkhead), and Patch Panels:

1. The connector panel(s) shall be made of flat smooth 3.175 mm (1/8 in.) thick solid aluminum, custom designed, fitted and installed in the cabinet. Bulkhead equipment connectors shall be mounted on the panel to enable all cabinet equipment's signal, control, and coaxial cables to be connected through the panel. Each panel shall be color matched to the cabinet installed.

a. Voice (or Telephone):

- 1) The CSS for voice or telephone service shall be Industry Standard type 110 (minimum) punch blocks for voice or telephone, and control wiring in lieu of patch panels, each being certified for category six service. IDC punch blocks (with internal RJ45 jacks) are acceptable for use in all CCS and shall be specifically designed for category six telecommunications service and the size and type of UTP cable used as described herein. As a minimum, punch block strips shall be secured to an OEM designed physical anchoring unit on a wall location in the MTC, IMTC, RTC, and TC. However, console, cabinet, rail, panel, etc. mounting is allowed at the OEM recommendation and as approved by the RE. Punch blocks shall not be used for Class II or 120 VAC power wiring.
- 2) Technical Characteristics:

Number of horizontal rows	2
Number of terminals per row	24
Terminal protector	required for each used or unused terminal
Insulation splicing	required between each row of terminals

b. Digital or High Speed Data:

- 1) The CSS for digital or high-speed data service shall be a patch panel with modular female RJ45 jacks installed in rows. Patch panels and RJ45 jacks shall be specifically designed for category 6 telecommunications service and the size and type of UTP or STP cable used. Each panel shall be 480 mm (19in.) horizontal EIA rack mountable dimensions with EIA standard spaced vertical mounting holes.
- 2) Technical Characteristics:

Number of horizontal rows	2, minimum
Number of jacks per row	24, MINIMUM
Type of jacks	RJ45
Terminal protector	required for each used or unused jack

Insulation	required between each row of jacks
------------	------------------------------------

2. Solderless Connectors: The connectors (or fork connectors) shall be crimp-on insulated lug to fit a 6-32 minimum screw terminal. The fork connector shall be installed using a standard lug-crimping tool.
3. Punch Blocks: As a minimum, Industry Standard 110 type punch blocks are approved for data, voice, and control wiring. Punch blocks shall be specifically designed for the size and type of wire used. Punch block strips shall be secured to a console, cabinet, rail, panel, etc. Punch blocks shall not be used for Class II or 120 VAC power wiring.

E. Wire Management System and Equipment:

1. Wire Management System: The system(s) shall be provided as the management center of the respective cable system, CCS, and TC it is incorporated. It shall perform as a platform to house peripheral equipment in a standard relay rack or equipment cabinet. It shall be arranged in a manner as to provide convenient access to all installed management and other equipment. All cables and connections shall be at the rear of each system interface to IDC and/or patch panels, punch blocks, wire wrap strips, and/or barrier strip.
2. Wire Management Equipment: The wire management equipment shall be the focal point of each wire management system. It shall provide an orderly interface between outside and inside wires and cables (where used), distribution and interface wires and cables, interconnection wires and cables and associated equipment, jumper cables, and provide a uniform connection media for all system fire retardant wires and cables and other subsystems. It shall be fully compatible and interface to each cable tray, duct, wireway, or conduit used in the system. All interconnection or distribution wires and cables shall enter the system at the top (or from a wireway in the floor) via a overhead protection system and be uniformly routed down either side (or both at the same time) of the frames side protection system then laterally via a anchoring or routing shelf for termination on the rear of each respective terminating assembly. Each system shall be custom configured to meet the System design and user needs.

2.3 ENVIRONMENTAL REQUIREMENTS

Technical submittals shall identify the environmental specifications for housing the system. These environmental specifications shall identify the requirements for initial and expanded system configurations for:

- A. Floor loading for batteries and cabinets.
- B. Minimum floor space and ceiling heights.
- C. Minimum size of doors for equipment passage.
- D. Power requirements: The bidders shall provide the specific voltage, amperage, phases, and quantities of circuits required.
- E. Air conditioning, heating, and humidity requirements. The bidder shall identify the ambient temperature and relative humidity operating ranges required preventing equipment damage.
- F. Air conditioning requirements (expressed in BTU per hour, based on adequate dissipation of generated heat to maintain required room and equipment standards).
- G. Proposed floor plan based on the expanded system configuration of the bidder's proposed EPBX for this Facility.
- H. Conduit size requirement (between equipment room and console room).

2.4 INSTALLATION KIT

The kit shall be provided that, at a minimum, includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, and/or cable tray, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire wrap terminal or punch block. Unfinished or unlabeled wire connections shall not be allowed. Turn over to the RE all unused and partially opened installation kit boxes, coaxial, fiberoptic, and twisted pair cable reels, conduit, cable tray, and/or cable duct bundles, wire rolls, physical installation hardware. The following are the minimum required installation sub-kits:

- A. System Grounding:
 - 1. The grounding kit shall include all cable and installation hardware required. All radio equipment shall be connected to earth ground via internal building wiring, according to the NEC.
 - 2. This includes, but is not limited to:
 - a. Coaxial Cable Shields.
 - b. Control Cable Shields.
 - c. Data Cable Shields.

- d. Equipment Racks.
 - e. Equipment Cabinets.
 - f. Conduits.
 - g. Duct.
 - h. Cable Trays.
 - i. Power Panels.
 - j. Connector Panels.
 - k. Grounding Blocks.
- B. Coaxial Cable: The coaxial cable kit shall include all coaxial connectors, cable tying straps, heat shrink tabbing, hangers, clamps, etc., required to accomplish a neat and secure installation.
- C. Wire and Cable: The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, punch blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.
- D. Conduit, Cable Duct, and Cable Tray: The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this document.
- E. Equipment Interface: The equipment kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface the systems with the identified sub-system(s) according to the OEM requirements and this document.
- F. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to completely and correctly label each subsystem according to the OEM requirements, as-installed drawings, and this document.
- G. Documentation: The documentation kit shall include any item or quantity of items, computer discs, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to completely and correctly provide the system documentation as required by this document and explained herein.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Product Delivery, Storage and Handling:
- 1. Delivery: Deliver materials to the job site in OEM's original unopened containers, clearly labeled with the OEM's name and

equipment catalog numbers, model and serial identification numbers. The COTR may inventory the cable, patch panels, and related equipment.

2. Storage and Handling: Store and protect equipment in a manner, which will preclude damage as directed by the COTR.

B. System Installation:

1. After the contract's been awarded, and within the time period specified in the contract, the Contractor shall deliver the total system in a manner that fully complies with the requirements of this specification. The Contractor shall make no substitutions or changes in the System without written approval from the COTR.
2. The Contractor shall install all equipment and systems in a manner that complies with accepted industry standards of good practice, OEM instructions, the requirements of this specification, and in a manner which does not constitute a safety hazard. The Contractor shall insure that all installation personnel understands and complies with all the requirements of this specification.
3. The Contractor shall install suitable filters, traps, directional couplers, splitters, TC's, and pads for minimizing interference and for balancing the System. Items used for balancing and minimizing interference shall be able to pass telephone and data signals in the frequency bands selected, in the direction specified, with low loss, and high isolation, and with minimal delay of specified frequencies and signals. The Contractor shall provide all equipment necessary to meet the requirements of Paragraph 2.1.C and the System performance standards.
4. All passive equipment shall be connected according to the OEM's specifications to insure future correct termination, isolation, impedance match, and signal level balance at each telephone/data outlet.
5. Where TCOs are installed adjacent to each other, install one outlet for each instrument.
6. All lines shall be terminated in a suitable manner to facilitate future expansion of the System. There shall be a minimum of one spare 25 pair cable at each distribution point on each floor.
7. All vertical copper and fiber optic, and coaxial cables shall be terminated so any future changes only requires modifications of the existing EPBX or signal closet equipment only.

8. Terminating resistors or devices shall be used to terminate all unused branches, outlets, equipment ports of the System, and shall be devices designed for the purpose of terminating fiber optic or twisted pair, and coaxial, and lightwave cables carrying telephone and data, signals in telephone and data systems.
9. Equipment installed indoors shall be installed in metal cabinets with hinged doors and locks with two keys.

C. Conduit and Signal Ducts:

1. Conduit:

- a. The Contractor shall employ the latest installation practices and materials. The Contractor shall provide conduit, junction boxes, connectors, sleeves, weatherheads, pitch pockets, and associated sealing materials not specifically identified in this document as GFE. Conduit penetrations of walls, ceilings, floors, interstitial space, fire barriers, etc., shall be sleeved and sealed. The minimum conduit size shall be 25 mm (1 in.).
- b. All cables shall be installed in separate conduit and/or signal ducts (exception from the separate conduit requirement to allow telephone cables to be installed in partitioned cable tray with data cables may be granted in writing by the COTR if requested.) Conduits shall be provided in accordance with Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and NEC Articles 517 for Critical Care and 800 for Communications systems, at a minimum.
- c. When metal, plastic covered, etc., flexible cable protective armor or systems are specifically authorized to be provided for use in the System, their installation guidelines and standards shall be as specified herein, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and the NEC.
- d. When "innerduct" flexible cable protective systems is specifically authorized to be provided for use in the System, it's installation guidelines and standards shall be as the specified herein, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and the NEC.
- e. Conduit (including GFE) fill shall not exceed 40%. Each conduit end shall be equipped with a protective insulator or sleeve to cover the conduit end, connection nut or clamp, to protect the wire or cable during installation and remaining in the conduit.

Electrical power conduit shall be installed in accordance with the NEC. AC power conduit shall be run separate from signal conduit.

- f. When metal, plastic covered, etc., flexible cable protective armor or systems are specifically authorized to be provided for use in the System, their installation guidelines and standards shall be as specified herein, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and the NEC.
 - g. Ensure that Nurse Call, and Code Blue Systems (as identified by NEC Section 517) are completely separated and protected from all other systems.
2. Signal Duct, Cable Duct, or Cable Tray:
- a. The Contractor shall use existing signal duct, cable duct, and/or cable tray, when identified and approved by the COTR.
 - b. Approved signal and/or cable duct shall be a minimum size of 100 mm x 100 mm (4 in. X 4 in.) inside diameter with removable tops or sides, as appropriate. Protective sleeves, guides or barriers are required on all sharp corners, openings, anchors, bolts or screw ends, junction, interface and connection points.
 - c. Approved cable tray shall be fully covered, mechanically and physically partitioned for multiple electronic circuit use, and be UL certified and labeled for use with telecommunication circuits and/or systems. The COTR shall approve width and height dimensions.
- D. Connectors: Circuits, transmission lines, and signal extensions shall have continuity, correct connection and polarity. A uniform polarity shall be maintained between all points in the system.
1. Wires:
- a. Wire ends shall be neatly formed and where insulation has been cut, heat shrink tubing shall be employed to secure the insulation on each wire. Tape of any type is not acceptable.
 - b. Audio spade lugs shall be installed on each wire (including spare or unused) end and connect to screw terminals of appropriate size barrier strips. AC barrier strips shall be provided with a protective cover to prevent accidental contact with wires carrying live AC current. Punch blocks are approved for signal, not AC wires. Wire Nut or "Scotch Lock" connectors are not acceptable for signal wire installation.

2. Cables: Each connector shall be designed for the specific size cable being used and installed with the OEM's approved installation tool. Typical system cable connectors include; but, are not limited to: Audio spade lug, punch block, IDC connector.
- E. AC Power: AC power wiring shall be run separately from signal cable.
- F. Grounding:
1. General: The Contractor shall ground all Contractor Installed Equipment and identified Government Furnished Equipment to eliminate all shock hazards and to minimize, to the maximum extent possible, all ground loops, common mode returns, noise pickup, crosstalk, etc. The total ground resistance shall be 0.1 Ohm or less.
 - a. The Contractor shall install lightning arrestors and grounding in accordance with the NFPA and this specification.
 - b. Under no conditions shall the AC neutral, either in a power panel or in a receptacle outlet, be used for system control, subcarrier or audio reference ground.
 - c. The use of conduit, signal duct or cable trays as system or electrical ground is not acceptable and will not be permitted. These items may be used only for the dissipation of internally generated static charges (not to be confused with externally generated lightning) that may applied or generated outside the mechanical and/or physical confines of the System to earth ground. The discovery of improper system grounding shall be grounds to declare the System unacceptable and the termination of all system acceptance testing.
 2. Cabinet Buss: A common ground buss of at least #10 AWG solid copper wire shall extend throughout each equipment cabinet and be connected to the system ground. Provide a separate isolated ground connection from each equipment cabinet ground buss to the system ground. Do not tie equipment ground busses together.
 3. Equipment: Equipment shall be bonded to the cabinet bus with copper braid equivalent to at least #12 AWG. Self grounding equipment enclosures, racks or cabinets, that provide OEM certified functional ground connections through physical contact with installed equipment, are acceptable alternates.
 4. Cable Shields: Cable shields shall be bonded to the cabinet ground buss with #12 AWG minimum stranded copper wire at only one end of the cable run. Cable shields shall be insulated from each other,

faceplates, equipment racks, consoles, enclosures or cabinets; except, at the system common ground point. Coaxial and audio cables, shall have one ground connection at the source; in all cases, cable shield ground connections shall be kept to a minimum.

G. Equipment Assembly:

1. Cabinets:

- a. Each enclosure shall be: floor or wall mounted with standard knockout holes for conduit connections or cable entrance; provide for ventilation of the equipment; have front and rear locking doors (except wall mounted cabinets that require only a front locking door); power outlet strip(s), and connector or patch panel(s).
- b. Rack (including freestanding radio relay) mounted equipment shall be installed in the enclosure's equipment adjustable mounting racks with equipment normally requiring adjustment or observation mounted so operational adjustment(s) can be conveniently made. Heavy equipment shall be mounted with rack slides or rails allowing servicing from the front of the enclosure. Heavy equipment shall not depend only upon front panel mounting screws for support. Equipment shall be provided with sufficient cable slack to permit servicing by removal of the installed equipment from the front of the enclosure. A color matched blank panel (spacer) of 44 mm (1.75 in.) high, shall be installed between each piece of equipment (active or passive) to insure adequate air circulation. The enclosure shall be designed for efficient equipment cooling and air ventilation. Each console or cabinet shall be equipped with a quiet fan and nondisposable air filter.
- c. Enclosures and racks shall be installed plumb and square. Each shall be permanently attached to the building structure and held firmly in place. Fifteen inches of front vertical space opening shall be provided for additional equipment.
- d. Signal connector, patch, and bulkhead panels (i.e.: audio, data, control, analog video, etc.) shall be connected so that outputs from each source, device or system component shall enter the panel at the top row of jacks, beginning left to right as viewed from the front, which will be called "inputs". Each connection to a load, device or system component shall exit the panel at the

bottom row of jacks, beginning left to right as viewed from the front, which will be called "outputs".

- 1) Equipment located indoors shall be installed in metal racks or enclosures with hinged doors to allow access for maintenance without causing interference to other nearby equipment.
- 2) Cables shall enter the equipment racks or enclosures in such a manner that allows all doors or access panels to open and close without disturbing or damaging the cables.
- 3) All distribution hardware shall be securely mounted in a manner that allows access to the connections for testing and provides sufficient room for the doors or access panels to open and close without disturbing the cables.

H. Labeling: Provide labeling in accordance with ANSI/EIA/TIA-606-B. All lettering for voice and data circuits shall be stenciled using laser printers or thermal ink transfer process. Handwritten labels are not acceptable.

1. Cable and Wires (Hereinafter referred to as "Cable"): Cables shall be labeled at both ends in accordance with ANSI/EIA/TIA-606-B. Labels shall be permanent in contrasting colors. Cables shall be identified according to the System "Record Wiring Diagrams".
2. Equipment: System equipment shall be permanently labeled with contrasting plastic laminate or bakelite material. System equipment shall be labeled on the face of the unit corresponding to its source.
3. Conduit, Cable Duct, and/or Cable Tray: The Contractor shall label all conduit, duct and tray, including utilized GFE, with permanent marking devices or spray painted stenciling a minimum of 3 meters (10 ft.) identifying it as the System. In addition, each enclosure shall be labeled according to this standard.
4. Termination Hardware: The Contractor shall label workstation outlets and patch panel connections using color coded labels with identifiers in accordance with ANSI/EIA/TIA-606-B and the "Record Wiring Diagrams".

3.2 TESTS

A. Interim Inspection:

1. This inspection shall verify that the equipment provided adheres to the installation requirements of this document. The interim inspection will be conducted by a factory-certified representative

- and witnessed by a Government Representative. Each item of installed equipment shall be checked to insure appropriate UL certification markings. This inspection shall verify cabling terminations in telecommunications rooms and at workstations adhere to color code for T568A pin assignments and cabling connections are in compliance with ANSI/EIA/TIA standards. Visually confirm Category 6 marking of outlets, faceplates, outlet/connectors and patch cords.
2. The Contractor shall notify the COTR, in writing, of the estimated date the Contractor expects to be ready for the interim inspection, at least 20 working days before the requested inspection date.
 3. Results of the interim inspection shall be provided to the COTR and PM. If major or multiple deficiencies are discovered, a second interim inspection may be required before permitting the Contractor to continue with the system installation.
 4. The COTR shall determine if an additional inspection is required, or if the Contractor will be allowed to proceed with the installation. In either case, re-inspection of the deficiencies noted during the interim inspection(s), will be part of the proof of performance test. The interim inspection shall not affect the Systems' completion date. The COTR shall ensure all test documents will become a part of the Systems record documentation.
- B. Pretesting:
1. Upon completing the installation of the System, the Contractor shall align and balance the system. The Contractor shall pretest the entire system.
 2. Pretesting Procedure:
 - a. During the system pretest, the Contractor shall verify (utilizing the approved spectrum analyzer and test equipment) that the System is fully operational and meets all the system performance requirements of this standard.
 - b. The Contractor shall pretest and verify that all System functions and specification requirements are met and operational, no unwanted aural effects, such as signal distortion, noise pulses, glitches, audio hum, poling noise, etc. are present. The Contractor shall measure and record the aural carrier levels of each system telephone and data channel, at each of the following points in the system:

- 1) Signal Level at each interface point to the distribution system, the last outlet on each trunk line plus all outlets installed as part of this contract.
3. The Contractor shall provide four (4) copies of the recorded system pretest measurements and the written certification that the System is ready for the formal acceptance test shall be submitted to the COTR.

C. Acceptance Test:

1. After the System has been pretested and the Contractor has submitted the pretest results and certification to the COTR, then the Contractor shall schedule an acceptance test date and give the RE 30 days written notice prior to the date the acceptance test is expected to begin. The System shall be tested in the presence of a Government Representative and an OEM certified representative. The System shall be tested utilizing the approved test equipment to certify proof of performance and Life Safety compliance. The test shall verify that the total System meets the requirements of this specification. The notification of the acceptance test shall include the expected length (in time) of the test.

D. Verification Tests:

1. Test the copper cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors, and between conductors and shield, if cable has an overall shield. Test the operation of shorting bars in connection blocks. Test cables after termination and prior to cross-connection.

E. Performance Testing:

1. Perform Category 6 tests in accordance with ANSI/EIA/TIA-568-C.1 and ANSI/EIA/TIA-568-C.2. Test shall include the following: wire map, length, insertion loss, return loss, NEXT, PSNEXT, ELFEXT, PSELFEXT, propagation delay and delay skew.

- F. Total System Acceptance Test: The Contractor shall perform verification tests for copper cabling system after the complete telecommunication distribution system and workstation outlet are installed.

3.3 TRAINING

- A. Furnish the services of a factory-trained engineer or technician for a total of two four hour classes to instruct designated Facility IRM personnel. Instruction shall include cross connection, corrective, and preventive maintenance of the System and equipment.

- B. Before the System can be accepted by the VA, this training must be accomplished. Training will be scheduled at the convenience of the COTR.

3.4 GUARANTEE PERIOD OF SERVICE

A. Contractor's Responsibilities:

1. The Contractor shall guarantee that all installed material and equipment will be free from defects, workmanship, and will remain so for a period of one year from date of final acceptance of the System by the VA. The Contractor shall provide OEM's equipment warranty documents, to the COTR if the Facility has taken possession of the building(s)), that certifies each item of equipment installed conforms to OEM published specifications.
2. The Contractor's maintenance personnel shall have the ability to contact the Contractor and OEM for emergency maintenance and logistic assistance, remote diagnostic testing, and assistance in resolving technical problems at any time. The Contractor and OEM shall provide this contact capability at no additional cost to the VA.
3. All Contractor installation, maintenance, and supervisor personnel shall be fully qualified by the OEM and must provide two (2) copies of current and qualified OEM training certificates and OEM certification upon request.
4. Additionally, the Contractor shall accomplish the following minimum requirements during the one year guarantee period:
 - a. Response Time:
 - 1) The COTR is the Contractor's reporting and contact official for the System trouble calls, during the guarantee period.
 - 2) A standard workweek is considered 8:00 A.M. to 5:00 P.M., Monday through Friday exclusive of Federal Holidays.
 - 3) The Contractor shall respond and correct on-site trouble calls, during the standard work week to:
 - a) A routine trouble call within one working days of its report. A routine trouble is considered a trouble which causes a system outlet, station, or patch cord to be inoperable.
 - b) An emergency trouble call within 6 hours of its report. An emergency trouble is considered a trouble which causes a subsystem or distribution point to be inoperable at

anytime. Additionally, the loss of a minimum of 50 station or system lines shall be deemed as this type of a trouble call.

- 4) The Contractor shall respond on-site to a catastrophic trouble call within 4 hours of its report. A catastrophic trouble call is considered total system failure.
 - a) If a system failure cannot be corrected within four hours (exclusive of the standard work time limits), the Contractor shall be responsible for providing alternate system CSS or TCO equipment, or cables. The alternate equipment and/or cables shall be operational within four hours after the four hour trouble shooting time.
 - b) Routine or emergency trouble calls in critical emergency health care facilities (i.e., cardiac arrest, intensive care units, etc.) shall also be deemed as a catastrophic trouble call if so determined by the RE or Facility Director. The COTR shall notify the Contractor of this type of trouble call.
- b. Required on-site visits during the one year guarantee period
 - 1) The Contractor shall visit, on-site, for a minimum of eight hours, once every 12 weeks, during the guarantee period, to perform system preventive maintenance, equipment cleaning, and operational adjustments to maintain the System according the descriptions identified in this SPEC.
 - a) The Contractor shall arrange all Facility visits with the COTR prior to performing the required maintenance visits.
 - b) The Contractor in accordance with the OEM's recommended practice and service intervals shall perform preventive maintenance during a non-busy time agreed to by the COTR and the Contractor.
 - c) The preventive maintenance schedule, functions and reports shall be provided to and approved by the COTR.
 - 2) The Contractor shall provide the COTR a type written report itemizing each deficiency found and the corrective action performed during each required visit or official reported trouble call. The Contractor shall provide the COTR with sample copies of these reports for review and approval at the

beginning of the Total System Acceptance Test. The following reports are the minimum required:

- a) Monthly Report: The Contractor shall provide a monthly summary of all equipment and sub-systems serviced during this guarantee period to the COTR by the fifth working day after the end of each month. The report shall clearly and concisely describe the services rendered, parts replaced and repairs performed. The report shall prescribe anticipated future needs of the equipment and Systems for preventive and predictive maintenance.
 - b) Contractor Log: The Contractor shall maintain a separate log entry for each item of equipment and each sub-system of the System. The log shall list dates and times of all scheduled, routine, and emergency calls. Each emergency call shall be described with details of the nature and causes of emergency steps taken to rectify the situation and specific recommendations to avoid such conditions in the future.
- 3) The COTR shall provide, two (2) copies of actual reports for evaluation.
- a) The COTR shall ensure copies of these reports are entered into the System's official acquisition documents.
 - b) The COTR shall ensure copies of these reports are entered into the System's official technical as-installed documents.

B. Work Not Included: Maintenance and repair service shall not include the performance of any work due to improper use, accidents, other vendor, contractor, owner tampering or negligence, for which the Contractor is not directly responsible and does not control. The Contractor shall immediately notify the COTR in writing upon the discovery of these incidents. The COTR will investigate all reported incidents and render findings concerning any Contractor's responsibility.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 27 15 00
COMMUNICATIONS HORIZONTAL CABLING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This Section specifies the furnishing, installing, certification, testing, and guaranty of a complete and operating Voice and Digital Cable Distribution System (here-in-after referred to as "*the System*"), and associated equipment and hardware to be installed in the VA Medical Center here-in-after referred to as "*the Facility*". The System shall include, but not be limited to: equipment cabinets, interface enclosures, and relay racks; necessary combiners, traps, and filters; and necessary passive devices such as: splitters, couplers, cable "patch", "punch down", and cross-connector blocks or devices, voice and data distribution sub-systems, and associated hardware. The System shall additionally include, but not be limited to: telecommunication closets (TC); telecommunications outlets (TCO); copper and analog radio frequency (RF) systems coaxial distribution cables, connectors, "patch" cables, and/or "break out" devices.
- B. The System shall be delivered free of engineering, manufacturing, installation, and functional defects. It shall be designed, engineered and installed for ease of operation, maintenance, and testing.
- C. The term "provide", as used herein, shall be defined as: designed, engineered, furnished, installed, certified, and tested, by the Contractor.
- D. The Voice and Digital Telecommunication Distribution Cable Equipment and System provides the media which voice and data information travels over and connects to the Telephone System which is defined as an Emergency Critical Care Communication System by the National Fire Protection Association (NFPA). Therefore, since the System connects to or extends the telephone system, the System's installation and operation shall adhere to all appropriate National, Government, and/or Local Life Safety and/or Support Codes, which ever are the more stringent for this Facility. At a minimum , the System shall be installed according to NFPA, Section 70, National Electrical Code (NEC), Article 517 and Chapter 7; NFPA, Section 99, Health Care Facilities, Chapter 3-4; NFPA, Section 101, Life Safety Code, Chapters 7, 12, and/or 13; Joint Commission on Accreditation of Health Care Organization (JCAHCO), Manual for Health Care Facilities, all necessary

Life Safety and/or Support guidelines; this specification; and the original equipment manufacturer's (OEM) suggested installation design, recommendations, and instructions. The OEM and Contractor shall ensure that all management, sales, engineering, and installation personnel have read and understand the requirements of this specification before the System is designed, engineered, delivered, and provided.

- E. The COTR is the approving authority for all contractual and mechanical changes to the System. The Contractor is cautioned to obtain in writing, all approvals for system changes relating to the published contract specifications and drawings, from the COTR before proceeding with the change.

F. System Performance:

1. At a minimum, the System shall be able to support the following voice and data and analog RF operations for Category 6 Certified Telecommunication Service:
 - a. Provide the following interchange (or interface) capabilities:
 - 1) Basic Rate (BRI).
 - 2) Primary Rate (PRI).
 - b. ISDN measured at TCO:
 - 1) Narrow Band BRI:
 - a) B Channel: 64 kilo-Bits per second (kBps), minimum.
 - b) D Channel: 16 kBps, minimum.
 - c) H Channel: 384 kBps, minimum.
 - 2) Narrow Band PRI:
 - a) B Channel: 64 kBps, minimum.
 - b) D Channel: 64 kBps, minimum.
 - c) H Channel: 1,920 kBps, minimum.
 - 3) Wide (or Broad) Band: All channels: 140 mega(m)-Bps, minimum, capable to 565 mBps at "T" reference.
 - c. ATM operation and interface: ATM 155 mBps measured at TCO.
 - d. Frame Relay: All stated compliance's measured at TCO.
 - e. Integrated Data Communications Utility (IDCU) operation and interface: Measured at TCO.
 - f. Government Open Systems Interconnection Profile (GOSSIP) compliant: Measured at TCO.
 - g. Fiberoptic Distributed Data Interface (FDDI): A minimum 100 mBps to a maximum of 1.8 giga(g)-Bps data bit stream speed measured at TCO (shall be Synchronous Optical Network [SONET] compliant).

- h. System Sensitivity: Satisfactory service shall be provided for at least 3,000 feet for all voice and data and analog RF locations.
 - i. Other 1 Gb/s, 10 G Base-T Ethernet.
2. At a minimum the System shall support the following operating parameters:
- a. EPBX connection:
 - 1) System speed: 1.0 gBps per second, minimum.
 - 2) Impedance: 600 Ohms.
 - 3) Cross Modulation: -60 deci-Bel (dB).
 - 4) Hum Modulation: -55 dB.
 - 5) System data error: 10 to the -10 Bps, minimum.
 - 6) Loss: Measured at the frame output with reference Zero (0) deciBel measured (dBm) at 1,000 Hertz (Hz) applied to the frame input.
 - a) Trunk to station: 1.5 dB, maximum.
 - b) Station to station: 3.0 dB, maximum.
 - c) Internal switch crosstalk: -60 dB when a signal of ± 10 deciBel measured (dBm), 500-2,500 Hz range is applied to the primary path.
 - d) Idle channel noise: 25 dBm "C" or 3.0 dBm "O" above reference (terminated) ground noise, whichever is greater.
 - e) Traffic Grade of Service for Voice and Data:
 - (1) A minimum grade of service of P-01 with an average traffic load of 7.0 CCS per station per hour and a traffic overload in the data circuits will not interfere with, or degrade, the voice service.
 - (2) Average CCS per voice station: The average CCS capacity per voice station shall be maintained at 7.0 CCS when the EPBX is expanded up to the projected maximum growth as stated herein.
 - b. Telecommunications Outlet (TCO):
 - 1) Voice:
 - a) Isolation (outlet-outlet): 24 dB.
 - b) Impedance: 600 Ohms, balanced (BAL).
 - c) Signal Level: 0 deciBel per mili-Volt (dBmV) ± 0.1 dBmV.
 - d) System speed: 100 mBps, minimum.
 - e) System data error: 10 to the -6 Bps, minimum.
 - 2) Data:

- a) Isolation (outlet-outlet): 24 dB.
 - b) Impedance: 600 Ohms, BAL.
 - c) Signal Level: 0 dBmV \pm 0.1 dBmV.
 - d) System speed: 120 mBps, minimum.
 - e) System data error: 10 to the -8 Bps, minimum.
- 3) Analog RF Service:
- a) Broadcast or "off air" RF (or television) analog service is considered to be at RF (below 900 mHz in frequency bandwidth). Usually a RF television circuits require a single coaxial cable plant from the headend to each TC location.
 - b) Isolation (outlet-outlet): 14 dB.
 - c) Impedance: 75 Ohms, Unbalanced (UNBAL).
 - d) Signal Level: 10 dBmV \pm 5.0 dBmV.
 - e) Bandwidth: 6.0 mHz per channel, fully loaded.

1.2 RELATED WORK

- A. Specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Specification Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.
- C. Specification Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.
- D. Specification Section 27 10 00, STRUCTURED CABLING.
- E. Specification Section 26 27 26, WIRING DEVICES.
- F. Specification Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.
- G. Specification Section 27 41 31, MASTER ANTENNA TV EQUIPMENT AND SYSTEMS.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in text by basic designation only. Except for a specific date given the issue in effect (including amendments, addenda, revisions, supplements, and errata) on the date the system's submittal is technically approved by VA, shall be enforced.
- B. National Fire Protection Association (NFPA):

70	NATIONAL ELECTRICAL CODE (NEC)
----	--------------------------------

75	Protection of Electronic Computer/Data Processing Equipment
77	Recommended Practice on Static Electricity
	Standard for Health Care Facilities
101	Life Safety Code
1221	Emergency Services Communication Systems

C. Underwriters Laboratories, Inc. (UL):

65	Wired Cabinets
96	Lightning Protection Components
96A	INSTALLATION REQUIREMENTS FOR LIGHTNING PROTECTION SYSTEMS
467	Grounding and Bonding Equipment
497/497A/497B	PROTECTORS FOR PAIRED CONDUCTORS/ COMMUNICATIONS CIRCUITS/DATA COMMUNICATIONS AND FIRE ALARM CIRCUITS
884	Underfloor Raceways and Fittings

D. ANSI/EIA/TIA Publications:

568C	Commercial Building Telecommunications Wiring Standard
569C	Commercial Building Standard for Telecommunications Pathways and Spaces
606B	ADMINISTRATION STANDARD FOR THE TELECOMMUNICATIONS INFRASTRUCTURE OF COMMERCIAL BUILDINGS
607B	Grounding and Bonding Requirements for Telecommunications in Commercial Buildings

E. International Telecommunication Union - Telecommunication Standardization Sector (ITU-T).

F. Federal Information Processing Standards (FIPS) Publications.

G. Federal Communications Commission (FCC) Publications: Standards for telephone equipment and systems.

H. United States Air Force: Technical Order 33K-1-100 Test Measurement and Diagnostic Equipment (TMDE) Interval Reference Guide.

I. Joint Commission on Accreditation of Health Care Organization (JCAHO): Comprehensive Accreditation Manual for Hospitals.

J. National and/or Government Life Safety Code(s): The more stringent of each listed code.

1.4 QUALITY ASSURANCE

- A. The authorized representative of the OEM, shall be responsible for the design, satisfactory total operation of the System, and its certification.
- B. The OEM shall meet the minimum requirements identified in Paragraph 2.1.A. Additionally, the Contractor shall have had experience with three or more installations of systems of comparable size and complexity with regards to coordinating, engineering, testing, certifying, supervising, training, and documentation. Identification of these installations shall be provided as a part of the submittal as identified in Paragraph 1.5.
- C. The System Contractor shall submit certified documentation that they have been an authorized distributor and service organization for the OEM for a minimum of three (3) years. The System Contractor shall be authorized by the OEM to certify and warranty the installed equipment. In addition, the OEM and System Contractor shall accept complete responsibility for the design, installation, certification, operation, and physical support for the System. This documentation, along with the System Contractor and OEM certification must be provided in writing as part of the Contractor's Technical Submittal.
- D. All equipment, cabling, terminating hardware, TCOs, and patch cords shall be sourced from the certifying OEM or at the OEM's direction, and support the System design, the OEM's quality control and validity of the OEM's warranty.
- E. The Contractor's Telecommunications Technicians assigned to the System shall be fully trained, qualified, and certified by the OEM on the engineering, installation, and testing of the System. The Contractor shall provide formal written evidence of current OEM certification(s) for the installer(s) as a part of the submittal or to the RE before being allowed to commence work on the System.

1.5 SUBMITTALS

- A. Provide submittals in accordance with Specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. The RE shall retain one copy for review and approval.
 - 1. If the submittal is approved the COTR shall retain one copy for Official Records and return three (3) copies to the Contractor.
 - 2. If the submittal is disapproved, three (3) copies will be returned to the Contractor with a written explanation attached that indicates

the areas the submittal deviated from the System specifications. The COTR shall retain one copy for Official Records.

- B. Environmental Requirements: Technical submittals shall confirm the environmental specifications for physical TC areas occupied by the System. These environmental specifications shall identify the requirements for initial and expanded system configurations for:
1. Floor loading for batteries and cabinets.
 2. Minimum floor space and ceiling heights.
 3. Minimum size of doors for equipment passage.
 4. Power requirements: The Contractor shall provide the specific voltage, amperage, phases, and quantities of circuits required.
 5. Air conditioning, heating, and humidity requirements. The Contractor shall identify the ambient temperature and relative humidity operating ranges required preventing equipment damage.
 6. Air conditioning requirements (expressed in BTU per hour, based on adequate dissipation of generated heat to maintain required room and equipment standards).
 7. Proposed floor plan, based on the expanded system configuration for this FACILITY.
 8. Conduit size requirement (between main TC, computer, and console rooms).
 9. Main backbone, trunk line, riser, and horizontal cable pathways, cable duct, and conduit requirements between each MTC, TC, and TCO.
- C. Documents: The submittal shall be separated into sections for each subsystem and shall contain the following:
1. Title page to include:
 - a. VA Medical Center.
 - b. Contractor's name, address, and telephone (including FAX) numbers.
 - c. Date of Submittal.
 - d. VA Project No.
 2. List containing a minimum of three locations of installations of similar size and complexity as identified herein. These locations shall contain the following:
 - a. Installation Location and Name.
 - b. Owner's or User's name, address, and telephone (including FAX) numbers.
 - c. Date of Project Start and Date of Final Acceptance by Owner.

- d. System Project Number.
 - e. Brief (three paragraphs minimum) description of each system's function, operation, and installation.
3. Narrative Description of the system.
 4. A List of the equipment to be furnished. The quantity, make, and model number of each item is required. Indicate the required equipment items quantities that will satisfy the needs of the system. Delete equipment items that are not required add additional items required, and renumber section as per system design. The following is the minimum equipment required by the system:

QUANTITY	UNIT
//As required//	Environmental Cabinet
//As required//	Distribution/Interface Cabinet
//As required//	Cross Connection (CCS) Systems
//As required//	Wire Management System/Equipment
//As required//	Telecommunications Outlets (TCO)
//As required//	Distribution Cables
//As required//	TCO Connection Cables
//As required//	System Connectors
//As required//	Terminators
//As required//	Distribution Frames
//As required//	Telecommunications Closets (TC)
//As required//	Environmental Requirements
1 ea.	Installation Kit
//As required//	Separate List Containing Each Equipment Spare(s)

5. Pictorial layouts of each MTC, IMTC, and RTCs; MCCA, IMCCA, VCCA, and HCCA termination cabinet(s), each distribution cabinet layout drawing, and TCO as each is expected to be installed and configured.
6. Equipment technical literature detailing the electrical and technical characteristics of each item of equipment to be furnished.
7. Engineering drawings of the System, showing calculated signal levels at the EPBX output, each input and output distribution point, proposed TCO values, and signal level at each TCO multipin, fiberoptic, and coaxial cable jack.
8. List of test equipment as per paragraph 1.5.D. below.

9. Letter certifying that the Contractor understands the requirements of the SAMPLES Paragraph 1.5.E.
 10. Letter certifying that the Contractor understands the requirements of Section 3.2 concerning acceptance tests.
- D. Test Equipment List:
1. The Contractor is responsible for furnishing all test equipment required to test the system in accordance with the parameters specified. Unless otherwise stated, the test equipment shall not be considered part of the system. The Contractor shall furnish test equipment of accuracy better than the parameters to be tested.
 2. The test equipment furnished by the Contractor shall have a calibration tag of an acceptable calibration service dated not more than 12 months prior to the test. As part of the submittal, a test equipment list shall be furnished that includes the make and model number of the following type of equipment as a minimum:
 - a. Spectrum Analyzer.
 - b. Signal Level Meter.
 - c. Volt-Ohm Meter.
 - d. Time Domain Reflectometer (TDR) with strip chart recorder (Data and Optical Measuring).
 - e. Bit Error Test Set (BERT).
 - f. Camera with a minimum of 60 pictures to that will develop immediately to include appropriate test equipment adapters. A video camera in VHS format is an acceptable alternate.
 - g. Video Waveform Monitor.
 - h. Video Vector Scope.
 - i. Color Video Monitor with audio capability.
 - j. 100 mHz Oscilloscope with video adapters.
- E. Samples: A sample of each of the following items shall be furnished to the RE for approval prior to installation.
1. TCO Wall Outlet Box 4" x 4"x 2.5" with:
 - a. One each telephone (or voice) rj45 jack installed.
 - b. Two each multi pin data rj45 jacks installed.
 - c. Cover Plate installed.
 - d. RF (F)/video installed.
 2. Data CCS patch panel, punch block or connection device with RJ45 connectors installed.

3. Telephone CCS system with IDC and/or RJ45 connectors and cable terminal equipment installed.
4. 610 mm (2 ft.) section of each copper cable to be used with cable sweep tags as specified in paragraph 2.4.H and connectors installed.
5. 610 mm (2 ft.) section of each fiber optic cable to be used with cable sweep tags as specified in paragraph 2.4.H and connectors installed.
6. 610 mm (2 ft.) section of each analog RF, video coaxial and audio cable to be used with cable sweep tags as specified in paragraph 2.4.H and connectors installed.
7. Analog RF patch panel or breakout box with cable management equipment and "F" connectors installed.

F. Certifications:

1. Submit written certification from the OEM indicating that the proposed supervisor of the installation and the proposed provider of the contract maintenance are authorized representatives of the OEM. Include the individual's exact name and address and OEM credentials in the certification.
2. Submit written certification from the OEM that the wiring and connection diagrams meet National and/or Government Life Safety Guidelines, NFPA, NEC, UL, this specification, and JCAHCO requirements and instructions, requirements, recommendations, and guidance set forth by the OEM for the proper performance of the System as described herein. The VA will not approve any submittal without this certification.
3. Preacceptance Certification: This certification shall be made in accordance with the test procedure outlined in paragraph 3.2.B.

G. Equipment Manuals: Fifteen (15) working days prior to the scheduled acceptance test, the Contractor shall deliver four complete sets of commercial operation and maintenance manuals for each item of equipment furnished as part of the System to the COTR. The manuals shall detail the theory of operation and shall include narrative descriptions, pictorial illustrations, block and schematic diagrams, and parts list.

H. Record Wiring Diagrams:

1. Fifteen (15) working days prior to the acceptance test, the Contractor shall deliver four complete sets of the Record Wiring Diagrams of the System to the COTR. The diagrams shall show all inputs and outputs of electronic and passive equipment correctly

identified according to the markers installed on the interconnecting cables, Equipment and room/area locations.

2. The Record Wiring Diagrams shall be in hard copy and two compact disk (CD) copies properly formatted to match the Facility's current operating version of Computer Aided Drafting (AutoCAD) system. The COTR shall verify and inform the Contractor of the version of AutoCAD being used by the Facility.

I. Surveys Required As A Part Of The Technical Submittal: The Contractor shall provide the following surveys that depict various system features and capacities are required in addition to the on site survey requirements described herein. Each survey shall be in writing and contain the following information (the formats are suggestions and may be used for the initial Technical Submittal survey requirements), as a minimum:

1. Projected Maximum Growth: The Contractor shall clearly and fully indicate this category for each item identified in Paragraph 1.4.H.1.a. as a part of the technical submittal. For this purpose, the following definitions and sample connections are provided to detail the system's capability:

EQUIPPED ITEM	CAPACITY	WIRED CAPACITY
Servers		
PC's		
Projected Maximum Growth		

The Contractor shall clearly and fully indicate this category for each item identified in Paragraph 1.4.H.2.a. as a part of the technical submittal.

2. Cable Distribution System Design Plan: A design plan for the entire cable distribution systems requirements shall be provided with this document. A specific cable count shall coincide with the total growth items as described herein. It is the Contractor's responsibility to provide the Systems entire cable requirements and engineer a distribution system requirement plan using the format of the following paragraph(s), at a minimum:

a. UTP (and/or STP) Requirements/Column Explanation:

Column	Explanation
FROM BUILDING	Identifies the building by number, title, or location, and main signal closet or intermediate signal closet cabling is provided from
BUILDING	Identifies the building by number, title, or location cabling is to be provided in
TO BUILDING IMC	Identifies building main terminal signal closet, by room number or location, to which cabling is provided too, in, and from
FLOOR	Identifies the floor by number (i.e. 1st, 2nd, etc.) cabling and TCOs are to be provided
TC ROOM NUMBER	Identifies the floor signal closet room, by room number, which cabling shall be provided
ROOM NUMBER	Identifies the room, by number, from which cabling and TCOs shall be provided
NUMBER OF CABLE PAIR	Identifies the number of cable pair required to be provided on each floor designated OR the number of cable pair (VA Owned) to be retained
NUMBER OF STRANDS USED/SPARE	Identifies the number of strands provided in each run

b. Analog RF Cabling Requirements/Column Explanation:

Column	Explanation
FLOOR	Identifies the floor by number (i.e. 1st, 2nd, etc.)
TC ROOM NUMBER	Identifies the room, by number, from which cabling shall be installed
TO FLOOR TC	Identifies building, by number or location, to which cabling is installed
NUMBER OF STRANDS	Identifies the number of strands in each run of RF cable
INSTALLED METHOD	Identifies the method of installation in accordance with as designated herein
NOTES	Identifies a note number for a special feature or equipment
BUILDING MTC	Identifies the building by number or title

3. Telecommunication Outlets: The Contractor shall clearly and fully indicate this category for each outlet location and compare the

total count to the locations identified above as a part of the technical submittal. Additionally, the Contractor shall indicate the total number of spares.

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIALS

A. System Requirements:

1. The System shall provide the following minimum services that are designed in accordance with and supported by an Original Equipment Manufacturer (OEM), and as specified herein. The System shall provide continuous inter and/or intra-Facility voice and data, and analog RF service. The System shall be capacity sized so that loss of connectivity to external telephone systems shall not affect the Facilities operation in specific designated locations. The System shall:
 - a. Be capable of inter-connecting and functioning fully with the existing Local Telephone Exchange (LEC) Network(s), Federal Telephone System (FTS) Inter-city Network(s), Inter-exchange Carriers, Integrated Services Digital Network (ISDN), Electronic Private Branch Exchange (EPBX) switches, asynchronous/synchronous data terminals and circuits including Automatic Transfer Mode (ATM), Frame Relay, and local area networks (LAN), at a minimum.
 - b. Be a voice and data cable distribution system that is based on a physical "Star" Topology. An Analog RF coaxial cable distribution system shall be provided in a "home run" configuration from each associated riser TC to identified locations and as shown on the drawings.
 - c. Be compatible with and able to provide direct digital connection to trunk level equipment including, but, not limited to: directly accessing trunk level equipment including the telephone system, audio paging, Industry Standard "T" and/or "DS" carrier services and external protocol converters. Additionally, connections to "T" and/or "DS" access/equipment or Customer Service Units (CSU) that are used in FTS and other trunk applications shall be included in the System design. Provide T-1 access/equipment (or CSU), as required for use, in FTS and other trunk applications by system design if this equipment is not provided by the existing telephone system and/or will be deactivated by the installation of the System. The Contractor shall provide all T-1 equipment

necessary to terminate and make operational the quantity of circuits designated. The CSU's shall be connected to the System's emergency battery power supply. The System shall be fully capable of operating in the Industry Standard "DS" protocol and provide that service when required.

2. Cable Systems - Twisted Pair, and Analog RF Coaxial:

a. General:

- 1) The Contractor shall be responsible for providing a new system conforming to current and accepted telephone and digital // , and analog RF industrial/commercial cable distribution standards. The distribution cable installation shall be fully coordinated with the COTR and the Contractor prior to the start of installation.
- 2) The Contractor is responsible for complete knowledge of the space and cable pathways (i.e. equipment rooms, TCs, conduits, wireways, etc.) of the Facility. The Contractor shall at a minimum design and install the System using the Pathway Design Handbook H-088C3, TIA/EIA Telecommunications Building Wiring Standards, and Facility Chief of Information Resource Management's (IRM) instructions, as approved in writing by the COTR.
- 3) The System cables shall be fully protected by cable duct, trays, wireways, conduit (rigid, thin wall, or flex), and when specifically approved, flexible innerduct. It is the responsibility of the Contractor to confirm all contract drawings and the Facility's physical layout to determine the necessary cable protective devices to be provided. If flexible innerduct is used, it shall be installed in the same manner as conduit.
- 4) Cable provided in the system (i.e. station cabling) shall conform to accepted industry and OEM standards with regards to size, color code, and insulation. The pair twists of any pair shall not be exactly the same as any other pair within any unit or sub-unit of cables that are bundled in twenty-five (25) pairs or less. The absence of specifications regarding details shall imply that best general industry practices shall prevail and that first quality material and workmanship shall

be provided. Certification Standards, (i.e., EIA, CCITT, FIPPS, and NFPA) shall prevail.

- 5) Some areas of this Facility may be considered "plenum". All wire and cable used in support of the installation in those areas (if any) shall be in compliance with national and local codes pertaining to plenum environments. It is the responsibility of the Contractor to review the VA's cable and wire requirements with the COTR prior to installation to confirm the type of environment present at each location.
- 6) The Contractor shall provide cables that furnishes the number of cable pairs required in accordance with the System requirements described herein. The Contractor shall fully coordinate and obtain approval of the design with the OEM, RE and the IRM prior to installation.
- 7) All metallic cable sheaths, etc. shall be grounded by the Contractor (i.e.: risers, underground, station wiring, etc.) as described herein.
- 8) If temporary cable and wire pairs are used, they shall be installed so as to not present a pedestrian safety hazard and the Contractor shall be responsible for all work associated with the temporary installation and for their removal when no longer necessary. Temporary cable installations are not required to meet Industry Standards; but, must be reviewed and approved by the COTR prior to installation.
- 9) Conductors shall be cabled to provide protection against induction in voice and data and analog RF circuits. Crosstalk attenuation within the System shall be in excess of -80 dB throughout the frequency ranges specified.
- 10) Measures shall be employed by the Contractor to minimize the radiation of RF noise generated by the System equipment so as not to interfere with audio, video, data, computer main distribution frame (MDF), telephone customer service unit (CSU), and electronic private branch exchange (EPBX) equipment the System may service.
- 11) The System's cables shall be labeled on each end and been fully tested and certified in writing by the Contractor to the COTR before proof of performance testing can be conducted. The as-installed drawings shall identify each cable as labeled,

used cable, and bad cable pairs. Minimum test requirements are for impedance compliance, inductance, capacitance, signal level compliance, opens, shorts, cross talk, noise, and distortion, and split pairs on all cables in the frequency ranges specified. The tests required for data cable must be made to guarantee the operation of this cable at not less than 10 mega (m) Hertz (Hz) full bandwidth, fully channel loaded and a Bit Error Rate of a minimum of 10^{-6} at the maximum rate of speed. All cable installation and test records shall be made available at acceptance testing by the Contractor and thereafter maintained in the Facility's Telephone Switch Room. All changes (used pair, failed pair, etc.) shall be posted in these records as the change occurs.

- 12) The Contractor shall provide proper test equipment to guarantee that cable pairs and analog RF coaxial cable meet each OEM's standard transmission requirements, and guarantee the cable will carry data transmissions at the required speeds, frequencies, and fully loaded bandwidth.
- 13) The Contractor shall coordinate with the COTR to install baseband analog RF, video, and audio interface cables and circuits from each TC to designated TCO locations and as shown on the drawings. The Contractor shall work with the COTR of MMPS to establish circuits throughout the Facility and shall provide proper test equipment to guarantee that analog RF, video, and audio cables meet each OEM's standard transmission requirements, and guarantee the cables will carry analog video and audio transmissions at the required speeds, frequencies, and fully loaded bandwidth.

- b. Telecommunications Closets (TC): In TC's that are served with both a UTP and STP backbone cable and a fiber optic backbone cable, the UTP and STP cable shall be terminated on separate RJ-45, 8-pin connectors with 110A or equivalent type punch down blocks located on the back or front of a 48-port modular patch panel dedicated to data applications. All connecting cables required to extend these cables (i.e. patch cords, twenty-five pair connectors, etc.), in the TC's shall also be provided by the Contractor to insure a complete and operational system:

c. Riser Cable:

- 1) All communication riser cables shall be listed as being suitable for the purpose and marked accordingly per Articles 517, 700, and 800 of the NEC.
- 2) All voice and data communication (analog RF coaxial cable is not to be provided in riser systems) riser cables shall be STP or Unshielded Twisted Pair (UTP), minimum 24 American Wire Gauge (AWG) solid, thermoplastic insulated conductors. They shall be enclosed with a thermoplastic outer jacket.
- 3) The Contractor shall provide and install inside riser cables to insure full service to all voice cable pairs identified in each TC terminating enclosure plus not less than 50% additional spare capacity.
- 4) The complete riser cabling system shall be labeled and tested as described herein.

d. Horizontal and Station Cable:

- 1) A Four (4) UTP 24 AWG station wiring cable shall be installed from the top TCO jack to the TC and shall be of a type designed to support Category 6 communications (500 mega-Hertz [mHz] or above). At the jack location, terminate all four pair on the RJ-45/11 jack. At the signal closet, all four pair shall be terminated on the modular punch down blocks.
- 2) A Four (4) UTP 24 AWG (in thermoplastic jacket unless otherwise specified by COTR) station wiring cable shall be installed from each of the two (2) bottom TCO RJ-45 jacks (shall conform to EIA/TIA 568 Standard "T568A" and NFPA) to the TC and shall be of a type designed to support Category 6 communications (500 mHz or above).

e. Telecommunication Outlets (TCO), Jacks: All TCO's shall have a minimum of three (3) RJ-45 type jacks. The top jack shall be an eight pin RJ-45/11 compatible jack, labeled, and designated for telephone applications only. The bottom two jacks shall be eight pin RJ-45 type unkeyed (sometimes called center keyed) jacks, labeled, and designated for data.

f. Patient Bedside Prefabricated Units (PBPU): Where PBPU's exist in the Facility, the Contractor shall identify the single gang "box" location on the PBPU designated for installation of the telephone jack. This location shall here-in-after be identified as the

PBTCO. The Contractor shall be responsible for obtaining written approval and specific instructions from the PBPU OEM regarding the necessary disassembly and reassembly of each PBPU to the extent necessary to pull wire from above the ceiling junction box to the PBPU box reserved for the PBTCO. A Contractor provided stainless steel cover plate approved for use by the PBPU OEM and COTR shall finish out the jack installation. Under no circumstances shall the Contractor proceed with the PBPU installations without the written approval of the PBPU OEM and the specific instructions regarding the attachment to or modifying of the PBPU. The COTR shall be available to assist the Contractor in obtaining these approvals and instructions in a timely manner as related to the project's time constraints. It is the responsibility of the Contractor to maintain the UL integrity of each PBPU. If the Contractor violates that integrity, it shall be the responsibility of the Contractor to obtain on site UL re-certification of the violated PBPU at the direction of the COTR and at the Contractor's expense.

3. Specific Subsystem Requirements: The System shall consist, as a minimum, of the following independent sub-systems to comprise a complete and functional voice and digital and analog RF telecommunications cabling system: "Main" (MTC), "intermediate" (IMTC), and "riser" (RTC) TC's; "backbone" cabling (BC) system; "vertical" (or "riser") trunk cabling system; "horizontal" (or "lateral") sub-trunk cabling system, vertical and horizontal cross-connection (VCC and HCC respectively) cabling systems, and TCO's with a minimum of three (3) RJ-45 jacks for the appropriate telephone, Data connections, and additional jacks, connectors, drop and patch cords, terminators, and adapters provided.

a. Telecommunication Closet (TC):

- 1) There shall be a minimum of one TC for the MTC, each building IMTC, and each RTC per building floor location. However, in large building(s), where the horizontal distance to the farthest voice and digital work area may exceed 90 Meters (M) (or 295 feet [ft]), additional TC's shall be provided as described herein. The maximum DC resistance per cable pair shall be no more than 28.6 Ohms per 305 M (1,000 feet). Each TC shall be centrally located to cover the maximum amount of

local floor space. The TC's house in cabinets or enclosures, on relay racks, and/or on backboards, various telecommunication data equipment, controllers, multiplexers, bridges, routers, LAN hub(s), telephone cross-connecting, active and passive equipment.

- 2) Additionally, the TC's may house fire alarm, nurses call, code one (or blue), video, public address, radio entertainment, intercom, and radio paging equipment. Regardless of the method of installation, mounting, termination, or cross-connecting used, all backbone, vertical, and horizontal copper and fiber optic and analog RF coaxial cables shall be terminated on appropriate cross-connection systems (CCS) containing patch panel(s), punch blocks, and/or breakout devices provided in enclosures and tested as described herein. A cable and/or wire management system shall be a part of each CCS.
 - a) A minimum of three 110-120 VAC active quad outlets shall be provided, each with "U" grounded receptacles at a minimum of one outlet for each front, side and back wall. These outlets shall be separately protected by an AC circuit breaker provided in the designated Government Emergency Critical Care AC power panel, that is connected to the Facilities Emergency AC Power Distribution System. For larger building TC applications, a minimum of one additional quad AC outlet shall be provided for every 800M² (or 8,000 ft²) of useable floor space. Additional outlets shall be equally spaced along the wall.
 - b) Climate control shall be provided in each TC 24 hours a day, seven days per week and 52 week per year to prevent failure of electronic components and for mission critical functional applications. The COTR is responsible for informing the Contractor regarding the minimum climate control requirements. In identified hostile TC locations where it has been determined (by the COTR) that proper TC climate or external signal radiation cannot be properly maintained or controlled, the Contractor may, at his/her option, provide a minimum of two individual and properly sized self contained climate controlled equipment cabinet enclosures; one designated for voice, and one designated

for data, and one additional cabinet designated for analog RF service, in each TC location identified on the drawings, in lieu of providing additional required TC air handling capability.

b. Cross-connect Systems (CCS):

- 1) The CCS shall be selected based on the following criteria: requires the use of a single tool, has the fewest amount of parts, and requires the least amount of assembly or projected trouble shooting time during the life of the system.
- 2) The CCS system used at the MTC, each IMTC, and each TC shall force cross-connect cable slack management through adherence to the OEM's installation methods, provided cable management systems, and as described herein, so that moves, adds, and changes can be administered easily and cost effectively.
- 3) Copper Cables: The MTC, each IMTC, and TC shall contain a copper CCS sized to support the System TCO's and connections served by each individual TC and as shown on the drawings. The System layout shall allow for a minimum of 50% anticipated growth. Additionally, each CCS must provide maximum flexibility, while maintaining performance, in order to meet system-changing requirements that are likely to occur throughout its useful life.
- 4) The Contractor shall not "cross-connect" the copper or cabling systems and subsystems even though appropriate "patch" cords are to be provided for each "patch", "punch", or "breakout" panel. In addition, the Contractor shall not provide active electronic distribution or interface equipment as a part of the System.
- 5) Grounding: Proper grounding and bonding shall be provided for each TC and all internal equipment. Reference shall be made to proper codes and standards, such that all grounding systems must comply with all applicable National, Regional, and Local Building and Electrical codes. The most stringent code of these governing bodies shall apply.
 - a) If local grounding codes do not exist for the System location, then at a minimum, a #6 American Wire Gauge (AWG) stranded copper wire, or equivalent copper braid, shall be connected to a separate earth grounding system for each TC

(the looping of TC's in a general location is allowed as long as the specifications contained herein are met). Under no circumstance shall the AC neutral be used for this ground. See PART 3 - EXECUTION for specific grounding instructions.

- c. Main Cross-connection Subsystem (MCCS): The MCCS is located in the MTC and it is the common point of appearance for existing inter and intra-building copper and fiber optic "backbone" system cables, and connections to the telephone and data cable systems. The MTC houses telephone EPBX, public address, radio paging interface, routers, and main hierarchical data LAN concentrating equipment. Additionally, it provides a single administration and management point for the entire System.
- d. Voice (or Telephone) Cable Cross-Connection Subsystem:
 - 1) Due to the usually high number of copper cable termination's required at the MCCS, Insulation Displacement Connection (IDC) hardware shall be used. Termination options shall include the following for a Category 6 Cabling System: IDC termination of cross-connection wire(s), IDC patch cord connector to IDC patch cord connector, and hybrid modular cord to IDC patch cord connector shall be the minimum provided.
 - 2) Additionally, due to the large or many MCCS (at initial installation and over the life of the System) copper termination points, the CCS that makes the best use of real estate while still following the OEM design and installation guidelines, and meeting the specifications described herein, shall be provided.
 - 3) For ease of maintenance purposes, all terminations shall be accessible without the need for disassembly of the IDC wafer. IDC wafers shall be removable from their mounts to facilitate testing on either side of the connector. Designation strips or labels shall be removable to allow for inspection of the terminations. The maximum number of terminations on a wall or on a rack frame or panel shall comply with the OEM recommendations and guidelines, and as described herein. A cable management system shall be provided as a part of the IDC.

- 4) IDC connectors shall be capable of supporting cable re-terminations without damaging the connector and shall support a minimum of 200 (telephone equipment standard compliant) IDC insertions or withdrawals on either side of the connector panel.
 - 5) A non-impact termination method using a full-cycle terminating tool having both a tactile and an audible feedback to indicate proper termination is required. For personnel safety and ease of use in day to day administration, high impact installation tools shall not be used.
 - 6) The splitting of pairs within cables between different jacks or connections shall not be allowed. In the case of ISDN and/or ATM and /or Frame Relay applications, terminating resistors shall be provided externally to the patch panel connector or jack.
 - 7) UTP or STP cross connecting wires shall be provided for each "pair" of connection terminals plus an additional 50% spare.
- e. Data Cross-Connection Subsystems:
- 1) The MCCS shall be a Main Distribution Terminating (MDT) data unit and shall be provided in the MTC. The MDT shall consist of a "patch" panel(s) provided with modular RJ45 female connectors for cross-connection of all copper data cable terminations. The panels shall provide for system grounding (where no dielectric cables are used) and be provided with a cable management system.
 - 2) Each panel shall conform to EIA dimensions and be suitable for mounting in standard equipment racks, have the RJ45 jacks aligned in two horizontal rows (up to a maximum of 48 jacks per panel), and shall not exceed the OEM's recommendations. Each RJ45 jack shall be of modular design and capable of accepting and functioning with other modular (i.e. RJ11) plugs without damaging the jack. It is not necessary to provide a jack for unused positions that are not part of the 50% expansion requirement.
 - a) The splitting of pairs within cables between different jacks shall not be allowed. In the case of ISDN and/or ATM and/or Frame Relay applications, terminating resistors

shall be provided externally to the patch panel connector or jack.

- 3) A patch cord shall be provided for each system "pair" of connection jacks. Each patch cord shall have modular RJ45 connectors provided on each end to match the panel's modular RJ45 female jack's being provided.
- f. Intermediate Cross-connection Subsystems (IMCCS): The MTC and each IMTC shall be provided with an IMCCS that shall be the connection point between the MCCA system and the distribution backbone cable and the IMCCS, that is located in one or more buildings on a campus, where each IMCCS is placed by system design. For a technical explanation of internal equipment and system requirements, refer to the above MTC and MCCA paragraphs.
- g. Distribution Cable Systems / Backbone Cable System (Common to Inter-buildings): The backbone cable system extends from the MCCA to each IMCCS to establish service between buildings on a campus. The media (copper and fiber optic) used in the BC system shall be designed according to the system requirements, OEM standards and guidelines, and as described herein. A multi-pair copper for voice and data, and separate multiple fiber optic backbone system shall be provided as a part of the BC distribution system.
- 1) All outside cable shall be minimum of STP or UTP, 22 AWG solid conductors, solid PVC insulation, and filled core (flexgel - waterproof Rural Electric Association (REA) LISTED PE 39 CODE) between the outer armor or jacket and inner conductors protective lining.
 - 2) The copper cable system shall be configured as a "Star" Topology with separate dedicated cables between the MCCA and each IMCCS.
 - 3) UTP and STP copper cables shall consist of thermoplastic insulated conductors formed into binder groups. The groups are to be identified by distinctly colored binders and assembled to form a single compact core covered by a protective sheath. Each cable shall be rated for Category 6 Telecommunications System Service. A minimum of eight pairs per circuit, plus an additional 50% spare for growth shall be provided.
 - 4) Where the distance limitations of UTP or STP may be exceeded, multimode (or single mode) fiber optic cable(s) shall be used

- to augment the voice and/or data backbone cable system(s). The total loss of each fiber shall not exceed 12 decibel (dB) at 850 nano-Meter (nM), 11 dB at 1,300 nM, or 10 dB at 1,500 nM.
- 5) The splitting of pairs within cables between different jacks shall not be allowed. In the case of ISDN and/or ATM and /or Frame Relay applications, terminating resistors shall be provided externally to the patch panel connector or jack.
 - 6) A patch cord shall be provided for each system "pair" of connection jacks. Each patch cord shall have modular connectors provided on each end to match the panel's modular female jack.
 - 7) All BC shall be identified with permanent labels at both ends. Labels will indicate system, floor, closet, and zone. The label designations shall match those used for cross-connect terminals and patch panels.
- h. Distribution (Common to Intra-Building) Cabling Systems: The intra-building trunk cabling system provides for connection between the IMCCS and each Riser TC's provided vertical cross-connecting system (VCCS) within a building. The media (copper, fiber optic, and RF coaxial) used in the intra-building backbone cabling system shall be designed according to the system requirements, OEM standards and guidelines, and as described herein. A multi-pair copper for voice and data, and separate multiple fiber optic, and analog RF coaxial trunk system shall be provided as a part of the System.
- 1) Category 6 UTP or STP multi-pair trunk cable(s) shall be used in the voice and data trunk-line-cabling systems. A minimum of eight pairs per circuit, plus an additional 50% spare for growth shall be provided.
 - 2) Where the distance limitations of UTP and/or STP will be exceeded, multimode (or single mode) fiber optic cable shall be used in the voice and/or trunk cabling systems. The total loss of the fiber trunks shall not exceed 12 dB at 850 nM , 11 dB at 1,300 nM, or 10 dB at 1,500 nM.
 - a) The splitting of pairs within cables between different jacks shall not be allowed. In the case of ISDN and/or ATM and/or Frame Relay applications, terminating resistors

shall be provided externally to the patch panel connector or jack.

- b) A patch cord shall be provided for each system "pair" of connection jacks. Each patch cord shall have modular connectors provided on each end to match the panel's modular female jack.
- 3) An analog RF coaxial cable trunk system shall be provided. A minimum of two coaxial cables shall be provided between the IMCCS and each Riser VCCS to comprise an individual circuit as designated and as shown on the drawings. Additional analog RF coaxial cables shall be provided as system design dictates and as shown on the drawings.
- 4) The analog RF coaxial trunk-line systems shall be connected between each IMCCS "bottom" row of "F" connectors and shall terminate on the VCCS "top" row of "F" connectors on an appropriate patch panel. A minimum of six coaxial cables shall be provided in the riser trunk-line system.
- i. VCCS and Horizontal Cross-connecting (HCCS) Systems: Each TC shall be provided with a separate VCCS and HCCS located within the TC. The VCCS and HCCS shall interconnect and interface the riser (vertical) trunk line cables with the horizontal (or station) sub-trunk line cables. The media (copper, fiber optic and analog RF coaxial) used in the CCS system shall be designed according to the System requirements, OEM standards and guidelines, and as described herein. A multi-pair copper for voice and data, and separate multiple fiber optic and RF coaxial CCS system shall be provided as a part of the System.
 - 1) The UTP, STP, and fiber optic and RF coaxial trunk-line cabling systems are that connected between the trunk-lines and Riser VCCS, shall be terminated.
 - 2) The UTP, STP, and fiber optic and analog RF coaxial sub-trunk (lateral) floor distribution cabling systems that are connected between each RTC and each TCO or secondary system distribution or connection point, shall terminate on an appropriate HCCS, at the:
 - a) The technical requirements of the VCCS and HCCS "patch", "terminating", or "breakout" panels and cable management assemblies for voice, data and fiber optic (and RF

coaxial) cables shall be as described in the above M CCS, IM CCS, and TC technical paragraphs.

- 3) The Contractor shall not "cross-connect" the V CCS or H CCS cabling systems even though appropriate patch cords are provided for each "patch", "punch", or "breakout" panel. Also, the Contractor shall not provide active interface or distribution electronic equipment as a part of the System.
 - 4) The analog RF coaxial cabling systems shall be connected between each IM CS and RTC shall terminate on the V CCS on the "top" row of "F" connectors on an appropriate patch panel. Additionally, each horizontal distribution analog RF coaxial cable shall terminate on the H CCS on the "bottom" row of "F" connectors of the same panel.
 - 5) The analog RF terminating panel(s) shall be the "patch" type. Each panel shall be the 19" EIA rack dimensions and provided with a minimum of 12 double female "F" connector rows. Each patch panel shall be provided with the expansion capability of a maximum of 24 double row "F" slots that can be field activated.
 - 6) Each analog RF "patch" panel shall be provided inside a lockable cabinet or enclosure. Stacking of the "patch" panels is permitted as long as installation guidelines are met.
- j. Horizontal (or Station) Cabling (HC): The HC distribution cabling systems connects the distribution field of the voice and data H CCS, in a "Star" Topology, to each TCO or connector and as shown on the drawings via the sub-trunk system.
- 1) Horizontal cables shall consist of insulated, UTP or STP conductors that are rated for Category 6 telecommunications service for voice and data systems.
 - 2) The number of UTP or STP distribution pairs dedicated to each floor from the HC shall be sufficient to accommodate all the horizontal voice and data circuits served by the distribution cable to each TCO.
the V CCS "input" connections appear in the RTC.
 - 3) The horizontal cable length to the farthest system outlet shall be limited to a maximum of 90M (or 295 ft). These maximum lengths must be derated, adjusted and reduced to include cross-connection and distribution system losses.

Additional TC(s) shall be provided on large floor areas of buildings to limit the horizontal distribution to a maximum of 90M (or 295 ft).

- 4) The splitting of pairs within a cable between different jacks shall not be permitted.
 - 5) The installation of the HC shall conform to appropriate OEM recommendations and standards outlined herein. This requirement will insure adequate protection for Electro-Magnetic Interference (EMI) sources.
 - 6) A system design where "looping" the HC distribution cables from room to room shall not be permitted.
 - 7) The analog RF coaxial cables dedicated from the "bottom" row of "F" connectors of the appropriate VCCS patch panel where the "input" connections were made, to each floor TCO shall provided in the "home run" configuration and be sufficient to accommodate all the TCO's served by the HC distribution cable system minimum of one analog RF coaxial cable shall be provided for each TCO circuit and as shown on the drawings).
- k. System Telecommunication Outlets (TCO): The System shall be capable of receiving the specified telephone (or voice) and data signals acquired from the LEC, FTS contracted carrier and computer system, and one each analog RF cable, and shall process and distribute them to the designated TCO's and as shown on the drawings. At a minimum, one TCO shall be provided on each room wall, associated with an active 120 VAC shall be provided and as shown on the drawings. The only exception to the general rule, of one outlet per wall, shall be those "special" locations (e.g., surgical suites, radiology MRI rooms, labs, patient bed rooms, warehouse, loading docks, storage rooms, etc.) where there is usually only one TCO provided as designated on the drawings.
- 1) Each TCO shall consist of three multipin modular RJ45 jacks, one designated for telephone and two for data service, and one optional analog RF coaxial "F" connector. Each TCO with appropriate jacks installed shall be provided by the Contractor in each designated location and as shown on the drawings.
 - 2) The Contractor shall connect each telephone multipin modular RJ45 jack to a separate "right side as you look at it"

telephone HC distribution system HCCS "punch down" 110A block or approved IDC terminating device in each associated RTC. The modular RJ45 jack shall be able to accept and operate with smaller modular RJ11 plugs while providing proper connection and not damaging the modular jack. The OEM shall warrant all modular RJ45/11 jacks in such a manner to be usable for modular RJ11 plugs.

- 3) The Contractor shall connect each TCO data multipin modular RJ45 jack to a separate lower row jack on the HCCS "patch panel" in each associated RTC. The Contractor is not to "cross-connect" VCCS and HCCS data distribution cables or provides active electronic data distribution equipment as a part of the System.
- 4) A non-impact termination method, using either a stuffer cap with installation tool or full-cycle terminating tool having both tactile and audible feedback to indicate proper termination shall be used. High impact installation tools shall not be used.
- 5) Each terminated conductor end shall be properly trimmed to assure a minimum clearance of 6.35 mm (0.250 in) clearance between the conductors of adjacent modules.
- 6) The multipin RJ45 jack shall be modular in construction that will accept and operate with a modular UTP and STP RJ45 connector and its pin assignments.
- 7) The Contractor shall connect each analog RF cable to a female "F" connector provided on each TCO and as shown on the drawings and to each bottom row of "F" connectors on the HCCS patch panel(s) serving the area. The Contractor is not to "interconnect" VCCS and HCCS analog RF distribution cables OR provides active analog RF distribution equipment as a part of the System.

B. System Performance:

1. At a minimum, the System shall be able to support the following voice and data and analog RF operations for Category 6 Certified Telecommunication Service:
 - a. Provide the following interchange (or interface) capabilities:
 - 1) Basic Rate (BRI).
 - 2) Primary Rate (PRI).

- b. ISDN measured at TCO
 - 1) Narrow Band BRI.
 - a) B Channel: 64 kilo-Bits per second (kBps), minimum.
 - b) D Channel: 16 kBps, minimum.
 - c) H Channel: 384 kBps, minimum.
 - 2) Narrow Band PRI:
 - a) B Channel: 64 kBps, minimum.
 - b) D Channel: 64 kBps, minimum.
 - c) H Channel: 1,920 kBps, minimum.
 - 3) Wide (or Broad) Band:
 - a) All channels: 140 mega(m)-Bps, minimum, capable to 565 mBps at "T" reference.
- c. ATM operation and interface: ATM 155 mBps measured at TCO.
- d. Frame Relay: All stated compliance's measured at TCO.
- e. Integrated Data Communications Utility (IDCU) operation and interface: Measured at TCO.
- f. Government Open Systems Interconnection Profile (GOSSIP) compliant: Measured at TCO.
- g. System Sensitivity: Satisfactory service shall be provided for at least 3,000 feet for all voice and data and analog RF locations.
- h. Other: 1 Gb/s 10G Base T-Ethernet.
- 2. At a minimum the System shall support the following operating parameters:
 - a. EPBX connection:
 - 1) System speed: 1.0 gBps per second, minimum.
 - 2) Impedance: 600 Ohms.
 - 3) Cross Modulation: -60 deci-Bel (dB).
 - 4) Hum Modulation: -55 Db.
 - 5) System data error: 10 to the -10 Bps, minimum loss measured at the frame output with reference Zero (0) deciBel measured (dBm) at 1,000 Hertz (Hz) applied to the frame input.
 - a) Trunk to station: 1.5 dB, maximum.
 - b) Station to station: 3.0 dB, maximum.
 - c) Internal switch crosstalk: -60 dB when a signal of ± 10 deciBel measured (dBm), 500-2,500 Hz range is applied to the primary path.
 - d) Idle channel noise: 25 dBm "C" or 3.0 dBm "O" above reference (terminated) ground noise, whichever is greater.

e) Traffic Grade of Service for Voice and Data:

(1) A minimum grade of service of P-01 with an average traffic load of 7.0 CCS per station per hour and a traffic overload in the data circuits will not interfere with, or degrade, the voice service.

(2) Average CCS per voice station: The average CCS capacity per voice station shall be maintained at 7.0 CCS when the EPBX is expanded up to the projected maximum growth as stated herein.

b. Telecommunications Outlet (TCO):

1) Voice:

- a) Isolation (outlet-outlet): 24 dB.
- b) Impedance: 600 Ohms, balanced (BAL).
- c) Signal Level: 0 deciBel per mili-Volt (dBmV) \pm 0.1 dBmV.
- d) System speed: 100 mBps, minimum.
- e) System data error: 10 to the -6 Bps, minimum.

2) Data:

- a) Isolation (outlet-outlet): 24 dB.
- b) Impedance: 600 Ohms, BAL.
- c) Signal Level: 0 dBmV \pm 0.1 dBmV.
- d) System speed: 120 mBps, minimum.
- e) System data error: 10 to the -8 Bps, minimum.

3) Fiber optic:

- a) Isolation (outlet-outlet): 36 dB.
- b) Signal Level: 0 dBmV \pm 0.1 dBmV.
- c) System speed: 540 mBps, minimum.
- d) System data error: 10 to the -6 BPS, minimum.

4) Analog RF Service: Broadcast or "off air" RF (or television) analog service is considered to be at RF (below 900 mHz in frequency bandwidth). Usually a RF television circuits require a single coaxial cable plant from the headend to each TC location.

- a) Isolation (outlet-outlet): 14 dB.
- b) Impedance: 75 Ohms, Unbalanced (UNBAL).
- c) Signal Level: 10 dBmV \pm 5.0 dBmV.
- d) Bandwidth: 6.0 mHz per channel, fully loaded.

C. General:

1. All equipment to be supplied under this specification shall be new and the current model of a standard product of an OEM or record. An OEM of record shall be defined as a company whose main occupation is the manufacture for sale of the items of equipment supplied and which:
 - a. Maintains a stock of replacement parts for the item submitted.
 - b. Maintains engineering drawings, specifications, and operating manuals for the items submitted.
 - c. Has published and distributed descriptive literature and equipment specifications on the items of equipment submitted at least 30 days prior to the Invitation for Bid.
2. Specifications of equipment as set forth in this document are minimum requirements, unless otherwise stated, and shall not be construed as limiting the overall quality, quantity, or performance characteristics of items furnished in the System. When the Contractor furnishes an item of equipment for which there is a specification contained herein, the item of equipment shall meet or exceed the specification for that item of equipment.
3. The Contractor shall provide written verification, in writing to the RE at time of installation, that the type of wire/cable being provided is recommended and approved by the OEM. The Contractor is responsible for providing the proper size and type of cable duct and/or conduit and wiring even though the actual installation may be by another subcontractor.
4. Active electronic component equipment shall consist of solid state components, be rated for continuous duty service, comply with the requirements of FCC standards for telephone equipment, systems, and service.
5. All passive distribution equipment shall meet or exceed -80 dB radiation shielding specifications.
6. All interconnecting twisted pair, or coaxial cables shall be terminated on equipment terminal boards, punch blocks, breakout boxes, splice blocks, and unused equipment ports/taps shall be terminated according to the OEM's instructions for telephone cable systems without adapters. The Contractor shall not leave unused or spare twisted pair wire, or coaxial cable unterminated, unconnected, loose or unsecured.

7. Color code all distribution wiring to conform to the Telephone Industry standard, EIA/TIA, and this document, which ever is the more stringent. At a minimum, all equipment, cable duct and/or conduit, enclosures, wiring, terminals, and cables shall be clearly and permanently labeled according to and using the provided record drawings, to facilitate installation and maintenance. Reference Specification Section 27 10 00, STRUCTURED CABLING.
8. Connect the System's primary input AC power to the Facility' Critical Branch of the Emergency AC power distribution system as shown on the plans or if not shown on the plans consult with RE regarding a suitable circuit location prior to bidding.
9. Plug-in connectors shall be provided to connect all equipment, except coaxial cables and interface points. Coaxial cable distribution points and RF transmission lines shall use coaxial cable connections recommended by the cable OEM and approved by the System OEM. Base- band cable systems shall utilize barrier terminal screw type connectors, at a minimum. Crimp type connectors installed with a ratchet type installation tool are and acceptable alternate as long as the cable dress, pairs, shielding, grounding, and connections and labeling are provided the same as the barrier terminal strip connectors. Tape of any type, wire nuts, or solder type connections are unacceptable and will not be approved.
10. All equipment faceplates utilized in the System shall be stainless steel, anodized aluminum, or UL approved cycolac plastic for the areas where provided.
11. Noise filters and surge protectors shall be provided for each equipment interface cabinet, switch equipment cabinet, control console, local, and remote active equipment locations to ensure protection from input primary AC power surges and noise glitches are not induced into low Voltage data circuits.

D. Equipment Functional Characteristics:

FUNCTIONS	CHARACTERISTICS
Input Voltage	105 to 130 VAC
POWER LINE FREQUENCY	60 HZ \pm 2.0 HZ

Operating Temperature	0 to 50 degrees (°) Centigrade (C)
Humidity	80 percent (%) minimum rating

E. Equipment Standards and Testing:

1. The System has been defined herein as connected to systems identified as Critical Care performing Life Support Functions. Therefore, at a minimum, the system shall conform to all aforementioned National and/or Local Life Safety Codes (which ever are the more stringent), NFPA, NEC, this specification, JCAHCO Life Safety Accreditation requirements, and the OEM recommendations, instructions, and guidelines.
2. All supplies and materials shall be listed, labeled or certified by UL or a nationally recognized testing laboratory where such standards have been established for the supplies, materials or equipment. See paragraph minimum requirements Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS, and the guidelines listed in paragraph 2.J.2.
3. The provided active and passive equipment required by the System design and approved technical submittal must conform with each UL standard in effect for the equipment, as of the date of the technical submittal (or the date when the COTR approved system equipment necessary to be replaced) was technically reviewed and approved by VA. Where a UL standard is in existence for equipment to be used in completion of this contract, the equipment must bear the approved UL seal.
4. Each item of electronic equipment to be provided under this contract must bear the approved UL seal or the seal of the testing laboratory that warrants the equipment has been tested in accordance with, and conforms to the specified standards.

2.2 DISTRIBUTION EQUIPMENT AND SYSTEMS

A. Telecommunication Outlet (TCO):

1. The TCO shall consist of one telephone multipin jack and two data multipin jacks, and one baseband analog RF, video, jacks mounted in a steel outlet box. A separate 100mm (4in.) x 100mm (4in.) x 63mm (2.5in.) steel outlet box with a labeled stainless steel faceplate will be used. A second 100mm (4in.) x 100mm (4in.) x 63mm (2.5in.) steel outlet box with a labeled faceplate shall be provided as

- required adjacent to the first box to ensure system connections and expandability requirements are met.
2. All telephone multipin connections shall be RJ-45/11 compatible female types. All data multipin connections shall be RJ-45 female types. All analog RF, and video connections shall be "F".
 3. The TCO shall be fed from the appropriate CCS located in the respective RTC in a manner to provide a uniform and balanced distribution system.
 4. Interface of the data multipin jacks to appropriate patch panels (or approved "punch down" blocks) in the associated RTC, is the responsibility of the Contractor. The Contractor shall not extend data cables from the RTCs to data terminal equipment or install data terminal equipment.
 5. The wall outlet shall be provided with a stainless steel or approve alternate cover plate to fit the telephone multipin jack, data multi-pin jacks, analog jack(s) and the outlet box provided (100mm (4in.) x 100mm (4in.) for single and 100mm (4in.) x 200mm (8in.) for dual outlet box applications). For PBPV installations, the cover plate shall be stainless steel.
 6. Interface of the analog RF "F", jacks to appropriate patch panels in the associated RTC, is the responsibility of the Contractor. The Contractor shall not cross-connect analog cables in the RTCs to analog equipment or install active analog equipment.
- B. Distribution Cables: Each cable shall meet or exceed the following specifications for the specific type of cable. Each cable reel shall be sweep tested and certified by the OEM by tags affixed to each reel. The Contractor shall turn over all sweep tags to the COTR. Additionally, the Contractor shall provide a 610 mm (2 ft.) sample of each provided cable, to the COTR and receive approval before installation.
1. Remote Control:
 - a. The remote control cable shall be multi-conductor with stranded (solid is permissible) conductors. The cable shall be able to handle the power and voltage necessary to control specified system equipment from a remote location. The cable shall be UL listed and pass the FR-1 vertical flame test, at a minimum. Each conductor shall be color-coded. Combined multi-conductor and coaxial cables are acceptable for this installation, as long as all system performance standards are met.

b. Technical Characteristics:

Length	As required, in 1K (3,000 ft.) reels minimum
Connectors	As required by system design
Size	18 AWG, minimum, Outside 20 AWG, minimum, Inside
Color coding	Required, EIA industry standard
Bend radius	10X the cable outside diameter
Impedance	As required
Shield coverage	As required by OEM specification
Attenuation	
Frequency in MHz	dB per 305 M (1,000ft.), maximum
0.7	5.2
1.0	6.5
4.0	14.0
8.0	19.0
16.0	26.0
20.0	29.0
25.0	33.0
31.0	36.0
50.0	52.0

2. Telephone:

- a. The System cable shall be provided by the Contractor to meet the minimum system requirements of Category 6 service. The cable shall interconnect each part of the system. The cable shall be completely survivable in areas where it is installed.

b. Technical Characteristics:

Length	As required, in 1K (3,000 ft.) reels minimum
Cable	Voice grade category 6
Connectors	As required by system design
Size	24 AWG, minimum, Inside
Color coding	Required, telephone industry standard
Bend radius	10X the cable outside diameter

Impedance	120 Ohms \pm 15%, BAL
Shield coverage	As required by OEM specification
Attenuation	
Frequency in mHz	dB per 305 M (1,000ft.), maximum
0.7	5.2
1.0	6.5
4.0	14.0
8.0	19.0
16.0	26.0
20.0	29.0
25.0	33.0
31.0	36.0
62.0	52.0
100.0	68.0

3. Data Multi-Conductor:

- a. The cable shall be multi-conductor, shielded or unshielded cable with stranded conductors. The cable shall be able to handle the power and voltage used over the distance required. It shall meet Category Six service at a minimum.

b. Technical Characteristics:

Wire size	22 AWG, minimum
Working shield	350 V
Bend radius	10X the cable outside diameter
Impedance	100 Ohms \pm 15%, BAL
Bandwidth	100 mHz, minimum
DC RESISTANCE	10.0 Ohms/100M, maximum
Shield coverage	
Overall Outside (if OEM specified)	100%
Individual Pairs (if OEM specified)	100%
Attenuation	
Frequency in mHz	dB per 305 M (1,000ft.), maximum
0.7	5.2
1.0	6.5

4.0	14.0
8.0	19.0
16.0	26.0
20.0	29.0
25.0	33.0
31.0	36.0
62.0	52.0
100.0	68.0

4. General Purpose Analog RF:

- a. The coaxial cable shall be an RG-6/U type (or equal), minimum and shall be increased in size (i.e. RG-11/U, .500", .750", etc.) as required to meet system design. It may also be used for baseband signals as approved by the OEM.
- b. Technical Characteristics:

Impedance	75 OHM, UNBAL
Center conductor 20 AWG, solid or stranded copper, or copper plated steel or aluminum	
Dielectric	Cellular polyethylene
Shield coverage	95%, copper braid
Connector type	BNC or UHF
Attenuation	
Frequency (k or mHz)	Maximum dB/30.5M (100ft.)
10 kHz	0.20
100 kHz	0.22
1.0 kHz	0.25
4.5 mHz	0.85
10.0 mHz	1.40
100 mHz	5.00

5. Public Address and/or General Purpose Audio:

- a. The audio cable shall be two-conductor, STP cable with stranded conductors. The cable shall be able to handle the power used for the load impedance over the distance required, with not more than

5% power loss. This cable is to be provided in local PA areas only and is not to be used as a part of the telephone system.

b. Technical Characteristics:

Impedance	70.7VRMS audio signal
Wire size	20 AWG, minimum
Working shield	350 V
Color coding	Required, EIA audio industry standard
Connectors	As required
Bend radius	10X the cable outside diameter
Impedance	100 Ohms \pm 15%, BAL
Bandwidth	20 mHz, minimum
DC resistance	10.0 Ohms/100M (330 ft.), maximum
Shield coverage	
Overall Outside (if OEM specified)	100%
Individual Pairs (if OEM specified)	100%
Attenuation	
Frequency in mHz	dB per 305 M (1,000ft.), maximum
0.7	5.2
1.0	6.5
4.0	14.0
8.0	19.0
16.0	26.0
20.0	29.0

C. Outlet Connection Cables:

1. Telephone:

- a. The Contractor shall provide a connection cable for each TCO telephone jack in the System with 10% spares. The telephone connection cable shall connect the telephone instrument to the TCO telephone jack. The Contractor shall not provide telephone instrument(s) or equipment.

b. Technical Characteristics:

Length	1.8M (6ft.), minimum
Cable	Voice Grade
Connector	RJ45 male on each end
Size	24 AWG, minimum
Color coding	Required, telephone industry standard

2. Data:

- a. The Contractor shall provide a connection cable for each TCO data jack in the system with 10% spares. The data connection cable shall connect a data instrument to the TCO data jack. The Contractor shall not provide data terminal(s)/equipment.
- b. Technical Characteristics:

Length	1.8M (6 ft.), minimum
Cable	Data grade Category Six
Connector	RJ-45 male on each end
Color coding	Required, data industry standard
Size	24 AWG, minimum

3. Analog RF:

- a. The Contractor shall provide a connection cable for each TCO analog RF connector in the System with 10% spares. The analog RF connection cable shall connect a analog RF instrument to the TCO analog RF jack. The Contractor shall not provide analog RF equipment.
- b. Technical Characteristics:

Length	1.8M (6 ft.), minimum
Cable	Flexible RG-6/U, minimum
Connector	"F" male on each end //

D. System Connectors:

1. Solderless (Forked Connector):

- a. The connector shall have a crimp-on coupling for quick connect/disconnect of wires or cables. The crimp-on connector shall be designed to fit the wire or cable furnished. The connector barrel shall be insulated and color-coded.

b. Technical Characteristics:

Impedance	As required
Working Voltage	500 V

2. Multipin:

- a. The connector shall have a crimp-on coupling for quick connect/disconnect of wires or cables. The crimp-on connector shall be designed to fit the wire or cable furnished. The connector housing shall be fully enclosed and shielded. It shall be secured to the cable group by screw type compression sleeves.

b. Technical Characteristics:

Impedance	As required
Working Voltage	500 V
Number of pins	As requires, usually 25 pairs minimum

3. Modular (RJ-45): The connectors shall be commercial types for voice and high speed data transmission applications. The connector shall be compatible with telephone instruments, computer terminals, and other type devices requiring linking through the modular telecommunications outlet to the System. The connector shall be compatible with UTP and STP cables.

a. Technical Characteristics:

Type	Number of Pins
RJ45	Compatible with RJ45
RJ-45	Eight
Dielectric	Surge
Voltage	1,000V RMS, 60 Hz @ one minute, minimum
Current	2.2A RMS @ 30 Minutes or 7.0A RMS @ 5.0 seconds
Leakage	100 μ A, maximum
Connectability	
Initial contact resistance	20 mili-Ohms, maximum
Insulation displacement	10 mili-Ohms, maximum

Interface	Must interface with modular jacks from a variety of OEMs. RJ-11/45 plugs shall provide connection when used in RJ-45 jacks.
Durability	200 insertions/withdrawals, minimum

4. "F" Type:

- a. The "F" connector shall have a screw type coupling for quick connect/disconnect of coaxial cable/termination's. It shall be a crimp-on connector designed to fit the coaxial cable furnished with integral 12.7 mm (½in.) ferrule.
- b. Technical Characteristics:

Impedance	75 Ohms, UNBAL
Working Voltage	500 V

E. Terminators:

1. Coaxial:

- a. These units shall be metal-housed precision types in the frequency ranges selected. They shall be the screw-on type that has low VSWR when installed and the proper impedance to terminate the required system unit or coaxial cable.
- b. Technical Characteristics:

Frequency	0-1 GHz
Power blocking	As required
Return loss	25 dB
Connectors	"F", minimum
Impedance	75 Ohms, UNBAL

F. Distribution Frames:

1. A new stand-alone (i.e., self supporting, free standing) MDF shall be provided to interconnect the EPBX and computer room. The MDF shall be modular and equipped with modular terminating mini blocks (i.e. Ericsson, 3M, etc.), and patch panels that are as small as possible and provide all the requirements of this specifications as described herein.

2. All cable distribution closets and MDFs shall be wired in accordance with industry standards and shall employ "latest state-of-the-art" modular cross-connect devices. The MDF/telephone closet riser cable shall be sized to satisfy all voice requirements plus not less than 50% spare (growth) capacity in each telephone closet which includes a fiber optic backbone. The MDF/telephone closet riser cable shall be sized to satisfy all voice and data requirements plus not less than 50% spare (growth) capacity in each telephone closet which does not include a fiber optic backbone.
3. The MDF and all intermediate distribution frames shall be connected to the EPBX system ground.
4. Technical Characteristics:

Telephone	
IDC type unit	As described in Part 2
Contact wires	50 micron of Gold over Nickel
Contact pressure	100 Grams, MIN
110A Punch blocks	Acceptable alternate to IDC
Data	110A blocks as described in Part 2
Analog Video	Patch panel as described in Part 2

2.3 TELECOMMUNICATIONS CLOSET REQUIREMENTS

Refer to VA Handbook H-088C3, Telephone System Requirements, for specific TC guidelines for size, power input, security, and backboard mounting requirements. It is the Contractors responsibility to ensure TC compliance with the System Requirements.

2.4 ENVIRONMENTAL REQUIREMENTS

Technical submittals shall identify the environmental specifications for housing the system. These environmental specifications shall identify the requirements for initial and expanded system configurations for:

- A. Floor loading for batteries and cabinets.
- B. Minimum floor space and ceiling heights.
- C. Minimum size of doors for equipment passage.
- D. Power requirements: The bidders shall provide the specific voltage, amperage, phases, and quantities of circuits required.

- E. Air conditioning, heating, and humidity requirements. The bidder shall identify the ambient temperature and relative humidity operating ranges required preventing equipment damage.
- F. Air conditioning requirements (expressed in BTU per hour, based on adequate dissipation of generated heat to maintain required room and equipment standards).
- G. Proposed floor plan based on the expanded system configuration of the bidder's proposed EPBX for this Facility.
- H. Conduit size requirement (between equipment room and console room).

2.5 INSTALLATION KIT

The kit shall be provided that, at a minimum, includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, and/or cable tray, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire wrap terminal or punch block. Unfinished or unlabeled wire connections shall not be allowed. Turn over to the RE all unused and partially opened installation kit boxes, coaxial, fiberoptic, and twisted pair cable reels, conduit, cable tray, and/or cable duct bundles, wire rolls, physical installation hardware. The following are the minimum required installation sub-kits:

- A. System Grounding:
 - 1. The grounding kit shall include all cable and installation hardware required. All radio equipment shall be connected to earth ground via internal building wiring, according to the NEC.
 - 2. This includes, but is not limited to:
 - a. Coaxial Cable Shields.
 - b. Control Cable Shields.
 - c. Data Cable Shields.
 - d. Equipment Racks.
 - e. Equipment Cabinets.
 - f. Conduits.
 - g. Duct.
 - h. Cable Trays.
 - i. Power Panels.
 - j. Connector Panels.
 - k. Grounding Blocks.

- B. Coaxial Cable: The coaxial cable kit shall include all coaxial connectors, cable tying straps, heat shrink tabbing, hangers, clamps, etc., required to accomplish a neat and secure installation.
- C. Wire and Cable: The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, punch blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.
- D. Conduit, Cable Duct, and Cable Tray: The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this document.
- E. Equipment Interface: The equipment kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface the systems with the identified sub-system(s) according to the OEM requirements and this document.
- F. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to completely and correctly label each subsystem according to the OEM requirements, as-installed drawings, and this document.
- G. Documentation: The documentation kit shall include any item or quantity of items, computer discs, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to completely and correctly provide the system documentation as required by this document and explained herein.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Product Delivery, Storage and Handling:
 - 1. Delivery: Deliver materials to the job site in OEM's original unopened containers, clearly labeled with the OEM's name and equipment catalog numbers, model and serial identification numbers. The RE may inventory the cable, patch panels, and related equipment.
 - 2. Storage and Handling: Store and protect equipment in a manner, which will preclude damage as directed by the RE.
- B. System Installation:
 - 1. After the contract's been awarded, and within the time period specified in the contract, the Contractor shall deliver the total system in a manner that fully complies with the requirements of this

specification. The Contractor shall make no substitutions or changes in the System without written approval from the RE and PM.

2. The Contractor shall install all equipment and systems in a manner that complies with accepted industry standards of good practice, OEM instructions, the requirements of this specification, and in a manner which does not constitute a safety hazard. The Contractor shall insure that all installation personnel understands and complies with all the requirements of this specification.
 3. The Contractor shall install suitable filters, traps, directional couplers, splitters, TC's, and pads for minimizing interference and for balancing the System. Items used for balancing and minimizing interference shall be able to pass telephone and data, and analog signals in the frequency bands selected, in the direction specified, with low loss, and high isolation, and with minimal delay of specified frequencies and signals. The Contractor shall provide all equipment necessary to meet the requirements of Paragraph 2.1.C and the System performance standards.
 4. All passive equipment shall be connected according to the OEM's specifications to insure future correct termination, isolation, impedance match, and signal level balance at each telephone/data outlet.
 5. Where TCOs are installed adjacent to each other, install one outlet for each instrument.
 6. All lines shall be terminated in a suitable manner to facilitate future expansion of the System. There shall be a minimum of one spare 25 pair cable at each distribution point on each floor.
 7. All vertical and horizontal copper and coaxial cables shall be terminated so any future changes only requires modifications of the existing EPBX or signal closet equipment only.
 8. Terminating resistors or devices shall be used to terminate all unused branches, outlets, equipment ports of the System, and shall be devices designed for the purpose of terminating twisted pair, and coaxial, cables carrying telephone and data, and analog signals in telephone and data, and analog video systems.
 9. Equipment installed indoors shall be installed in metal cabinets with hinged doors and locks with two keys.
- C. Conduit and Signal Ducts:
1. Conduit:

- a. The Contractor shall employ the latest installation practices and materials. The Contractor shall provide conduit, junction boxes, connectors, sleeves, weatherheads, pitch pockets, and associated sealing materials not specifically identified in this document as GFE. Conduit penetrations of walls, ceilings, floors, interstitial space, fire barriers, etc., shall be sleeved and sealed. The minimum conduit size shall be 25 mm (1 in.).
 - b. All cables shall be installed in separate conduit and/or signal ducts (exception from the separate conduit requirement to allow telephone cables to be installed in partitioned cable tray with data cables may be granted in writing by the COTR if requested.) Conduits shall be provided in accordance with Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and NEC Articles 517 for Critical Care and 800 for Communications systems, at a minimum.
 - c. When metal, plastic covered, etc., flexible cable protective armor or systems are specifically authorized to be provided for use in the System, their installation guidelines and standards shall be as specified herein, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and the NEC.
 - d. Conduit (including GFE) fill shall not exceed 40%. Each conduit end shall be equipped with a protective insulator or sleeve to cover the conduit end, connection nut or clamp, to protect the wire or cable during installation and remaining in the conduit. Electrical power conduit shall be installed in accordance with the NEC. AC power conduit shall be run separate from signal conduit.
 - e. When metal, plastic covered, etc., flexible cable protective armor or systems are specifically authorized to be provided for use in the System, their installation guidelines and standards shall be as specified herein, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and the NEC.
 - f. Ensure that Critical Care -----Nurse Call, and PA Systems (as identified by NEC Section 517) are completely separated and protected from all other systems.
2. Signal Duct, Cable Duct, or Cable Tray:
- a. The Contractor shall use existing signal duct, cable duct, and/or cable tray, when identified and approved by the COTR.

- b. Approved signal and/or cable duct shall be a minimum size of 100 mm x 100 mm (4 in. X 4 in.) inside diameter with removable tops or sides, as appropriate. Protective sleeves, guides or barriers are required on all sharp corners, openings, anchors, bolts or screw ends, junction, interface and connection points.
 - c. Approved cable tray shall be fully covered, mechanically and physically partitioned for multiple electronic circuit use, and be UL certified and labeled for use with telecommunication circuits and/or systems. The COTR shall approve width and height dimensions.
- D. Distribution System Signal Wires and Cables:
- 1. Wires and cables shall be provided in the same manner and use like construction practices as Fire Protective and other Emergency Systems that are identified and outlined in NFPA 101, Life Safety Code, Chapters 7, 12, and/or 13, NFPA 70, National Electrical Code, Chapter 7, Special Conditions. The wires and cables shall be able to withstand adverse environmental conditions in their respective location without deterioration. Wires and cables shall enter each equipment enclosure, console, cabinet or rack in such a manner that all doors or access panels can be opened and closed without removal or disruption of the cables.
 - a. Each wire and cable shall terminate on an item of equipment by direct connection. Spare or unused wire and cable shall be provided with appropriate connectors (female types) that are installed in appropriate punch blocks, barrier strips, patch, or bulkhead connector panels.
 - b. Coaxial cables that are spare, unused or dark shall be provided with the cable OEM specified type female connectors installed in appropriate break out, patch, or bulkhead connector panels provided in enclosure(s) and shall be protected from the environment.
 - c. All cable junctions and taps shall be accessible. Provide an 8" X 8" X 4" (minimum) junction box attached to the cable duct or raceway for installation of distribution system passive equipment. Ensure all equipment and tap junctions are accessible.
 - 2. Routing and Interconnection:

- a. Wires or cables between consoles, cabinets, racks and other equipment shall be in an approved conduit, signal duct, cable duct, or cable tray that is secured to building structure.
- b. Wires and cables shall be insulated to prevent contact with signal or current carrying conductors. Wires or cables used in assembling consoles, panels, equipment cabinets and racks shall be formed into harnesses that are bundled and tied. Harnessed wires or cables shall be combed straight, formed and dressed in either a vertical or horizontal relationship to equipment, controls, components or terminations.
- c. Harnesses with intertwined members are not acceptable. Each wire or cable that breaks out from a harness for connection or termination shall have been tied off at that harness or bundle point, and be provided with a neatly formed service loop.
- d. Wires and cables shall be grouped according to service (i.e.: AC, grounds, signal, DC, control, etc.). DC, control and signal cables may be included with any group. Wires and cables shall be neatly formed and shall not change position in the group throughout the conduit run. Wires and cables in approved signal duct, conduit, cable ducts, or cable trays shall be neatly formed, bundled, tied off in 600 mm to 900 mm (24 in. to 36 in.) lengths and shall not change position in the group throughout the run. Concealed splices are not allowed.
- e. Separate, organize, bundle, and route wires or cables to restrict EMI, channel crosstalk, or feedback oscillation inside any enclosure. Looking at any enclosure from the rear (wall mounted enclosures, junction, pull or interface boxes from the front), locate AC power, DC and speaker wires or cables on the left; coaxial, control, microphone and line level audio and data wires or cables, on the right. This installation shall be accomplished with ties and/or fasteners that will not damage or distort the wires or cables. Limit spacing between tied off points to a maximum of 150 mm (6 inches).
- f. Do not pull wire or cable through any box, fitting or enclosure where change of cable tray or signal or cable duct alignment or direction occurs. Ensure the proper bend radius is maintained for each wire or cable as specified by it's OEM.

- g. Employ temporary guides, sheaves, rollers, and other necessary items to protect the wire or cable from excess tension or damage from bending during installation. Abrasion to wire or cable jackets is not acceptable and will not be allowed. Replace all cables whose jacket has been abraded. The discovery of any abraded and/or damaged cables during the proof of performance test shall be grounds for declaring the entire system unacceptable and the termination of the proof of performance test. Completely cover edges of wire or cable passing through holes in chassis, cabinets or racks, enclosures, pull or junction boxes, conduit, etc., with plastic or nylon grommeting.
- h. Cable runs shall be splice free between conduit junction and interface boxes and equipment locations.
- i. Cables shall be installed and fastened without causing sharp bends or rubbing of the cables against sharp edges. Cables shall be fastened with hardware that will not damage or distort them.
- j. Cables shall be labeled with permanent markers at the terminals of the electronic and passive equipment and at each junction point in the System. The lettering on the cables shall correspond with the lettering on the record diagrams.
- k. Completely test all of the cables after installation and replace any defective cables.
- l. Wires or cables installed outside of conduit, cable trays, wireways, cable duct, etc.
 - 1) Only when specifically authorized as described herein, will wires or cables be identified and approved to be installed outside of conduit. The wire or cable runs shall be UL rated plenum and OEMcertified for use in air plenums.
 - 2) Wires and cables shall be hidden, protected, fastened and tied at 600 mm (24 in.) intervals, maximum, as described herein to building structure.
 - 3) Closer wire or cable fastening intervals may be required to prevents sagging, maintain clearance above suspended ceilings, remove unsightly wiring and cabling from view and discourage tampering and vandalism. Wire or cable runs, not provided in conduit, that penetrate outside building walls, supporting walls, and two hour fire barriers shall be sleeved and sealed with an approved fire retardant sealant.

- 4) Wire or cable runs to system components installed in walls (i.e.: volume attenuators, circuit controllers, signal, or data outlets, etc.) may, when specifically authorized by the COTR, be fished through hollow spaces in walls and shall be certified for use in air plenum areas.

E. Outlet Boxes, Back Boxes, and Faceplates:

1. Outlet Boxes: Signal, power, interface, connection, distribution, and junction boxes shall be provided as required by the system design, on-site inspection, and review of the contract drawings.
2. Back Boxes: Back boxes shall be provided as directed by the OEM as required by the approved system design, on-site inspection, and review of the contract drawings.
3. Face Plates (or Cover Plates): Faceplates shall be of a standard type, stainless steel, anodized aluminum or UL approved cyclac plastic construction and provided by the Contractor for each identified system outlet location. Connectors and jacks appearing on the faceplate shall be clearly and permanently marked.

F. Connectors: Circuits, transmission lines, and signal extensions shall have continuity, correct connection and polarity. A uniform polarity shall be maintained between all points in the system.

1. Wires:

- a. Wire ends shall be neatly formed and where insulation has been cut, heat shrink tubing shall be employed to secure the insulation on each wire. Tape of any type is not acceptable.
 - b. Audio spade lugs shall be installed on each wire (including spare or unused) end and connect to screw terminals of appropriate size barrier strips. AC barrier strips shall be provided with a protective cover to prevent accidental contact with wires carrying live AC current. Punch blocks are approved for signal, not AC wires. Wire Nut or "Scotch Lock" connectors are not acceptable for signal wire installation.
2. Cables: Each connector shall be designed for the specific size cable being used and installed with the OEM's approved installation tool. Typical system cable connectors include; but, are not limited to: Audio spade lug, punch block, wirewrap, etc.
3. Speaker Line Audio:
- a. Each connector shall be installed according to the cable, transformer or speaker OEM instructions and using the OEM's

approved installation tool. The Contractor shall ensure each speaker is properly phased and connected in the same manner throughout the System using two conductor type wires.

- b. One of the conductors shall be color coded to aid in establishing speaker signal polarity. Each speaker line shall be permanently soldered or audio spade lug connected to each appropriate speaker or line matching transformer connection terminal. Speaker line connection to each audio amplifier shall use audio spade lugs, as described herein.

G. AC Power: AC power wiring shall be run separately from signal cable.

H. Grounding:

- 1. General: The Contractor shall ground all Contractor Installed Equipment and identified Government Furnished Equipment to eliminate all shock hazards and to minimize, to the maximum extent possible, all ground loops, common mode returns, noise pickup, crosstalk, etc. The total ground resistance shall be 0.1 Ohm or less.
 - a. The Contractor shall install lightning arrestors and grounding in accordance with the NFPA and this specification.
 - b. Under no conditions shall the AC neutral, either in a power panel or in a receptacle outlet, be used for system control, subcarrier or audio reference ground.
 - c. The use of conduit, signal duct or cable trays as system or electrical ground is not acceptable and will not be permitted. These items may be used only for the dissipation of internally generated static charges (not to be confused with externally generated lightning) that may applied or generated outside the mechanical and/or physical confines of the System to earth ground. The discovery of improper system grounding shall be grounds to declare the System unacceptable and the termination of all system acceptance testing.
- 2. Cabinet Buss: A common ground buss of at least #10 AWG solid copper wire shall extend throughout each equipment cabinet and be connected to the system ground. Provide a separate isolated ground connection from each equipment cabinet ground buss to the system ground. Do not tie equipment ground busses together.
- 3. Equipment: Equipment shall be bonded to the cabinet bus with copper braid equivalent to at least #12 AWG. Self grounding equipment enclosures, racks or cabinets, that provide OEM certified functional

ground connections through physical contact with installed equipment, are acceptable alternates.

4. Cable Shields: Cable shields shall be bonded to the cabinet ground buss with #12 AWG minimum stranded copper wire at only one end of the cable run. Cable shields shall be insulated from each other, faceplates, equipment racks, consoles, enclosures or cabinets; except, at the system common ground point. Coaxial and audio cables, shall have one ground connection at the source; in all cases, cable shield ground connections shall be kept to a minimum.

I. Labeling: Provide labeling in accordance with ANSI/EIA/TIA-606-B. All lettering for voice and data circuits shall be stenciled using laser printers or thermal ink transfer process. Handwritten labels are not acceptable.

1. Cable and Wires (Hereinafter referred to as "Cable"): Cables shall be labeled at both ends in accordance with ANSI/EIA/TIA-606-B. Labels shall be permanent in contrasting colors. Cables shall be identified according to the System "Record Wiring Diagrams".
2. Equipment: System equipment shall be permanently labeled with contrasting plastic laminate or bakelite material. System equipment shall be labeled on the face of the unit corresponding to its source.
3. Conduit, Cable Duct, and/or Cable Tray: The Contractor shall label all conduit, duct and tray, including utilized GFE, with permanent marking devices or spray painted stenciling a minimum of 3 meters (10 ft.) identifying it as the System. In addition, each enclosure shall be labeled according to this standard.
4. Termination Hardware: The Contractor shall label workstation outlets and patch panel connections using color coded labels with identifiers in accordance with ANSI/EIA/TIA-606-B and the "Record Wiring Diagrams".

3.2 TESTS

A. Interim Inspection:

1. This inspection shall verify that the equipment provided adheres to the installation requirements of this document. The interim inspection will be conducted by a factory-certified representative and witnessed by a Government Representative. Each item of installed equipment shall be checked to insure appropriate UL certification markings. This inspection shall verify cabling terminations in

telecommunications rooms and at workstations adhere to color code for T568A pin assignments and cabling connections are in compliance with ANSI/EIA/TIA standards. Visually confirm Category 6 marking of outlets, faceplates, outlet/connectors and patch cords.

2. The Contractor shall notify the COTR, in writing, of the estimated date the Contractor expects to be ready for the interim inspection, at least 20 working days before the requested inspection date.
3. Results of the interim inspection shall be provided to the COTR. If major or multiple deficiencies are discovered, a second interim inspection may be required before permitting the Contractor to continue with the system installation.
4. The COTR shall determine if an additional inspection is required, or if the Contractor will be allowed to proceed with the installation. In either case, re-inspection of the deficiencies noted during the interim inspection(s), will be part of the proof of performance test. The interim inspection shall not affect the Systems' completion date. The COTR shall ensure all test documents will become a part of the Systems record documentation.

B. Pretesting:

1. Upon completing the installation of the System, the Contractor shall align and balance the system. The Contractor shall pretest the entire system.
2. Pretesting Procedure:
 - a. During the system pretest, the Contractor shall verify (utilizing the approved spectrum analyzer and test equipment) that the System is fully operational and meets all the system performance requirements of this standard.
 - b. The Contractor shall pretest and verify that all System functions and specification requirements are met and operational, no unwanted aural effects, such as signal distortion, noise pulses, glitches, audio hum, poling noise, etc. are present. The Contractor shall measure and record the aural carrier levels of each system telephone and data channel, at each of the following points in the system:
 - 1) Signal Level at each interface point to the distribution system, the last outlet on each trunk line plus all outlets installed as part of this contract.

3. The Contractor shall provide four (4) copies of the recorded system pretest measurements and the written certification that the System is ready for the formal acceptance test shall be submitted to the COTR.
- C. Acceptance Test: After the System has been pretested and the Contractor has submitted the pretest results and certification to the COTR, then the Contractor shall schedule an acceptance test date and give the COTR 30 days written notice prior to the date the acceptance test is expected to begin. The System shall be tested in the presence of a Government Representative and an OEM certified representative. The System shall be tested utilizing the approved test equipment to certify proof of performance and Life Safety compliance. The test shall verify that the total System meets the requirements of this specification. The notification of the acceptance test shall include the expected length (in time) of the test.
- D. Performance Testing:
 1. Perform Category 6 tests in accordance with ANSI/EIA/TIA-568-C.1 and ANSI/EIA/TIA-568-C.2. Test shall include the following: wire map, length, insertion loss, return loss, NEXT, PSNEXT, ELFEXT, PSELFEXT, propagation delay and delay skew.
- E. Total System Acceptance Test: The Contractor shall perform verification tests for UTP and STP copper cabling system(s) after the complete telecommunication distribution system and workstation outlet are installed.

3.3 TRAINING

- A. Furnish the services of a factory-trained engineer or technician for a total of two four hour classes to instruct designated Facility IRM personnel. Instruction shall include cross connection, corrective, and preventive maintenance of the System and equipment.
- B. Before the System can be accepted by the VA, this training must be accomplished. Training will be scheduled at the convenience of the COTR.

3.4 GUARANTEE PERIOD OF SERVICE

- A. Contractor's Responsibilities:
 1. The Contractor shall guarantee that all installed material and equipment will be free from defects, workmanship, and will remain so for a period of one year from date of final acceptance of the System by the VA. The Contractor shall provide OEM's equipment warranty

- documents, to the RE (or Facility Contracting Officer if the Facility has taken possession of the building(s)), that certifies each item of equipment installed conforms to OEM published specifications.
2. The Contractor's maintenance personnel shall have the ability to contact the Contractor and OEM for emergency maintenance and logistic assistance, remote diagnostic testing, and assistance in resolving technical problems at any time. The Contractor and OEM shall provide this contact capability at no additional cost to the VA.
 3. All Contractor installation, maintenance, and supervisor personnel shall be fully qualified by the OEM and must provide two (2) copies of current and qualified OEM training certificates and OEM certification upon request.
 4. Additionally, the Contractor shall accomplish the following minimum requirements during the one year guarantee period:
 - a. Response Time:
 - 1) The COTR is the Contractor's reporting and contact official for the System trouble calls, during the guarantee period.
 - 2) A standard workweek is considered 8:00 A.M. to 5:00 P.M., Monday through Friday exclusive of Federal Holidays.
 - 3) The Contractor shall respond and correct on-site trouble calls, during the standard work week to:
 - a) A routine trouble call within one working days of its report. A routine trouble is considered a trouble which causes a system outlet, station, or patch cord to be inoperable.
 - b) An emergency trouble call within 6 hours of its report. An emergency trouble is considered a trouble which causes a subsystem or distribution point to be inoperable at anytime. Additionally, the loss of a minimum of 50 station or system lines shall be deemed as this type of a trouble call.
 - 4) The Contractor shall respond on-site to a catastrophic trouble call within 4 hours of its report. A catastrophic trouble call is considered total system failure.
 - a) If a system failure cannot be corrected within four hours (exclusive of the standard work time limits), the

Contractor shall be responsible for providing alternate system CSS or TCO equipment, or cables. The alternate equipment and/or cables shall be operational within four hours after the four hour trouble shooting time.

- b) Routine or emergency trouble calls in critical emergency health care facilities (i.e., cardiac arrest, intensive care units, etc.) shall also be deemed as a catastrophic trouble call if so determined by the COTR. The COTR shall notify the Contractor of this type of trouble call at the direction of the Facilities Director.

b. Required on-site visits during the one year guarantee period

- 1) The Contractor shall visit, on-site, for a minimum of eight hours, once every 12 weeks, during the guarantee period, to perform system preventive maintenance, equipment cleaning, and operational adjustments to maintain the System according the descriptions identified in this SPEC.
 - a) The Contractor shall arrange all Facility visits with the COTR prior to performing the required maintenance visits.
 - b) The Contractor in accordance with the OEM's recommended practice and service intervals shall perform preventive maintenance during a non-busy time agreed to by the COTR.
 - c) The preventive maintenance schedule, functions and reports shall be provided to and approved by the COTR.
- 2) The Contractor shall provide the COTR a type written report itemizing each deficiency found and the corrective action performed during each required visit or official reported trouble call. The Contractor shall provide the COTR with sample copies of these reports for review and approval at the beginning of the Total System Acceptance Test. The following reports are the minimum required:
 - a) Monthly Report: The Contractor shall provide a monthly summary all equipment and sub-systems serviced during this guarantee period to COTR by the fifth working day after the end of each month. The report shall clearly and concisely describe the services rendered, parts replaced and repairs performed. The report shall prescribe anticipated future needs of the equipment and Systems for preventive and predictive maintenance

- b) Contractor Log: The Contractor shall maintain a separate log entry for each item of equipment and each sub-system of the System. The log shall list dates and times of all scheduled, routine, and emergency calls. Each emergency call shall be described with details of the nature and causes of emergency steps taken to rectify the situation and specific recommendations to avoid such conditions in the future.
- 3) The COTR shall provide two (2) copies of actual reports for evaluation.
 - a) The COTR shall ensure copies of these reports are entered into the System's official acquisition documents.
 - b) The COTR shall ensure copies of these reports are entered into the System's official technical as-installed documents.
- B. Work Not Included: Maintenance and repair service shall not include the performance of any work due to improper use, accidents, other vendor, contractor, owner tampering or negligence, for which the Contractor is not directly responsible and does not control. The Contractor shall immediately notify the COTR in writing upon the discovery of these incidents. The COTR will investigate all reported incidents and render findings concerning any Contractor's responsibility.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 27 41 31
MASTER ANTENNA TELEVISION EQUIPMENT AND SYSTEMS

PART 1 - GENERAL

1.1 SECTION SUMMARY

- A. Work covered by this document includes design, engineering, labor, material, products, guarantee, training and services for, and incidental to the complete installation of new and fully operating NFPA listed Master Antenna Television (TV) equipment and systems as detailed herein.
- B. Work shall be complete, complete, labeled, VA Central Office (VACO) tested and certified and ready for operation

1.2 RELATED SECTIONS

- A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 Volts and Below).
- C. Section 26 41 00, FACILITY LIGHTNING PROTECTION.
- D. Section 27 10 00, STRUCTURED COMMUNICATIONS SYSTEMS CABLING.
- E. Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.
- F. Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.
- G. Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.
- H. Section 27 10 00, STRUCTURED CABLING.
- I. Section 27 15 00, COMMUNICATIONS HORIZONTAL CABLING.
- J. Section 27 52 23, NURSE CALL/CODE BLUE EQUIPMENT AND SYSTEMS.

1.3 DEFINITIONS

- A. Provide: Design, engineer, furnish, install, connect complete, test, certify and guarantee.
- B. Work: Materials furnished and completely installed.
- C. Review of contract drawings: A service by the engineer to reduce the possibility of materials being ordered which do not comply with contract documents. The engineer's review shall not relieve the Contractor of responsibility for dimensions or compliance with the contract documents. The reviewer's failure to detect an error does not constitute permission for the Contractor to proceed in error.
- D. Headquarters Technical Review, for National/VA communications and security, codes, frequency licensing, standards, guidelines compliance:
 Office of Telecommunications
 Special Communications Team (0050P2B)
 1335 East West Highway - 3rd Floor
 Silver Spring, Maryland 20910
 (O) 301-734-0350, (F) 301-734-0360
- E. Contractor: You; successful bidder

1.4 REFERENCES

A. The installation shall comply fully with all governing authorities, laws and ordinances, regulations, codes and standards, including, but not limited to:

1. United States Federal Law/Codes:

a. Departments of:

1) CFR, Title 15 - Department of Commerce, Under the Information Technology Management Reform Act (Public Law 104-106), the Secretary of Commerce approves standards and guidelines that are developed by the:

a) Chapter II, National Institute of Standards Technology (NIST - formerly the National Bureau of Standards). Under Section 5131 of the Information Technology Management Reform Act of 1996 and the Federal Information Security Management Act of 2002 (Public Law 107-347), NIST develops - Federal Information Processing Standards Publication (FIPS) 140-2-Security Requirements for Cryptographic Modules.

b) Chapter XXIII, National Telecommunications and Information Administration (NTIA - aka 'Red Book') Chapter 7.8/9 Federal communications Commission (FCC) Title 47 (CFR), Part 15, Radio Frequency Restriction of Use and Compliance in "Safety of Life" Functions and Locations.

2) CFR, Title 29, Department of Labor, Chapter XVII - Occupational Safety and Health Administration (OSHA), Part 1910 - Occupational Safety and Health Standard:

a) Subpart 7 - Definition and requirements for a National Recognized Testing Laboratory (NRTL - 15 Laboratory's, for complete list, contact

http://www.osha.gov/dts/otpc/nrtl/faq_nrtl.html)

(1) Underwriter's Laboratories (UL):

65	Standard for Wired Cabinets.
468	Standard for Grounding and Bonding Equipment.
1449	Standard for Transient Voltage Surge Suppressors.
1069	Hospital Signaling and Nurse Call Equipment.
60950-1/2	Information Technology Equipment - Safety.

- (2) Canadian Standards Association (CSA): same tests as for UL.
 - (3) Communications Certifications Laboratory (CCL): same tests as for UL.
 - (4) Intertek Testing Services NA, Inc. (ITSNA formerly Edison Testing Laboratory [ETL]): same tests as for UL.
 - b) Subpart 35, Compliance with NFPA 101 - Life Safety Code.
 - c) Subpart 36, Design and construction requirements for exit routes.
 - d) Subpart 268, Telecommunications.
 - e) Subpart 305, Wiring methods, components, and equipment for general use.
- 3) Public Law No. 100-527, Department of Veterans Affairs:
- a) Office of Telecommunications: Handbook 6100 - Telecommunications.
 - b) Office of Cyber and Information Security (OCIS):
 - (1) Handbook 6500 - Information Security Program.
 - (2) Wireless and Handheld Device Security Guideline Version 3.2, August 15, 2005.
 - c) Spectrum Management FCC and NTIA Radio Frequency Compliance and Licensing Program.
 - d) Office of Cyber and Information Security (OCIS):
 - (1) Handbook 6500 - Information Security Program.
 - (2) Wireless and Handheld Device Security Guideline Version 3.2, August 15, 2005.
- 4) Title 42, CFC, Department of Health, Chapter IV Health and Human Services, Subpart 1395(a)(b) Joint Commission on Accreditation of Healthcare Organizations (JCAHO) "a hospital that meets JCAHO accreditation is deemed to meet the Medicare conditions of Participation by meeting Federal Directives:" All guidelines for Life, Personal and Public Safety; and, Essential and Emergency Communications.
- 5) CFR, Title 47 - Telecommunications, in addition to FCC: Part 15 - Restrictions of use for Part 15 listed Radio Equipment in Safety of Life/Emergency Functions/Equipment/Locations (also see CFR, Title 15 - Department of Commerce, Chapter XXIII - NTIA):

Part 73	Radio Broadcast Service,
Part 90	Rules and Regulations, Appendix C.
Form 854	Antenna Structure Registration.

6) Public Law 89-670, Department of Transportation, CFR-49, Part 1, Subpart C - Federal Aviation Administration (FAA):

a) Standards AC 110/460-ID and AC 707/460-2E - Advisory Circulars for Constructions of Antenna Towers.

b) Forms 7450 and 7460-2 - Antenna Construction Registration.

2. National Codes:

a. American Institute of Architects (AIA): Guidelines for Healthcare Facilities.

b. American National Standards Institute/Electronic Industries Association/Telecommunications Industry Association (ANSI/EIA/TIA):

568-C	Commercial Building Telecommunications Wiring Standards:
569-B	Commercial Building Standard for Telecommunications Pathways and Spaces.
606-B	Administration Standard for the Telecommunications Infrastructure of Communications Buildings.
607-A	Commercial Building Grounding and Bonding Requirements for Telecommunications.
REC 127-49	Power Supplies.
RS 27	Tools, Crimping, Solderless Wiring Devices, Recommended Procedures for User Certification.

c. Institute of Electrical and Electronics Engineers (IEEE):

SO/TR 21730:2007	Use of mobile wireless communication and computing technology in healthcare facilities - Recommendations for electromagnetic compatibility (management of unintentional electromagnetic interference) with medical devices.
0739- 5175/08/\$25. 00©2008IEEE	Medical Grade - Mission Critical - Wireless Networks.
C62.41	Surge Voltages in Low-Voltage AC Power Circuits.

d. American Society of Mechanical Engineers (ASME):

1) Standard 17.4, Guide for Emergency Personnel.

2) Standard 17.5, Elevator and Escalator Equipment (prohibition of installing non-elevator equipment in Elevator Equipment Room/Mechanical Penthouse).

e. NFPA:

70	National Electrical Code (current date of issue) - Articles 517, 645 and 800.
75	Standard for Protection of Electronic Computer Data- Processing Equipment.
77	Recommended Practice on Static Electricity.
99	Healthcare Facilities.
101	Life Safety Code.

3. State Hospital Code(s).

4. Local Codes.

1.5 QUALIFICATIONS

- A. The OEM shall have had experience with three or more installations of systems of comparable size and complexity about type and design as specified herein. Each of these installations shall have performed satisfactorily for at least 1 year after final acceptance by the user. Include the names, locations and point of contact for these installations as a part of the submittal.
- B. The Contractor shall submit certified documentation that they have been an authorized distributor and service organization for the OEM for a minimum of 3 years. The Contractor shall be authorized by the OEM to pass thru the OEM's warranty of the installed equipment to VA. In addition, the OEM and Contractor shall accept complete responsibility for the design, installation, certification, operation, and physical support for the system. This documentation, along with the System Contractor and OEM certifications must be provided in writing as part of the Contractor's Technical submittal.
- C. The Contractor's Communications Technicians assigned to the system shall be fully trained, qualified, and certified by the OEM on the engineering, installation, operation, and testing of the system. The Contractor shall provide formal written evidence of current OEM certification(s) for the installer(s) as a part of the submittal or to the Resident Engineer before being allowed to commence work on the system.
- D. Applicable national, state and local licenses.
- E. Certificate of successful completion of OEM's installation/training school for installing technicians of the equipment being proposed.

1.6 CODES AND PERMITS

- A. Provide all necessary permits and schedule all inspections as identified in the contract's milestone chart, so that the system is proof of performance tested and ready for operation on a date directed by the Owner.
- B. The contractor is responsible to adhere to all codes described herein and associated contractual, state and local codes.

1.7 SCHEDULING

- A. After the award of contract, the Contractor shall prepare a detailed schedule (aka milestone chart) using "Microsoft Project" software or equivalent. The Contractor Project Schedule (CPS) shall indicate detailed activities for the projected life of the project. The CPS shall consist of detailed activities and their restraining relationships. It will also detail manpower usage throughout the project.
- B. It is the responsibility of the Contractor to coordinate all work with the other trades for scheduling, rough-in, and finishing all work specified. The owner will not be liable for any additional costs due to missed dates or poor coordination of the supplying contractor with other trades.

1.8 REVIEW OF CONTRACT DRAWINGS AND EQUIPMENT DATA SUBMITTALS

- A. Submit at one time within 10 days of contract awarding, drawings and product data on all proposed equipment and system. Check for compliance with contract documents and certify compliance with Contractor's "APPROVED" stamp and signature.
- B. Support all submittals with descriptive materials, i.e., catalog sheets, product data sheets, diagrams, and charts published by the manufacturer. These materials shall show conformance to specification and drawing requirements.
- C. Where multiple products are listed on a single cut-sheet, circle or highlight the one that you propose to use. Provide a complete and through equipment list of equipment expected to be installed in the system, with spares, as a part of the submittal. Special Communications (TVE-0050P3B - herein after referred to as [0050P3B]) will not review any submittal that does not have this list.

- D. Provide 4 copies to the COTR for technical review. The COTR will provide a copy to the offices identified in Paragraph 1.3.C and D, at a minimum for compliance review as described herein where each responsible individual(s) should respond to the PM within 10 days of receipt of their acceptance or rejection of the submittal(s).
- E. Head End and each interface distribution cabinet layout drawing, as they are to be installed.
- F. Equipment technical literature detailing the electrical and technical characteristics of each item of equipment to be furnished.
- G. Engineering drawings of the system, showing calculated signal levels at the Head End input and output, each input and output distribution point, and signal level at each telecommunications outlet.

1.9 PROJECT RECORD DOCUMENTS (AS BUILTS)

- A. Throughout progress of the work, maintain an accurate record of changes in Contract Documents. Upon completion of Work, transfer recorded changes to a set of Project Record Documents.
- B. The floor plans shall be marked in pen to include the following:
 - 1. All device locations with labels.
 - 2. Conduit locations.
 - 3. Wiring diagram.
 - 4. Labeling and administration documentation.
 - 5. Warranty certificate.
 - 6. System test results.

1.10 WARRANTIES AND GUARANTEE

- A. The Contractor shall warrant the installation be free from defect in material and workmanship for a period of 1 year from the date of acceptance of the project by the owner. The Contractor shall agree to remedy covered defects within eight (8) hours of notification of major failures or within twenty-four (24) hours of notification for individual station related problems.
- B. Refer to Part 4 for applicable System Guarantee requirements.

1.11 USE OF THE SITE

- A. Use of the site shall be at the GC's direction.
- B. Coordinate with the GC for lay-down areas for product storage and administration areas.
- C. Coordinate work with the GC and their sub-contractors.
- D. Access to buildings wherein the work is performed shall be directed by the GC.

1.12 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft.
- B. Store products in original containers.
- C. Coordinate with the GC for product storage. There may be little or no storage space available on site. Plan to potentially store materials off site.
- D. Do not install damaged products. Remove damaged products from the site and replaced with new product at no cost to the Owner.

1.13 PROJECT CLOSEOUT

- A. Prior to final inspection and acceptance of the work, remove all debris, rubbish, waste material, tools, construction equipment, machinery and surplus materials from the project site and thoroughly clean your work area.
- B. Before the project closeout date, the Contractor shall submit:
 - 1. Warranty certificate.
 - 2. Evidence of compliance with requirements of governing authorities such as the Low Voltage Certificate of Inspection.
 - 3. Project record documents.
 - 4. Instruction manuals and software that is a part of the system.
- C. Contractor shall submit written notice that:
 - 1. Contract Documents have been reviewed.
 - 2. Project has been inspected for compliance with contract.
 - 3. Work has been completed in accordance with the contract

PART 2 - PRODUCTS AND FUNCTIONAL REQUIREMENTS**2.1 GENERAL REQUIREMENTS FOR EQUIPMENT AND MATERIALS**

- A. Furnish and install a complete and fully operational extension of the existing master antenna TV signal distribution system. Include all amplifiers, power supplies, cables, outlets, attenuators, antennas, and all other parts necessary for the reception and distribution of the off-the-air TV signals.
- B. Coordinate features and select components to form an integrated system. Match components and interconnections for optimum performance of specified functions.
- C. Expansion Capability: Increase number of stations in the future by 25 percent above those indicated without adding any internal or external components or main trunk cable conductors.

- D. Distribute cable channels to all TV outlets to permit simple connection of EIA standard high definition television (HDTV) receivers.
- E. Deliver at all outlets all HDTV monochrome and color television signals without introducing noticeable effect on picture and color fidelity or sound. System picture fidelity shall be equal to that received from the cable company and other modulated channels.
- F. Provide reception quality at each outlet equal to or better than that received in the area with individual antennas. Deliver at all television outlets a minimum +6.0 dBmv (2,000 microvolts across 75 Ohms) and maximum of +20 dBmv (20,000 microvolts) for each channel at each outlet.
- G. Equipment: Modular type using solid-state components, fully rated for continuous duty unless otherwise indicated. Select equipment for normal operation on input power usually supplied at 110 to 130 V, 60 Hz.
- H. Meet all FCC requirements regarding low radiation and/or interference of RF signal(s). The system shall be designed to prevent direct pickup of signals from the building structure.
- I. Weather-Resistant Equipment: Listed and labeled by an OSHA certified National Recognized Testing Laboratory (NRTL - i.e. UL) for duty outdoors or in damp locations.

2.2 SYSTEM DESCRIPTION

- A. The Contractor is responsible for interfacing the Nurse Call systems with the system.
- B. The Contractor shall continually employ interfacing methods that are approved by the OEM and VA. At a minimum, an acceptable interfacing method requires not only a physical and mechanical connection, but also a matching of signal, voltage, and processing levels with regard to signal quality and impedance. The interface point must adhere to all standards described herein for the full separation of Critical Care and Life Safety systems.
- C. It is not acceptable to utilize the telephone cable system for the control of MATV signals and equipment. The System Contractor shall connect the system ensuring that all NFPA and Underwriters Laboratory, Inc. (UL) Critical Care and Life Safety Circuit and system separation guidelines are satisfied. The System Contractor is not allowed to make any connections to the Telephone System. The Owner shall arrange for the interconnection between the MATV, Nurses Call Systems with the appropriate responsible parties.

- D. All passive distribution equipment shall meet or exceed -80 dB radiation shielding specifications and be provided with screw type audio connectors.
- E. All trunk, branch, and interconnecting cables and unused equipment ports or taps shall be terminated with proper terminating resistors designed for RF, audio and digital cable systems without adapters.
- F. The system shall utilize microprocessor components for all signaling and programming circuits and functions. System program memory shall be non-volatile or protected from erasure from power outages for a minimum of 30 minutes.
- G. Plug-in connectors shall be provided to connect all equipment, except coaxial cables and RF transmission line interface points. Coaxial cable distribution points and RF transmission lines shall use coaxial cable connections recommended by the cable OEM and approved by the system OEM. Base band cable systems shall utilize barrier terminal screw type connectors, at a minimum. As an alternate, crimp type connectors installed with a ratchet type installation tool are acceptable provided the cable dress, pairs, shielding, grounding, connections and labeling are the same as the barrier terminal strip connectors. Tape of any type, wire nuts or solder type connections are unacceptable and will not be approved.
- H. All equipment faceplates utilized in the system shall be stainless steel, anodized aluminum or UL approved cycolac plastic for the areas where provided.
- I. Noise filters and surge protectors shall be provided for each equipment interface cabinet, Head End cabinet, control console and local and remote amplifier locations to insure protection from input primary AC power surges and to insure noise glitches are not induced into low voltage data circuits.
- J. Audio Level Processing: The use of telephone cable to distribute MATV signals, carrying system or sub-system AC or DC voltage is not acceptable and will not be approved. Additionally, each control location shall be provided with the equipment required to insure the system can produce its designed audio channel capacity at TV/speaker identified on the contract drawings.

- K. Contractor is responsible for pricing all accessories and miscellaneous equipment required to form a complete and operating system. Unless otherwise noted in this Part, equipment quantities shall be as indicated on the drawings.

2.3 MANUFACTURERS

- A. The products specified shall be new, FCC and UL Listed, and produced by OEM manufacturer of record. An OEM of record shall be defined as a company whose main occupation is the manufacture for sale of the items of equipment supplied and which:
1. Maintains a stock of replacement parts for the item submitted,
 2. Maintains engineering drawings, specifications, and operating manuals for the items submitted, and
 3. Has published and distributed descriptive literature and equipment specifications on the items of equipment submitted at least 30 days prior to the Invitation for Bid.
- B. Specifications contained herein as set forth in this document detail the salient operating and performance characteristics of equipment in order for VA to distinguish acceptable items of equipment from unacceptable items of equipment. When an item of equipment is offered or furnished for which there is a specification contained herein, the item of equipment offered or furnished shall meet or exceed the specification for that item of equipment.
- C. The equipment items are the salient requirements of VA to provide an acceptable system described herein.

2.4 PRODUCTS

- A. The system distribution amplifier shall have a frequency range of 49-1,000 MHz and shall accommodate a minimum of 35 HDTV channels of programming. Gain of the preamplifier shall be 32dB, with an output level of 48dBmV for each HDTV channel processed. The preamplifier shall utilize a hybrid push-pull amplifier module. The preamplifier shall provide gain and slope control ranges of 8dB and 9dB, respectively.
- B. Provide one 8-port passive combiner for the combining of all RF signals into one main trunk run for distribution to all building locations. Bandwidth of combiners shall be 0 to 1,000MHz.

- C. Provide riser rated coaxial cable with a nominal characteristic impedance of 75 Ohms throughout the entire frequency spectrum utilized in this system. Each reel of cable shall be sweep-tested and return-loss tested over the entire frequency range from 50MHz to 750MHz by the manufacturer. Provide RG-6, RG-11 or appropriate minimum .500" Hardline Coaxial cable as required to achieve the specified signal level. However, all runs over 150' in length shall be RG-11 or .500".
- D. Line Splitters:
1. Provide low-radiation line splitters with a flat frequency response from 50MHz to 1,000MHz. Provide units of a hybrid design with a 75-ohm match on input and outputs and a VSWR no greater than 1.4:1.
 2. Two way line splitters shall have a signal loss of not more than 3.5dB at each output.
 3. Four way line splitters shall have a signal loss of not more than 7.2dB at each output.
 4. All unused splitter outputs shall be terminated with 75-Ohm terminations.
- E. HDTV Outlets:
1. Provide outlets at each location shown on the plans. Mount in electrical contractor provided 4" square, 2" deep minimum flush electrical boxes as indicated on plans.
 2. Provisions shall be incorporated in the network to prevent 60 Hz AC or DC feedback into the distribution lines.
 3. Outlets shall be designed to cover a frequency range of 10MHz to 1,000MHz. Insertion loss shall not exceed 1.0 db at any frequency within the designated frequency range for a 17dB isolation network. Outlets shall be back-matched from 10 to 1,000MHz. Outlets shall have one F-type connector on the front and two F-type connectors on the rear.
 4. The minimum isolation value between any two outlets shall be 24 db.
- F. Television Receivers shall be provided separately by the Owner.

G. Distribution Devices:

1. Distribution Amplifier:

- a. Description: Broadband CATV quality HDTV distribution amplifier.
- b. Specifications:

Frequency Range: 49MHz to 1,000MHz.	Channel Loading: 150.
Flatness: +/- .75dB.	Gain: 32dB.
Output Level: +40dBmV.	Gain Control Range: 10dB.
Slope Control Range: 8dB.	Plug in equalizers as needed.
Attenuator options as needed.	

2. Splitters:

- a. Description: RF signal splitter.
- b. Specifications:

Frequency Range: 5MHz to 1,000MHz.	Outputs: 2, 3, 4 and 8.
Splitter Loss: less than 12 dB.	RFI Shielding: 120dB.

3. Taps:

- a. Description: Directional Coupler Type Taps.
- b. For use in Telecomm closets or accessible cable trays.
- c. Specifications:
 - 1. Frequency Range: 5MHz to 1,000MHz.
 - 2. Outputs: 2, 4 and 8.
 - 3. Isolation Tap Value: Varies.

4. Wallplate Bulkhead Connector and Terminators:

- a. Description: Wall plates for termination of CATV signals at television sets.
 - 1. Impedance: 75 Ohms.
 - 2. Frequency Band: SUB/VHF/CATV/UHF.

5. "F" Connectors:

- a. Coaxial cable connectors and connector inserts shall be designed to provide maximum performance with the cable to be used. Coaxial cables shall be connectorized with the Head End quality 360 degree F connectors as applicable, meeting or exceeding standard industry and the cable manufacture's specifications. All drop F-connectors shall be hex type crimp or a "Snap and Seal" type connector. Housing to housing (KS to KS) type or 90-degree type connectors shall be used where specified by the OEM.

6. Terminator:

- a. Description: 75-Ohm terminator.
- b. Specifications:

DC blocking.	Bandwidth: 50MHz-890MHz.
Return Loss: greater than 16dB.	Impedance: 75 Ohm.

7. RG6 Cable:

- a. Description: CATV RG6 double shielded cable CM Rated
- b. Specifications:
 - 1. Attenuation:

1.48 dB/100ft at 50 MHz.	7.45 dB/100ft at 1000 MHz.
Impedance: 75 Ohm	

8. RG11 Cable:

- a. Description: CATV RG11 cable CM Rated
- b. Specifications:
 - 1. Attenuation:

0.90 dB/100ft at 50 MHz.	5.04 dB/100ft at 1000 MHz.
Impedance: 75 Ohm	

PART 3 - EXECUTION**3.1 PROJECT MANAGEMENT**

- A. Assign a single project manager to this project who will serve as the point of contact for the Owner, the General Contractor, and the Engineer.
- B. The Contractor shall be proactive in scheduling work at the hospital, specifically the Contractor will initiate and maintain discussion with the general contractor regarding the schedule for ceiling cover up and install cables to meet that schedule.
- C. Contact the Office of Telecommunications, Special Communications Team (0050P3B) at (301) 734-0350 to have a VA Certified Telecommunications COTR assigned to the project for telecommunications review, equipment and system approval and co-ordination with VA's Spectrum Management and OCIS Teams.

3.2 COORDINATION WITH OTHER TRADES

- A. Coordinate with the cabling contractor the location of the faceplate and the faceplate opening for the MATV backbox.

- B. Coordinate with the cabling contractor the location of MATV equipment in the Telecommunications Closets.
- C. Before beginning work, verify the location, quantity, size and access for the following:
 - Isolated ground AC power circuits provided for systems.
 - Primary, emergency and extra auxiliary AC power generator requirements.
 - Junction boxes, wall boxes, wire troughs, conduit stubs and other related infrastructure for the systems.
 - System components installed by others.
 - Overhead supports and rigging hardware installed by others.
- D. Immediately notify the Owner, General Contractor and Consultant in writing of any discrepancies.

3.3 NEEDS ASSESSMENT

Provide a one-on-one meeting with the particular nursing manager of each unit affected by the installation of the new HDTV MATV system. Review the floor plan drawing, educate the nursing manager with the functions of the equipment that is being provided and gather details specific to the individual units; coverage and priorities of calls; staffing patterns; and other pertinent details that will affect system programming and training.

3.4 INSTALLATION

- A. General:
 - 1. Execute work in accordance with National, State and local codes, regulations and ordinances.
 - 2. Install work neatly, plumb and square and in a manner consistent with standard industry practice. Carefully protect work from dust, paint and moisture as dictated by site conditions. The Contractor will be fully responsible for protection of his work during the construction phase up until final acceptance by the Owner.
 - 3. Install equipment according to OEM's recommendations. Provide any hardware, adaptors, brackets, rack mount kits or other accessories recommended by OEM for correct assembly and installation.

4. Secure equipment firmly in place, including receptacles, speakers, equipment racks, system cables, etc:
 - a. All supports, mounts, fasteners, attachments and attachment points shall support their loads with a safety factor of at least 5:1.
 - b. Do not impose the weight of equipment or fixtures on supports provided for other trades or systems.
 - c. Any suspended equipment or associated hardware must be certified by the OEM for overhead suspension.
 - d. The Contractor is responsible for means and methods in the design, fabrication, installation and certification of any supports, mounts, fasteners and attachments.
 5. Locate overhead ceiling-mounted loudspeakers as shown on drawings, with minor changes not to exceed 12 inches in any direction:
 - a. Mount transformers securely to speaker brackets or enclosures using screws. Adjust torsion springs as needed to securely support speaker assembly.
 - b. Speaker back boxes shall be completely filled with fiberglass insulation.
 - c. Seal cone speakers to their enclosures to prevent air passing from one side of the speaker to the other.
 6. Finishes for any exposed work such as plates, racks, panels, speakers, etc. shall be approved by the Architect, Owner and 0050P3B.
 7. Coordinate cover plates with field conditions. Size and install cover plates as necessary to hide joints between back boxes and surrounding wall. Where cover plates are not fitted with connectors, provide grommeted holes in size and quantity required. Do not allow cable to leave or enter boxes without cover plates installed.
- B. Equipment Racks:
1. Fill unused equipment mounting spaces with blank panels or vent panels. Match color to equipment racks.
 2. Provide security covers for all devices not requiring routine operator control.

3. Provide vent panels and cooling fans as required for the operation of equipment within the OEM' specified temperature limits. Provide adequate ventilation space between equipment for cooling. Follow manufacturer's recommendations regarding ventilation space between amplifiers.
 4. Provide insulated connections of the electrical raceway to equipment racks.
 5. Provide continuous raceway and conduit with no more than 40 percent fill between wire troughs and equipment racks for all non-plenum-rated cable. Ensure each system is mechanically separated from each other in the wireway.
- C. Wiring Practice - in addition to the mandatory infrastructure requirements outlined in VA Construction Specification, Section 27 10 00, STRUCTURED COMMUNICATIONS CABLING SYSTEM, the following additional practices shall be adhered to:
1. Comply with requirements for raceways and boxes specified in Division 26, Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS.
 2. Execute all wiring in strict adherence to the National Electrical Code, applicable local building codes and standard industry practices.
 3. Where raceway is to be EMT (conduit), wiring of differing classifications shall be run in separate conduit. Where raceway is to be an enclosure (rack, tray, wire trough, utility box) wiring of differing classifications, which share the same enclosure, shall be mechanically partitioned and separated by at least 4 inches. Where Wiring of differing classifications must cross, they shall cross perpendicular to one another.
 4. Do not splice wiring anywhere along the entire length of the run. Make sure cables are fully insulated and shielded from each other and from the raceway for the entire length of the run.
 5. Do not pull wire through any enclosure where a change of raceway alignment or direction occurs. Do not bend wires to less than radius recommended by manufacturer.
 6. Replace the entire length of the run of any wire or cable that is damaged or abraded during installation. There are no acceptable methods of repairing damaged or abraded wiring.

7. Use wire pulling lubricants and pulling tensions as recommended by the OEM.
8. Use grommets around cut-outs and knock-outs where conduit or chase nipples are not installed.
9. Do not use tape-based or glue-based cable anchors.
10. Ground shields and drain wires as indicated by the drawings.
11. Field wiring entering equipment racks shall be terminated as follows:
 - a. Provide ample service loops at harness break-outs and at plates, panels and equipment. Loops should be sufficient to allow plates, panels and equipment to be removed for service and inspection.
 - b. Line level and speaker level wiring may be terminated inside the equipment rack using specified terminal blocks (see "Products"). Provide 15 percent spare terminals inside each rack. Microphone level wiring may only be terminated at the equipment served.
 - c. If specified terminal blocks are not designed for rack mounting, utilize 3/4 inch plywood or 1/8 inch thick aluminum plates/blank panels as a mounting surface. Do not mount on the bottom of the rack.
 - d. Employ permanent strain relief for any cable with an outside diameter of 1 inch or greater.
12. Use only balanced audio circuits unless noted otherwise
13. Make all connections as follows:
 - a. Make all connections using rosin-core solder or mechanical connectors appropriate to the application.
 - b. For crimp-type connections, use only tools that are specified by the manufacturer for the application.
 - c. Use only insulated spade lugs on screw terminals. Spade lugs shall be sized to fit the wire gauge. Do not exceed two lugs per terminal.
 - d. Wire nuts, electrical tape or "Scotch Lock" connections are not acceptable for any application.
- D. Cable Installation - In addition to the mandatory infrastructure requirements outlined in VA Construction Specification, Section 27 10 00, STRUCTURED CABLING the following additional practices shall be adhered to:

1. Support cable on maximum 4'-0" centers. Acceptable means of cable support are cable tray, j-hooks, and bridal rings. Velcro wrap cable bundles loosely to the means of support with plenum rated Velcro straps. Plastic tie wraps are not acceptable as a means to bundle cables.
2. Run cables parallel to walls.
3. Install maximum of 10 cables in a single row of J-hooks. Provide necessary rows of J-hooks as required by the number of cables.
4. Do not lay cables on top of light fixtures, ceiling tiles, mechanical equipment, or ductwork. Maintain at least 2'-0" clearance from all shielded electrical apparatus.
5. All cables shall be tested after the total installation is fully complete. All test results are to be documented. All cables shall pass acceptable test requirements and levels. Contractor shall remedy any cabling problems or defects in order to pass or comply with testing. This includes the re-pull of new cable as required at no additional cost to the Owner.
6. Ends of cables shall be properly terminated on both ends per industry and OEM's recommendations.
7. Provide proper temporary protection of cable after pulling is complete before final dressing and terminations are complete. Do not leave cable lying on floor. Bundle and tie wrap up off of the floor until you are ready to terminate.
8. Cover the end of the overall jacket with a 1 inch (minimum) length of transparent heat-shrink tubing. Cut unused insulated conductors 2 inches (minimum) past the heat-shrink, fold back over jacket and secure with cable-tie. Cut unused shield/drain wires 2 inches (minimum) past the Heatshrink and serve as indicated below.
9. Cover shield/drain wires with heat-shrink tubing extending back to the overall jacket. Extend tubing 1/4 inch past the end of unused wires, fold back over jacket and secure with cable tie.
10. For each solder-type connection, cover the bare wire and solder connection with heat-shrink tubing.
11. Terminate conductors; no cable shall contain unterminated elements. Make terminations only at outlets and terminals.
12. Splices, Taps, and Terminations: Arrange on numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures. Cables may not be spliced.

13. Bundle, lace, and train conductors to terminal points without exceeding OEM's limitations on bending radii. Install lacing bars and distribution spools.
14. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used.
15. Cable shall not be run through structural members or be in contact with pipes, ducts, or other potentially damaging items.

E. Labeling:

1. Clearly, consistently, logically and permanently mark switches, connectors, jacks, relays, receptacles and electronic and other equipment.
2. Engrave and paint fill all receptacle panels using 1/8 inch (minimum) high lettering and contrasting paint.
3. For rack-mounted equipment, use engraved Lamacoid labels with white 1/8 inch (minimum) high lettering on black background. Label the front and back of all rack-mounted equipment.
4. Where multiple pieces of equipment reside in the same rack group, clearly and logically label each indicating to which room, channel, receptacle location, etc. they correspond.
5. Permanently label cables at each end, including intra-rack connections. Labels shall be covered by the same, transparent heat-shrink tubing covering the end of the overall jacket. Alternatively, computer generated labels of the type which include a clear protective wrap may be used.
6. Contractor's name shall appear no more than once on each continuous set of racks. The Contractor's name shall not appear on wall plates or portable equipment.
7. Ensure each OEM supplied equipment has permanently attached/marked the appropriate UL Labels/Marks for the service the equipment is performed. Equipment installed not bearing these UL marks will not be allowed to be part of the system. The Contractor shall bear all costs required to provide replacement equipment with approved UL marks.

3.5 PROTECTION OF NETWORK DEVICES

Contractor shall protect network devices during unpacking and installation by wearing manufacturer approved electrostatic discharge (ESD) wrist straps tied to chassis ground. The wrist strap shall meet OSHA requirements for prevention of electrical shock, should technician encounter high voltage.

3.6 CUTTING AND PATCHING

- A. It shall be the responsibility of the contractor to keep their work area clear of debris and clean area daily at completion of work.
- B. It shall be the responsibility of the contractor to patch and paint any wall or surface that has been disturbed by the execution of this work.
- C. The Contractor shall be responsible for providing any additional cutting, drilling, fitting or patching required that is not indicated as provided by others to complete the Work or to make its parts fit together properly.
- D. The Contractor shall not damage or endanger a portion of the Work or fully or partially completed construction of the Owner or separate contractors by cutting, patching or otherwise altering such construction, or by excavation. The Contractor shall not cut or otherwise alter such construction by the Owner or a separate contractor except with written consent of the Owner and of such separate contractor; such consent shall not be unreasonably withheld. The Contractor shall not unreasonably withhold from the Owner or a separate Contractor, the Contractor's consent to cutting or otherwise altering the work.
- E. Where coring of existing (previously installed) concrete is specified or required, including coring indicated under unit prices, the location of such coring shall be clearly identified in the field and the location shall be approved by the Project Manager prior to commencement of coring work.

3.7 FIREPROOFING

- A. Where MATV cables penetrate fire rated walls, floors and ceilings, fireproof the opening.
- B. Provide conduit sleeves (if not already provided by electrical contractor) for cables that penetrate fire rated walls. After the cabling installation is complete, install fire proofing material in and around all conduit sleeves and openings. Install fire proofing material thoroughly and neatly. Seal all floor and ceiling penetrations.

- C. Use only materials and methods that preserve the integrity of the fire stopping system and its rating.

3.8 GROUNDING

- A. Ground cable shields and equipment to eliminate shock hazard and to minimize ground loops, common mode returns, noise pickup, cross talk, and other impairments.
- B. Signal Ground Terminal: Locate at main equipment cabinet. Isolate from power system and equipment grounding.
- C. Install grounding electrodes as specified in Division 27, Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATION SYSTEMS.
- D. Do not use "3rd or 4th" wire internal electrical system conductors for ground.
- E. Do not connect system ground to the building's external lightning protection system.
- F. Do not "mix grounds" of different systems.

PART 4 - TESTING/GUARANTEE/TRAINING

4.1 SYSTEM CLASSIFICATION

The HDTV MATV System is FCC and NFPA listed. Therefore, the following testing and guaranty provisions are the minimum to be performed and provided by the contractor and Warranted by the OEM.

4.2 PROOF OF PERFORMANCE TESTING

- A. Intermediate Testing:
 1. After completion of 25 - 30 percent of the installation of a head end cabinet(s) and equipment, one wing of HDTV MATV outlets and interconnection to the corresponding Nurse Call (Code Blue) System Patient Head Wall Units and prior to any further work, this portion of the system must be pretested, inspected, and certified. Each item of installed equipment shall be checked to ensure appropriate FCC listing and UL certification labels are affixed, NFPA, Emergency, Safety, and JCAHCO guidelines are followed, and proper installation practices are followed. The intermediate test shall include a full operational test.
 2. The inspection and test will be conducted by a factory-certified contractor representative and witnessed by a Government Representative. The results of the inspection will be officially recorded by a local Government Representative and maintained on file by the COTR, until completion of the entire project. The results will be compared to the Acceptance Test results. An identical inspection may be conducted between the 65 - 75percent of the system construction phase, at the direction of the Resident Engineer.

B. Pretesting:

1. Upon completing installation of the system, the Contractor shall align, balance, and completely pretest the entire system under full operating conditions.
2. Pretesting Procedure:
 - a. During the system pretest the Contractor shall verify (utilizing approved test equipment) that the system is fully operational and meets all the system performance requirements of this standard.
 - b. The Contractor shall pretest and verify that all system functions and specification requirements are met and operational, no unwanted aural effects, such as signal distortion, noise pulses, glitches, audio hum, poling noise, etc. are present. At a minimum, each of the following locations shall be fully pretested:
 - 1) Antennas.
 - 2) Lightning Grounds.
 - 3) Head End.
 - 4) Local and Remote Control Units/Enunciation Panels.
 - 5) All Networked locations.
 - 6) System interface locations (i.e.PA, Auditorium Audio, etc.).
 - 7) System trouble reporting.
 - 8) UPS operation.
 - 9) Primary and Emergency AC Power Requirements
3. The Contractor shall provide 4 copies of the recorded system pretest measurements and the written certification that the system is ready for the formal acceptance test shall be submitted to the COTR.

C. Acceptance Test:

1. After the system has been pre-tested and the Contractor has submitted the pretest results and certification to the COTR, then the Contractor shall schedule an acceptance test date and give the COTR 30 days written notice prior to the date the acceptance test is expected to begin. The system shall be tested in the presence of a Government Representative and an OEM certified representative. The system shall be tested utilizing the approved test equipment to certify proof of performance and FCC compliance. The test shall verify that the total system meets all the requirements of this specification. The notification of the acceptance test shall include the expected length (in time) of the test.

2. The acceptance test shall be performed on a "go-no-go" basis. Only those operator adjustments required to show proof of performance shall be allowed. The test shall demonstrate and verify that the installed system does comply with all requirements of this specification under operating conditions. The system shall be rated as either acceptable or unacceptable at the conclusion of the test. Failure of any part of the system that precludes completion of system testing, and which cannot be repaired in 4 hours, shall be cause for terminating the acceptance test of the system. Repeated failures that result in a cumulative time of 8 hours to affect repairs shall cause the entire system to be declared unacceptable. Retesting of the entire system shall be rescheduled at the convenience of the Government.

D. Acceptance Test Procedure:

1. Physical and Mechanical Inspection:

- a. The VACO Government Representative will tour all major areas where the system is and all sub-systems are completely and properly installed to insure they are operationally ready for proof of performance testing. A system inventory including available spare parts will be taken at this time. Each item of installed equipment shall be checked to ensure appropriate UL certification labels are affixed.
- b. The system diagrams, record drawings, equipment manuals, Telecommunications Infrastructure Plant (TIP) Auto CAD Disks, intermediate, and pretest results shall be formally inventoried and reviewed.
- c. Failure of the system to meet the installation requirements of this specification shall be grounds for terminating all testing.

2. Operational Test:

- a. After the Physical and Mechanical Inspection, the antennas, head end terminating and control equipment shall be checked to verify that it meets all performance requirements outlined herein. A spectrum analyzer and sound level meter shall be utilized to accomplish this requirement.
- b. The distribution system shall be checked at each interface, junction, and distribution point, first, middle, and last leg to verify that the HDTV MATV video, audio and control signals meets all system performance standards.

- c. Each HDTV MATV outlet shall be functionally tested at the same time utilizing the Contractor's approved hospital grade TV receiver and Spectrum Analyzer.
- d. The system and volume stepper switches shall be checked to insure proper operation of the pillow speaker, the volume stepper and the system.
- e. Once these tests have been completed, each installed sub-system function shall be tested as a unified, functioning and fully operating system.
- f. Individual Item Test: The VACO Government Representative will select individual items of equipment for detailed proof of performance testing until 100percent of the system has been tested and found to meet the contents of this specification. Each item shall meet or exceed the minimum requirements of this document.

3. Test Conclusion:

- a. At the conclusion of the Acceptance Test, using the generated punch list (or discrepancy list) the VA and the Contractor shall jointly agree to the results of the test, and reschedule testing on deficiencies and shortages with the COTR. Any retesting to comply with these specifications will be done at the Contractor's expense.
- b. If the system is declared unacceptable without conditions, all rescheduled testing expenses will be borne by the Contractor.

E. Acceptable Test Equipment:

- 1. The test equipment shall furnished by the Contractor shall have a calibration tag of an acceptable calibration service dated not more than 12 months prior to the test. As part of the submittal, a test equipment list shall be furnished that includes the make and model number of the following type of equipment as a minimum:
 - a. Spectrum Analyzer.
 - b. Signal Level Meter.
 - c. Volt-Ohm Meter.
 - d. Sound Pressure Level (SPL) Meter.
 - e. Oscilloscope.
 - f. Pillow Speaker Test Set (Pillow Speaker with appropriate load and cross connections in lieu of the set is acceptable).

4.3 SYSTEM GUARANTEE PERIOD OF SERVICE

A. Contractor's Responsibility:

1. The Contractor shall guarantee that all provided material and equipment will be free from defects, workmanship and will remain so for a period of one year from date of final acceptance of the system by the VA. The Contractor shall provide OEM's equipment warranty documents, to the COTR that certifies each item of equipment installed conforms to OEM published specifications.
2. The Contractor's maintenance personnel shall have the ability to contact the Contractor and OEM for emergency maintenance and logistic assistance, remote diagnostic testing, and assistance in resolving technical problems at any time. This contact capability shall be provided by the Contractor and OEM at no additional cost to the VA.
3. All Contractor maintenance and supervisor personnel shall be fully qualified by the OEM and must provide 2 copies of current and qualified OEM training certificates and OEM certification upon request.
4. Additionally, the Contractor shall accomplish the following minimum requirements during the Two Year Guarantee Period:
 - a. Response Time during the Two Year Guarantee Period:
 - 1) The COTR is the Contractor's only official reporting and contact official for MATV system trouble calls, during the guarantee period.
 - 2) A standard work week is considered 8:00 A.M. to 5:00 P.M. or as designated by the COTR, Monday through Friday exclusive of Federal Holidays.
 - 3) The Contractor shall respond and correct on-site trouble calls, during the standard work week to:
 - a) A routine trouble call within 1 working day of its report. A routine trouble is considered a trouble that causes a pillow speaker or cordset, 1 master IC control station, room station or emergency station to be inoperable.
 - b) Routine trouble calls in critical emergency health care facilities (i.e., cardiac arrest, intensive care units, etc.) shall also be deemed as an emergency trouble call. The COTR shall notify the Contractor of this type of trouble call.

- c) An emergency trouble call within 4 hours of its report. An emergency trouble is considered a trouble that causes a sub-system (ward), distribution point, terminal cabinet, or all call system to be inoperable at any time.
- 4) If a HDTV MATV component failure cannot be corrected within 6 hours (exclusive of the standard work time limits), the Contractor shall be responsible for providing alternate HDTV MATV equipment. The alternate equipment/system shall be operational within a maximum of 18 hours after the 6 hour trouble shooting time and restore the effected location operation to meet the system performance standards. If any sub-system or major system trouble cannot be corrected within one working day, the Contractor shall furnish and install compatible substitute equipment returning the system or sub-system to full operational capability, as described herein, until repairs are complete.
- b. Required On-Site Visits during the One Year Guarantee Period:
 - 1) The Contractor shall visit, on-site, as necessary, during the guarantee period, to perform system preventive maintenance, equipment cleaning, and operational adjustments to maintain the system according the descriptions identified in this document.
 - 2) The Contractor shall arrange all Facility visits with the COTR prior to performing the required maintenance visits.
 - 3) Preventive maintenance shall be performed by the Contractor in accordance with the OEM's recommended practice and service intervals during non-busy time agreed to by the COTR and Contractor.
 - 4) The preventive maintenance schedule, functions and reports shall be provided to and approved by the COTR.
 - 5) The Contractor shall provide the COTR a type written report itemizing each deficiency found and the corrective action performed during each required visit or official reported trouble call. The Contractor shall provide the COTR with sample copies of these reports for review and approval at the beginning of the Acceptance Test. The following reports are the minimum required:

- a) The Contractor shall provide a monthly summary of all equipment and sub-systems serviced during this guarantee period to the COTR by the fifth (5th) working day after the end of each month. The report shall clearly and concisely describe the services rendered, parts replaced and repairs performed. The report shall prescribe anticipated future needs of the equipment and systems for preventive and predictive maintenance.
 - b) The Contractor shall maintain a separate log entry for each item of equipment and each sub-system of the system. The log shall list dates and times of all scheduled, routine, and emergency calls. Each emergency call shall be described with details of the nature and causes of emergency steps taken to rectify the situation and specific recommendations to avoid such conditions in the future.
- 6) The COTR shall convey to the Facility Engineering Officer, 2 copies of actual reports for evaluation.
- a) The COTR shall ensure a copy of these reports is entered into the system's official acquisition documents.
 - b) The COTR shall ensure a copy of these reports is entered into the system's official technical record documents.
- B. Work Not Included: Maintenance and repair service shall not include the performance of any work due to improper use; accidents; other vendor, contractor, or owner tampering or negligence, for which the Contractor is not directly responsible and does not control. The Contractor shall immediately notify the COTR in writing upon the discovery of these incidents. The COTR will investigate all reported incidents and render

4.4 TRAINING

- A. Provide thorough training of the owner's engineering and maintenance staff.
- B. Provide the following minimum training times and durations:
 - 1. 48 hours prior to opening
 - 2. 4 hours during the opening week
 - 3. 2 hours for supervisors and system administrators

- - - E N D - - -

SECTION 27 52 23
NURSE CALL AND CODE BLUE SYSTEMS

PART 1 - GENERAL

1.1 SECTION SUMMARY

- A. Work covered by this document includes design, engineering, labor, material and products, equipment warranty and system guarantee, training and services for, and incidental to, the complete installation of new and fully operating National Fire Protection Association (NFPA) - Life Safety Code 101.3-2 (a) Labeled and (b) Listed, Emergency Service Nurse-Call and/or Life Safety listed Code Blue Communication System and associated equipment (here-in-after referred to as the System) provided in approved locations indicated on the contract drawings. These items shall be tested and certified capable of receiving, distributing, interconnecting and supporting Nurse-Call and/or Code Blue communications signals generated local and remotely as detailed herein.
- B. Work shall be complete, Occupational Safety and Health Administration (OSHA), National Recognized Testing Laboratory (NRTL - i.e. Underwriters Laboratory [UL]) Listed and Labeled; and VA Central Office (VACO), Telecommunications Voice Engineering (TVE 0050P3B) tested, certified and ready for operation.
- C. The System shall be delivered free of engineering, manufacturing, installation, and functional defects. It shall be designed, engineered and installed for ease of operation, maintenance, and testing.
- D. The term "provide", as used herein, shall be defined as: designed, engineered, furnished, installed, certified, tested, and guaranteed by the Contractor.
- E. Specification Order of Precedence: In the event of a conflict between the text of this document and the Project's Contract Drawings outlined and/or cited herein; **THE TEXT OF THIS DOCUMENT TAKES PRECEDENCE.** *HOWEVER, NOTHING IN THIS DOCUMENT WILL SUPERSEDE APPLICABLE EMERGENCY LAWS AND REGULATIONS, SPECIFICALLY NATIONAL AND/OR LOCAL LIFE AND PUBLIC SAFETY CODES.* The Local Fire Marshall and/or VA Public Safety Officer are the only authorities that may modify this document's EMERGENCY CODE COMPLIANCE REQUIREMENTS, on a case by case basis, in writing and confirmed by the COTR and TVE-0050P3B. The COTR is the only approving authority for other amendments to this document that may be granted, on a case by case basis, in writhing with technical concurrencies by the COTR TVE-0050P3B and identified Facility Project Personnel.

F. The Original Equipment Manufacturer (OEM) and Contractor shall ensure that all management, sales, engineering and installation personnel have read and understand the requirements of this specification before the system is designed, engineered, delivered and provided. The Contractor shall furnish a written statement stating this requirement as a part of the technical submittal that includes each name and certification, including the OEMs. The Contractor is cautioned to obtain in writing, all approvals for system changes relating to the published contract specifications and drawings, from the COTR before proceeding with the change.

1.2 RELATED SECTIONS

- A. 01 33 23 - Shop Drawings, Product Data and Samples.
- B. 07 84 00 - Firestopping.
- C. 26 05 21 - Low - Voltage Electrical Power Conductors and Cables (600 Volts and Below).
- D. 27 05 11 - Requirements for Communications Installations.
- E. 27 05 26 - Grounding and Bonding for Communications Systems.
- F. 27 05 33 - Raceways and Boxes for Communications Systems.
- G. 27 10 00 - TIP Structured Communications Systems Cabling.
- H. 27 11 00 - TIP Communications Interface and Equipment Rooms Fittings.
- I. 27 41 31 / 41 - Master Antenna Television Equipment and Systems and/or Extension.
- J. 10 25 13 - Patient Bed Service Walls.

1.3 DEFINITION

- A. Provide: Design, engineer, furnish, install, connect complete, test, certify and guarantee.
- B. Work: Materials furnished and completely installed.
- C. Review of contract drawings: A service by the engineer to reduce the possibility of materials being ordered which do not comply with contract documents. The engineer's review shall not relieve the Contractor of responsibility for dimensions or compliance with the contract documents. The reviewer's failure to detect an error does not constitute permission for the Contractor to proceed in error.
- D. Headquarters (aka VACO) Technical Review, for National and VA Communications and Security, Codes, Frequency Licensing Standards, Guidelines and Compliance:
 - Office of Telecommunications
 - Special Communications Team (0050P3B)
 - 1335 East West Highway - 3rd Floor
 - Silver Spring, Maryland 20910,
 - (O) 301-734-0350, (F) 301-734-0360
- E. Contractor: Systems Contractor; you; successful bidder.

1.4 REFERENCES

A. The installation shall comply fully with all governing authorities, laws and ordinances, regulations, codes and standards, including, but not limited to:

1. United States Federal Law:

a. Departments of:

1) Commerce, Consolidated Federal Regulations (CFR), Title 15 - Under the Information Technology Management Reform Act (Public Law 104-106), the Secretary of Commerce approves standards and guidelines that are developed by the:

a) Chapter II, National Institute of Standards Technology (NIST - formerly the National Bureau of Standards). Under Section 5131 of the Information Technology Management Reform Act of 1996 and the Federal Information Security Management Act of 2002 (Public Law 107-347), NIST develops - Federal Information Processing Standards Publication (FIPS) 140-2-Security Requirements for Cryptographic Modules.

b) Chapter XXIII, National Telecommunications and Information Administration (NTIA - aka 'Red Book') Chapter 7.8 / 9; CFR, Title 47 Federal communications Commission (FCC) Part 15, Radio Frequency Restriction of Use and Compliance in "Safety of Life" Functions & Locations.

2) FCC - Communications Act of 1934, as amended, CFR, Title 47 - Telecommunications, in addition to Part 15 - Restrictions of use for Part 15 listed Radio Equipment in Safety of Life / Emergency Functions / Equipment/ Locations (also see CFR, Title 15 - Department of Commerce, Chapter XXIII - NTIA):

a) Part 15 - Restrictions of use for Part 15 listed Radio Equipment in Safety of Life / Emergency Functions / Equipment/Locations.

b) Part 58 - Television Broadcast Service.

c) Part 90 - Rules and Regulations, Appendix C.

3) Health, (Public Law 96-88), CFR, Title 42, Chapter IV Health & Human Services, CFR, Title 46, Subpart 1395(a)(b) JCAHO "a hospital that meets JCAHO accreditation is deemed to meet the Medicare conditions of Participation by meeting Federal Directives:"

- a) All guidelines for Life, Personal and Public Safety; and, Essential and Emergency Communications.
- 4) Labor, CFR, Title 29, Part 1910, Chapter XVII - Occupational Safety and Health Administration (OSHA), Occupational Safety and Health Standard:
 - a) Subpart 7 - Definition and requirements (for a NRTL - 15 Laboratory's, for complete list, contact (http://www.osha.gov/dts/otpc/nrtl/faq_nrtl.html)):
 - 1) UL:
 - a) 44-02 - Standard for Thermoset-Insulated Wires and Cables.
 - b) 65 - Standard for Wired Cabinets.
 - c) 83-03 - Standard for Thermoplastic-Insulated Wires and Cables.
 - d) 467-01 - Standard for Electrical Grounding and Bonding Equipment
 - e) 468 - Standard for Grounding and Bonding Equipment.
 - f) 486A-01 - Standard for Wire Connectors and Soldering Lugs for Use with Copper Conductors
 - g) 486C-02 - Standard for Splicing Wire Connectors.
 - h) 486D-02 - Standard for Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations.
 - i) 486E-00 - Standard for Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors.
 - j) 493-01 - Standard for Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable.
 - k) 514B-02 - Standard for Fittings for Cable and Conduit.
 - l) 1069 - Hospital Signaling and Nurse Call Equipment.
 - m) 1449 - Standard for Transient Voltage Surge Suppressors.
 - n) 1479-03 - Standard for Fire Tests of Through-Penetration Fire Stops.
 - o) 1666 - Standard for Wire/Cable Vertical (Riser) Tray Flame Tests.
 - p) 1863 - Standard for Safety, Communications Circuits Accessories.

- q) 2024 - Standard for Optical Fiber Raceways.
- r) 60950-1/2 - Information Technology Equipment - Safety.
- 2) Canadian Standards Association (CSA): same tests as for UL.
- 3) Communications Certifications Laboratory (CCL): same tests as for UL.
- 4) Intertek Testing Services NA, Inc. (ITSNA formerly Edison Testing Laboratory [ETL]): same tests as for UL.
- b) Subpart 35 - Compliance with NFPA 101 - Life Safety Code.
- c) Subpart 36 - Design and construction requirements for exit routes.
- d) Subpart 268 - Telecommunications.
- e) Subpart 305 - Wiring methods, components, and equipment for general use.
- 5) Department of Transportation, CFR, Title 49 (Public Law 89-670), Part 1, Subpart C - Federal Aviation Administration (FAA):
 - a) Standards AC 110/460-ID & AC 707 / 460-2E - Advisory Circulars for Construction of Antenna Towers.
 - b) Forms 7450 and 7460-2 - Antenna Construction Registration.
- 6) Veterans Affairs (Public Law No. 100-527), CFR, Title 38, Volumes I & II:
 - a) Office of Telecommunications:
 - 1) Handbook 6100 - Telecommunications.
 - a) Spectrum Management FCC & NTIA Radio Frequency Compliance and Licensing Program.
 - b) Special Communications Proof of Performance Testing, VACO Compliance and Life Safety Certification(s).
 - b) Office of Cyber and Information Security (OCIS):
 - 1) Handbook 6500 - Information Security Program.
 - 2) Wireless and Handheld Device Security Guideline Version 3.2, August 15, 2005.
 - c) VA's National Center for Patient Safety - Veterans Health Administration Warning System, Failure of Medical Alarm Systems using Paging Technology to Notify Clinical Staff, July 2004.

- d) VA's Center for Engineering Occupational Safety and Health, concurrence with warning identified in VA Directive 7700.
- e) Office of Construction and Facilities Management (CFM):
 - 1) Master Construction Specifications (PG-18-1).
 - 2) Standard Detail and CAD Standards (PG-18-4).
 - 3) Equipment Guide List (PG-18-5).
 - 4) Electrical Design Manual for VA Facilities (PG 18-10), Articles 7 & 8.
 - 5) Minimum Requirements of A/E Submissions (PG 18-15):
 - a) Volume B, Major New Facilities, Major Additions; and Major Renovations, Article VI, Paragraph B.
 - b) Volume C - Minor and NRM Projects, Article III, Paragraph S.
 - c) Volume E - Request for Proposals Design/Build Projects, Article II, Paragraph F.
 - 6) Mission Critical Facilities Design Manual (Final Draft - 2007).
 - 7) Life Safety Protected Design Manual (Final Draft - 2007).
 - 8) Solicitation for Offerors (SFO) for Lease Based Clinics - (05-2009).
- b. Federal Specifications (Fed. Specs.):
 - 1) A-A-59544-00 - Cable and Wire, Electrical (Power, Fixed Installation).
- 2. National Codes:
 - a. American Institute of Architects (AIA): Guidelines for Healthcare Facilities.
 - b. American National Standards Institute/Electronic Industries Association/Telecommunications Industry Association (ANSI/EIA/TIA):
 - 1) 568-C - Commercial Building Telecommunications Wiring Standards:
 - a) C-1 - General Requirements.
 - b) C-2 - Balanced twisted-pair cable systems.
 - c) C-3 - Fiber optic cable systems.
 - 2) 569-B - Commercial Building Standard for Telecommunications Pathways and Spaces.

- 3) 606-B - Administration Standard for the Telecommunications Infrastructure of Communications Buildings.
- 4) 607-A - Commercial Building Grounding and Bonding Requirements for Telecommunications.
- 5) REC 127-49 - Power Supplies.
- 6) RS 270 - Tools, Crimping, Solderless Wiring Devices, Recommended Procedures for User Certification.
- c. American Society of Mechanical Engineers (ASME):
 - 1) Standard 17.4 - Guide for Emergency Personnel.
 - 2) Standard 17.5 - Elevator & Escalator Equipment (prohibition of installing non-elevator equipment in Elevator Equipment Room / Mechanical Penthouse).
- d. American Society of Testing Material (ASTM):
 - 1) D2301-04 - Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape.
- e. Building Industries Communications Services Installation (BICSI):
 - 1) All standards for smart building wiring, connections and devices for commercial and medical facilities.
 - 2) Structured Building Cable Topologies.
 - 3) In consort with ANSI/EIA/TIA.
- f. Institute of Electrical and Electronics Engineers (IEEE):
 - 1) SO/TR 21730:2007 - Use of mobile wireless communication and computing technology in healthcare facilities - Recommendations for electromagnetic compatibility (management of unintentional electromagnetic interference) with medical devices.
 - 2) 0739-5175/08/©2008 IEEE - Medical Grade - Mission Critical - Wireless Networks.
 - 3) C62.41 - Surge Voltages in Low-Voltage AC Power Circuits.
- g. NFPA:
 - 1) 70 - National Electrical Code (current date of issue) - Articles 517, 645 & 800.
 - 2) 75 - Standard for Protection of Electronic Computer Data-Processing Equipment.
 - 3) 77 - Recommended Practice on Static Electricity.
 - 4) 99 - Healthcare Facilities.
 - 5) 101 - Life Safety Code.
- 3. State Hospital Code(s).

4. Local Town, City and/or County Codes.
5. Accreditation Organization(s):
 - a. Joint Commission on Accreditation of Hospitals Organization (JCAHO) - Section VI, Part 3a - Operating Features.

1.5 QUALIFICATIONS

- A. The OEM shall have had experience with three (3) or more installations of Nurse Call systems of comparable size and interfacing complexity with regards to type and design as specified herein. Each of these installations shall have performed satisfactorily for at least one (1) year after final acceptance by the user. Include the names, locations and point of contact for these installations as a part of the submittal.
- B. The Contractor shall submit certified documentation that they have been an authorized distributor and service organization for the OEM for a minimum of three (3) years. The Contractor shall be authorized by the OEM to pass thru the OEM's warranty of the installed equipment to VA. In addition, the OEM and Contractor shall accept complete responsibility for the design, installation, certification, operation, and physical support for the System. This documentation, along with the System Contractor and OEM certifications must be provided in writing as part of the Contractor's Technical submittal.
- C. The Contractor's Communications Technicians assigned to the System shall be fully trained, qualified, and certified by the OEM on the engineering, installation, operation, and testing of the System. The Contractor shall provide formal written evidence of current OEM certification(s) for the installer(s) as a part of the submittal or to the RE before being allowed to commence work on the System.
- D. The Contractor shall display all applicable national, state and local licenses.
- E. The Contractor shall submit copy (s) of Certificate of successful completion of OEM's installation/training school for installing technicians of the System's Nurse Call and/or Code Blue equipment being proposed.

1.6 CODES AND PERMITS

- A. Provide all necessary permits and schedule all inspections as identified in the contract's milestone chart, so that the system is proof of performance tested, certified and approved by VA and ready for operation on a date directed by the Owner.

- B. The contractor is responsible to adhere to all codes described herein and associated contractual, state and local codes.

1.7 SCHEDULING

- A. After the award of contract, the Contractor shall prepare a detailed schedule (aka milestone chart) using "Microsoft Project" software or equivalent. The Contractor Project Schedule (CPS) shall indicate detailed activities for the projected life of the project. The CPS shall consist of detailed activities and their restraining relationships. It will also detail manpower usage throughout the project.
- B. It is the responsibility of the Contractor to coordinate all work with the other trades for scheduling, rough-in, and finishing all work specified. The owner will not be liable for any additional costs due to missed dates or poor coordination of the supplying contractor with other trades.

1.8 REVIEW OF CONTRACT DRAWINGS AND EQUIPMENT DATA SUBMITTALS (AKA TECHNICAL SUBMITTAL[S])

(Note: The Contractor is encouraged, but not required, to submit separate technical submittal(s) outlining alternate technical approach(s) to the system requirements stated here-in as long as each alternate technical document(s) is complete, separate, and submitted in precisely the same manner as outlined herein. VA will review and rate each received alternate submittal, which follows this requirement, in exactly the same procedure as outlined herein. Partial, add-on, or addenda type alternates will not be accepted or reviewed.)

- A. Submit at one time within 10 days of contract awarding, drawings and product data on all proposed equipment and system. Check for compliance with contract documents and certify compliance with Contractor's "APPROVED" stamp and signature.
- B. Support all submittals with descriptive materials, i.e., catalog sheets, product data sheets, diagrams, and charts published by the manufacturer. These materials shall show conformance to specification and drawing requirements.
- C. Where multiple products are listed on a single cut-sheet, circle or highlight the one that you propose to use. Provide a complete and through equipment list of equipment expected to be installed in the system, with spares, as a part of the submittal. Special Communications (TVE-0050P3B) will not review any submittal that does not have this list.

- D. Provide four (4) copies to the COTR for technical review. The COTR will provide a copy to the offices identified in Paragraph 1.3.C & D, at a minimum for compliance review as described herein where each responsible individual(s) shall respond to the COTR within 10 days of receipt of their acceptance or rejection of the submittal(s).
- E. Provide interconnection methods, conduit (where not already installed), junction boxes (J-Boxes), cable, interface fixtures and equipment lists for the: ENR(s) (aka DMARC), TER, TCR, MCR, MCOR, PCR, ECR, Stacked Telecommunications Rooms (STR), Nurses Stations (NS), Head End Room (HER), Head End Cabinet (HEC), Head End Interface Cabinet (HEIC) and approved TCO locations TIP interface distribution layout drawing, as they are to be installed and interconnected to teach other (REFER TO APPENDIX B - SUGGESTED TELECOMMUNICATIONS ONE LINE TOPOLOGY pull-out drawing).
- F. Equipment technical literature detailing the electrical and technical characteristics of each item of equipment to be furnished.
- G. Engineering drawings of the System, showing calculated of expected signal levels at the headend input and output, each input and output distribution point, and signal level at each telecommunications outlet.
- H. Surveys Required as a Part of The Technical Submittal:
 - 1. The Contractor shall provide the following System surveys that depict various system features and capacities required in addition to the on-site survey requirements described herein (see Specification Paragraph 2.4.3). Each survey shall be in writing and contain the following information (the formats are suggestions and may be used for the initial Technical Submittal Survey requirements), as a minimum:
 - a. Nurse Call Cable System Design Plan:
 - 1) An OEM and contractor designed functioning Nurse Call System cable plan **to populate the entire TIP empty conduit/pathway distribution systems provided as a part of Specification 27 11 00** shall be provided as a part of the technical proposal. A specific functioning Nurse Call: cable, interfaces, J-boxes and back boxes shall coincide with the total growth items as described herein. It is the Contractor's responsibility to provide the Systems' entire Nurse Call cable and accessory requirements and engineer a functioning Nurse Call distribution system and equipment requirement plan of the following paragraph(s), at a minimum:
 - 2) The required Nurse Call and/or Code Blue Equipment Locations:

<u>EQUIPPED ITEM</u>	<u>CAPACITY</u>	<u>GROWTH</u>
Master Stations		
Dome Lights		
Room		
Corridor		
Other		
Patient Stations		
Single		
Dual		
Isolation		
Other		
Emergency Stations		
Bath		
Toilet		
Isolation		
Other		
Staff Stations		
Duty Stations		
Code Blue		
Patient Locations		
Surgical Recovery Locations		
Medical Recovery Locations		
ICU Locations		
SICU		
MICU		
CCU		
Other		
Emergency Room Locations		
Other		
Supervisory Locations		
Nurse Stations		
On-Call Rooms		
Other		
Remote Locations		
Telephone Operator's Room		
Police Control Room		

Other		
Radio Paging Access (when pre-approved by TVE-0050P3B)		
Audio Paging Access (when pre-approved by TVE-0050P3B)		
Wireless Access (when pre-approved by TVE-0050P3B)		
Maintenance/Programming Console		
Location(s)		
Central Control Cabinet/Equipment		
Location		
Power Supply(s)		
UPS(s)		

3) The required Nurse Call and/or Code Blue Cable

Plant/Connections:

The Contractor shall clearly and fully indicate this category for each item identified herein as a part of the technical submittal. For this purpose, the following definitions and sample connections are provided to detail the system's capability:

<u>EQUIPPED ITEM</u>	<u>CAPACITY</u>	<u>GROWTH</u>
Central Control Cabinet/Equipment		
Location		
Power Supply(s)		
UPS(s)		
Essential Electrical Power Panel(s)		
Other		
Cable Plant		
Supply to Locations Identified in Paragraph 1.8.H.1.a.2)		
Remote Locations		
Telephone Operator Room		
Police Control Room		
Other		
Maintenance/Program Console		
Location(s)		
Other		
LAN (Local Facility)		

Access/Equipment/Location (when pre-approved by TVE-0050P3B)		
Wireless Access/Equipment/Location (when pre-approved by TVE-0050P3B)		
PA Access/Equipment/Location (when pre-approved by TVE-0050P3B)		
Other		

1.9 PROJECT RECORD DOCUMENTS (AS BUILTS)

- A. Throughout progress of the Work, maintain an accurate record of changes in Contract Documents. Upon completion of Work, transfer recorded changes to a set of Project Record Documents.
- B. The floorplans shall be marked in pen to include the following:
 - 1. Each device specific locations with UL labels affixed.
 - 2. Conduit locations.
 - 3. Each interface and equipment specific location.
 - 4. Head-end equipment and specific location.
 - 5. Wiring diagram.
 - 6. Labeling and administration documentation.
 - 7. Warranty certificate.
 - 8. System test results.

1.10 WARRANTIES / GUARANTY

- A. The Contractor shall warrant the installation to be free from defect in material and workmanship for a period of two (2) years from the date of acceptance of the project by the owner. The Contractor shall agree to remedy covered defects within four (4) hours of notification of major failures or within twenty-four (24) hours of notification for individual station related problems.
- B. The Contractor shall agree to grantee the system according to the guidelines outlined in Article 4 herein.

1.11 USE OF THE SITE

- A. Use of the site shall be at the GC's direction.
- B. Coordinate with the GC for lay-down areas for product storage and administration areas.
- C. Coordinate work with the GC and their sub-contractors.
- D. Access to buildings wherein the work is performed shall be directed by the GC.

1.12 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft.
- B. Store products in original containers.
- C. Coordinate with the GC for product storage. There may be little or no storage space available on site. Plan to potentially store materials off site.
- D. Do not install damaged products. Remove damaged products from the site and replaced with new product at no cost to the Owner.

1.13 PROJECT CLOSE-OUT

- A. Prior to final inspection and acceptance of the work, remove all debris, rubbish, waste material, tools, construction equipment, machinery and surplus materials from the project site and thoroughly clean your work area.
- B. Before the project closeout date, the Contractor shall submit:
 - 1. OEM Equipment Warranty Certificates.
 - 2. Evidence of compliance with requirements of governing authorities such as the Low Voltage Certificate of Inspection.
 - 3. Project record documents.
 - 4. Instruction manuals and software that is a part of the system.
 - 5. System Guaranty Certificate.
- C. Contractor shall submit written notice that:
 - 1. Contract Documents have been reviewed.
 - 2. Project has been inspected for compliance with contract.
 - 3. Work has been completed in accordance with the contract.

PART 2 - PRODUCTS / FUNCTIONAL REQUIREMENTS**2.0 GENERAL REQUIREMENTS FOR EQUIPMENT AND MATERIALS**

- A. Furnish and install a complete and fully functional and operable Nurse Call System for each location shown on the contract drawings and TCOs **WHOSE EMPTY CONDUIT SYSTEM WAS PROVIDED AS A PART OF SPECIFICATION 27 11 00.**
- B. The specific location for each Nurse Call: Central Control Cabinet is COMM 230 & 333, Power Supply is COMM 230 & 333, Electrical Supervisor Panel is COMM 230 & 333, UPS is COMM 230 & 333, Two (2) Remote Annunciation Consoles is Telephone Operator, Master Station is Nurse Station 204 & Nurse Station 306, Duty Station is Room & Police Control Center, Nurse Station 205 & 305, Staff Station is Room 205 B, Room 336 and Room 316, Emergency Station is Each Patient Room and Bath Room,

Dome Light is outside each Patient Room, Code Blue Station is each Patient Room.

- C. Coordinate features and select interface components to form an integrated Nurse Call system. Match components and interconnections between the systems for optimum performance of specified functions.
- D. Expansion Capability: The Nurse Call equipment interfaces and cables shall be able to increase number of enunciation points in the future by a minimum of 50 percent (%) above those indicated without adding any internal or external components or main trunk cable conductors.
- E. Equipment: Active electronic type shall use solid-state components, fully rated for continuous duty unless otherwise indicated. Select equipment for normal operation on input power usually supplied between 110 to 130 VAC, 60 Hz supplied from the Facility's Emergency Electrical Power System.
- F. Meet all FCC requirements regarding equipment listing, low radiation and/or interference of RF signal(s). The system shall be designed to prevent direct pickup of signals from within and outside the building structure.

2.1 SYSTEM DESCRIPTION

- A. Furnish and install a complete and fully functional and operable Nurse Call and/or Code Blue System **WHOSE EMPTY CONDUIT SYSTEM WAS PROVIDED AS A PART OF SPECIFICATION 27 11 00.**
- B. **The Contractor is responsible for interfacing the MATV, Patient Bed Service Walls.**
- C. The Contractor shall continually employ interfacing methods that are approved by the OEM and VA. At a minimum, an acceptable interfacing method requires not only a physical and mechanical connection, but also a matching of signal, voltage, and processing levels with regard to signal quality and impedance. The interface point must adhere to all standards described herein for the full separation of Critical Care and Life Safety systems.
- D. The System Contractor shall connect the System ensuring that all NFPA and UL Critical Care and Life Safety Circuit and System separation guidelines are satisfied. The System Contractor is not allowed to make any connections to the Telephone System. VA shall arrange for the interconnection between the **MATV, Patient Bed Service Walls** with the appropriate responsible parties.

- E. System hardware shall consist of a **standalone (separate)** nurse call **Code Blue** patient communications network comprised of nurse consoles, control stations, staff and duty stations, room and corridor dome lights, pillow speakers/call cords, pull cord and/or emergency push button stations, wiring. And, other options such as, **pocket page interfaces**, computer interfaces, printer interfaces, wireless / telephone network interfaces, and nurse locating system interface **(when specifically approved first by TVE 0050P3B)** and as shown on drawings. All necessary equipment required to meet the intent of these specifications, whether or not enumerated within these specifications, shall be supplied and installed to provide a complete and operating nurse call **Code Blue** patient communications network. **It is not acceptable to utilize the telephone cable system for the control and distribution of nurse call (code Blue) signals and equipment.**
- F. System firmware shall be the product of a reputable firmware OEM of record with a proven history of product reliability and sole control over all source code. Manufacturer shall provide, free of charge, product firmware/software upgrades for a period of two (2) years from date of acceptance by VA for any product feature enhancements. System configuration programming changes shall not require any exchange of parts and shall be capable of being executed remotely via a modem connection **(when specifically approved first by TVE 0050P3B).**
- G. The Nurse Call Head End Equipment shall be located in Telecommunications Room 230. **The Nurse Call / Code Blue System may interface the PA system when specifically approved by VA Headquarters TVE 0050P3B during the project approval process prior to contract bidding.**
- H. The System shall utilize microprocessor components for all signaling and programming circuits and functions. Self contained or on board system program memory shall be non-volatile and protected from erasure from power outages for a minimum of 12 hours.
- I. Provide a backup battery or a UPS for the System (including each distribution cabinet/point, CRT and Monitor) to allow normal operation and function (as if there was no AC power failure) in the event of an AC power failure or during input power fluctuations for a minimum of 30 minutes.

J. The System is defined as Critical Service and the Code Blue functions is defined as Life Safety/Support by NFPA (re Part 1.1.A) and so evaluated by JCAHCO. **Therefore, the system shall have a minimum of two (2) additional remote enunciation points in order to satisfy NFPA's Life Safety Code 101 (the typical secondary locations are Telephone Operators Room, MAS ER Desk, Boiler Plant, etc; AND the primary location is required to be in the SCC Room.**

1. These two (2) additional remote locations shall be fully manned:
 - a. 24/7/365 for certified Hospital.
 - b. As long as other identified VA Medical / Servicing Facilities are open for servicing patients.
 - c. At a minimum, Code Blue Functions shall be provided in all Recovery (Medical and Surgical) Rooms, Intensive Care Units (ICU), Cardiac Care Units (CCU), Step Down Room, Life Support / Monitoring Rooms, Oncology / Radiology Procedure Rooms, Dialysis Areas.
 - d. The minimum remote enunciation locations shall be:
 - 1) The Telephone / PBX Operator Room.
 - 2) The Police Control / Operations Room.
 - 3) Other location(s) that is specifically approved by VA Headquarters TVE - 0050P3B DURING THE PROJECT DEVELOPMENT STAGES AND PRIOR TO EQUIPMENT PURCHASE.
2. In addition to the two (2) remote locations afore described, the following locations are the minimum required for additional Nurse Call /Code Blue Annunciation:
 - a. "On Call" Rooms.
 - b. Each Nurse Master Station.
 - c. Each Staff Station.
 - d. Each Duty Station.
3. The MAXIMUM enunciation time period from placement of the Code Blue Call to enunciation at each remote locations is 10 seconds; and, 15 seconds to the subsequent enunciating media stations (i.e. PA, Radio Paging, Emergency Telephone or Radio Backup, etc.).

K. Each Code Blue System shall be designed to provide continuous electrical supervision of the complete and entire system (i.e. dome light bulbs [each light will be considered supervised if they use any one or a combination of (UL) approved electrical supervision alternates, as identified in UL-1069, 1992 revision], wires, contact switch connections, circuit boards, data, audio, and communication busses, main and UPS power, etc.). All alarm initiating and signaling

circuits shall be supervised for open circuits, short circuits, and system grounds. Main and UPS power circuits shall be supervised for a change in state (i.e. primary to backup, low battery, UPS on line, etc.). When an open, short or ground occurs in any system circuit, an audible and visual fault alarm signal shall be initiated at the nurse control station and all remote locations.

- L. When the System is approved to connect to a separate communications system (i.e. LAN, WAN, Telephone, Public Address, radio raging, wireless systems, etc) the connection point shall meet the following minimum requirements for each hard wired / wireless connection (note each wireless system connection MUST BE APPROVED PRIOR TO CONTRACT BID BY VA HEADQUARTERS TVE - 0050P3B AND SPECTRUM MANAGEMENT - 0050P2B - hereinafter referred to as SM - 0050P2B):
 - 1. UL 60950-1/2.
 - 2. FIPS 142.
 - 3. FCC Part 15 Listed Radio Equipment restriction compliance approved by SM - 0050P2B.
- M. All passive distribution equipment shall meet or exceed -80 dB radiation shielding (aka RFI) shielding specifications and be provided with connectors specified by the OEM.
- N. All equipment face plates utilized in the system shall be stainless steel, anodized aluminum or UL approved cycolac plastic for the areas where provided.
- O. Noise filters and surge protectors shall be provided for each equipment interface cabinet, headend cabinet, control console and local and remote amplifier locations to insure protection from input primary AC power surges and to insure noise glitches are not induced into low voltage data circuits.
- P. Plug-in connectors shall be provided to connect all equipment, except coaxial cables. Coaxial cable distribution points shall use coaxial cable connections recommended by the cable OEM and approved by the system OEM. Base band cable systems shall utilize barrier terminal screw type connectors, at a minimum. As an alternate, crimp type connectors installed with a ratchet type installation tool are acceptable provided the cable dress, pairs, shielding, grounding, connections and labeling are the same as the barrier terminal strip connectors. Tape of any type, wire nuts or solder type connections are unacceptable and will not be approved.

- Q. Audio Level Processing: The control equipment shall consist of audio mixer(s), volume limiter(s) and/or compressor(s), and power amplifier(s) to process, adjust, equalize, isolate, filter, and amplify each audio channel for each sub-zone in the system and distribute them into the System's RF interfacing distribution trunks and amplification circuits. It is acceptable to use identified Telephone System cable pairs designated for Two-Way Radio interface and control use or identified as spare telephone cable pairs by the Facility's Telephone System Contractor. The use of telephone cable to distribute RF signals, carrying system or sub-system AC or DC voltage is not acceptable and will not be approved. Additionally, each control location shall be provided with the equipment required to insure the system can produce its designed audio channel capacity at each speaker identified on the contract drawings. The Contractor shall provide: a spare set of telephone paging modules as recommended by the OEM (as a minimum provide one spare module for each installed module); one spare audio power amplifier, one spare audio mixer, one spare audio volume limiter and/or compressor, and one spare audio automatic gain adjusting device, and minimum RF equipment recommended by the OEM.
- R. Contractor is responsible for pricing all accessories and miscellaneous equipment required to form a complete and operating system. Unless otherwise noted in this Part, equipment quantities shall be as indicated on the drawings.
- S. System Performance:
1. At a minimum, each distribution, interconnection, interface, terminating point and TCO shall be capable of supporting the Facility's Nurse Call and/or Code Blue System voice and data service as follows:
 - a. Shall be compliant with and not degrade the operating parameters of the Public Switched Telephone Network (PSTN) and the Federal Telecommunications System (FTS) at each PSTN and FTS interface (if attachment is permitted by TVE 0050P3B), interconnection and TCO terminating locations detailed on the contract drawings.

- b. The System shall provide the following minimum operational functions:
 - 1) Code Blue calls shall be cancelable at the calling station only. The nurse call master station (s) that a managing Code Blue functions shall not have the ability to cancel Code Blue calls.
 - 2) Each Code Blue system shall be able to receive audio calls from all bedside stations simultaneously.
 - 3) Calls placed from any Code Blue station shall generate Code Blue emergency type audible and visual signals at each associated nurse control and duty station, respective dome lights and all local and remote annunciator panels. Calls placed from a bedside station shall generate emergency type visual signals at the bedside station and associated dome light(s) in addition to the previous stated stations and panels.
 - 4) Activating the silencing device at any location, while a Code Blue call or system fault is occurring shall mute the audible signals at the alarm location.
 - a) The audible alarm shall regenerate at the end of the selected time-out period until the call or fault is corrected.
 - b) The visual signals shall continue until the call is canceled and/or a fault is corrected. When the fault is corrected, all signals generated by the fault shall automatically cease, returning the System to a standby status.
 - c) Audible signals shall be regenerated in any local or remote annunciator panel that is in the silence mode, in the event an additional Code Blue call is placed in any Code Blue system.
 - d) The additional Code Blue call shall also generate visual signals at all annunciators to identify the location of the call.
- 2. Each System Nurse Call location shall generate a minimum of distinct calls:
 - a. Routine: single flashing dome lights & master station color and audio tone,

- b. Staff Assist: rapid flashing dome lights & master station color and audio tone,
- c. Emergency: Red flashing dome lights & master station color and audio tone,
- d. Code Blue (if equipped): Blue flashing dome lights and master station color and audio tone,
- e. Each generated call shall be cancelable at ONLY the originating location,
- f. Staff Locator: Green Flashing dome lights & master station color and audio tone, and

2.3 MANUFACTURERS

- A. The products specified shall be new, FCC and UL Listed, labeled and produced by OEM manufacturer of record. An OEM of record shall be defined as a company whose main occupation is the manufacture for sale of the items of equipment supplied and which:
 - 1. Maintains a stock of replacement parts for the item submitted,
 - 2. Maintains engineering drawings, specifications, and operating manuals for the items submitted, and
 - 3. Has published and distributed descriptive literature and equipment specifications on the items of equipment submitted at least 30 days prior to the Invitation for Bid.
- B. Specifications contained herein as set forth in this document detail the salient operating and performance characteristics of equipment in order for VA to distinguish acceptable items of equipment from unacceptable items of equipment. When an item of equipment is offered or furnished for which there is a specification contained herein, the item of equipment offered or furnished shall meet or exceed the specification for that item of equipment.
- C. Equipment Standards and Testing:
 - 1. The System has been defined herein as connected to systems identified as Critical Service performing various Emergency and Life Support Functions. Therefore, at a minimum, the system shall conform to all aforementioned National and/or Local Life Safety Codes (which ever are the more stringent), NFPA, NEC, this specification, JCAHCO Life Safety Accreditation requirements, and the OEM recommendations, instructions, and guidelines.

2. All supplies and materials shall be listed, labeled or certified by UL or a NRTL where such standards have been established for the supplies, materials or equipment.
3. The provided equipment required by the System design and approved technical submittal must conform with each UL standard in effect for the equipment, as of the date of the technical submittal (or the date when the COTR approved system equipment necessary to be replaced) was technically reviewed and approved by VA. Where a UL standard is in existence for equipment to be used in completion of this contract, the equipment must bear the approved UL seal.
4. Each item of electronic equipment to be provided under this contract must bear the approved UL seal or the seal of the testing laboratory that warrants the equipment has been tested in accordance with, and conforms to the specified standards. The placement of the UL Seal shall be a permanent part of the electronic equipment that is not capable of being transportable from one equipment item to another.

2.4 PRODUCTS

A. General.

1. Contractor is responsible for pricing all accessories and miscellaneous equipment required to form a complete and operating system. The equipment quantities provided herein shall be as indicated on the drawings with the exception of the indicated spare equipment.
2. Contractor Furnished Equipment List (CFEs):
 - a. The Contractor is required to provide a list of the CFE equipment to be furnished. The quantity, make and model number of each item is required. Select the required equipment items quantities that will satisfy the needs of the system as described herein and with the OEM's concurrence applied to the list(s), in writing.

<u>Item</u>		<u>Quantity</u>	<u>Unit</u>
1.	As required	Interface Panel(s)	
1.a	As required	Electrical Supervision	
		Trouble Enunciator	
1.a.1	As required	Equipment Back Box(s)	
1.b	As required	Telephone	
1.c	As required	Public Address	
1.d	As required	Radio Paging / Equipment	
1.e	As required	Wireless / Equipment	
1.f.	As required	Radio Pager / Equipment	
1.g	As required	Wireless / Equipment	

1.f	As required	Personal Communicator / Equipment
2.	As required	Lightning Arrestor
3.	As required	Head End Equipment/Locations
3.a	As required	Cabinet(s)
3.a.1	As required	AC Power Conditioner & Filter
3.a.2	As required	AC Power Strip
3.a.3	As required	UPS
3.a.4	As required	Interconnecting Wire/Cables
3.a.5	As required	Wire / Cable Connector(s)
3.a.6	As required	Wire / Cable Terminator(s)
3.b	As required	Wire Management System
3.b	As required	Head End Function(s)
3.b.1	As required	H7 Interface
3.b.2	As required	Nurse Locator
3.b.3	As required	Staff Locator
4.	As required	Master Station(s)
4.a	As required	Nurse Locator
4.b	As required	Staff Locator
5.	As required	Distribution System(s)
5.a	As required	Staff Station
5.a.1	As required	Equipment Back Box(s)
5.b	As required	Duty Station
5.b.1	As required	Equipment Back Box(s)
5.c	As required	Code Blue Station
5.c.1	As required	Equipment Back Box(s)
5.c.2	2 (MIN)	Remote Station(s)
5.d	As required	Patient Station(s)
5.d.1	As required	Equipment Back Box(s)
5.d.2	As required	Bed Interface(s)
5.d.3	As required	Pillow Speaker
5.d.4	As required	Push Button Cordset
5.d.5	As required	Dummy Plugs
5.d.6	As required	Bed Integrated Control
5.d.7	As required	Lighting Interface Module
5.d.8	As required	TV Control Interface
5.d.9	As required	TV Control Jack
5.d.10	As required	TV Interconnection Cables
5.d.11	As required	HDTV Coaxial
5.d.12	As required	HDTV/Nurses Call Interface/Control
5.d.13	As required	Auxiliary Mounting Interface
5.e	As required	Emergency Station(s)
5.e.1	As required	Equipment Back Box(s)
5.e.2	As required	Toilet Emergency Station (waterproof)
5.e.3	As required	Shower Emergency Station (waterproof)
5.e.4	As required	Lavatory Emergency Station (waterproof)
5.f.	As required	Room Dome Light
5.f.1	As required	Equipment Back Box(s)
5.g	As required	Other Dome Light(s)
5.g.1	As required	Equipment Back Box(s)
5.g.2	As required	Corridor Dome Light
5.g.3	As required	Intersectional Dome Light

5.h	As required	System Cable(s)
5.h.1	As required	Coaxial
5.h.2	As required	System Pin
5.h.3	As required	Audio
5.h.4	As required	Control
5.h.5	As required	Video
5.i	As required	System Connector(s)
5.i.1	As required	Coaxial
5.i.2	As required	System Pin
5.i.2	As required	Audio
5.i.3	As required	Control
5.i.4	As required	Video
5.j	As required	Wire Management Required as described herein
6.	As required	Mental Health Unit
6.a	As required	Head End Function(s)
6.a.1	As required	H7 Interface
6.a.2	As required	Nurse Locator
6.a.3	As required	Staff Locator
6.b.	As required	Master Station(s)
6.b.1	As required	Nurse Locator
6.b.2	As required	Staff Locator
6.c	As required	Distribution System(s)
6.c.1	As required	Staff Station
6.c.1.a	As required	Equipment Back Box(s)
6.c.2	As required	Duty Station
6.c.2.a	As required	Equipment Back Box(s)
6.c.3	As required	Patient Station(s)
6.c.3.a	As required	Equipment Back Box(s)\
6.c.4	As required	Security Room(s)
6.c.4.a	As required	Security Station(s)
6.c.4.b	As required	Equipment Back Box(s)\
6.c.4.c	As required	Overhead Speaker/Microphone
6.c.4.d	As required	Equipment Back Box(s)\
6.c.4.e	As required	TV Surveillance System
6.c.4.f	As required	Equipment Back Box(s)\
6.c.4.g	As required	TV Interconnection Cables
6.c.4.h	As required	Audio Interconnection Cables
6.c.5	As required	Emergency Station(s)
6.c.5.a	As required	Equipment Back Box(s)
6.c.5.b	As required	Toilet Emergency Station (waterproof)
6.c.5.c	As required	Shower Emergency Station (waterproof)
6.c.5.d	As required	Lavatory Emergency Station (waterproof)
6.c.6	As required	Room Dome Light
6.c.7	As required	Other Dome Light(s)
6.c.7.a	As required	Equipment Back Box(s)
6.c.7.b	As required	Corridor Dome Light
6.c.7.c	As required	Intersectional Dome Light
6.c.8	As required	System Cable(s)
6.c.8.a	As required	Coaxial
6.c.8.b	As required	System Pin
6.c.8.c	As required	Audio
6.c.8.d	As required	Control

6.c.8.e	As required	Video
6.c.9	As required	System Connector(s)
6.c.9.a	As required	Coaxial
6.c.9.b	As required	System Pin
6.c.9.c	As required	Audio
6.c.9.d	As required	Control
6.c.9.e	As required	Video
6.c.9.f	As required	Wire Management Required as described herein//
7	0	Blind Rehabilitation Unit
7.a	0	Head End Function(s)
7.a.1	0	H7 Interface
7.a.2	0	Nurse Locator
7.a.3	0	Staff Locator
7.b.	0	Master Station(s)
7.b.1	0	Nurse Locator
7.b.2	0	Staff Locator
7.c	0	Distribution System(s)
7.c.1	0	Staff Station
7.c.1.a	0	Equipment Back Box(s)
7.c.2	0	Duty Station
7.c.2.a	0	Equipment Back Box(s)
7.c.3	0	Patient Station(s)
7.c.3.a	0	Equipment Back Box(s)\
7.c.4	0	Emergency Station(s)
7.c.4.a	0	Equipment Back Box(s)
7.c.4.b	0	Toilet Emergency Station (waterproof)
7.c.4.c	0	Shower Emergency Station (waterproof)
7.c.4.d	0	Lavatory Emergency Station (waterproof)
7.c.5	0	Room Dome Light
7.c.5.a	0	Equipment Back Box(s)
7.c.6	0	Other Dome Light(s)
7.c.6.a	0	Equipment Back Box(s)
7.c.6.b	0	Corridor Dome Light
7.c.6.c	0	Intersectional Dome Light
7.c.7	0	System Cable(s)
7.c.7.a	0	Coaxial
7.c.6.b	0	System Pin
7.c.7.c	0	Audio
7.c.7.d	0	Control
7.c.7.e	0	Video
7.c.8	0	System Connector(s)
7.c.8.a	0	Coaxial
7.c.8.b	0	System Pin
7.c.8.c	0	Audio
7.c.8.d	0	Control
7.c.8.e	0	Video
7.c.9	0	Wire Management Required as described herein//
8.	0	Center for the Aging (aka Nursing Home Care Unit)
8.a	0	Head End Function(s)
8.a.1	0	H7 Interface

8.a.2	0	Nurse Locator
8.a.3	0	Staff Locator
8.b.	0	Master Station(s)
8.b.1	0	Nurse Locator
8.b.2	0	Staff Locator
8.c	0	Distribution System(s)
8.c.1	0	Staff Station
8.c.1.a	0	Equipment Back Box(s)
8.c.2	0	Duty Station
8.c.2.a	0	Equipment Back Box(s)
8.c.3	0	Patient Station(s)
8.c.3.a	0	Equipment Back Box(s)\
8.c.4	0	Security Room(s)
8.c.4.a	0	Security Station(s)
8.c.4.b	0	Equipment Back Box(s)\
8.c.4.c	0	Overhead Speaker/Microphone
8.c.4.d	0	Equipment Back Box(s)\
8.c.4.e	0	TV Surveillance System
8.c.4.f	0	Equipment Back Box(s)\
8.c.4.g	0	TV Interconnection Cables
8.c.4.h	0	Audio Interconnection Cables
8.c.5	0	Emergency Station(s)
8.c.5.a	0	Equipment Back Box(s)
8.c.5.b	0	Toilet Emergency Station (waterproof)
8.c.5.c	0	Shower Emergency Station (waterproof)
8.c.5.d	0	Lavatory Emergency Station (waterproof)
8.c.6	0	Room Dome Light
8.c.7	0	Other Dome Light(s)
8.c.7.a	0	Equipment Back Box(s)
8.c.7.b	0	Corridor Dome Light
8.c.7.c	0	Intersectional Dome Light
8.c.8	0	System Cable(s)
8.c.8.a	0	Coaxial
8.c.8.b	0	System Pin
8.c.8.c	0	Audio
8.c.8.d	0	Control
8.c.8.e	0	Video
8.c.9	0	System Connector(s)
8.c.9.a	0	Coaxial
8.c.9.b	0	System Pin
8.c.9.c	0	Audio
8.c.9.d	0	Control
8.c.9.e	0	Video
8.c.9.f	0	Wire Management Required as described herein
9.	0	Oncology, Radiology, Dialysis, Units (These units are treated the same as Blind Rehabilitation Unit EXCEPT it does contains a CODE BLUE Function. If these units are provided as a part of the project, AT A MINIMUM -

DUPLI-CATE THE BLINE
REHABILITATION UNIT'S
EQUIPMETN LISTE AND EDIT AND
RENUMBER ACCORD-INGLY)

10.

On Hand Spares Provide a
separate system spares list
as indicated in each
equipment description.

B. NS Room(s):

Refer to CFM Physical Security Manual (07-2007) for VA Facilities, Chapters 9.3 & 1) and PG 18-10, EDM, Chapters 7- Table 7-1, 8 & Appendix B, Telecommunications One Line Topology for specific Room and TIP Connection Requirements.

C. TER, SCC, PCR, STR, HER Rooms and Equipment:

Refer to CFM Physical Security Manual (07-2007) for VA Facilities, Chapters 9.3 & 1) and PG 18-10, EDM, Chapters 7- Table 7-1, 8 & Appendix B, Telecommunications One Line Topology for specific Room and TIP Connection Requirements.

D. Telecommunications Room(s) (TR):

1. Locate the Nurse Call and/or Code Blue floor distribution equipment as required by system design and OEM direction. Provide secured and lockable cabinet/rack(s) as required.

2. Head-End Equipment:

- a. Provide all required power supplies, communications hubs, network switches, intelligent controllers and other devices necessary to form a complete system. Head-end components may be rack mounted or wall mounted in an enclosed metal enclosure.
- b. Provide the head end equipment in the closest Telecommunications Room where the System is installed.
- c. Provide the System UPS inside the cabinet or in a separate cabinet adjacent to the head end cabinet that shall maintain a minimum of 30 minute battery back-up to all system components.
- d. Equipment Cabinet: Comply with TIA/EIA-310-D. Lockable, ventilated metal cabinet houses terminal strips, power supplies, amplifiers, system volume control, and other switching and control devices required for conversation channels and control functions. See Paragraph 2.5.E for the Cabinet's minimum internal items that are in addition to the installed System equipment.

- e. Vertical Equipment Rack, Wall Mounted (to be included inside of the Equipment Cabinet) containing the following minimum items:
 - 1) 36" (28RU) internal rack space, welded steel construction, minimum 20" usable depth, adjustable front mounting rails.
 - 2) Install the following products in rack provided by same manufacturer or as specified:
 - a) Security screws w/ nylon isolation bushings.
 - b) Textured blank panels.
 - c) Custom mounts for components without rack mount kits.
 - d) Security covers.
 - e) Internal system ground copper buss (may be substituted with a bare #0 AWG copper wire or equivalent size copper mesh strip connected to ONLY THE FACILITY'S SIGNAL GROUNDING SYSTEM.
 - f) Power Sequencer- rack-mounted power conditioner and (provide as-needed) delayed sequencer(s) with (2) unswitched outlets each and contact closure control inputs. Connect the conditioner to one of the dual duplex outlets.
 - g) Two (2) each 120VAC @ 20A dual duplex outlets, connected via conduit to the nearest Electrical Service Panel that is supplied by the Facility's Essential Electrical System.
 - h) One (1) each 120VAC @ 15A Power Distribution Strip(s). Connect each strip to the unstitched outlet on the power conditioner.
3. HL7 Interface:
- a. The system may support downloading and updating of patient data from the hospital admission system (or other database) via the HL7 standard. The data only has to travel one way, i.e. from the admission system to the nurse-call system.
 - b. Coordinate with the Owner the exact fields that will be populated from the admissions system in the nurse-call system.
 - c. The Facility's LAN/WAN is not allowed for Nurses Call/Code Blue main wiring / function that must be a "stand alone primary cable infrastructure" as described herein.
 - d. Connections to the VA LAN/WAN for functional or operable conditions will be allowed ONLY when the LAN/WAN system has been demonstrated and NFPA (at a minimum by TVE-0050P3B) Certified meeting Life Safety Standards.

e. Provide one (1) spare HL Interface unit.

4. Wireless:

a. Radio Paging Equipment / Systems

- 1) The nurse call/code blue system shall have the ability to interface ONLY with VA Certified and Licensed radio paging system (FCC Part 15 listed pagers and transmitters are not allowed for "Safety of Life" functions or installed in those specific areas - VA Headquarters TVE - 0050PB2 and SM - 0050PB2 are the ONLY approving authorities for this function) and must have the following minimum system features:
 - a) Ability to pass-through location information (such as a room number) and call-type as well as other text messages simultaneously to shift supervisor identified staff members
 - b) System shall allow the operator to select staff members by name and pager number and to select a message consisting of a room number and a condition code (aka priority level). Operator may also choose to type in a unique alpha-numeric text message (the text message shall meet or exceed all HIPA and VA OCIS Communications Security Guidelines for the transmission of Patient or Staff Specific information [aka PII] - VA Headquarters TVE - 0050P2B is the approving authority for this function) into the system to be read by the holder of the pager unit.
 - c) While a patient station is connected to the nurse's master station, the system shall allow the operator to automatically page the staff member assigned to that room. An alternate staff member may be selected for paging purposes in place of the primary staff member. The System must allow an alternate staff member to be paged when the primary staff member is unable to respond to patient's needs within a specified period of time. The System must have the ability to assign any bed to any pager or pager group, and to assign an unlimited amount of pagers to any patient bed.
 - d) System shall have the ability to send all code blue calls to staff members by predetermined group (as required) automatically by simply pressing one "Code Blue" button. Pager shall indicate room number of code call, and state

"Code Blue" in plain English format on pagers (*FCC Part 15 listed pagers are not allowed to be use as "Safety of Life" functions or those specific locations - VA Headquarters TVE - 0050P2B is the approving authority for this requirement*).

- 2) When pagers are approved, provide a minimum of ten (10) spare pagers with one spare pager for each 10 issued.

5. Personal Wireless Communicator

- a. The System will only be allowed to connect to the personal wireless communications system, pass text data and provide a 2-way communication between the Telephone Interface and the personal wireless communicator as long as it is not a FCC Part 15 listed device(s), meets or exceeds UL 60950-1/2, meets OCIS Guide Lines for FIPS 140-2 certification and the using staff shows an extensive training program along with recertification(s) according to the Facility Emergency Plan concerning HIPA requirements.
- b. VA Headquarters TVE - 0050P3B and SM - 0050P2B are the approving authority for this requirement.
- c. When communicators are approved, provide a minimum of ten (10) spare communicators for each 10 communicators issued.

6. Other Wireless Equipment / Systems

- a. Each proposed wireless system and/or equipment to be connected to or be a part of the System, each shall meet the minimum requirements outlines in Paragraph 2.7.A.
- b. Contact TVE - 0050P3B and SM - 0050P2B for specific required PRE approvals (full or conditional) as described herein.
- c. When approved, TVE-0050P3B and SM-0050P2B will provide the spare equipment requirements.
- d. When other wireless components are approved, provide ten (10) components with one spare components for each 10 issued.

E. TIP Cable Systems:

Connect the system to the TIP system provided as a part of Speciation Section 27 15 00. Provide additional TIP equipment, interfaces and connections as required by System design. Provide secured pathway(s) and lockable cabinet/rack(s) as required.

F. Interface Equipment:

1. TCR:

a. Code Blue Annunciation Station:

- 1) The Code Blue Remote Annunciation Station shall be located in the Telephone Operators Room, Police Control Center.
- 2) The Annunciation Station shall be connected to the System via hard wire connection(s) that shall contain all the electrical supervisory tone signals, visual bulbs, read out panel to indicate the location of the Code and system troubles.
- 3) The System shall not be connected to the Telephone system unless specifically APPROVED BY VA HEADQUARTERS (0050P3B) and (0050P2B) PRIOR TO CONTRACT BID.
- 4) The Annunciation Station shall be installed in a location directly viewable and the readout is completely readable from the Public Address Microphone Control Console.
- 5) Provide one (1) spare panel.

b. Electrical Supervision Trouble Annunciator Panel:

- 1) The Electrical Supervision Trouble Annunciation Panel shall be located in the Telephone Operators Room, Police Control Center, associate Nurses Station(s).
- 2) The panel(s) shall be compatible with the generated electrical and/or electronic supervising signals to continuously monitor the operating condition for the System head-end processing equipment, master stations, staff stations, patient stations, duty stations, audio power amplifier(s), UPS, power supplies, dome lights and interconnecting trunks. The panels shall generate an audible and visual signal when the System's supervising system detects a system and equipment trouble or trunk-line is malfunctioning.
- 3) Provide one (1) spare panel.

2. Hospital Bed Interface(s):

- a. Provide a multi-pin receptacle for bed connection.
- b. Connect cable from the multi-pin receptacle to the nurse-call system, so that alarms, such as bed exit, shall be monitored by the nurse-call system.
- c. Connect cable from the multi-pin receptacle to the nurse-call system, so that the bedside control buttons, such as nurse call, and television controls are functional and monitored.

- d. Provide one (1) spare interface for each ten (10) interfaces installed.
- 3. Nurse (aka Staff) Locator Interface:
 - a. The System must be capable of performing nurse-locator functions.
 - b. The System must be capable of performing staff-locator functions
 - c. These functions may be combined into one operation.
 - d. Provide two (2) spare interfaces.
- 4. Lighting Interface Module:
 - a. Provide an interface module for the pillow speakers to control up to 2 lights. Coordinate with the electrical contractor the exact voltage requirements.
 - b. Provide one (1) spare module for each ten (10) modules installed.
- 5. Pillow Speaker Interfaces:
 - a. See functional requirements herein.
 - b. Provide (1) pillow speaker for each patient station.
 - c. Provide two (2) spare pillow speaker for each twenty (20) speakers installed.
- 6. TV Remote Control Interface:
 - a. The pillow speaker shall have the following TV control capability:
 - 1) Play the TV audio through the pillow speaker.
 - 2) Change channels up and down.
 - 3) Increase and decrease the volume.
 - 4) TV audio mute.
 - 5) UL Certified for direct patient contact.
 - b. Provide one (1) spare interface for each 20 interfaces installed.
- 7. TV Control Jack and Wiring:
 - a. Provide connection from the pillow speaker to the TV location. Terminate wire on a jack in the TV low voltage faceplate. Coordinate faceplate opening with the cabling contractor. Coordinate jack type with the TV (typically it is a ¼" jack, but verify prior to installation).
 - b. Provide patch cord from the TV control jack to the TV.
 - c. Provide one (1) spare complete assembly for each twenty (20) assemblies installed.

8. Additional Functions / Interfaces:

The nurse-call system may perform additional services/ functions when specifically approved by TVE-0050P3B during the project design phases and prior to the bid process.

9. TER

a. Paging adaptor (When connections are specifically approved by TVE 0050P3B):

- 1) The Contractor shall coordinate the installation of the paging adapter(s) designed for use with the Facility's telephone system with the Facility Telephone Contractor or local telephone company.
- 2) The Contractor shall provide and install a paging adapter(s) for each zone and sub zone. The paging adapter(s) shall be accessible by dialing a telephone number provided by the Facility's Telephone Contractor. The Paging Adapter shall:
 - a) Monitor each audio input and output on the unit.
 - b) Be provided with an electrical supervision panel to provide both audio and visual trouble alarms.
 - c) Be provided as part of the headend equipment and shall be located in the Telephone Switch Room.
 - d) Be provide with Executive Paging Override of all routine paging calls in progress or being accessed to allow system "all call" (aka global) and radio paging calls designated as Code One Blue) functions.
 - e) Be capable of internal time out capability.
 - f) Function completely with the interface module.
 - g) Provide one spare adapter.
- 3) Time Out Device:

A time out device/capability shall be provided to prevent system "hang-up" due to an off-hook telephone. The device shall be able to be preset from 30 seconds to two (2) minutes. Its function shall not interfere with or override the required "all call" (aka global) operational capability.

G. Call Initiation, Annunciation and Response:

1. Light and Tones:

a. Calls may be initiated through:

- 1) Patient station.
- 2) Staff station.

- 3) Code Blue station.
 - 4) Toilet Emergency Station pull cord / push button.
 - 5) Shower Emergency Station pull cord.
 - 6) Bed Pillow speaker.
 - 7) Bed Push-button cordset.
 - 8) Hospital Bed Integrated controls.
- b. Once a call is initiated, it must be annunciated at the following locations:
- 1) The Corridor, Intersectional and Room dome light associated with the initiating device.
 - 2) A local master control station indicating the call location and priority.
 - 3) Each duty station.
 - 4) Each staff station.
 - 5) Each remote location.
 - 6) All calls must be displayed until they are cleared by the nursing staff **ONLY** from the initiating device location.
2. Voice:
- a. Calls may be initiated through:
- 1) Patient station.
 - 2) Staff station.
 - 3) Code Blue station.
 - 4) Toilet Emergency pull cord / push button station.
 - 5) Shower Emergency pull cord station.
 - 6) Pillow speaker.
 - 7) Push-button cordset.
 - 8) Integrated bed controls.
 - 9) Master Station.
- b. Once a call is initiated, it must be annunciated at the following locations:
- 1) The Corridor, Intersectional and Room dome light associated with the initiating device.
 - 2) A master station indicating the call location and priority.
 - 3) Any duty stations associated with the unit.
 - 4) Any staff Stations associated with the unit.
 - 5) Each remote location.
- c. All calls must be displayed until they are cleared by the nursing staff **ONLY** from the initiating device location.

3. Provide two-way voice communication between a master station and patient, staff, duty and each of the two (2) remote stations.
4. Failure of voice intercom portion of system shall not interfere with visual and audible signal systems.
5. All calls must be displayed on the master station until they are cleared by the nursing staff at ONLY the originating station. If multiple calls are received at the master station within a short period of time, they shall be stacked based on priority and wait time. If there are more calls than the master station screen can display at one time (four [4] minimum), the system must provide a simple scrolling feature. The nurse must be able to answer any call in any order at the master station. The nurse must also be able to forward calls to staff members. If a call is not answered within a programmable time period, then the system must forward the call to appropriate back-up staff identified by each shift supervisor in a manner technically approved by VA Headquarters 0050P3B.
6. Radio pager (**within the restrictions identified herein**)
7. Wireless personal communicator (**within the restrictions identified herein**)

H. Auxiliary Alarm Monitoring:

1. Each patient station must have the ability to connect a separate and isolated auxiliary alarm to it such as an infusion pump or data tracking / recording device (patient life support units ARE NOT allowed to be connected to these units **UNLESS APPROVED BY TVE - 0050P3B DURING THE PROJECT DEVELOPMENT PHASE AS DESCRIBED HEREIN**. The System must support naming the device that is being monitored as well as display its alarms at the master station and via the room / corridor dome light(s).
2. Provide **(2)** alarm jacks at each patient station.
3. The above requirements may ONLY be allowed when the system has been approved by VA Headquarters TVE - 0050P3B and TVE - 0050P2B and concurred by the appropriate Medical Service(s) indicates it meets the minimum guidelines and requirements of Paragraph 2.8.A.

I. Patient and Staff Assignment:

1. System may provide for transfer of one or more individual or groups of stations from one master station to another without mechanical switches or additional wiring of the stations. The transfer may be initiated manually by the nurse or automatically at certain times of the day.

2. The Facility's LAN/WAN IS NOT ALLOWED for Nurses Call/Code Blue main wiring which must be a "stand alone primary cable infrastructure."
Connections to the VA LAN/WAN will be allowed ONLY when the LAN/WAN system has been demonstrated and certified by TVE - 0050P3B meeting the minimum guidelines and requirements of the Life Safety Code.

J. Reports:

1. The system's generated reports logging all calls, alarms, response time, bed, and staff assignments may be allowed to transmit these reports to a central archiving entity.
2. Reports function shall be limited by passwords and security tier level access, so that only supervisors may access it when desired.
3. Provide instructions to the owner on how to enable/disable the reporting functions.
4. The Facility's LAN/WAN IS NOT ALLOWED for Nurses Call/Code Blue main wiring that must be a "stand alone primary cable infrastructure."
 Connections to the VA LAN/WAN will be allowed ONLY when the system has been demonstrated and certified by 0050P2B meeting the minimum guidelines and requirements of the Life Safety Code.

K. System/Management Software:

1. Provide and install system/management software on minimum of three (3) owner-provided computers.
 - a. The management software shall at a minimum provide all historical reporting features of the system as well as real-time monitoring of events.
 - b. The system software shall at a minimum provide the system's operating and functioning parameters and script. The OEM shall provide VA with access to the software's script writing and functions.
2. Provide two (2) spare CD's with the software installed and operable.
3. Rights in Data: VA shall have the right to all script and programming language of system management software. If commercial off the shelf (COTS) or a memorandum of understanding (MOU) is required for follow-on maintenance, the Contractor is required to accomplish the COTS Survey document and the COTR is required to accomplish the COTS Acquisition document supplied in Part 5 Attachments herein.

L. System Functional Station:

1. Master Control:

a. Simple Tone and Light:

- 1) A visual / aural (tone only) system shall be provided, protected and located in the Day Hospital, Mental Health & Blind Rehabilitation Areas, OPC where surgery or procedures are not performed. The System shall include a push-button emergency station (pull cord in Day Hospital and pushbutton in Mental Health & Blind Rehabilitation areas) with an associated corridor dome light in each dressing room (OPC) and toilet (OPC, Day Hospital, Mental Health, Blind Rehabilitation).
- 2) The visual / aural (tone only) system shall also include a power supply and a visual / aural (tone only) display panel in the respective OPC receptionist / secretary's office and the Day Hospital / Nurse Station area and as shown on the drawings. The visual / tone display panel shall generate audible and visual emergency signals to indicate the location of a placed call.
- 3) The Visual Display Panel shall be a digital readout touch screen to visually announce the location of incoming calls placed in the System including room and bed number and priority of the call. Identify each calling station with an individual display, including separate displays for each patient sharing a dual bedside station. If a digital readout touch screen standard is not required or approved by the Facility during the project design phase, an alpha - numeric scheme shall be provided that identifies the: ward, room and bed (i.e. Ward 2a, Room 201, Bed A (or 1) shall read 2A201A - or- 2A201-1. Equivalent readouts are acceptable as long as TVE 0050P3B and the Facility approve the readout).
 - a) Calls placed at emergency stations located in toilets and baths inside bedrooms shall be displayed for the bed closest to the nurse control station. Beds in multi-bed bedrooms shall be identified in a clock-wise pattern upon entering the bedroom.
 - b) It shall display a minimum of four incoming calls. Additional placed calls shall be stored in order of placement and priority.

- 4) The visual / aural (tone only) system shall be installed according to the same Procedures, guidelines and standards outlined for a regular Nurse Call System for emergency ***NOT CODE BLUE OPERATION.***
 - 5) Speakerphone and handset communication.
 - 6) Provide one (1) spare station for each ten (1) stations installed.
- b. Touch Screen:
- 1) Provide a touch screen master station with 15" minimum monitor size.
 - 2) The master station shall have a full control capability over staff assignment to patients and beds as well as pagers and wireless personal communication devices (when specifically approved by 0050P3B on a case by case basis).
 - 3) Speakerphone and handset communication.
 - 4) Provide one (1) spare station for each ten (1) stations installed.
2. Staff:
- a. Light and Tine Only.
 - b. Voice Communications Enabled.
 - c. Provide one (1) spare station for each twenty (20) stations installed.
3. Duty:
- a. Light and Tine Only.
 - b. Voice Communications Enabled.
 - c. Provide one (1) spare station for each twenty (20) stations installed.
4. Patient:
- a. Single & Dual:
 - 1) Provide each patient station with the following minimum Feature.
 - a) Call button.
 - b) Call answered button.
 - c) Pillow speaker jack.
 - d) Auxiliary alarm monitoring jack.
 - e) Hospital bed interface jack (when specially approved by TVE - 0050P3B).
 - f) Provide one (1) spare station for each twenty (20) stations installed.

M. Distribution System: Refer to Specification Sections 27 11 00, Structured TIP Communications Cables; 27 11 00, TIP Communications Interface and Equipment Rooms Fittings and 27 15 00, HORIZONTAL and Vertical TIP Communications Cabling for additional specific TIP wire and cable standards and installation requirements used to install the Facility's TIP network.

1. In addition to the TIP provided under the aforementioned Specification Sections, the contractor shall provide the following additional TIP installation and testing requirements, provide the following minimum additional System TIP requirements, cables & interconnections:
 - a. Each wire and cable used in the System shall be specifically OEM certified by tags on each reel and recommended and approved for installation in the Facility.
 - b. The Contractor shall provide the RE a 610 mm (2 foot) sample of each wire and/or cable actually employed in the System and each certification tag for approval before continuing with the installation as described herein.
 - c. Fiberoptic Cables: Refer to Specification Section 27 15 00, Horizontal and Vertical TIP Communications Cabling; Paragraph 2.4.C12.d. Fiberoptic Cables - for minimum technical standards and requirements for additional System cables.
 - d. Copper Cables: Refer to Specification Section 27 15 00, Horizontal and Vertical TIP Communications Cabling; Paragraph 2.4.C12.c. Copper Cables - for minimum technical standards and requirements for additional System voice and data cables.
 - e. Line Level Audio and Microphone Cable:
 - 1) Line level audio and microphone cable for inside racks and conduit.
 - 2) Shielded, twisted pair Minimum 22AWG, stranded conductors and 24AWG drain wire with overall jacket.
 - f. Speaker Level Audio (70.7Volt RMS):
 - 1) For use with 70.7V speaker circuits.
 - 2) 18AWG stranded pair, minimum.
 - g. All cabling shall be plenum or riser (UL-1666) rated.
 - h. Provide one (1) spare 1,000 foot roll of approved System (not microphone) cable only.

2. Raceways, Back Boxes and conduit:

- a. In addition to the Raceways, Equipment Room Fittings provided under Specification Sections 27 15 00 TIP Communication Room Fittings and 27 15 00 - TIP Communications Horizontal and Vertical Cabling, provide the following additional TIP raceway and fittings:
- b. Each raceway that is open top, shall be: UL certified for telecommunications systems, partitioned with metal partitions in order to comply with NEC Parts 517 & 800 to "mechanically separate telecommunications systems of different service, protect the installed cables from falling out when vertically mounted and allow junction boxes to be attached to the side to interface "drop" type conduit cable feeds.
- c. Intercommunication System cable infrastructure: EMT or in J-hooks above accessible ceilings, 24 inches on center.
- d. Junction boxes shall be not less than 2-1/2 inches deep and 6 inches wide by 6 inches long.
- e. Flexible metal conduit is prohibited unless specifically approved by 0050P3B.
- f. System Conduit:
 - 1) The PA system is NFPA listed as Emergency / Public Safety Communication System which requires the entire system to be installed in a separate conduit system.
 - 2) The use of centralized mechanically partitioned wireways may be used to augment main distribution conduit on a case by case basis when specifically approved by VA Headquarters (0050P3B).
- 3) Conduit Sleeves:
 - a) The AE has made a good effort to identify where conduit sleeves through full-height and fire rated walls on the drawings, and has instructed the electrician to provide the sleeves as shown on the drawings.
 - b) While the sleeves shown on the drawings will be provided by others, the contractor is responsible for installing conduit sleeves and fire-proofing where necessary. It is often the case, that due to field conditions, the nurse-call cable may have to be installed through an alternate route. Any conduit sleeves required due to field conditions or those omitted by the engineer shall be provided by the cabling contractor.

g. Device Back Boxes:

- 1) Furnish to the electrical contractor all back boxes required for the PA system devices.
- 2) The electrical contractor shall install the back boxes as well as the system conduit. Coordinate the delivery of the back boxes with the construction schedule.

3. UPS:

- a. Provide a backup battery or a UPS for the System to allow normal operation and function (as if there was no AC power failure) in the event of an AC power failure or during input power fluctuations for a minimum of 30 minutes.
- b. As an alternate solution, the telephone system UPS may be utilized to meet this requirement at the headend location, as long as this function is specifically approved by the Telephone Contractor and the COTR.
- c. The Nurse Call Contractor shall not make any attachments or connection to the telephone system until specifically directed to do so, in writing, by the COTR.
- d. Provide UPS for all active system components including but not limited to:
 - 1) System Amplifiers.
 - 2) Microphone Consoles.
 - 3) Telephone Interface Units.
 - 4) TER, TR & Headend Equipment Rack(s).

N. Patient Bedside Prefabricated Units (PBPU):

1. Where PBPU's exist in the Facility; the Contractor shall identify the "gang box" location on the PBPU designated for installation of the telephone jack. This location shall here-in-after be identified as the unit's TCO. The Contractor shall be responsible for obtaining written approval and specific instructions from the PBPU OEM regarding the necessary disassembly and reassembly of each PBPU to the extent necessary to pull wire from above the TIP ceiling junction box to the PBPU's reserved gang box for the unit's TCO. A Contractor provided stainless steel cover plate approved for use by the PBPU OEM and Facility IRM Chief shall finish out the jack installation.

2. Under no circumstances shall the Contractor proceed with the PBPUs installations without the written approval of the PBPUs OEM and the specific instructions regarding the attachment to or modifying of the PBPUs. The RE shall be available to assist the Contractor in obtaining approvals and instructions in a timely manner as related to the project's time constraints.
3. It is the responsibility of the Contractor to maintain the UL integrity of each PBPUs. If the Contractor violates that integrity, it shall be the responsibility of the Contractor to obtain on site UL re-certification of the violated PBPUs at the direction of the RE and at the Contractor's expense.

O. Installation Kit:

1. General: The kit shall be provided that, at a minimum, includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, and/or cable tray, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire wrap terminal or punch block. Unfinished or unlabeled wire connections shall not be allowed. Turn over to the RE all unused and partially opened installation kit boxes, coaxial, fiberoptic, and twisted pair cable reels, conduit, cable tray, and/or cable duct bundles, wire rolls, physical installation hardware. The following are the minimum required installation sub-kits:
 2. System Grounding:
 - a. The grounding kit shall include all cable and installation hardware required. All radio equipment shall be connected to earth ground via internal building wiring, according to the NEC.
 - b. This includes, but is not limited to:
 - 1) Fiberoptic Optic Cable Armor/External Braid
 - 2) Coaxial Cable Shields.
 - 3) Control Cable Shields.
 - 4) Data Cable Shields.
 - 5) Equipment Racks.
 - 6) Equipment Cabinets.
 - 7) Conduits.
 - 8) Cable Duct.

- 9) Cable Trays.
 - 10) Interduct
 - 11) Power Panels.
 - 12) Connector Panels.
 - 15) Grounding Blocks.
3. Fiber optic Cable: The fiber optic cable kit shall include all fiber optic connectors, cable tying straps, interduct, heat shrink tubing, hangers, clamps, etc. required to accomplish a neat and secure installation.
 4. Coaxial Cable: The coaxial cable kit shall include all coaxial connectors, cable tying straps, heat shrink tubing, hangers, clamps, etc., required to accomplish a neat and secure installation.
 5. Wire and Cable: The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, punch blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.
 6. Conduit, Cable Duct, and Cable Tray: The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this document.
 7. Equipment Interface: The equipment kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface the systems with the identified sub-system(s) according to the OEM requirements and this document.
 8. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to completely and correctly label each subsystem according to the OEM requirements, as-installed drawings, and this document.
 9. Documentation: The documentation kit shall include any item or quantity of items, computer discs, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to completely and correctly provide the system documentation as required by this document and explained herein.
- P. MENTAL HEALTH (aka PSYCHIATRIC) UNIT - when a Mental Health Unit is to be provided as a part of the project, provide each unit as follows:
1. EMERGENCY STATION:

- a. A push-button emergency station shall be provided in each toilet stall and each shower/bath facility in Mental Health Units. Shower emergency stations shall be installed inside the shower stall at the shower head end. They shall be installed approximately a minimum of 18 inches from the showerhead itself and at a maximum of 72 inches above the finished floor. Each station inside shower and toilet areas shall be equipped with a rubber gasket between the faceplate and wall or be rated by UL as waterproof. The gasket shall cover and water seal the entire back box opening and not extend beyond the sides of the associated faceplate by ¼" MAX. If the wall is tile or other uneven type material the gasket and associated faceplate shall be provided to completely seal the opening and uneven material surface.
 - b. Fasten each emergency station faceplate to the back-boxes with tamperproof screws.
2. SECURITY ROOMS:
- a. Provide Security rooms in a Mental Health Unit with an emergency wall station containing a key activated switch. Provide four (4) emergency pushbutton stations and a four-inch flush mounted ceiling microphone/speaker.
 - b. Mount all equipment with tamperproof screws.
 - c. Activating the switch shall energize each emergency station in the security room.
 - d. Selection of the security room station at the nurse control station shall permit two-way voice communication within the room and nurse control station, through the ceiling microphone/speaker.
 - e. Pressing the push-button on any security room emergency station shall generate emergency visual signals in the corridor dome light and emergency audible and visual signals at the nurse control station.
 - f. Provide six (6) keys for each Mental Health Unit.
3. PATIENT STATION:
- a. Provide a patient station with pushbutton, microphone/speaker.
 - b. Mount all equipment with tamperproof screws.

- c. Selection of the patient room station at the nurse control station shall permit two-way voice communication within the room and nurse control station, through the ceiling microphone/speaker.
 - d. Pressing the push-button on any patient room station shall generate visual signals in the corridor dome light and routine audible and visual signals at the nurse control station.
 - e. The patient wall station shall be equipment with a method (aka separate push-button) to initiate an emergency call in the room and corridor dome lights and nurse call station.
4. NURSE CONTROL (aka MASTER) STATION - provide a station as described herein.

PART 3 - EXECUTION

3.1 PROJECT MANAGEMENT

- A. Assign a single project manager to this project who will serve as the point of contact for the Owner, the General Contractor, and the Engineer.
- B. The Contractor shall be proactive in scheduling work at the hospital, specifically the Contractor will initiate and maintain discussion with the general contractor regarding the schedule for ceiling cover up and install cables to meet that schedule.
- C. Contact the Office of Telecommunications, Special Communications Team (0050P2B) at (301) 734-0350 to have a VA Certified Telecommunications COTR assigned to the project for telecommunications review, equipment and system approval and co-ordination with VA's Spectrum Management and OCIS Teams.

3.2 COORDINATION WITH OTHER TRADES

- A. Coordinate with the cabling contractor the location of the TV faceplate and the faceplate opening for the nurse call TV control jack.
- B. Coordinate with the cabling contractor the location of TIP equipment in the **TER, TCR, PCR, SCC, ECR, STRs, NSS, and TCOs** in order to connect to the TIP cable network that was installed as a part of Section Specification 27 11 00. Contact the COTR immediately, in writing, if additional location(s) are discovered to be activated that was not previously provided.

- C. Before beginning work, verify the location, quantity, size and access for the following:
 - 1. Isolated ground AC power circuits provided for systems.
 - 2. Primary, emergency and extra auxiliary AC power generator requirements.
 - 3. Junction boxes, wall boxes, wire troughs, conduit stubs and other related infrastructure for the systems.
 - 4. System components installed by others.
 - 5. Overhead supports and rigging hardware installed by others.
- D. Immediately notify the COTR, GC and Consultant(s) in writing of any discrepancies.

3.3 NEEDS ASSESSMENT

Provide a one-on-one meeting with the particular nursing manager of each unit affected by the installation of the new nurse call/code blue system. Review the floor plan drawing, educate the nursing manager with the functions of the equipment that is being provided and gather details specific to the individual units; coverage and priorities of calls; staffing patterns; and other pertinent details that will affect system programming and training.

3.4 INSTALLATION

A. General:

- 1. Execute work in accordance with National, State and local codes, regulations and ordinances.
- 2. Install work neatly, plumb and square and in a manner consistent with standard industry practice. Carefully protect work from dust, paint and moisture as dictated by site conditions. The Contractor will be fully responsible for protection of his work during the construction phase up until final acceptance by the Owner.
- 3. Install equipment according to OEM's recommendations. Provide any hardware, adaptors, brackets, rack mount kits or other accessories recommended by OEM for correct assembly and installation.
- 4. Secure equipment firmly in place, including receptacles, speakers, equipment racks, system cables, etc.
 - a. All supports, mounts, fasteners, attachments and attachment points shall support their loads with a safety factor of at least 5:1.
 - b. Do not impose the weight of equipment or fixtures on supports provided for other trades or systems.

- c. Any suspended equipment or associated hardware must be certified by the OEM for overhead suspension.
 - d. The Contractor is responsible for means and methods in the design, fabrication, installation and certification of any supports, mounts, fasteners and attachments.
5. Finishes for any exposed work such as plates, racks, panels, speakers, etc. shall be approved by the Architect, Owner and TVE 0050P3B.
 6. Coordinate cover plates with field conditions. Size and install cover plates as necessary to hide joints between back boxes and surrounding wall. Where cover plates are not fitted with connectors, provide grommets in size and quantity required. Do not allow cable to leave or enter boxes without cover plates installed.
 7. Active electronic component equipment shall consist of solid state components, be rated for continuous duty service, comply with the requirements of FCC standards for telephone and data equipment, systems, and service.
 8. Color code all distribution wiring to conform to the Nurse Call Industry Standard, EIA/TIA, and this document, whichever is the more stringent. At a minimum, all equipment, cable duct and/or conduit, enclosures, wiring, terminals, and cables shall be clearly and permanently labeled according to and using the provided record drawings, to facilitate installation and maintenance.
 9. Connect the System's primary input AC power to the Facility's Critical Branch of the Emergency AC power distribution system as shown on the plans or if not shown on the plans consult with RE regarding a suitable circuit location prior to bidding.
 10. Product Delivery, Storage and Handling:
 - a. Delivery: Deliver materials to the job site in OEM's original unopened containers, clearly labeled with the OEM's name and equipment catalog numbers, model and serial identification numbers. The COTR may inventory the cable, patch panels, and related equipment.
 - b. Storage and Handling: Store and protect equipment in a manner, which will preclude damage as directed by the COTR.
 11. Where TCOs are installed adjacent to each other, install one outlet for each instrument.

12. Equipment installed outdoors shall be weatherproof or installed in weatherproof enclosures with hinged doors and locks with two keys.

B. Equipment Racks/Cabinets:

1. Fill unused equipment mounting spaces with blank panels or vent panels. Match color to equipment racks/cabinets.
2. Provide security covers for all devices not requiring routine operator control.
3. Provide vent panels and cooling fans as required for the operation of equipment within the OEM' specified temperature limits. Provide adequate ventilation space between equipment for cooling. Follow manufacturer's recommendations regarding ventilation space between amplifiers.
4. Provide insulated connections of the electrical raceway to equipment racks.
5. Provide continuous raceway/conduit with no more than 40% fill between wire troughs and equipment racks/cabinets for all non-plenum-rated cable. Ensure each system is mechanically separated from each other in the wireway.
6. Ensure a minimum of 36 inches around each cabinet and/or rack to comply with OSHA Safety Standards. Cabinets and/or Racks installed side by side - the 36" rule applies to around the entire assembly

C. Distribution Frames.

1. A new stand-alone (i.e., self supporting, free standing) PA rack/frame may be provided in each TR to interconnect the TCR, PCR, SCC, NS, STRs & ECRs. Rack/frames shall be wired in accordance with industry standards and shall employ "latest state-of-the-art" modular cross-connect devices. The PA riser cable shall be sized to satisfy all voice/digital requirements plus not less than 50% spare (growth) capacity in each TR which includes a fiber optic backbone.
2. The frames/racks shall be connected to the TER/MCR system ground.

D. Wiring Practice - in addition to the MANDATORY infrastructure requirements outlined in VA Construction Specifications 27 10 00 - TIP Structured Communications Cabling, 27 11 00 - TIP Communications Rooms Fittings and 27 15 00 - TIP Horizontal and Vertical Communicators Cabling, the following additional practices shall be adhered too:

1. Comply with requirements for raceways and boxes specified in Division 26 Section "Raceway and Boxes for Electrical Systems."

2. Execute all wiring in strict adherence to the National Electrical Code, applicable local building codes and standard industry practices.
3. Wiring shall be classified according to the following low voltage signal types:
 - a. Balanced microphone level audio (below -20dBm) or Balanced line level audio (-20dBm to +30dBm)
 - b. 70V audio speaker level audio.
 - c. Low voltage DC control or power (less than 48VDC)
4. Where raceway is to be EMT (conduit), wiring of differing classifications shall be run in separate conduit. Where raceway is to be an enclosure (rack, tray, wire trough, utility box) wiring of differing classifications which share the same enclosure shall be mechanically partitioned and separated by at least four (4) inches. Where Wiring of differing classifications must cross, they shall cross perpendicular to one another.
5. Do not splice wiring anywhere along the entire length of the run. Make sure cables are fully insulated and shielded from each other and from the raceway for the entire length of the run.
6. Do not pull wire through any enclosure where a change of raceway alignment or direction occurs. Do not bend wires to less than radius recommended by manufacturer.
7. Replace the entire length of the run of any wire or cable that is damaged or abraided during installation. There are no acceptable methods of repairing damaged or abraided wiring.
8. Use wire pulling lubricants and pulling tensions as recommended by the OEM.
9. Use grommets around cut-outs and knock-outs where conduit or chase nipples are not installed.
10. Do not use tape-based or glue-based cable anchors.
11. Ground shields and drain wires to the Facility's signal ground system as indicated by the drawings.
12. Field wiring entering equipment racks shall be terminated as follows:
 - a. Provide OEM directed service loops at harness break-outs and at plates, panels and equipment. Loops should be sufficient to allow plates, panels and equipment to be removed for service and inspection.

- b. Line level and speaker level wiring may be terminated inside the equipment rack using specified terminal blocks (see "Products.") Provide 15% spare terminals inside each rack. Microphone level wiring may only be terminated at the equipment served.
 - c. If specified terminal blocks are not designed for rack mounting, utilize $\frac{3}{4}$ " plywood or $\frac{1}{8}$ " thick aluminum plates/blank panels as a mounting surface. Do not mount on the bottom of the rack.
 - d. Employ permanent strain relief for any cable with an outside diameter of 1" or greater.
- 13. Use only balanced audio circuits unless noted otherwise directed and indicated on the drawings.
- 14. Make all connections as follows:
 - a. Make all connections using rosin-core solder or mechanical connectors appropriate to the application.
 - b. For crimp-type connections, use only tools that are specified by the manufacturer for the application.
 - c. Use only insulated spade lugs on screw terminals. Spade lugs shall be sized to fit the wire gauge. Do not exceed two lugs per terminal.
 - d. Wire nuts, electrical tape or "Scotch Lock" connections are not acceptable for any application.
- 15. Noise filters and surge protectors shall be provided for each equipment interface cabinet, switch equipment cabinet, control console, local, and remote active equipment locations to ensure protection from input primary AC power surges and noise glitches are not induced into low Voltage data circuits.
- 16. Wires or cables **previously approved** to be installed outside of conduit, cable trays, wireways, cable duct, etc:
 - a. Only when specifically authorized as described herein, will wires or cables be identified and approved to be installed outside of conduit. The wire or cable runs shall be UL rated plenum and OEM certified for use in air plenums.
 - b. Wires and cables shall be hidden, protected, fastened and tied at 600 mm (24 in.) intervals, maximum, as described herein to building structure.
 - c. Closer wire or cable fastening intervals may be required to prevents sagging, maintain clearance above suspended ceilings, remove unsightly wiring and cabling from view and discourage

tampering and vandalism. Wire or cable runs, not provided in conduit, that penetrate outside building walls, supporting walls, and two hour fire barriers shall be sleeved and sealed with an approved fire retardant sealant.

- d. Wire or cable runs to system components installed in walls (i.e.: volume attenuators, circuit controllers, signal, or data outlets, etc.) may, when specifically authorized by the COTR, be fished through hollow spaces in walls and shall be certified for use in air plenum areas.
 - e. Completely test all of the cables after installation and replace any defective cables.
 - f. Wires or cables that are installed outside of buildings shall be in conduit, secured to solid building structures. If specifically approved, on a case by case basis, to be run outside of conduit, the wires or cables shall be installed, as described herein. The bundled wires or cables must: Be tied at not less than 460 mm (18 in.) intervals to a solid building structure; have ultra violet protection and be totally waterproof (including all connections). The laying of wires or cables directly on roof tops, ladders, drooping down walls, walkways, floors, etc. is not allowed and will not be approved.
- E. Cable Installation - Cable Installation - In addition to the **MANDATORY** infrastructure requirements outlined in VA Construction Specifications 27 10 00 - Structured TIP Communications Cabling, 27 11 00 - TIP Communications Rooms and Fittings and 27 15 00 - TIP Communications Horizontal and Vertical Cabling and the following additional practices shall be adhered too:
- 1. Support cable on maximum 2'-0" centers. Acceptable means of cable support are cable tray, j-hooks, and bridal rings. Velcro wrap cable bundles loosely to the means of support with plenum rated Velcro straps. Plastic tie wraps are not acceptable as a means to bundle cables.
 - 2. Run cables parallel to walls.
 - 3. Install maximum of 10 cables in a single row of J-hooks. Provide necessary rows of J-hooks as required by the number of cables.
 - 4. Do not lay cables on top of light fixtures, ceiling tiles, mechanical equipment, or ductwork. Maintain at least 2'-0" clearance from all shielded electrical apparatus.

5. All cables shall be tested after the total installation is fully complete. All test results are to be documented. All cables shall pass acceptable test requirements and levels. Contractor shall remedy any cabling problems or defects in order to pass or comply with testing. This includes the re-pull of new cable as required at no additional cost to the Owner.
6. Ends of cables shall be properly terminated on both ends per industry and OEM's recommendations.
7. Provide proper temporary protection of cable after pulling is complete before final dressing and terminations are complete. Do not leave cable lying on floor. Bundle and tie wrap up off of the floor until you are ready to terminate.
8. Terminate all conductors; no cable shall contain unterminated elements. Make terminations only at outlets and terminals.
9. Splices, Taps, and Terminations: Arrange on numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures. Cables may not be spliced.
10. Bundle, lace, and train conductors to terminal points without exceeding OEM's limitations on bending radii. Install lacing bars and distribution spools.
11. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used.
12. Cable shall not be run through structural members or be in contact with pipes, ducts, or other potentially damaging items.
13. Separation of Wires: (REFER TO RACEWAY INSTALLATION) Separate speaker-microphone, line-level, speaker-level, and power wiring runs. Install in separate raceways or, where exposed or in same enclosure, separate conductors at least 12 inches apart for speaker microphones and adjacent parallel power and telephone wiring. Separate other intercommunication equipment conductors as recommended by equipment manufacturer.
14. Serve all cables as follows:
 - a. Cover the end of the overall jacket with a 1" (minimum) length of transparent heat-shrink tubing. Cut unused insulated conductors 2" (minimum) past the heat-shrink, fold back over jacket and secure with cable-tie. Cut unused shield/drain wires 2" (minimum) past the Heatshrink and serve as indicated below.

- b. Cover shield/drain wires with heat-shrink tubing extending back to the overall jacket. Extend tubing ¼" past the end of unused wires, fold back over jacket and secure with cable tie.
 - c. For each solder-type connection, cover the bare wire and solder connection with heat-shrink tubing.
- F. Labeling: Provide labeling in accordance with ANSI/EIA/TIA-606-B. All lettering for Nurse Call and/or Code Blue circuits shall be stenciled using **laser printers or thermal ink transfer process.**
 - 1. Cable and Wires (Hereinafter referred to as "Cable"): Cables shall be labeled at both ends in accordance with ANSI/EIA/TIA-606-B. Labels shall be permanent in contrasting colors. Cables shall be identified according to the System "Record Wiring Diagrams."
 - 2. Equipment: System equipment shall be permanently labeled with contrasting plastic laminate or Bakelite material. System equipment shall be labeled on the face of the unit corresponding to its source.
 - a. Clearly, consistently, logically and permanently mark switches, connectors, jacks, relays, receptacles and electronic and other equipment.
 - b. Engrave and paint fill all receptacle panels using 1/8" (minimum) high lettering and contrasting paint.
 - c. For rack-mounted equipment, use engraved Lamacoid labels with white 1/8" (minimum) high lettering on black background. Label the front and back of all rack-mounted equipment.
 - 3. Conduit, Cable Duct, and/or Cable Tray: The Contractor shall label all conduit, duct and tray, including utilized GFE, with permanent marking devices or spray painted stenciling a minimum of 3 meters (10 ft.) identifying it as the System. In addition, each enclosure shall be labeled according to this standard.
 - 4. Termination Hardware: The Contractor shall label TCOs and patch panel connections using color coded labels with identifiers in accordance with ANSI/EIA/TIA-606-B and the "Record Wiring Diagrams."
 - 5. Where multiple pieces of equipment reside in the same rack group, clearly and logically label each indicating to which room, channel, receptacle location, etc. they correspond.
 - 6. Permanently label cables at each end, including intra-rack connections. Labels shall be covered by the same, transparent heat-shrink tubing covering the end of the overall jacket. Alternatively,

- computer generated labels of the type which include a clear protective wrap may be used.
7. Contractor's name shall appear no more than once on each continuous set of racks. The Contractor's name shall not appear on wall plates or portable equipment.
 8. Ensure each OEM supplied item of equipment has appropriate UL Labels / Marks for the service the equipment is performed permanently attached / marked to a non-removal board in the unit. EQUIPMENT INSTALLED NOT BEARING THESE UL MARKS WILL NOT BE ALLOWED TO BE A PART OF THE SYSTEM. THE CONTRACTOR SHALL BEAR ALL COSTS REQUIRED TO PROVIDE REPLACEMENT EQUIPMENT WITH APPROVED UL MARKS.
- G. Conduit and Signal Ducts: When the Contractor and/or OEM determines additional system conduits and/or signal ducts are required in order to meet the system minimum performance standards outlined herein, the contractor shall provide these items as follows:
1. Conduit:
 - a. The Contractor shall employ the latest installation practices and materials. The Contractor shall provide conduit, junction boxes, connectors, sleeves, weather heads, pitch pockets, and associated sealing materials not specifically identified in this document as GFE. Conduit penetrations of walls, ceilings, floors, interstitial space, fire barriers, etc., shall be sleeved and sealed.
 - b. All cables shall be installed in separate conduit and/or signal ducts (exception from the separate conduit requirement to allow Nurse Call and/or Code Blue cables to be installed in partitioned cable tray with voice cables may be granted in writing by the COTR if requested). Conduits shall be provided in accordance with Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and NEC Articles 517 for Critical Care and 800 for Communications systems, at a minimum.
 - c. When metal, plastic covered, etc., flexible cable protective armor or systems are specifically authorized to be provided for use in the System, their installation guidelines and standards shall be as specified herein, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and the NEC.
 - d. When "interduct" flexible cable protective systems is specifically authorized to be provided for use in the System,

it's installation guidelines and standards shall be as the specified herein, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and the NEC.

- e. Conduit fill (including GFE approved to be used in the system) shall not exceed 40%. Each conduit end shall be equipped with a protective insulator or sleeve to cover the conduit end, connection nut or clamp, to protect the wire or cable during installation and remaining in the conduit. Electrical power conduit shall be installed in accordance with the NEC. AC power conduit shall be run separate from signal conduit.
 - f. Ensure that Critical Care Nurse Call and/or Code Blue Systems (as identified by NEC Section 517) are completely separated and protected from all other systems.
2. Signal Duct, Cable Duct, or Cable Tray:
- a. The Contractor shall use GFE signal duct, cable duct, and/or cable tray, when identified and approved by the RE.
 - b. Approved signal and/or cable duct shall be a minimum size of 100 mm x 100 mm (4 in. X 4 in.) inside diameter with removable tops or sides, as appropriate. Protective sleeves, guides or barriers are required on all sharp corners, openings, anchors, bolts or screw ends, junction, interface and connection points.
 - c. Approved cable tray shall be fully covered, mechanically and physically partitioned for multiple electronic circuit use, and be UL certified and labeled for use with telecommunication circuits and/or systems. The RE shall approve width and height dimensions.
 - d. All cable junctions and taps shall be accessible. Provide an 8" X 8" X 4" (minimum) junction box attached to the cable duct or raceway for installation of distribution system passive equipment. Ensure all equipment and tap junctions are accessible

3.5 PROTECTION OF NETWORK DEVICES

- A. Contractor shall protect network devices during unpacking and installation by wearing manufacturer approved electrostatic discharge (ESD) wrist straps tied to chassis ground. The wrist strap shall meet OSHA requirements for prevention of electrical shock, should technician come in contact with high voltage.

3.6 CUTTING, CLEANING AND PATCHING

- A. It shall be the responsibility of the contractor to keep their work area clear of debris and clean area daily at completion of work.
- B. It shall be the responsibility of the contractor to patch and paint any wall or surface that has been disturbed by the execution of this work.
- C. The Contractor shall be responsible for providing any additional cutting, drilling, fitting or patching required that is not indicated as provided by others to complete the Work or to make its parts fit together properly.
- D. The Contractor shall not damage or endanger a portion of the Work or fully or partially completed construction of the Owner or separate contractors by cutting, patching or otherwise altering such construction, or by excavation. The Contractor shall not cut or otherwise alter such construction by the Owner or a separate contractor except with written consent of the Owner and of such separate contractor; such consent shall not be unreasonably withheld. The Contractor shall not unreasonably withhold from the Owner or a separate Contractor the Contractor's consent to cutting or otherwise altering the Work.
- E. Where coring of existing (previously installed) concrete is specified or required, including coring indicated under unit prices, the location of such coring shall be clearly identified in the field and the location shall be approved by the Project Manager prior to commencement of coring work.

3.7 FIREPROOFING

- A. Where Nurse Call and/or Code Blue wires, cables and conduit penetrate fire rated walls, floors and ceilings, fireproof the opening.
- B. Provide conduit sleeves (if not already provided by electrical contractor) for cables that penetrate fire rated walls and Telecommunications Rooms floors and ceilings. After the cabling installation is complete, install fire proofing material in and around all conduit sleeves and openings. Install fire proofing material thoroughly and neatly. Seal all floor and ceiling penetrations.
- C. Use only materials and methods that preserve the integrity of the fire stopping system and its rating.
- D. Install fireproofing where low voltage cables are installed in the same manholes with high voltage cables; also cover the low voltage cables with arc proof and fireproof tape.

- E. Use approved fireproofing tape of the same type as used for the high voltage cables, and apply the tape in a single layer, one-half lapped or as recommended by the manufacturer. Install the tape with the coated side towards the cable and extend it not less than 25 mm (one inch) into each duct.
- F. Secure the tape in place by a random wrap of glass cloth tape.

3.8 GROUNDING

- A. Ground Nurse Call and/or Code Blue cable shields and equipment to eliminate shock hazard and to minimize ground loops, common mode returns, noise pickup, cross talk, and other impairments as specified in CFM Division 27, Section 27 05 26 - Grounding and Bonding for Communications Systems.
- B. Facility Signal Ground Terminal: Locate at main room or area signal ground within the room (i.e. head end and telecommunications rooms) or area(s) and indicate each signal ground location on the drawings.
- C. Extend the signal ground to inside each equipment cabinet and/or rack. Ensure each cabinet and/or rack installed item of equipment is connected to the extended signal ground. Isolate the signal ground from power and major equipment grounding systems.
- D. When required, install grounding electrodes as specified in CFM Division 26, Section 26 05 26 -Grounding and Bonding for Electrical Systems.
- E. Do not use "3rd or 4th" wire internal electrical system conductors for communications signal ground.
- F. Do not connect the signal ground to the building's external lightning protection system.
- G. Do Not "mix grounds" of different systems.
- H. Insure grounds of different systems are installed as to not violate OSHA Safety and NEC installation requirements for protection of personnel.

PART 4 - TESTING / GUARANTY / TRAINING

4.0 SYSTEM LISTING

The Nurses Call System is NFPA listed as an "Emergency" Communication system. Where Code Blue signals are transmitted, that listing is elevated to "Life Support/Safety." Therefore, the following testing and guaranty provisions are the minimum to be performed and provided by the contractor and Warranted by the OEM.

4.1 PROOF OF PERFORMANCE TESTING

A. Intermediate Testing:

1. After completion of 30 - 40% of the installation of a head end cabinet(s) **and interconnection to the corresponding System Patient Head Wall Units** and equipment, one master stations, local and remote stations, treatment rooms, and prior to any further work, this portion of the system must be pretested, inspected, and 1certified. Each item of installed equipment shall be checked to ensure appropriate UL Listing and Certification Labels are affixed as required by NFPA -Life Safety Code 101-3.2 (a) & (b), UL Nurse Call Standard 1069 and JCHCO evaluation guidelines, and proper installation practices are followed. The intermediate test shall include a full operational test.
2. All inspections and tests shall be conducted by an OEM-certified contractor representative and witnessed by TVE-0050P3B if there is no local Government Representative that processes OEM and VA approved Credentials to inspect and certify the system. The results of the inspection will be officially recorded by the Government Representative and maintained on file by the COTR, until completion of the entire project. The results will be compared to the Acceptance Test results. An identical inspection may be conducted between the 65 - 75% of the system construction phase, at the direction of the RE.

B. Pretesting:

1. Upon completing installation of the Nurse Call and/or Code Blue System, the Contractor shall align, balance, and completely pretest the entire system under full operating conditions.
2. Pretesting Procedure:
 - a. During the System Pretest the Contractor shall verify (utilizing approved test equipment) that the System is fully operational and meets all the System performance requirements of this standard.
 - b. The Contractor shall pretest and verify that all PSM System functions and specification requirements are met and operational, no unwanted aural effects, such as signal distortion, noise pulses, glitches, audio hum, poling noise, etc. are present. At a minimum, each of the following locations shall be fully pretested:
 - 1) Central Control Cabinets.

- 2) Nurse Control Stations.
 - a) Master Stations
 - b) Patient Stations
 - c) Staff Stations
 - d) Emergency Stations
 - e) Code Blue Stations
 - 3) Dome Lights.
 - a) Patient Rooms
 - b) Corridors
 - c) Intersectional
 - 4) STRs
 - 5) Local and Remote Enunciation Panels (code blue).
 - 6) Electrical Supervision Panels/Functions/locations.
 - 7) All Networked locations.
 - 8) System interface locations (i.e. wireless, PA, telephone, etc.).
 - 9) System trouble reporting.
 - 10) System electrical supervision.
 - 11) UPS operation.
 - 12) Primary / Emergency AC Power Requirements
 - 13) Extra Auxiliary Generator Requirements.
 - 14) NSs.
3. The Contractor shall provide four (4) copies of the recorded system pretest measurements and the written certification that the System is ready for the formal acceptance test shall be submitted to the COTR.

C. Acceptance Test:

- 1. After the Nurse Call and/or Code Blue System has been pretested and the Contractor has submitted the pretest results and certification to the COTR, then the Contractor shall schedule an acceptance test date and give the COTR 15 working days written notice prior to the date the acceptance test is expected to begin. The System shall be tested in the presence of a TVE 0050P3B and OEM certified representatives. The System shall be tested utilizing the approved test equipment to certify proof of performance and Life Safety / Critical Service compliance. The tests shall verify that the total System meets all the requirements of this specification. The notification of the acceptance test shall include the expected length (in time) of the test.

2. The acceptance test shall be performed on a "go-no-go" basis. Only those operator adjustments required to show proof of performance shall be allowed. The test shall demonstrate and verify that the installed System does comply with all requirements of this specification under operating conditions. The System shall be rated as either acceptable or unacceptable at the conclusion of the test. Failure of any part of the System that precludes completion of system testing, and which cannot be repaired in four (4) hours, shall be cause for terminating the acceptance test of the System. Repeated failures that result in a cumulative time of eight (8) hours to affect repairs shall cause the entire System to be declared unacceptable.
3. Retesting of the entire System shall be rescheduled at the convenience of the Government and costs borne by the Contractor at the direction of the COTR.

D. Acceptance Test Procedure:

1. Physical and Mechanical Inspection:
 - a. The TVE 0050P3B Representative will tour all major areas where the Nurse Call and/or Code Blue System and all sub-systems are completely and properly installed to insure they are operationally ready for proof of performance testing. A system inventory including available spare parts will be taken at this time. Each item of installed equipment shall be checked to ensure appropriate UL certification labels are affixed.
 - b. The System diagrams, record drawings, equipment manuals, TIP Auto CAD Disks, intermediate, and pretest results shall be formally inventoried and reviewed.
 - c. Failure of the System to meet the installation requirements of this specification shall be grounds for terminating all testing.
2. Operational Test:
 - a. After the Physical and Mechanical Inspection, the central terminating and nurse call master control equipment shall be checked to verify that it meets all performance requirements outlined herein. A spectrum analyzer and sound level meter may be utilized to accomplish this requirement.
 - b. Following the central equipment test, a pillow speaker (or on board speaker) shall be connected to the central terminating and nurse call master control equipment's output tap to ensure there are no signal distortions such as intermodulation, data noise, popping sounds, erratic system functions, on any function.

- c. The distribution system shall be checked at each interface, junction, and distribution point, first, middle, and last intersectional, room, and bed dome light in each leg to verify that the nurse call distribution system meets all system performance standards.
 - d. Each MATV outlet that is controlled by a nurse call pillow speaker shall be functionally tested at the same time utilizing the Contractor's approved hospital grade HDTV receiver and TV remote control cable.
 - e. The RED system and volume stepper switches shall be checked to insure proper operation of the pillow speaker, the volume stepper and the RED system (if installed).
 - f. Additionally, each installed emergency, patient, staff, duty, panic station, intersectional, room, and bed dome light, power supply, code one, and remote annunciator panels shall be checked insuring they meet the requirements of this specification.
 - g. Once these tests have been completed, each installed sub-system function shall be tested as a unified, functioning and fully operating system. The typical functions are: nurse follower, three levels of emergency signaling (i.e. flashing red emergency, flashing white patient emergency, flashing white or combination lights for staff emergency, separate flashing code blue), minimum of 10 minutes of UPS operation, memory saving, minimum of ten station audio paging, canceling emergency calls at each originating station only, and storage and prioritizing of calls.
 - h. Individual Item Test: The TVE 0050P3B Representative will select individual items of equipment for detailed proof of performance testing until 100% of the System has been tested and found to meet the contents of this specification. Each item shall meet or exceed the minimum requirements of this document.
3. Test Conclusion:
- a. At the conclusion of the Acceptance Test, using the generated punch list (or discrepancy list) the VA and the Contractor shall jointly agree to the results of the test, and reschedule testing on deficiencies and shortages with the COTR. Any retesting to comply with these specifications will be done at the Contractor's expense.

- b. If the System is declared unacceptable without conditions, all rescheduled testing expenses will be borne by the Contractor.
- E. Acceptable Test Equipment: The test equipment shall furnished by the Contractor shall have a calibration tag of an acceptable calibration service dated not more than 12 months prior to the test. As part of the submittal, a test equipment list shall be furnished that includes the make and model number of the following type of equipment as a minimum:
 - 1. Spectrum Analyzer.
 - 2. Signal Level Meter.
 - 3. Volt-Ohm Meter.
 - 4. Sound Pressure Level (SPL) Meter.
 - 5. Oscilloscope.
 - 6. Pillow Speaker Test Set (Pillow Speaker with appropriate load and cross connections in lieu of the set is acceptable).
 - 7. Patient Push Button Cord Test Set.
 - 8. Patient Bed with connecting multiple conductor cord.

4.2 SYSTEM GUARANTEE PERIOD OF SERVICE

- A. Contractor's Responsibility:
 - 1. The Contractor shall guarantee that all provided material and equipment will be free from defects, workmanship and will remain so for a period of one year from date of final acceptance of the System by the VA. The Contractor shall provide OEM's equipment warranty documents, to the COTR that certifies each item of equipment installed conforms to OEM published specifications.
 - 2. The Contractor's maintenance personnel shall have the ability to contact the Contractor and OEM for emergency maintenance and logistic assistance, remote diagnostic testing, and assistance in resolving technical problems at any time. This contact capability shall be provided by the Contractor and OEM at no additional cost to the VA.
 - 3. All Contractor maintenance and supervisor personnel shall be fully qualified by the OEM and must provide two (2) copies of current and qualified OEM training certificates and OEM certification upon request.
 - 4. Additionally, the Contractor shall accomplish the following minimum requirements during the two year guaranty period:
 - a. Response Time during the Two Year Guaranty Period:

- 1) The COTR is the Contractor's ONLY OFFICIAL reporting and contact official for nurse call system trouble calls, during the guaranty period.
 - 2) A standard work week is considered 8:00 A.M. to 5:00 P.M. or as designated by the COTR, Monday through Friday exclusive of Federal Holidays.
 - 3) The Contractor shall respond and correct on-site trouble calls, during the standard work week to:
 - a) A routine trouble call within one (1) working day of its report. A routine trouble is considered a trouble which causes a pillow speaker or cordset, one (1) master nurse control station, patient station, emergency station, or dome light to be inoperable.
 - b) Routine trouble calls in critical emergency health care facilities (i.e., cardiac arrest, intensive care units, etc.) shall also be deemed as an emergency trouble call. The COTR shall notify the Contractor of this type of trouble call.
 - c) An emergency trouble call within four hours of its report. An emergency trouble is considered a trouble which causes a sub-system (ward), distribution point, terminal cabinet, or code one system to be inoperable at anytime.
 - 4) If a Nurse Call and/or Code Blue/ component failure cannot be corrected within four (4) hours (exclusive of the standard work time limits), the Contractor shall be responsible for providing alternate nurse call equipment. The alternate equipment/system shall be operational within a maximum of 20 hours after the four (4) hour trouble shooting time and restore the effected location operation to meet the System performance standards. If any sub-system or major system trouble cannot be corrected within one working day, the Contractor shall furnish and install compatible substitute equipment returning the System or sub-system to full operational capability, as described herein, until repairs are complete.
- b. Required On-Site Visits during the Two Year Guaranty Period
- 1) The Contractor shall visit, on-site, for a minimum of eight (8) hours, once every 12 weeks, during the guaranty period, to

perform system preventive maintenance, equipment cleaning, and operational adjustments to maintain the System according the descriptions identified in this document.

- 2) The Contractor shall arrange all Facility visits with the COTR prior to performing the required maintenance visits.
- 3) Preventive maintenance shall be performed by the Contractor in accordance with the OEM's recommended practice and service intervals during non-busy time agreed to by the COTR and Contractor.
- 4) The preventive maintenance schedule, functions and reports shall be provided to and approved by the COTR.
- 5) The Contractor shall provide the COTR a type written report itemizing each deficiency found and the corrective action performed during each required visit or official reported trouble call. The Contractor shall provide the COTR with sample copies of these reports for review and approval at the beginning of the Acceptance Test. The following reports are the minimum required:
 - a) The Contractor shall provide a monthly summary all equipment and sub-systems serviced during this guarantee period to COTR by the fifth (5th) working day after the end of each month. The report shall clearly and concisely describe the services rendered, parts replaced and repairs performed. The report shall prescribe anticipated future needs of the equipment and systems for preventive and predictive maintenance.
 - b) The Contractor shall maintain a separate log entry for each item of equipment and each sub-system of the System. The log shall list dates and times of all scheduled, routine, and emergency calls. Each emergency call shall be described with details of the nature and causes of emergency steps taken to rectify the situation and specific recommendations to avoid such conditions in the future.
- 6) The COTR shall convey to the Facility Engineering Officer, two (2) copies of actual reports for evaluation.
 - a) The COTR shall ensure a copy of these reports is entered into the System's official acquisition documents.

b) The COTR shall ensure a copy of these reports is entered into the System's official technical record documents.

B. Work Not Included: Maintenance and repair service shall not include the performance of any work due to improper use; accidents; other vendor, contractor, or owner tampering or negligence, for which the Contractor is not directly responsible and does not control. The Contractor shall immediately notify the COTR in writing upon the discovery of these incidents. The COTR will investigate all reported incidents and render

4.3 TRAINING

A. Provide thorough training of all nursing staff assigned to those nursing units receiving new networked nurse/patient communications equipment. This training shall be developed and implemented to address two different types of staff. Floor nurses/staff shall receive training from their perspective, and likewise, unit secretaries (or any person whose specific responsibilities include answering patient calls and dispatching staff) shall receive operational training from their perspective. A separate training room will be set up that allows this type of individualized training utilizing in-service training unit, prior to cut over of the new system.

B. Provide the following minimum training times and durations:

1. 48 hours prior to opening for nursing staff (in 8-hour increments) - split evenly over 3 weeks and day and night shifts. Coordinate schedule with Owner.
2. 32 hours during the opening week for nursing staff - both day and night shifts.
3. 24 hours for supervisors and system administrators.

5.0 ATTACHMENTS

A. The following items are required as a part of the system:

1. COTS Documents:
 - a.

CHECKLIST FOR SOFTWARE LICENSING AGREEMENTS
(For use in commercial item acquisition [COTS] conforming to – FAR Part 12)

The Government may not be able to accept standard commercial licensing agreement without modification; <u>you must</u> negotiate terms and conditions so it is consistent with the FAR and the VAAR.		
Is the license (check all that apply):	Yes	No
Exclusive		
Non-exclusive		
Perpetual		
Limited term		
If limited term, state the period (months or years):		
If limited term, is there an automatic renewal provision?		
CPU based		
If CPU based, state number of machines and whether simultaneous use is permitted:		
Site license		
If site license, state the site/location:		
Network license		
Other basis (e.g., # of users, # of transactions, etc.) (state specifics)		
Applicable to only the current version (doesn't apply to future versions)		
Software maintenance included at no extra cost		
Allow for office relocation or transfer		
Allow copying for backup or archival purpose		
Allow no cost copy at disaster recovery site		
Restricted on Use: (see note below)		
Restricted on the processing of data by or for user's subsidiaries and affiliates		
Restricted on processing of third party data (or use in service bureau)		
Restricted on network use		
Restricted on site and equipment limitations		
Restricted on number of users (e.g., cannot exceed _____ # of users)		
Terms and Conditions that may need to be negotiated:	Yes	No
Does the license prohibit use of the software outside of the Government? If yes, this needs to be deleted/modified if other Government contractors need access to the software (as GFP) to fulfill obligations of their own contracts.		
Does license state that the software is Year 2000 compliant or include a Year 2000 warranty? If no, must ensure it is compliant per FAR 39 or include a Y2K warranty.		
Does the license state that it provides no warranties or guarantees of any kind? If yes, need to determine whether additional warranty would be in the best interest of the Government.		
Does the license warrant that the software does not contain any code (e.g., virus) that will disable the software, and if such code exists, that Licensor agrees to indemnify the licensee (user) for all damages suffered as a result of such code? If no, need to negotiate for such warranty.		
Does the license allow access to source code? If no, negotiate for access if software will be modified or customized for the Government's needs or if the Government intends to maintain the software itself.		
Does the license require Licensor to deposit source code in escrow account? If no and source code is needed, consider negotiating for this provision, and state what "release conditions" are.		
Does the license allow the Government to hold the rights to customized code and to the data that the software manipulates? If no, negotiate for the rights if the Government (customer) requires them.		
Does the license authorize us to copy user manuals for internal purposes? If no, negotiate for authorization if multiple copies must be made for our internal use or ensure that the vendor supplies adequate number of copies. May also negotiate for updated manuals at periodic intervals, e.g., with each major update.		
Does the license state that licensee modifications to the software void all warranties? If yes, ensure that the vendor still warrants the unmodified portions.		
Does the license include clauses that prohibit needed uses of software, restrict the use of output from the software, or inappropriately burden the operation of the computer facilities? If yes, need to negotiate better terms and conditions.		
Is the dispute clause in the license consistent with FAR 52.233-1, Disputes Clause? If no, then need to modify license to be consistent with FAR.		
Does the default clause in the license allow for the Government to terminate for convenience or for cause, consistent with FAR 52.212-4(l) or FAR 52.212-4(m)? If no, then need to modify license to be consistent with FAR Part 12 (not FAR Part 49).		

b.

SOLICITATION/CONTRACT/ORDER FOR COMMERCIAL ITEMS				1. REQUISITION NUMBER		PAGE 1 OF 7		
OFFEROR TO COMPLETE BLOCKS 12, 17, 23, 24, & 30								
2. CONTRACT NO.		3. AWARD/EFFECTIVE DATE SEE BLOCK 31C		4. ORDER NUMBER		5. SOLICITATION NO.		
7. FOR SOLICITATION INFORMATION		a. NAME			b. TELEPHONE NUMBER (No collect calls)		6. SOLICITATION ISSUE DATE	
9. ISSUED BY:		CODE		10. THIS ACQUISITION IS <input type="radio"/> UNRESTRICTED <input type="checkbox"/> SETASIDE: 100 % FOR <input type="checkbox"/> SMALL BUSINESS <input type="radio"/> HUBZONE SMALL BUSINESS <input type="radio"/> 8(A) NAICS: 541511 SIZE STANDARD:		11. DELIVERY FOR FOB DESTINATION UNLESS BLOCK IS MARKED <input type="radio"/> SEE SCHEDULE		
						12. DISCOUNT TERMS		
						<input type="radio"/> 13a. THIS CONTRACT IS A RATED ORDER UNDER DPAS (15 CFR 700)		
						13b. RATING		
						14. METHOD OF SOLICITATION <input checked="" type="checkbox"/> RFQ <input type="checkbox"/> IFB <input type="checkbox"/> RFP		
15. DELIVER TO			CODE		16. ADMINISTERED BY			CODE
					See #9 above			
17a. CONTRACTOR/			FACILITY		18a. PAYMENT WILL BE			CODE
CODE			TY		MADE BY			
OFFEROR			CODE		UNITED STATES OF AMERICA Department of Veterans Affairs FMS P.O. Box 149971 Austin, TX 78714-8971			
TELEPHONE NO: 703.246-0392								
<input type="radio"/> 17b. CHECK IF REMITTANCE IS DIFFERENT AND PUT SUCH ADDRESS IN OFFER				18b. SUBMIT INVOICES TO ADDRESS SHOWN IN BLOCK 18a. UNLESS BLOCK BELOW IS CHECKED <input checked="" type="checkbox"/> SEE ADDENDUM				
19. ITEM NO.	20. SCHEDULE OF SUPPLIES/SERVICES			21. QUANTITY	22. UNIT	23. UNIT PRICE	24. AMOUNT	

See page 2

Use Reverse and/or (Attach Additional
Sheets as Necessary)

25. ACCOUNTING AND APPROPRIATION DATA

26. TOTAL AWARD AMOUNT
(For Govt. Use Only)

☐ 27a. SOLICITATION INCORPORATES BY REFERENCE FAR 52.212-1, 52.212-4. ☐ ARE NOT
FAR 52.212-3 AND 52.212-5 ARE ATTACHED. ADDENDA ARE ATTACHED.

☒ 27b. CONTRACT/PURCHASE ORDER INCORPORATES BY REFERENCE FAR 52.212-4, ☒ ARE ☐ ARE NOT
52.227-14, 52.227-16, and 52.227-19. ADDENDA ATTACHED.

☒ 28. CONTRACTOR IS REQUIRED TO SIGN THIS
DOCUMENT AND RETURN 1
COPIES TO ISSUING OFFICE. CONTRACTOR
AGREES TO FURNISH AND DELIVER
ALL ITEMS SET FORTH OR OTHERWISE
IDENTIFIED ABOVE AND ON ANY ADDITIONAL
SHEETS SUBJECT TO THE TERMS AND
CONDITIONS SPECIFIED HEREIN.

☐ 29. AWARD OF CONTRACT: REF.
_____ OFFER
DATED _____. YOUR OFFER ON
SOLICITATION (BLOCK 5),
INCLUDING ANY ADDITIONS OR CHANGES
WHICH ARE SET FORTH
HEREIN, IS ACCEPTED AS TO ITEMS:

30A. SIGNATURE OF OFFEROR/CONTRACTOR

31a. UNITED STATES OF AMERICA (SIGNATURE OF
CONTRACTING OFFICER)30b. NAME AND TITLE OF SIGNER
(Type or Print)30c. DATE
SIGNED31b. NAME OF CONTRACTING
OFFICER (Type or Print)

Contracting Officer

31c. DATE
SIGNED

AUTHORIZED FOR LOCAL
REPRODUCTION
PREVIOUS EDITION IS NOT
USABLE

COMPUTER-GENERATED

STANDARD FORM 1449
(REV. 4/2002)

Prescribed By GSA
- FAR (48CFR) 53.212

19. ITEM NO.	20. SCHEDULE OF SUPPLIES/SERVICES	21. QUANTI TY	22. UNI T	23. UNIT PRICE	24. AMOUNT
-----------------	--------------------------------------	---------------------	-----------------	----------------------	---------------

This Contract is Firm Fixed Price (FFP). The Contractor is required to provide the software, software license, and software maintenance services for the computer software identified below. Distribution of maintenance copies shall be accomplished by using an appropriate magnetic, electronic or printed media. Software maintenance includes periodic updates, enhancements and corrections to the software, and reasonable technical support, all of which are customarily provided by the Contractor to its customers.

The name of the software is: Word 2008

License Type: Perpetual or Term?????

Software Manufacturer: Microsoft

Governing Law. Federal law and regulations, including the Federal Acquisition Regulations ("FAR"), shall govern this Contract or Order (Contract/Order). Commercial license agreements may be made a part of this Contract/Order but only if both parties expressly make them an addendum. If the commercial license agreement is not made an addendum, it shall not apply, govern, be a part of or have any effect whatsoever on this Contract/Order; this includes, but is not limited to, any agreement embedded in the computer software (clickwrap) or any agreement that is otherwise delivered with or provided to the Government with the commercial computer software or documentation (shrinkwrap), or any other license agreement otherwise referred to in any document. If a commercial license agreement is made an addendum, only those provisions addressing data rights regarding the Government's use, duplication and disclosure of data (e.g., restricted computer software) are included and made a part of this Contract/Order, and only to the extent that those provisions are not duplicative or inconsistent with Federal law, Federal regulation or the incorporated FAR clauses; those provisions in the commercial license agreement that do not address data rights regarding the Government's use, duplication and disclosure of data shall not be included or made a part of the Contract/Order. Federal law and regulation, including without limitation, the Contract Disputes Act (41 U.S.C. §601-613), the Anti-Deficiency Act (31 U.S.C. §1341 et seq.), the Competition in Contracting Act (41 U.S.C. §251, et seq.), the Prompt Payment Act (31 U.S.C. §3901, et seq.) and FAR clauses 52.212-4, 52.227-14, 52.227-19 shall supersede, control and render ineffective any inconsistent, conflicting or duplicative provision in any commercial license agreement. In the event of conflict between this clause and any provision in the Contract/Order or the commercial license agreement or elsewhere, the terms of this clause shall prevail. Claims of patent or copyright infringement brought against the Government as a party shall be defended by the U.S. Department of Justice (DOJ). 28 U.S.C. § 516. At the discretion of DOJ, the Contractor may be allowed reasonable participation in the defense of the litigation. Any additional changes to the Contract/Order must be made by contract modification (Standard Form 30). Nothing

1	Microsoft Word 2008 Software License, Part No. 9891-7069. Software may be installed on four separate personal computers and be used by any VA employee or support service contractor. Licenses are perpetual. 12 months of Standard Microsoft Word Software Maintenance and Technical Support Services for the software being acquired under CLIN 1; Part No. 9891-7069.	4	EA	\$10,000.00	\$40,000.00
2		4	EA	\$2,500.00	\$10,000.00
	Total				\$50,000.00

32a. QUANTITY IN COLUMN 21 HAS BEEN
☐ RECEIVED ☐ INSPECTED ☐ ACCEPTED, AND CONFORMS TO THE CONTRACT,
EXCEPT AS NOTED:

32b. SIGNATURE OF AUTHORIZED GOVT. REPRESENTATIVE	32c. DATE	32d. PRINTED NAME AND TITLE OF AUTHORIZED GOVERNMENT REPRESENTATIVE
32e. MAILING ADDRESS OF AUTHORIZED GOVERNMENT REPRESENTATIVE		32f. TELEPHONE NO. OF AUTHORIZED GOVERNMENT REPRESENTATIVE
32g. E-MAIL OF AUTHORIZED GOVERNMENT REPRESENTATIVE		

33. SHIP NUMBER	34. VOUCHER NUMBER	35. AMOUNT VERIFIED CORRECT FOR	36. PAYMENT <input type="checkbox"/> COMPLETE <input type="checkbox"/> PARTIAL <input type="checkbox"/> FINAL	37. CHECK NUMBER
<input type="checkbox"/> PARTIAL <input type="checkbox"/> FINAL				
38. S/R ACCOUNT NUMBER	39. S/R VOUCHER NUMBER	40. PAID BY		
41a. I CERTIFY THIS ACCOUNT IS CORRECT AND PROPER FOR PAYMENT		42a. RECEIVED BY (Print)		
41b. SIGNATURE AND TITLE OF CERTIFYING OFFICER		42b. RECEIVED AT (Location)		
		42c. DATE REC'D (YY/MM/DD)	42d. TOTAL CONTAINERS	

STANDARD FORM

1449 (REV. 4/2002) BACK

ADDENDUM A -ADDITIONAL TERMS AND CONDITIONS FOR CONTRACT # _____ OR
ORDER# _____

A.1 Federal Acquisition Regulation (FAR) Incorporated by Reference. The Contractor agrees to comply with the following FAR clauses, which the Contracting Officer has indicated as being incorporated in this Contract/Order by reference, to implement provisions of law or executive orders applicable to acquisitions of this nature, to implement department policy or to clarify the Government's requirement. Copies of clauses in full text will be provided on request. FAR Clauses can be viewed at <http://www.arinet.gov/far/>.

- 1) FAR 52.212-4, Contract Terms and Conditions-Commercial Items (Oct 2003)
- 2) FAR 52.227-14, Rights in Data-General (Dec 2007), Alt III
- 3) FAR 52.227-16, Additional Data Requirements (Jun 1987)
- 4) FAR 52.227-19, Commercial Computer Software License (Dec 2007)

A.2 Contracting Officer's Authority. The Contracting Officer is the only person authorized to make or approve any changes in any of the requirements of this Contract, and notwithstanding any provisions contained elsewhere in this Contract/Order, the said authority remains solely within the Contracting Officer. In the event the Contractor makes any changes at the direction of any person other than the Contracting Officer, the changes will be considered to have been made without authority and no adjustment will be made in the contract price to cover any increase in costs incurred as a result thereof.

A.3 VAAR 852.270-1 Representatives of Contracting Officers (APR 1984). The Contracting Officer reserves the right to designate representatives to act for him/her in furnishing technical guidance and advice or generally supervise the work to be performed under this Contract/Order. Such designation will be in writing and will define the scope and limitations of the designee's authority. A copy of the designation shall be furnished the Contractor.

A.4 VAAR 852.270-4 Commercial Advertising (NOV 1984). The Contractor will not advertise the award of this Contract/Order in his/her commercial advertising in such a manner as to state or imply that the Department of Veterans Affairs endorses a product, project or commercial line of endeavor.

A.5 VAAR 852.237-70 Contractor Responsibilities (APR 1984) The Contractor shall obtain all necessary licenses and/or permits required to perform this work. He/she shall take all reasonable precautions necessary to protect persons and property from injury or damage during the performance of the Contract/Order. He/she shall be responsible for any injury to himself/herself, his/her employees, as well as for any damage to personal or public property that occurs during the performance of the Contract/Order that is caused by his/her employees fault or negligence, and shall maintain personal liability and property damage insurance having coverage for a limit as required by the laws of the state where services are performed. Further, it is agreed that any negligence of the Government, its officers, agents, servants and employees, shall not be the responsibility of the Contractor hereunder with the regard to any claims, loss, damage, injury, and liability resulting there from.

A.6 Indemnification. The Contractor shall save and hold harmless and indemnify the Government against any and all liability claims, and cost of whatsoever kind and nature for injury to or death of any person or persons and for loss or damage to any Contractor property or property owned by a third party occurring in connection with or in any way incident to or arising out of the occupancy, use service, operation, or performance of work under the terms of the Contract/Order, resulting in whole or in part from the acts or omissions of the Contractor, any subcontractor, or any employee, agent, or representative of the Contractor or subcontractor.

A.7 Government's Liability. The Government shall not be liable for any injury to the Contractor's personnel or damage to the Contractor's property unless such injury or damage is due to negligence on the part of the

Government and is recoverable under the Federal Torts Claims Act, or pursuant to other Federal statutory authority.

A.10 Uniform Computer Information Transaction Act (UCITA). UCITA is not applicable to the Contract/Order.

A.11 Software License and Software Maintenance Subscription and Technical Support.

(1) Definitions.

- (a) Licensee. The term "licensee" shall mean the U.S. Department of Veterans Affairs ("VA") and is synonymous with "Government."
- (b) Licensor. The term "licensor" shall mean the software manufacturer of the computer software being acquired. The term "Contractor" is the company identified in Block 17a on the SF1449. If the Contractor is a reseller and not the Licensor, the Contractor remains responsible for performance under this Contract.
- (c) Software. The term "software" shall mean the licensed computer software product(s) cited in the Schedule of Supplies (Page 2).
- (d) Maintenance. The term "maintenance" is the process of enhancing and optimizing software, as well as remedying defects. It shall include all new fixes, patches, releases, updates, versions and upgrades, as further defined below.
- (e) Technical Support. The term "technical support" refers to the range of services providing assistance for the software via the telephone, email, a website or otherwise.
- (f) Release or Update. The term "release" or "update" are terms that refer to a revision of software that contains defect corrections, minor enhancements or improvements of the software's functionality. This is usually designated by a change in the number to the right of the decimal point (e.g., from Version 5.3 to 5.4). An example of an update is the addition of new hardware.
- (g) Version or Upgrade. The term "version" or "upgrade" are terms that refer to a revision of software that contains new or improved functionality. This is usually designated by a change in the number to the left of the decimal point (e.g., from Version 5.4 to 6).

(2) License. Grant of License and Term.

- (a) See also Addendum B.
- (b) Unless otherwise stated in the Schedule of Supplies/Services, the software license provided to the Government is a perpetual, nonexclusive license to use the software.
- (c) The license authorizes the Government to use the software in processing data for other federal agencies.
- (d) If the licensed software requires a password (or license key) to be operational, it shall be delivered with the software media and have no expiration date.
- (e) If the Government decides to outsource or contract its services, the Government may allow the outsourcer to use the licensed software solely to provide the services on its behalf. The outsourcer shall be bound by the provisions of this Contract relating to the use of the software.

- (f) If the software is for use in a networked environment, as may be reflected by the number of servers or users described in the Contract/Order, the license grant provided by the Contractor includes the Government's use of the software in such environment.
- (g) Any dispute regarding the license grant or usage limitations shall be resolved in accordance with the Disputes Clause incorporated in FAR 52.212-4(d).
- (h) If the Government purchases additional licenses, the terms and conditions for those additional licenses (including technical support and upgrade subscription) shall be the same as agreed to in this Contract/Order, unless negotiated otherwise by mutual agreement of the parties.
- (i) The licensed software contains critical product functionality that meets the minimum needs of the Government and is the basis for the Government's procurement of the software; consequently, the Contractor agrees that the Government has the right to successor products at no additional cost when functionality is later unbundled from the product licensed herein and bundled into a new or different product, provided the Government is current on maintenance.
- (j) If the Contractor is a reseller for the computer software being acquired under this Contract/Order, it is permissible for the actual software manufacturer (Licensor) to deliver the software directly to the Government.
- (k) All limitations of software usage are expressly stated in the SF 1449 and Addendum A and Addendum B.

(3) Software Maintenance Subscription and Technical Support.

- (a) See also Addendum B.
- (b) Software maintenance and technical support are included at the agreed upon price. However, if additional charges are assessed during the maintenance and technical support period as a result of negotiated changes in the license (e.g., CPU upgrades), the fee shall be by mutual agreement of the parties and any dispute thereof shall be resolved in accordance with the Disputes Clause incorporated herein at FAR 52.212-4(g).
- (c) If the Government desires to continue software maintenance and support beyond the period identified in this Contract/Order, the Government will issue a separate contract or order to renew annual maintenance and technical support. Conversely, if an order or contract to renew software maintenance and technical support is not received, no assumption by the Contractor shall be made that it has been renewed. It shall not be automatically renewed.
- (d) Unless otherwise agreed, for any new additional software that may be licensed, the Contractor shall provide for software maintenance and technical support for the first year of the license at no additional cost.
- (e) Unless otherwise agreed, the Contractor shall provide VA with software maintenance, which includes periodic updates, upgrades, enhancements and corrections to the software, and reasonable technical support, all of which are customarily provided by the Contractor to its customers so as to cause the software to perform according to its specifications, documentation or demonstrated claims.

- (f) Any telephone support provided by Contractor shall be at no additional cost.
- (g) All technical support services will be provided in a timely manner in accordance with the Contractor's customary practice. However, prolonged delay in resolving software problems will be noted in the Government's various past performance records on the Contractor (e.g., www.ppirs.gov).
- (h) If the Government allows the maintenance and/or technical support to lapse and subsequently wishes to reinstate maintenance and technical support, any reinstatement fee charged shall not exceed the amounts that would have been charged if the Government had not allowed it to lapse.

A.12 Disabling Software Code. The Government requires delivery of computer software that does not contain any code that will, upon the occurrence or the nonoccurrence of any event, disable the software. Such code includes but is not limited to a computer virus, restrictive key, node lock, time-out or other function, whether implemented by electronic, mechanical, or other means, which limits or hinders the use or access to any computer software based on residency on a specific hardware configuration, frequency of duration of use, or other limiting criteria. If any such code is present, the Contractor agrees to indemnify the Government for all damages suffered as a result of a disabling caused by such code, and the Contractor agrees to remove such code upon the Government's request at no extra cost to the Government. Inability of the Contractor to remove the disabling software code will be considered an inexcusable delay and a material breach of contract, and the Government may exercise its right to terminate for cause. In addition, the Government is permitted to remove the code as it deems appropriate and charge the Contractor for consideration for the time and effort in removing the code.

A.13 Disaster Recovery Clause. Government hereby certifies to Contractor that it has a bona fide disaster plan with respect to the computer software programs used in its operations. The Contract/Order authorizes the Government's operation to maintain a second copy of software on tape for use at loading at sites that are not live (e.g. subscription-based disaster recovery services) for the sole purpose of duplicating or mirroring the software environment of the "primary" licenses at the designated licensed site and as described herein. Additionally, use of the software at the contingency sites must not include general access or any processing for program development or production. Contractor shall permit operation and testing of all licensed programs at the contingency sites as designated by the Government without prior approval and at no additional cost to the Government solely for the purpose of maintaining or implementing disaster recovery readiness including continuity of business operations. CPU's, MIPS or MSU's at these contingency sites are excluded from the total CPU's, MIPS or MSU's count included elsewhere in the Contract/Order and are not separately billable. Activation of operations at a contingency site shall be at Government's discretion. Government is authorized to install all software at the contingency sites for testing, problem resolution purposes, and to ensure there will be no operational delays in association with transition of workload from the designated licensed site to the contingency sites. Use of the software at the contingency sites in the event of a disaster shall continue until such time as normal processing can be resumed at the "primary" site regardless of the duration required. Nothing in the Contract/Order diminishes the Government's rights in accordance with the data rights clause(s). Any license keys, codes, or passwords required by the Contractor

in order to use the software at the contingency sites shall be provided to the Government within 10 days of the Government's request.

A.14 NOTICE OF THE FEDERAL ACCESSIBILITY LAW AFFECTING ALL ELECTRONIC AND INFORMATION TECHNOLOGY PROCUREMENTS (SECTION 508)

On August 7, 1998, Section 508 of the Rehabilitation Act of 1973 was amended to require that when Federal departments or agencies develop, procure, maintain, or use Electronic and Information Technology, that they shall ensure it allows Federal employees with disabilities to have access to and use of information and data that is comparable to the access to and use of information and data by other Federal employees.

Section 508 required the Architectural and Transportation Barriers Compliance Board (Access Board) to publish standards setting forth a definition of electronic and information technology and the technical and functional criteria for such technology to comply with Section 508. These standards have been developed were published with an effective date of December 21, 2000. Federal departments and agencies must develop all Electronic and Information Technology requirements to comply with the standards found in 36 CFR 1194 .____*_____ in performing this contract. (Fill in Section Number and Title)

ADDENDUM B - STATEMENT OF WORK FOR CONTRACT # _____ or ORDER# _____

B.1 License. BROADLY DESCRIBE COMPUTING ENVIRONMENT AND HOW VA INTENDS TO USE THE SOFTWARE, HOW ITS LICENSED, WHAT THE SOFTWARE IS EXPECTED TO DO, ETC. TO GET YOU STARTED: The Department of Veterans Affairs (VA) has a need for the computer software identified on the Schedule of Supplies/Services (page 2) (software media and license) and software support services. The software will be installed **onto multiple servers** at the ITAC in Austin Texas for support/training/staging of the _____ Project. These are processor-based licenses that allow for unlimited users utilizing the processor(s). Contractor shall grant the Government the necessary license to accommodate this need. VA may move the software to any other location or hardware at any time.

B.2 Maintenance. The Contractor will provide software maintenance services, which includes periodic updates, enhancements and corrections to the software, and reasonable technical support, all of which are customarily provided by the Contractor to its customers so as to cause the software to perform according to its specifications, documentation or demonstrated claims. Add detailed, specific maintenance and support information here. The Contractor will distribute maintenance updates or releases by using an appropriate magnetic, electronic, or printed media to the address in Block 15 of page one, but to the attention of **Joe Smith**. Alternatively, the Contractor may offer access to maintenance copies through its website. All maintenance services will be provided in a timely manner in accordance with the Contractor's customary practice. However, prolonged delay in resolving software problems will be noted in the Government's various past performance records on the Contractor (e.g., www.ppirs.gov).

2. MOU

**Department of
Veterans Affairs**

Memorandum

- Date:** (Current Date)
- From:** Department of Veterans Affairs
Office of Telecommunications (005OP)
Spectrum Management (005OP2H3 – Room 047))
Telecommunications Voice Engineering (005OP2H2)
810 Vermont Avenue, NW
Washington, DC 20420
- Subj:** Memorandum of Understanding (MOU) for Non - VA Licensed Wireless Operations
- To:** Facility Director (00)
(Address)
(Address)
1. The following circumstances are the minimum necessary for conditional use of Wireless Equipment / System (s) in VA Owned or Leased Facilities (here-in after referred to as ‘the Facility’). VA Headquarters OI&T’s (005) Spectrum Management (005OP2H3), Telecommunications Voice Engineering, Special Communications (TVE - 005OP2H2) and Office of Cyber Security (OCIS – 005OP2) are the responsible entities insuring conformity of each requirement:
 - a. Each item of equipment or system whose Radio Frequency (RF) equipment is listed under Consolidated Federal Regulations (CFR), Title 47 – Federal Communications Commission (FCC), Part 15, Chapter 7, *Use of Non Licensed Devices* must be installed and operated in a manner consistent with Part 15’s “Safety of Life” restrictions. This information is re-emphasized in CFR, Title 15 – Department of Commerce, Under the Information Technology Management Reform Act (Public Law 104-106), National Telecommunications Information Administration (NTIA) Manual of Regulations and Procedures for Federal Radio Frequency Management (aka ‘The Red Book’).
 - b. FCC Part 15 listed RF devices ***shall not*** be Installed or used in areas where “Safety of Life” functions / operations are accomplished or where a ‘Code Blue’ enunciation may occur. A list of the minimum areas affected by this statement is provided as Attachment One.
 - c. If external or internal interference is detected and cannot be corrected, ***the FCC Part 15 Listed RF Equipment affected must be turned off until corrections and/or substitutions can be made.*** Contact VA’s Office of Spectrum Management (OSM – 005OP2H3), 202 461-5301 for specific conditional approval(s) concerning this issue.

3. Risk Assessment

Department of
Veterans Affairs

Memorandum

Date: (current date)

From: Director (XXXXX)
Address
Address
Address

Subj: VA Headquarters (VACO) Memorandum of Understanding (MOU) for
Federal Communications Commission (FCC) Part 15 Listed "Non-Regulated
Equipment Wireless Operations"

To: Department of Veterans Affairs
Office of Telecommunications (005OP)
Spectrum Management (005OP2H3)
Telecommunications Voice Engineering (005OP2H2)
1335 East West Highway, 3rd Floor
Silver Spring, Maryland 20420

1. We have received the subject VACO MOU (signed copy attached), and are pleased to provide the following information and comments for your review that includes our risks and risk-mitigation factors that prompted our Facility's decision:

a. RISK ASSESSMENT AND MITIGATION:

(1) Background:

(a) (name) VAMC (here-in-after referred to as "the Facility") has used (OEM Mdl Nr©) for over 10 years to allow nurses in the telemetry studio to communicate with nurses at the patients' bedside. This communication medium is a vital patient safety tool that allows for rapid response to the development of a potentially fatal arrhythmia such as ventricular tachycardia. The only information the telemetry technician states on the phone is "bed 109-2 Smith has an alarm for XXXXX." Last four is never communicated. In terms of the pager we have limited the information on the pager to sector, bed number and last name. We must include the last name as occasionally the patients are moved without the knowledge of the telemetry technician, if we were to have a patient mix up the page must contain the last name for safety reasons. Facility Management Services (FMS) has restricted paging access to the telemetry system only. Because pager access is restricted, only an administrator from Technology and Information Management (TIM) or FMS can troubleshoot a pager malfunction.

VAMC (City), (State - ZIP Code), Unregulated FCC Equipment Use, Risk Assessment and Mitigation, Page Two

(b) Because the phones are used 24X7 and have exceeded their life expectancy, many of them have begun to fail which creates a need to purchase newer models that will continue to insure system integrity.

(c) Our Facility has been prevented from purchasing replacement phones because VACO now has updated security and Information Technology (IT) connection controls along with continuing FCC Part 15 restrictions (described in the attached MOU) on devices of which these wireless phones are but one example. These updated security and connection controls are in place to address risks related life safety, information security, personal privacy and IT system integrity. The FCC restrictions continue to warn against the use of "non-regulated radio / wireless based equipment in safety of life locations and functions." Of note, these controls are intended to prevent use of these devices in areas especially where a code-blue announcement might occur, yet our devices have been used in such areas for over 10 years and so far has not prevented a code-blue announcement from happening.

(d) Because the Facility does not have a near-term alternative to the current wireless phones, it now faces a set of competing risks. On the one hand are the risks of privacy, connection and interference or security breach(s) that are behind the controls in place for these devices. On the other hand are risks to patient safety if the current phones were to fail and telemetry nurses would lose the ability to rapidly communicate with nurses at the bedside. Our Facility does have a Life Safety approved Nurses Call / Code Blue hardwired system that is installed in those affected areas as the primary Code Blue Enunciation media.

(2) SECURITY:

(a) NEC provides a proprietary scrambling algorithm that is applied to handset registration / authentication and all communications. Every time a (OEM Mdl Nr©) user enters a designated area within the systems' coverage; an automatic user authentication process is performed to confirm the device is authorized for service on the system. This information is scrambled using a proprietary coding scheme to prevent duplication. All voice conversations are also scrambled to enhance security.

(b)The (OEM Mdl Nr©) has several built in security features in each of the wireless handsets are administered through the Facility's Telephone Private Branch Exchange (PBX) administration tool; therefore, the PBX Administrator has full control over the (OEM Mdl Nr©) wireless phones, if one gets lost or stolen it can be disabled immediately. Because of this feature you cannot purchase a similar wireless phone and have it work on our network. These phones have a 50 ft radius from the Zone radio frequency (RF) transceiver; they can only be used within the hospital as there is no handoff via other cellular networks.

(c) These items are not NIST FIPS compliant; but based on the aforementioned facts, we feel patient / staff privacy and HIPAA instructions have been and will continue to be met.

(d) Our Facility will work with (OEM) and VACO's Office of Cyber Security (Name and Phone Nr) to secure the appropriate NIST FIPS certifications will allow VA to issue a Official Approvals from the onset in the IT equipment / system procurement process.

VAMC (City), (State - ZIP Code), Unregulated FCC Equipment Use, Risk Assessment and Mitigation, Page Three

(3) RADIO FREQUENCY (RF) INTERFERENCE:

(a) (OEM) engineers provided us with extensive information on the potential for RF along with electromagnetic (EM) interference to medical equipment within our Facility from the (OEM System) Wireless radio transceivers.

1) Field Experience: Since introduction of the (OEM System) Wireless product in 1996, NEC has installed this system at many health care institutions across the spectrum of medical departments. In all this time there have been zero reports of either suspected or actual RF and EM interference. This includes the experience using these devices at Portland VAMC and our continued testing documentation is available for review if requested.

2) Potential interference called Near Field Coupling: In these cases, an EM field emanating from one device may cause another device within its field area to malfunction. Typically the distances for these fields are less than six (6) inches. In attempts to mitigate these sources of interference, standards have been put in place, namely IEC 60601. This standard calls for devices susceptible to interference to provide shielding against fields of up to three (3) Volts per Meter. In contrast, the (OEM System) wireless products are classified under the FCC Part 15 rules as Class B unlicensed devices, and as such must meet very tight restrictions regarding field emissions of a maximum of from 100 to 500 micro (μ) Volts per Meter across the band of RFs from 30 Hz to 18 GHz. Thus, any medical device even marginally meeting the IEC Standard has not had problems with any near field emissions.

3) Potential phenomenon known as Far Field Induced RFI: should be considered when studying RF and EM interference sources. In this case, a part of the device subject to interference (e.g., a wire, probe, or the casing itself) can inadvertently act as a receiving antenna for a signal transmitted from another device within close proximity (within 6 to 18 inches, depending on the source power levels). To realize this type of interference, the source transmitter power must be fairly strong to conduct through the inefficient nature of the unintended antenna of the receiving device, and the material acting as the antenna must be of a shape and length that matches or is a near multiple of the wavelength of the transmitted RF signal. Finally, this unintentional antenna must not have the typical shielding between it and the subject device's electronics, which if present would prevent such a received signal from causing interference. In the case of the (OEM System) Wireless transmission, which operates between 1,920 MHz and 1,930 MHz, a probe or such piece of any medical device measuring at about six (6) inches would match the wavelength of the RF carrier, and if not properly shielded from

the units electronics may indeed conduct the RF energy within. However, even in this case, one must consider the power level at the so-called antenna receiving the signal. The average output of the (OEM Mdl Nr©) handset is approximately 10 mili (m) Watts when in use. This very low power, even further reduced by the distance between any handset in use and the subject receiving equipment, considered along with the high loss of the "antenna", results in a very low probability of actual interference. These facts, along with the standard procedures of your engineering department's efforts to check the medical equipment for such shielding and filtering defects, should mitigate this potential source.

4) Potential interference between intentional radiators operating in the RF band. Known as either in-band or out-of-band interference, these are cases where a transmitter broadcasts a signal of significant power at the other device's receiver to either overload the receiving radio or mix with the subject's transmitted signal to cause an interfered signal to be received. In-band interference

VAMC (City), (State - ZIP Code), Unregulated FCC Equipment Use, Risk Assessment and Mitigation, Page Four

in the Unlicensed PCS band of which the (OEM System) Wireless system operates is prevented by the FCC rules requiring our equipment to monitor the carrier on which a device intends to transmit on before doing so, so as to sense any current use by another device. If such a signal is received during monitoring, we move to another carrier and try again. This protocol has been demonstrated many times within the FCC labs as well as at many industry trade shows where 5 or more vendors with U-PCS devices have operated in booths close to each other without interference. As for out-of-band interference, because of the extremely low power our devices operate with and the very strict out-of-band emission requirements placed upon the U-PCS devices, and the additional factor of a wide separation in the operating frequencies of our system and the typical radio telemetry equipment used in many hospital environments, such interference is very remote and would require extremely close proximity of the two devices.

5) All of our (OEM Mdl Nr©) are FCC listed and has not interfered with other traffic within the same band. We expect the FCC listed (OEM Mdl Nr©) equipment will perform in the same manner.

(b) Our Facility will work with (OEM) and VACO's Spectrum Management (0050P2H3) to find a RF band that can be utilized for this operation that will allow VA to issue a formal and Official Radio Use Permit that will negate the "unregulated equipment use" issues.

(4) CONNECTION TO IT/CABLE NETWORKS:

(a) Each item or system that attaches to a VA IT Network (telephone or data) must be Department of Commerce's National Recognized Testing Laboratory (NRTL) Underwriters Laboratory (UL) 60950-1/2; Information Technology Equipment - Safety listed and bears UL's mark.

1) Paragraph 1.1.1; Equipment Covered by this Standard specifically identifies these systems / networks as one affected system.

2) Paragraph 1.1.2; Additional Requirements further identifies this requirement for electomedical applications with physical connections to the patient be met.

(b) This requirement is paramount since the Facility's Telephone PABX and associated system is listed by the National Fire Protection Association as Critical Service. Additionally, since it carries our Code Blue Radio and Overhead Audio Paging Signals, VA elevates it to Life Safety Service.

(c) Presently the (OEM Mdl Nr©) wireless phones are UL Listed but does not have the aforementioned specific UL certification. Our Facility is working with (The OEM) in this arena to have them meet or exceed this UL requirement. In the meantime we will abide within the confines outlined in the attached MOU for insuring an approved IT Network / System connection is maintained until the appropriate UL certification has been obtained allowing it to be directly connected to our telephone system.

b. The Facility Director after careful review of the attached MOU and consultation with the Facility's CIO, (OEM) engineers, Biomedical and NFPA Engineers, ISO, HIPAA / Privacy Officer, Clinical Staff and JACHAO Officials has decided this risk-benefit analysis strongly favors purchasing replacement (OEM Mdl Nr) phones.

VAMC (City), (State - ZIP Code), Unregulated FCC Equipment Use, Risk Assessment and Mitigation, Page Four

2. Please feel free to contact me concerning the contents of this document.

DIRECTOR'S NAME IN CAPS

cc: Office of General Consul
Office of Telecommunications (05)
VA Enterprise Infrastructure Engineering
Telecommunications Engineering and Design
Office of Cyber Security

Attachment: VACO MOU

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 27 53 19

DISTRIBUTED RADIO ANTENNA (WITHIN BUILDING) EQUIPMENT AND SYSTEM

PART 1 - GENERAL

- A. Pursuant to the Department of Veterans Affairs (VA), General Council's (GC) Decision (FY1998 and Grand-Fathered to be fully implemented in FY2000) directing VA that all VOICE (aka TELEPHONE) and DATA (aka DIGITAL) Low Voltage Communications Wires and Cables have been "DECLARED AS BUILDING FIXTURES;" AND are to be provided as a part of the BUILDING STRUCTURE Installed During Construction by Construction and Facilities Management's (CFM) AND each Facility's (VAMC, OPC, CBOPC, etc.) Construction / Renovation Projects.
- B. **VA** - IS REQUIRED TO INSTALL AND MAINTAIN A STRUCTURED AND FULLY FUNCTIONING COMMUNICATIONS WIRE, CABLE AND SIGNAL DISTRIBUTION TIP CONTAINING ALL LOW VOLTAGE COMMUNICATIONS SYSTEMS, EQUIPMENT, PATHWAY(S), DISTRIBUTION AND INTERFACE POINT[S] THAT RENDERS A FULLY FUNCTIONING TIP FOR EACH VA FACILITY THROUGHOUT ITS MEDICAL CARE NETWORK.
- C. THIS DOCUMENT FORMS BUT ONE (1) PART OF CFM'S REQUIRED FOUR (4) PART TIP TECHNICAL SPECIFICATION REQUIREMENTS REQUIREMENTS OUTLINED HEREIN AND IN SECTIONS: 27 10 00 - COMMUNICATIONS ROOMS FITTINGS (that included all Outside and In-side TIP Conduit Systems and Equipment; 27 13 00 - COMMUNICATIONS STRUCTURED (aka Backbone) TIP CABLING EQUIPMENT AND SYSTEMS; AND 27 15 00 - COMMUNICAITONS HORIZONTAL TIP CABLING SYSTEMS AND EQUIPMENT.
- D. ADDITONALLY, THIS DOCUMENT CONTAINS COMMON REFERENCE(S) ADDRESSING ALL DIVISION 27 & 28 SECTIONS AND IS TO BE INCLUDED AS THE BASIC PART OF EACH LOW VOLTAGE SYSTEM'S CONTRACT DOCUMENTS. EACH DIVISION 27 & 28 SECTION WILL REFER BACK TO THE APPROPRIATE PARAGRAPH(S) HEREIN IN-LIEU OF REPEATING THE SAME INFORMATION AND WRITING OVER AND OVER. THE SPEC WRITER IS CAUTIONED TO *INSURE* EACH APPROPRIATE DIVISION 27 & 28 SECTION IS MADE A PART OF THE CONTRACT PACKAGE WHERE THIS DOCUMENT FORMS THE BASIS FOR ALL (re PART 1.1 STATEMENT). THEREFORE, IN ADDITION TO THE REQUIREMENTS OF SECTION 01 42 19-REFERENCE STANDARDS, THESE DOCUMENTS AND THE INFORMATION DEPICTED HEREIN SHALL BE THE MINIMUM STANDARD(S), CODES AND REQUIREMENTS FOR EACH DIVISION 27 AND 28 COMMUNICAITONS SYSTEM SO IDENTIFIED (re PART 1, PARAGRAPH 1.3.A.1 for VA HEADQUARTERS [aka VACO], and *other required project contact information* DO NOT DELETE)

1.1 DESCRIPTION

- A. This Section describes the interfacing, technical and performance requirements for a fully installed, functioning and operating Distributed RF Antenna (Within House) Equipment and System (hereinafter will be referred to as "the system"). The system is based upon outside antenna(s), inside plant, active amplification functions and architecture to support local two way communications for Public Safety Radio (aka Emergency Responder, local and state police, sheriff, ambulance, etc) Radio Coverage, other RF (VA radios) commercial Wireless Service

Providers (WSP), and wireless (Cell) equipment and systems when approved by the **AHJ** via IWS architecture for the **Fort Boise** VA Facility. The Contractor:

- B. SHALL USE ALL SECTIONS IDENTIFIED IN PART 1, PARAGRAPH 1.2 THAT HAVE BEEN DETERMINED, BY VA, NECESSARY FOR THE COMPLETE SYSTEM PROJECT(S), TO THE EXTENT THAT IS DESCRIBED HEREIN AND IN EACH SECTION, IN ORDER TO PROVIDE THE VA FACILITY A STATE-OF-THE-ART, VIABLE, COMPLETE AND FULLY FUNCTIONAL REQUIRED LOW VOLTAGE COMMUNICATIONS SYSTEM(S).
 - 1. IF A REFERENCED SECTION APPEARS NOT NEEDED, THE CONTRACTOR SHALL NOTIFY THE COTR, IN WRITING, OF EXACTLY WHY HE/SHE FEELS THAT PARTICULAR SECTION APPEARS NOT NECESSARY,
 - 2. THE COTR, IN TURN, WILL RESEARCH THE ISSUE AND CONTACT VA'S SMCS (0050P2H3a) FOR AN OFFICIAL TECHNICAL DETERMINATION AND WILL REPLY TO THE CONTRACTOR, IN WRITING, OF THE OFFICIAL CONTRACT DECISION CONCERNING THE REQUEST AFFECTING THE PROJECT, and
 - 3. Is cautioned to obtain, in writing, all approvals for system changes (ie corrections, updates, additions, subtractions, etc.) relating to the published bid contract specifications, drawings and other approved contract document(s), from the COTR BEFORE proceeding with the change.
- C. The voice (telephone) and data portion of the horizontal TIP is managed by VA and/or the Facility's OI&T. The FMS (low-voltage special communications) portion of the TIP is managed by the Facility's FMS with technical assistance provided by VA OI&T's SMCS 0050P2H3.
- D. The system Contractor shall provide all system design, project management, coordination with WSPs and Public Safety, Radio Enhancement / Emergency Responder Services, and with VAMC Entities (ie Police, FMS, OI&T (local for wireless LAN/VoIP) and VACO Spectrum Management (SMCS 0050P2H3B) for technical and RF authorization compliance).
- E. The DAS is designated by VA as an "Emergency and Public Safety" Communications System.
- F. The System is existing in Building 67 and is to be removed and reinstalled within the Project boundary.

1.2 RELATED WORK

- A. (re PART 1, PARAGRAPH 1.1.): In addition to the requirements identified in SECTION 01 00 01, GENERAL CONDITIONS; the following SECTIONS, that are not bracketed (i.e. // _____ //), ARE THE MINIMUM REQUIRED FOR ALL SYSTEMS(S). The bracketed (i.e. // _____ //) SECTIONS MAY - ALL, PART OR NONE be required to form a complete and functioning system depending system design, present and approved future requirements.
- B. In the event of conflict or discrepancy between this Section and the requirements of the PSRAS Code, the requirements stated herein for PSRAS shall govern unless the local PSRAS requirement is more stringent and is furthermore not contrary to the National Requirements for PSRAS.

- C. The Contractor shall identify the portion(s) of this Section that has exceeded the requirements and receive approval from the AHJ and RE for acceptance. The following SECTIONS are the minimum required,
1. 00 01 15 - List of Drawing Sheets.
 2. 01 00 01 - General Conditions.
 3. 01 33 23 - Shop Drawings, Product Data and Samples.
 4. 01 42 19 - Reference Standards.
 5. 01 57 19 - Temporary Environmental Controls.
 6. 01 74 19 - Waste Management.
 7. 07 02 00 - Joint Sealants.
 8. 07 84 00 - Firestopping.
 9. 26 05 11 - Requirements for Electrical Installations.
 10. 26 05 21 - Low Voltage Electrical Power Conductors and Cables (600 Volts and Below).
 11. 26 05 26 - Grounding and Bonding for Electrical Systems.
 12. 26 05 33 - Raceways and Boxes for Electrical Systems.
 13. 27 05 11 - Requirements for Communications Installations.
 14. 27 05 26 - Grounding and Bonding for Communications Systems.
 15. 27 05 33 - Raceways, Conduits and Boxes for Communications Systems.
 16. 27 11 00 - Communications Equipment Room Fittings.
 17. 27 13 00 - Communications Backbone Cable Equipment and System.
 18. 27 15 00 - Communications Horizontal Cable Equipment and Systems.
 19. 28 05 13 - Conductors and Cables for Electronic Safety and Security.
 20. 28 05 26 - Grounding and Bonding for Security Systems.
 21. 28 05 28.33 - Conduits and Back boxes for Electronic Safety and Security.
 22. 27 41 31 - Master Antenna Television Equipment and System.//
 23. 27 51 16 - Public Address Equipment and Systems.//
 24. 27 52 23 - Nurse Call and Code Blue Equipment and Systems.//
- C. The following information is in addition to those identified herein: AHJ Ordinance and / or Supplemental Rules for Public Safety Radio Enhancement / Emergency Responder Amplification Systems.

1.3 DEFINITIONS

- A. In addition to the requirements of SECTION 01 00 01, GENERAL CONDITIONS; the following are made a part of this document:
- B. REVIEW OF CONTRACT DOCUMENTS - a service by the CFM AE, PM, RE AND VACO SMCS to reduce the possibility of materials being ordered which do not comply with contract documents. The review shall not relieve the Contractor of responsibility for dimensions or compliance with the contract documents. The

reviewer's failure to detect an error does not constitute VA's permission for the Contractor to proceed in or with the error.

1. VA Headquarters (aka VACO) Project Review: Is required for National and Local Building Codes, Standards and Guidelines Compliance.
2. VACO Technical Review: Is required for VA Security; Low Voltage Telecommunications, RF, FAA, FCC and other Spectrum Coordination, Licensing and operating permits; Life and Public Safety, Critical and Emergency Codes, Standards and Guideline Compliance; AND, System(s) Interim and Proof of Performance Testing, VA Final Technical Acceptance, Functional and Operational Certification, contact:
 - a. VACO: Department of Veterans Affairs Office of Telecommunications (005) Telecommunications Engineering (0050P) Spectrum Management and COMSEC Service Special Communications Team (0050P2H3a)
810 Vermont Avenue NW, (1100 1st NW, Area 501L) Washington, DC 20420
301-734-0376, 202, 632, 7754 or 202-461-5897
 - b. VACO, OFFICE OF TELECOMMUNICATIONS, ENTERPRISE ENGINEERING, SPECTRUM MANAGEMENT AND COMMUNICATIONS SECURITY (COMSEC) SERVICE (SMCS) IS THE AUTHORITY HAVING JURISDICTION (AHJ - see SME PART 1, PARAGRAPHS 1.3.A.2, 1.3.B.41 & 1.4.B.1.a.[7][a]) FOR THE LOW VOLTAGE SPECIAL COMMUNICATIONS AND COMSEC SYSTEMS AND EQUIPMENT (EXCEPT FIRE ALARM, Telephone and Data); PLUS, RF CO-ORDINATION REQUIRED THROUGH-OUT VA'S MEDICAL SYSTEM BY ORDER OF THE SECRETARY (RE PART 1, PARAGRAPH 1.4.B.1.a.(7)(a): VICE THE SIGNED AND EXECUTED MP-6, PART VIII - TELECOMMUNICATIONS, CHAPTER 5-AUDIO, RADIO AND TELEVISION COMMUNICATIONS SYSTEMS.
 - 1) For each of the DIVISION 27 & 28 Publication referred and used here-in, consider the advisory provisions to be mandatory, as though the word, "shall" had been substituted for "should and will" where it appears.
 - 2) Interpret references in these publications to the "AHJ," or words of similar value, to mean the CFM: PE, PM, RE or CO for Project / Contract Guidance; AND VACO SMCS for Technical Concurrence.

C. **THE FOLLOWING ACRONYMS** are made a part of this document and are in addition to the ones aforementioned and later herein:

1. AHJ - Authority Having Jurisdiction - SMCS (0050P2H3) for Low Voltage Telecommunications Systems (Re PART 1, PARAGRAPHS 1.3.A.2.a & b; 1.4.b.1.a. (7) (a) and 1.8.A. & B,

2. AWG - American Wire Gauge (originally North American Wire Gauge; see STP & UTP) - also known as the Brown & Sharpe wire gauge, is a system used for standardizing all wire and cable conductors cross-sectional area (diameters) that has been in use since 1857 pre-dominantly in the United States and Canada,
3. AWS - Advanced Wireless Services (synonymous with AWS and UMTS),
4. BDA - Bi-Directional Amplifier,
5. BICSI - Building Industries Communications Services Installation,
6. BIM - Building Information Modeling (aka Model),
7. BOM - CFE or GFE Bill of Materials,
8. BUCR - Back-up Computer Room - (re PG 18-10, Page B-5; OI&T Design Guide PG 18-12, Page 4-4),
9. BTS - Base Transceiver Station,
10. CFE - Contractor (or OEM) Furnished Equipment,
11. CFR - Consolidated Federal Regulations - that governs ALL Federal Contracts / Projects.
12. CUP - Conditional Use Permit(s)-Federal/GSA for VA,
13. DBm - Deci-Bell, Measured.
14. DBmV - Deci-Bell per Mili-Volt,
15. ECC - Engineering Control Center; sometimes referred to The Emergency Control Center, - (see EMCR, re PG 18-10, Page B-5),
16. EMCR - Emergency Management Control Room" - (see ECC, re PG 18-10, Page B-5),
17. EMI - Electromagnetic Interference - also called Radio Frequency Interference or RFI when a high frequency (or radio frequency) disturbance affects an electrical circuit due to either electromagnetic induction or electro-magnetic radiation emitted from an external source (see ESI, RFI),
18. EMT - Electrical Metallic Tubing - relates to "thin wall" non-rigid metal conduit,
19. ENTR - Utilities Entrance Location (see DEMARC, POTS, LEC)" - (re PG 18-10, Page B-5),
20. ESI - Electrostatic Interference - also called "Electro-static Discharge Interference (ESD) - ESD is the transfer of static charge between bodies of different electrostatic potential, in the proximity or through direct contact (see EMI, RFI),
21. ESR - Vendor Engineering Service Report,
22. ERTF - Real Time Location System,
23. FA - Fire Alarm - is a system that is installed in VA Facilities to protect the building and installed property,

24. GFE - Government Furnished Equipment,"
25. HE - Antenna Head End Room - (re PG 18-10, Page B-5; OI&T De-sign Guide PG 18-12, Page 4-76; see HEC, HEIC, PA, RPEC),
26. HEC - Head End Cabinet(s) - (re PG 18-10, Page B-5; OI&T De-sign Guide PG 18-12, Page 4-76; see HE, HEIC, PA, RPEC),
27. HEIC - Head End Interface Cabinet(s) - (re PG 18-10, Page B-5; OI&T Design Guide PG 18-12, Page 4-76; see HE, HEC, PA RPEC),
28. HSPA - High Speed Packet Access,
29. iDEN - Integrated Digital Enhanced Network,
30. ICRA - Infection Control Risk Assessment,
31. ILSM - Interim Life Safety Measures,
32. ISM - Industrial, Scientific, Medical,
33. LAN - Local Area Network (see VoIP, WAN) - is a digital / data based network localized within a given structure (VA'S LAN IS NOT AUTHORIZED FOR LIFE AND PUBLIC SAFETY, CRITICAL OR EMERGENCY FUNCTIONS UNTIL IT'S CERTIFIED AND LISTED MEETING NFPA'S LIFE SAFETY CODE BY AN AP-PROVED UDOC NRTL - SEE PART 1, PARAGRAPH 1.4.B.1.a. [5]),
34. LBS - Location Based Services,
35. LEC - Local Exchange Carrier - (aka the Local Telephone Company; see DEMARC, PBX & POTS),
36. LMR - Land Mobile Radio,
37. LTE - Long Term Evolution,
38. MCR - Main Computer Room - (re PG 18-10, Page B-5, OI&T Design Guide PG 18-12, Pages 2-18, 4-9),
39. MCOR - Main Computer Operators Room - (re PG 18-10, Page B-5),
40. MH - Man Hole (aka Maintenance Holes) are structures used to provide access to outside buried conduit runs in or-der to allow compliance for signal interconnection, pro-tecton and long run operations across wide areas and multiple buildings/locations,
41. MOU - Memorandum of Understanding,
42. MW - Microwave (RF Band, Equipment or Services),
43. NID - Network Interface Device - (see DEMARC),
44. NEC - National Electric Code - is the main part of NFPA's Standards and Guides referenced herein,
45. NFPA - National Fire Protection Association - establishes min-imum standards for the protection of life and buildings in VA Projects,
46. NOR - Network Operations Room - (re PG 18-10, Page B-5; OI&T Design Guide PG 18-12, Page 4-54),
47. NS - Nurse Station(s) - (re PG 18-10, Page B-5),

- 48. OI&T - VA's Office of Information and Telecommunications (re OI&T Design Guide PG 18-12, Page 2-1),
- 49. OSHA - Occupational Safety and Health Administration,
- 50. OTDR - Optical Time Domain Reflectometer relating to the primary piece of test equipment for evaluating fiberoptic cable plants,
- 51. PA - Public Address / Cabinet(s) (re PG 18-10, Page B-5; see HE, HEIC, RPEC),
- 52. PBX - Private Branch Exchange (see DEMARC, LEC, POTS; aka EPBX or Electronic Private Branch Exchange - a reference that is being phased out and will no longer be used in VA) is the typical acronym for a Telephone Switch not owned by the Telephone Company that is NFPA CRITICAL SERVICE LIST-ED AND VA APPROVED FOR THE DIRECT MANAGEMENT OF THOSE LIFE SAFETY CODE AND OSHA REQUIRED FACILITIES MANAGEMENT SERVICE'S (FMS) LIFE & PUBLIC SAFETY, CRITICAL AND EMERGENCY COMMUNICATIONS SYSTEMS (re OI&T Design Guide PG 18-12, Page 4-20),
- 53. PCR - Police Control Room (see SPCC), could be designated SCC" (re PG 18-10, Page B-5),
- 54. PCS - Personal Communications Service,
- 55. POE - Power over Ethernet,
- 56. POTS - Plain Old Telephone System (see DEMARC, LEC, PBX),
- 57. PSRAS - Public Safety Radio Amplification Systems,
- 58. PTS - Pay Telephone Station (may or may not be required); OR may be provided on as a portable station controlled by the using Service Chief (re PG 18-10, Page B-5),
- 59. PVC - Poly-Vinyl Chloride" - relates to a form of plastic,
- 60. RAN - Radio Access Network,
- 61. RFI - "Radio Frequency Interference" is the Electromagnetic Radiation which is emitted by electrical circuits carrying rapidly changing signals, as a by-product of their normal operation, and which causes unwanted signals (interference or noise) to be induced in other circuits (see EMI, ESI),
- 62. RFID - RF Identification,
- 63. RPEC - Radio Paging Equipment Cabinet(s) - (see HE, HEC, HEIC, PA; PG 18-10, Page B-5),
- 64. RUS - The DoA's - "Rural Utilities Service" which is technical standards issued (for telecommunications services here-in). Also, RUS BULL is "Rural Utilities Service Bulletin" applied for the aforementioned telecom service,
- 65. RSSI - Mobile Telecommunications System,

- 66. RTLS - Real Time Location Service / System,
- 68. SME - Subject Matter Expert - (re, PART 1-GENERAL, PARA-GRAPHS 1.3.A.2-[VACO SMCS] and 1.4.B.1.a. [7] [a] - VACO SMCS as AJS),
- 69. SMR - Specialized Mobile Radio,
- 70. STP - Shielded Twisted Pair (see AWG & UTP)- relating to communications wire and cable that has copper conductors that are twisted to reduce or eliminate interference and crosstalk with an internal cable shield necessary for installation in locations susceptible to high levels of interference,
- 71. STR - Stacked Telecommunications Rooms; also just Telecommunications Room (see TR)" - this term replaces "Signal and/or Telecommunications Closet" that are no longer used. Additionally, each TR shall be designed to provide occupancy for all OI&T AND FMS Low Voltage Communications Systems/Equipment (re Electrical Design Manual, PG 18-10, Sections 7 & 8, Physical Security Design Manual for VA Facilities, PG 18-10 AND OI&T Design Guide PG 18-12, Pages 2-20 & 4-84),
- 72. TCO - Telecommunications Outlet - is a device that is specifically constructed to afford the TIP a place to terminate in a useable apparatus in designated locations. The TCO's design is detailed herein,
- 73. TOR - Telephone Operators Room - (re PG 18-10, Page B-5; OI&T Design Guide PG 18-12, Page 4-92),
- 74. TER - Telephone Equipment Room - (see PBX; re PG 18-10, Page B-5; OI&T Design Guide PG 18-12, Page 4-50),
- 75. TR - Telecommunications Room - is a standalone room that houses OI & T and FMS equipment and systems cross-connections for servicing a specific area (see STR),
- 76. UMTS - Universal Mobile Telecommunications System,
- 77. UPCS - Unlicensed Personal Communications Service
- 78. UL - Underwriters Laboratories - is one of the approximate 15 USDC approved NRTLs (see PART 1, PARAGRAPH 1.4.B.1.a. [5]),
- 79. UTP - Unshielded Twisted Pair (see AWG & TWP) - relates to communication wire and cable that has copper conductors and are twisted to reduce or eliminate interference and cross-talk without an internal cable shield,
- 80. UV - Ultra Violet,
- 81. VoIP - Voice over Internet Protocol (see PBX, LAN, WAN) - is an emerging technology that is replacing POTS & PBX vo-ice equipment (VA'S VoIP IS NOT AUTHORIZED FOR LIFE & PUBLIC SAFETY, CRITICAL, EMERGENCY OR SAFETY FUNCTIONS UNTIL IT'S CERTIFIED AND LISTED MEETING NFPA'S LIFE SAFETY CODE BY

AN APPROVED UDOC NRTL - SEE PART 1, PARA-GRAPH 1.4.C.1.e.; OI&T Design Guide PG 18-12, Page 4-14),

82. WAN - "Wide Area Network (see LAN, VoIP)" is a digital (data) network that transcends localized LANs within a given structure (VA'S WAN IS NOT AUTHORIZED FOR LIFE & PUBLIC SAFETY, EMERGENCY OR SAFETY FUNCTIONS UNTIL IT'S CERTI-FIED AND LISTED MEETING NFPA'S LIFE SAFETY CODE BY AN APPROVED UDOC NRTL - SEE PART 1, PARAGRAPH 1.4.C.1.e; see LAN),
83. WiFi - Wireless Fidelity,
84. WiMAX - Worldwide Interoperability for MW Access,
85. WMTS - Wireless medical Telemetry Service, and
86. 24/7 - Is the shortened designation of 24 hours a day, seven days per week and 52 weeks per year.

D. **ADDITIONALLY:** The following language is required to form a part of this document (re SECTION 27 05 26, GROUNDING AND BONDING FOR COM-MUNICATIONS SYSTEMS for additional required information). The terms:

1. Provide is considered as being: Designed, engineered, furnished, installed, tested and guaranteed by the Contractor AND the system equipment's OEM; plus, being concurred and certified by SMCS-0050P2H3,
2. Supervision:

a. <u>Electrical</u>	Is the electrical and/or elec-tronic operation of completely (aka full time) analyzing a system's functional components (ie cable breaks / shorts), in-operative stations, lights and state(s) of change (ie from primary to backup) functions 24/7/365; <u>and</u> provides aural and visual emergency notifica-tion signals to at least two remote designated / approved monitoring stations,
b. <u>Government</u>	It is the responsibility of the RE or the RE's assigned inspec-tor to observe the Contractor's employees installing cable, conduit & pathway(s)/ wire way(s), System Ground develop-ment and installation , inside and outside plant housings, splices, cleanup, and other related work items associated with the system(s) construction project.
c. <u>Contractor</u>	It is the responsibility of the Contractor to directly manage the Contractor's employees work as outlined by this document throughout the system(s) project.
d. <u>OEM</u>	It is the responsibility of the OEM or the OEM's assigned liai-son to assist the Contractor in all functions / requirements / operations outlined herein throughout the project.

3. System: Used interchangeably with "The System" is the common word that is applied for each SECTION's specific system in order to shorten each SECTION's written NOT TECHNICAL content,
4. Work: Materials furnished and completely installed by the Contractor. The System work shall be complete, OSHA NRTL (i.e. [UL]) - Listed AND Labeled on each item of installed equipment / part; AND VACO SMCS 0050P2H3a tested, certified and designated ready for operation (re "Work Performance," PART 1, PARAGRAPH 1.12).
5. Grounding and Bonding (re SECTION 27 05 26 - GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS):

a. <u>Grounding electrode conductor</u>	Shall refer to the earth ground-ing electrode that is connected to the sepearte circulating telecommunications grounding conductor, to the equipment grounding conductor at the source of a separately derived system.
b. <u>Grounding electrode system</u>	Refers to an electrode(s) as specified in the National Ele-ctrical Code, Article 250. All electrodes required by NEC, as well as including supplementary, telecommunications system grounding electrodes.
c. <u>Telecommunications Bonding Backbone</u>	Or " TBB " shall refer to a con-ductor(s) of appropriate size (minimum 1/0 Stranded AWG), which connects each telecommuni-cations main grounding busbar (TMGB) and circulates to interconnect various telecomm-unications grounding busbars (TGB) and in the locations shown on the drawings.
d. <u>Connect and bond</u>	Are used interchangeably herein and shall mean "the permanent joining of metallic parts to form an electrically conductive path that will assure electrical continuity and the capacity to conduct safely any current likely to be imposed" having the same meaning.
e. <u>effectively grounded</u>	Shall mean intentionally con-nected to earth through a ground connection or connections of sufficiently low impedance and having sufficient current carry-ing capacity to prevent the buildup of voltages that may result in undue hazard to con-nected equipment or persons.
f. <u>Grounding equalizer</u>	Shall refer to the conductor that interconnects elements of the telecommunications grounding infrastructure.

1.4 APPLICABLE PUBLICATIONS AND VESTED FEDERAL, STATE AND LOCAL LAWS (DO NOT DELTE):

- A. In addition with the requirements in SECTION 01 00 01, GENERAL CONDITIONS; the following is made a part of this document:

1. ORDER OF PRECEDENCE OF APPLYING STANDARDS AND CODES: In the case of a conflict or duplicate code or standard (re PART 1, PARAGRAPHS 1.8.A), use the following deciding guidance for:
 - a. Duplicate Codes / Standards: Use the most recent Federal Code / Standard (unless the State and Local Code addresses increased specific regional safety requirements [ie roof construction in Florida, increased Seismic requirements in California, etc.]), and
 - b. Conflict of Codes / Standards: Use the more stringent Code / Standard.
- B. **IN ADDITION TO THE REQUIREMENTS OF SECTION 01 42 19 - REFERENCE STANDARDS (DO NOT DELTE)**: The following information is made a part of the System's design and installation minimum requirements; and the installation shall fully comply with all governing authorities, laws and ordinances, regulations, and including, but not limited to UNITED STATES FEDERAL LAW and The following Agencies' requirements form a part of the System's Project Documents a directed by formal regulations vested in United States Federal Law:
 - C. **US Departments of Agriculture, (USDA** - Title 7, USC, Chapter 55, Sections 2201, 2202 & 2202) - organized in 1862 by President Abraham Lincoln and formally established by Congress in 1820 & 1825 and final establish Law on February 9, 1889. The following USDA Standards apply to this document:
 - RUS 1755 Telecommunications Standards and Specifications for
Materials, Equipment and Construction,
 - RUS Bull 1751F-630 Design of Aerial Cable Plant(s),
 - RUS Bull 1751F-640 Design of Buried Cable Plant, Physical Considerations,
 - RUS Bull 1751F-643 Underground Plant Design,
 - RUS Bull 1751F-815 Electrical Protection of Outside Plant(s),
 - RUS Bull 1753F-201 Acceptance Tests of Telecommuni-cations Plant(s) (PC-4),
 - RUS Bull 1753F-401 Splicing Copper and Fiber Optic Cables (PC-2),
 - RUS Bull 345-50 Trunk Carrier Systems (PE-60),
 - RUS Bull 345-65 Shield Bonding Connectors (PE-65),
 - RUS Bull 345-72 Filled Splice Closures (PE-74),
 - RUS Bull 345-83 Gas Tube Surge Arrestors (PE-80).
 - D. **US Department of Commerce, (USDC** - Public Law 426-62, CFR, Title 15 - Under the Information Technology Management Reform Act; Public Law 104-106, the Secretary of Commerce approves standards and guidelines that are developed by the):
National Institute of Standards Technology, (NIST - formerly the National Bureau of Standards, now P/O Com-merce). Under Section 5131 of the Information Technology Management Reform Act of 1996 and the Federal Information Security Management Act of 2002 (*Public Law 107-347*), NIST develops **Federal Information**

Processing Standards Publication (FIPS) requirements, Chapter II. The following NIST FIPS Documents forms a part of this document:

FIPS PUB 1-1 Telecommunications Information Ex-change,
 FIPS PUB 100/1 Interface between Data Terminal Equipment (DTE) Circuit Terminating Equipment for operation with Packet Switched Networks, or Between Two DTEs, by Dedicated Circuit,
 FIPS PUB 140/2 Telecommunications Information Security Algorithms,
 FIPS PUB 143 General Purpose 37 Position Interface between DTE and Data Circuit Terminating Equipment,
 FIPS 160/2 Electronic Data Interchange (EDI),
 FIPS 175 Federal Building Standard for Telecom-munications Pathway and Spaces,
 FIPS 191 Guideline for the Analysis of Local Area Network Security,
 FIPS 197 Advanced Encryption Standard (AES)
 FIPS 199 Standards for Security Categorization of Federal Information and Information Systems.

E. **Federal Communications Commission, (FCC, P/O Commerce - The Communications Act of 1934 [as amended], CFR, Title 47, Telecommunications)** - the following FCC Rules / Regulations / Requirements applies to this document:

Part 15 Restrictions of use for Part 15 listed RF Equipment in Safety of Life Emergency Functions and Equipment Locations (also see CFR, Title 15 - Department of Commerce, Chapter XXIII - NTIA below),
 Part 47 Chapter A, Paragraphs 6.1-6.23, Access to Telecommunications Service, Telecommunications Equipment and Customer Premises Equipment,
 Part 58 Television Broadcast Service,
 Part 73 Radio and Television Broadcast Rules,
 Part 90 Rules and Regulations, Appendix C,
 Form 854 Antenna Structure Registration.
 Chapter XXIII National Telecommunications and Information Administration (NTIA - aka 'Red Book') Chapters 7. 8. / 9; CFR, Title 47 FCC Part 15, RF Restriction of Use and Compliance in "Safety of Life" Functions & Locations.

F. **Department of Defense, (DoD, The National Security Act of 1947)** - formed the National Military Establishment; re-organized to The Department of Defense (DoD) on August 10, 1949 as an Amendment to the 1947 Law. The following DoD guidelines apply to this document:

MIL-STD-188-110 Interoperability and Performance Standards for Data Modems,

MIL-STD-188-114 Electrical Characteristics of Digital Interface Circuits,

MIL-STD-188-115 Communications Timing and Synchronizations Subsystems,

MIL-C-28883 Advanced Narrowband Digital Voice Terminals.

- G. Department of Health, (HHS, Public Law 96-88, CFR, Title 42, Chapter IV Health & Human Services [HHS], CFR, Title 46, Subpart 1395[a], [b] defines the Joint Commission of Accreditation of Hospital Organization [JCAHO - RE PART 1, PARAGRAPH 1.4.E.1] - **The Secretary of HHS has decreed "a hospital that meets JCAHO accreditation is deemed to meet the Medi-care conditions of Participation by meeting Federal Directives" in:**

Life Safety System References,

Critical Safety System References,

Public Safety System References,

Telephony System Engineering References,

Data / Digital Systems Engineering References,

Information Security References.

- H. Department of Labor, (DoL, Public Law 426-62 - CFR, Title 29, Part 1910, Chapter XVII - Occupational Safety and Health Administration (OSHA), Occupational Safety and Health Standards). The following OSHA Standards apply to this document:

Subpart 7 - defines the requirements for a Nationally Recognized Testing Laboratory (NRTL) - for complete list, of authorized NRTLs contact their below WEB Site. The following are four (4) of the approximate 15 approved NRTLs (obtain a copy at):(http://www.osha.gov/dts/otpc/nrtl/faq_nrtl.html)

UL (re Part 1, Paragraph 1.4.B.8): The following UL Standards apply to this document:

UL01 Flexible Metal Conduit,

UL05 Surface Metal Raceways and Fittings,

UL06 Rigid Metal Conduit,

UL44 Standard for Thermoset-Insulated Wires and Cables,

UL50 Enclosures for Electrical Equipment,

UL65 Standard for Wired Cabinets,

UL83 Standard for Thermoplastic-Insulated Wires and Cables,

UL96 Standard for Lightning Protection Components,

UL96A Installation requirements for Lightning Protection Systems,

UL360 Liquid-Tight Flexible Steel Conduit,

UL444 Communications Cables,

UL467 Standard for Electrical Grounding and Bonding Equipment,
 UL468 Standard for Grounding and Bonding Equipment,
 UL486A Standard for Wire Connectors and Soldering Lugs for Use
 with Copper Conductors,
 UL486C Standard for Splicing Wire Connectors,
 UL486D Standard for Insulated Wire Connector Systems for
 Underground Use or in Damp or Wet Locations,
 UL486E Standard for Equipment Wiring Terminals for Use with
 Aluminum and/or Copper Conductors,
 UL493 Standard for Thermoplastic-Insulated Under Ground Feeder
 and Branch Circuit Cable,
 UL497 Protectors for Paired Conductor Communications Circuits,
 UL497A Secondary Protectors for Communications Circuits,
 UL510 Polyvinyl Chloride, Polyethylene and Rubber Insulating
 Tape,
 UL514A Metallic Outlet Boxes,
 UL514B Standard for Fittings for Cable and Conduit,
 UL514C Non-Metallic Outlet Boxes, Flush Devices and Covers,
 UL651 Schedule 40 and 80 Rigid PVC Conduit,
 UL797 EMT,
 UL884 Under Floor Raceways and Fittings,
 UL1069 Hospital Signaling and Nurse Call Equipment,
 UL1198 Distress Signaling.
 UL1242 Intermediate Metal Conduit,
 UL1333 Riser Low Smoke Vertical Rating,
 UL1449 Standard for Transient Voltage Surge Suppressors,
 UL1459 Standard for Safety, Telephone Equipment,
 UL1479 Standard for Fire Tests of Through-Penetration Fire
 Stops,
 UL1666 Standard for Wire/Cable Vertical (Riser) Tray Flame
 Tests,
 UL1685 Vertical Tray Fire Protection and Smoke Release Test
 for Electrical and Fiber Optic Cables,
 UL1861 Communication Circuit Accessories,
 UL1863 Standard for Safety, communications Circuits
 Accessories,
 UL1865 Standard for Safety for Vertical-Tray Fire Protection
 and Smoke-Release Test for Electrical and Optical-Fiber
 Cables,

UL2024 Standard for Optical Fiber Raceways,
 UL2196 Standard for Test of Fire Resistive Cable,
 UL60950-1/2 Standard for Safety of Information Technology Equipment
 Safety.

Canadian Standards Association, (CSA - same tests as presented by UL),
Communications Certifications Laboratory, (CCL - same tests as presented by UL),
Intertek Testing Services NA, Inc., (ITSNA - formerly Edison Testing Laboratory
 [ETL] - same tests as presented by UL),

Subpart 35 - Compliance with NFPA 101, Life Safety Code,

Subpart 36 - Design and construction requirements for exit routes,

Subpart 268 - Telecommunications,

Subpart 305 - Wiring methods, components, and equipment for general use.

- I. Department of Transportation, (DoT, Public Law 85-625, CFR, Title 49, Part 1,
 Subpart C - Federal Aviation Administration [FAA]) - the following FAA
 requirements form a part of this document:

AC 110/460-ID & AC 707 / 460-2E - Advisory Circulars Standards for Construction
 of Antenna Towers,

7450 and 7460-2 - Antenna Construction Registration Forms.

Federal Specifications for Signal / Communications Standards (FED SPEC) - the
 following FED SPECS forms a part of this document:

A-A-59544-00 Cable and Wire, Electrical (Power, Fixed Installation),

1003 Synchronous Bit Oriented Data Link Control Procedures,

1020 Electrical Characteristics of Balanced Voltage Digital
 Interface Circuits,

1030 Electrical Characteristics of Un-Balanced Voltage
 Digital Interface Circuits, and

1037 Glossary of Telecommunications Terms.

- J. Department of Veterans Affairs (USDVA or VA, Public Law No. 100-527), CFR, Title
 38, Volumes I & II) - the following VA requirements form a part of this
 document:

OFFICE OF TELECOMMUNICAITONS, MP-6, PART VIII, TELECOMMUNICAITONS, CHAPTER 5,
 AUDIO, RADIO AND TELEVISION (and COMSEC) COMMUNICATIONS SYSTEMS (RE PART 1,
 PARAGRAPH B):

Spectrum Management and COMSEC Service (SMCS):

FAA, FCC, & NTIA RF Compliance and Licensing Program,

COMSEC co-ordination and control of security / classified communication assets,

CoG, "Continuance of Government" communications guidelines and compliance,

COOP, "Continuance of Operations" emergency com-munications guidelines and
 compliance,

Wireless and Handheld Device(s) guidelines and compliance,
 SATCOM - "Satellite Communications" guidelines and compliance,
 Low Voltage Special Communications - Construction Contract Specifications and Drawings Conformity, Proof of Performance Testing, VACO Compliance and Life Safety Certification(s) for CFM and VA Facility Low Voltage Special Communications Projects (EXCEPT Fire Alarm, Telephone and Data Systems).
Handbook 6100 - Telecommunications: - Cyber and In-formation Security (OCIS),
Handbook 6500 - Information Security Program.

VA's National Center for Patient Safety - Veterans Health Administration Warning System, Failure of Medical Alarm Systems using Paging Technology to Notify Clinical Staff, July 2004.

VA's Center for Engineering Occupational Safety and Health, concurrence with warning identified in VA Directive 7700.

OFFICE OF CFM:

PG-18-1, Master Construction Specifications (See Paragraph 1.1.2),
 PG-18-4, Standard Detail and CAD Standards
 PG-18-5, Equipment Guide List
 PG-18-10, Manuals by Discipline
 Electrical Design Manual,
 Physical Security, Mission Critical Facilities
 Physical Security, Life-Safety Protected,
 VA Directive 0730, Security and Law Enforcement,
 PG-18-3,.Design and Construction Production Procedures
 Fire Protection,
 Heating, Air, Ventilation and Cooling (HAVC),
 PG-18-12, OI&T Design Guide
 Additional CFM Design Guides & Manuals (re Part 1, Paragraph 1.2),
 PG-18-15, Minimum Requirements of A/E Submissions:
 Volume B - Major New Facilities, Major Additions; and Major Renovations, Article VI, Paragraph B,
 Volume C - Minor and NRM Projects, Article III, Paragraph S,
 Volume E - Request for Proposals Design/Build Projects, Article II, Paragraph F, Solicitation for Offerors (SFO) for Lease Based Clinics (05-2009).

- K. Local and Regional Codes (LRC): The following Regional requirements form a part of the System's Project Documents as directed by each formal regulation(s) vested in State, City /Town Local Law and Jurisdictional Code(s) / Regulations (re PART 1, PARA-GRAPHS 1.4.A,E, 1.6 & 1.8.A). The following LRC's apply to this document:

State:

Law,

Hospital Code(s),

Regulations,

Directives,

Codes,

Town:

Ordinances,

Regulations,

Codes,

City:

Ordinances,

Regulations,

Codes,

County:

Ordinances,

Regulations,

Codes.

- L. COMMERCIAL / NATIONAL CODES: The following Agencies' requirements have been accepted to form a part of the System's Project Documents as provided by formal agreement(s) by VA and each Agency (re PART 1, PARAGRAPHS 1.4.A,D, 1,6 & 1.8.A):
- JCAHO - Re PART 1, PARAGRAPH 1.4.C.1.d,
- American Institute of Architects (AIA) - Guidelines for Health Care Facilities,
- American National Standards Institute / Electronic Industries Association / Telecommunications Industry Association (ANSI/ EIA / TIA) - the following ANSI/EIA/TIA Standards apply to this document:
- ANSI-C2 National Electrical Safety Code, Part 2 - Safety Rules
for Overhead Lines,
- TIA/EIA-423 Electrical Characteristics of Unbalanced Voltage Digital
Interface Circuits,
- TIA-455-46A Spectral Attenuation Measurement for Long Length, Graded
Index Optical Fibers,
- TIA/EIA-455 Standard Test Procedure for Fiber Optic Fibers, Cables,
Transducers, Sensors, Connecting and Terminating
Devices, and Other Fiber Optic Components,
- TIA-455-78B Optical Fibres - Part 1-40: Measurement Methods and Test
Procedures - Attenuation,
- TIA-455-107 Determination of Component Reflectance or Link/ System
Return Loss using a Loss Test Set,

TIA/EIA-455-204 Standard for Measurement of Bandwidth on Multimode Fiber,
 TIA/EIA 455-213 Optical Fiber Amplifiers, Basic Specification Test methods for Out-of-Band Insertion Losses Filtered Optical Power Meter,
 TIA-472D-000 Fiber Optic Communications Cable for Outside Plant Use,
 IA-492AAA 62.5-um Core Diameter/125-um Cladding Diameter Class 1a Graded-Index Multimode Optical Fibers,
 TIA-492AAAB 50-um Core Diameter/125-um Cladding Diameter Class 1A Graded-Index Multimode Optically Optimized AMERICAN STANDARD Fibers (DO NOT SUBSTITUTE; re PART 2, PARAGRAPH 2.4.E.2.b.),
 TIA-492CAAA Detail Specification for Class IVa Dispersion- Unshifted Single-Mode Optical Fibers,
 TIA-492E000 Sectional Specification for Class IVd Nonzero-Dispersion Single-Mode Optical Fibers for the 1,550 nm Window,
 EIA/TIA 496A Interface between Data Circuit Terminating Equipment and the Public Switched Telephone Network,
 TIA 526-7 Measurement of Optical Power Loss of Installed Single Mode Fiber Cable Plant,
 EIA 526-14 Optical Power Loss Measurements of Installed Multimode Fiber Cable Plant,
 EIA 530 High Speed 25 Position interface for Data Terminal Equipment and Data Circuit Terminating Equipment,
 TIA 562 Electrical Characteristics for an Unbalanced Digital Interface,
 TIA 568/0 Standard for Installing Commercial Building Telecommunications Cabling,
 TIA 568/2 Commercial Building Telecommunications Cabling Standard, Part 2: Balanced Twisted Pair Cable Components,
 TIA 568-C0 Telecommunications Cabling for Customer Premises,
 TIA 568-C1 Commercial Building Telecommunications Cabling Standard,
 TIA 568-C2 Balanced Twisted-Pair Telecommunications Cabling and Components Standards,
 TIA 568-C3 Optical Fiber Cabling Components Standard,
 TIA 569-A Commercial Building Standard for Telecommunications Pathways and Spaces,

TIA 569-B Commercial Building Standard for Telecommunica-tions
Pathways and Spaces,

TIA 569-B.1 Part 1, General Requirements, Commercial Building
Telecommunications Cabling,

TIA 574-9 Position Non-Synchronous Interface between Data Terminal
equipment and Data Circuit Terminating Equipment
Employing Serial Binary Interchange,

TIA-590 Standard for Physical Location and Protection of Below
Ground Fiber Optic Cable Plant,

TIA 606A Administration Standard for the Telecommuni-cations
Infrastructure of Communications Buildings,

TIA J-STD-607 Commercial Building Grounding (Earthing) and Bonding
Requirements for Telecommunications,

EIA 613 High Speed Serial Interface for Data Terminal Equipment
and Data Circuit Terminal Equipment,

TIA 668-527 Wireless Features Description,

TIA 758 Customer Owned Outside Plant Telecommunications
Infrastructure Standard,

TIA 942 Telecommunications Infrastructure Standard for Data
Centers,

TIA 1152 Requirements for Field Testing Instruments and
Measurements for Balanced Twisted Pair Cabling,

TIA 1179 Healthcare Facility Telecommunications Infrastructure
Standard,

BS EN 50109-2(*) Hand Crimping Tools - Tools for The Crimp Termination
of Electric Cables and Wires for Low Frequency and Radio
Frequency Applications - All Parts & Sections.

American Society of Mechanical Engineers (ASME) - the follow-ing ASME Standards
apply to this document:

Standard 17.4 Guide for Emergency Personnel,

Standard 17.5 Elevator & Escalator Equipment (prohibited of installing
non-elevator equipment in Elevator Equipment Room /
Mechanical Penthouse).

American Society of Testing Material (ASTM) - the following ASTM Standards apply
to this document:

B1 Standard Specification for Hard Drawn Copper Wire,

B8 Standard Specification for Concentric-Lay-Stranded
Copper Conductors, Hard, Medium Hard, or Soft,

B258 Standard Specification for Standard Nominal Diameters and Cross-Sectional Areas AWG Sizes of Round Wires Used as Electrical Conductors,

D709 Laminated Thermosetting Materials,

D1557 Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft³) (2700 kN-m/m³),

D2301 Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape,

D4566 Standard Test Methods for Electrical Performance Properties of Insulation and Jackets for Telecommunications Wire and Cable.

American Telephone and Telegraph Corporation (AT&T)- the following AT&T Publications apply to this document (copies may be obtained at <https://ebiznet.sbc.com/SBCNEBS/>):

ATT-TP-76200 Network Equipment and Power Grounding, Environmental, and Physical Design Requirements,

ATT-TP-76305 Common Systems Cable and Wire Installation and Removal Requirements - Cable Racks and Raceways,

ATT-TP-76300 AT&T Installation Requirements (and ICRN's Change Notices),

ATT-TP-76306 Electrostatic Discharge Control,

ATT-TP-76400 Detail Engineering Requirement (and ICRN's Change Notices),

ATT-TP-76402 AT&T Raised Access Floor Engineering and Installation Requirements,

ATT-TP-76405 Technical Requirements for Supplemental Cooling Systems in Network Equipment Environments,

ATT-TP-76416 Grounding and Bonding Requirements for Network Facilities,

ATT-TP-76440 Ethernet Copper Cable & Ethernet Copper Assembly Specification,

ATT-TP-76450 Common Systems Equipment Interconnection Standards for the AT&T Local Exchange Companies and AT&T Corporation,

ATT-TP-76461 Fiber Optic Cleaning,

ATT-TP-76900 AT&T Installation Testing Requirement,

ATT-TP-76911 AT&T LEC Technical Publication Notice,

ATT-812-000-705 Technical Requirements for Thermal Management Systems in Network Equipment Environments.

(NOTE: SMCS-0050P2H3a - will evaluate contractor considered and produced equal document(s) to the aforementioned AT&T Commercial Publications, on a case-by-case basis as long as each supplied document is complete and on the originator (not the contractor or OEM) letterhead and enclosed in its published technical binder.

Building Industries Communications Services Installation (BICSI) - the following BICSI Standards apply to this document:

All standards for smart building wiring, connections and devices for commercial and medical facilities,

Standards for Structured Building Cable Topologies,

Standards in consort with ANSI/EIA/TIA.

Institute of Electrical and Electronics Engineers (IEEE) - the following IEEE Standards apply to this document:

C62.41 Surge Voltages in Low Voltage AC Power Circuits

SO/TR 21730 Use of mobile wireless communication and computing technology in healthcare facilities, Recommendations for electromagnetic compatibility (management of unintentional electromagnetic interference) with medical devices,

81-1983 IEEE Guide for Measuring Earth Resistivity, Ground Impedance and Earth Surface Potentials of a Ground System,

100 The Authoritative Dictionary of IEEE Standards and Terms,

0739-5175 Medical Grade, Mission Critical and Wireless Networks,

1100 Powering and Grounding Sensitive Electronic Equipment.

Insulated Cable Engineers Association (ICEA) - the following ICEA Standards apply to this document:

S-87-640 Optical Fiber Outside Plant Communications Cable,

S-98-688 Broadband Twisted Pair Telecommunication Cable, Aircore, Polyolefin Insulated, Copper Conductors Technical Requirements,

S-99-689 Broadband Twisted Pair Telecommunication Cable Filled, Polyolefin Insulated, Copper Conductors Technical Requirements.

National Electrical Manufacturers Association (NEMA) - the following NEMA Standards form a part of this document:

C62.61 American National Standard for Gas Tube Surge Arresters on Wire Line Telephone Circuit,

FB-1 Fittings, Cast Metal Boxes and Conduit Bodies for
Conduit, Metallic Tubing and Cable,

OS-1 Sheet Steel Outlet Boxes, Device Boxes, Covers and Box
Supports,

TC-3PVC Fittings for Use with Rigid PVC Conduit and Tubing.

NFPA - the following NFPA Standards apply to this document:

69 National Electrical Safety Code (NES, current date of
issue),

70 NEC (current date of issue); Articles 300, 517, 645, 700
& 800,

72 National Fire Alarm and Signaling Code,

75 Standard for Protection of Electronic Computer Data
Processing Equipment,

76 Standard for the Fire Protection of Telecommunications
Facilities,

77 Recommended Practice on Static Electricity,

99 Healthcare Facilities,

101 Life Safety Code,

1221 Emergency Communications Systems.

The Society for Protective Coatings (SSPC) - the following SSPC Standard apply
to this document: SSPC SP 6/NACE No.3 - Commercial Blast Cleaning.

International Telecommunication Union (ITU) - the following ITU Standard applies
to this document: Telecommunication Standardization Sector (ITU-T).

1.5 QUALIFICATIONS (OEM AND SERVICES)

- A. MANUFACTURERS (refer to SECTION 2, PARAGRAPH 2.3): The OEM shall have had
experience with three (3) or more installations of systems of comparable size
and interfacing complexity with regards to type and design as specified herein.
Each of these installations shall have performed satisfactorily for at least two
(2) years in seriatim after final acceptance by the user. Include the names,
locations and point of contact for these installations as a part of the
technical submittal (see PART 1, PARAGRAPH 1.8).
1. The Contractor shall submit certified documentation they have been an
authorized distributor and service organization for the OEM for a minimum of
three (3) years; the:
 - b. Contractor shall provide OEM certification they are authorized to pass
thru the OEM's warranty of the installed equipment to VA,
 - c. OEM and Contractor shall accept complete responsibility for the design,
installation, certification, operation, and physical support for the
System.

2. The Contractor's Communications Engineers and Technicians as-signed to the System shall be fully trained, qualified, and certified by the OEM on the engineering, installation, operation, and testing of the System. The Contractor shall provide formal written evidence of current OEM certification(s) for the installer(s) as a part of the technical submittal (see PART 1, PARAGRAPH 1.8). VA will not approve technical submittals without this information.
3. The OEM shall ensure that all management, sales, engineering and installation personnel have read and understand the requirements of this document before the system is provided. The Contractor shall furnish a written statement attesting this requirement as a part of the technical submittal (see PART 1, PARAGRAPH 1.8) that includes each name and certification, in-cluding the OEMs. VA will not approve technical submittals without this information.

B. SERVICES

1. The System will be delivered free of engineering, manufacturing, installation, and functional defects. It shall be designed, eng-ineered and installed for ease of operation, maintenance, and testing.
2. Provide communications cabling, systems, communications equipment fittings, equipment, conduits, wireways and accessories in ac-cordance with the specifications and drawings. Capacities and ratings of conduit, wireways, cable, locations, other items and arrangements for the specified requirement(s) shall be shown on drawings AND CO-ORDINATED WITH AND LIKE IDENTIFIED IN THE SPECI-FICATION CHAPTERS/PARAGRAPHS FOR THE PARTICULAR SYSTEM.

1.6 CODES AND PERMITS (RE PART 1, PARAGRAPHS 1.4.A, D&E. & 1.8.A)

- A. Provide all necessary permits and schedule all inspections as ident-ified in the contract's milestone chart, so that the system is proof of performance tested and ready for operation on a date directed by VA.
- B. The OEM and Contractor are responsible to adhere to all codes, standards and requirements described herein.
- C. The Contractor shall display all applicable national, state and local licenses and permits on the Job Site at the direction of the COTR.

1.7 SCHEDULING

- A. After the award of contract, the Contractor shall prepare detailed and proposed Contractor Project Schedule (CPS - aka milestone chart) using "Microsoft Project" software (or RE approved equivalent). The CPS shall:
 1. Indicate detailed activities for the projected life of the project,
 2. Consist of specific activities and their restraining relationships,
 3. Detail manpower usage throughout the project,

4. Show expected completed portions of the system, in percentage of the total system, which will be available for interim testing / technical investigation at the direction of the COTR.

B. It is the responsibility of the Contractor to coordinate all work with the other trades for scheduling, rough-in, and finishing all work specified. The VA will not be liable for any additional costs due to missed dates or poor coordination of the Contractor or their supplying trades.

1.8 REVIEW OF CONTRACT DRAWINGS, EQUIPMENT DATA AND SYSTEM OPERATION SUB-MITTALS (AKA TECHNICAL SUBMITTAL[S] - DO NOT DELETE)

A. SPECIFICATION ORDER OF PRECEDENCE (Re PART 1, PARAGRAPHS 1.4.A,D,E & 1.6): In the event of a conflict between the text of these documents and the Project's Contract Drawings outlined and / or cited herein; THE TEXT OF DIVISION 27 SECTIONS TAKES PRECEDENCE OVER THE CONTRACT DRAWINGS. HOWEVER, NOTHING HEREIN WILL SUPERSEDE APPLICABLE EMERGENCY AND SAFETY LAWS AND REGULATIONS, SPECIFICALLY NATIONAL AND / OR LOCAL LIFE AND PUBLIC SAFETY CODES.

1. The Local Fire Marshall and/or VA Public Safety Officer are the only authorities that may modify this document's EMERGENCY CODE COMPLIANCE REQUIREMENTS, on a case by case basis, in writing, with consensus with CFM's PM, PE and/or RE AND SMCS-0050P2H3a.

2. CFM's PM, PE & RE are the only approving authority's for amendments to this document that may be granted, on a case by case basis, in writing, with technical consensus by SCMS-0050P2H3a and identified Facility Project Personnel.

3. It is the responsibility of the VA to clarify all issues with this document. When a concern arises - the Contractor shall notify the COTR, in writing, on a case by case basis. The COTR will render the VA's Official clarification and answer to the Contractor, in writing, covering each submitted question.

4. The Contractor is again cautioned to obtain in writing, all approvals for system changes relating to the published contract specifications and drawings, from the COTR BEFORE proceeding with the change.

5. Interpret references in these publications to the "AHJ (Re PART 1, PARAGRAPHS D, 1.3.B.1 & 1.4.B.a. (7) (a)," or words of similar value, to mean the CFM: PM, RE or CO for Project / Contract Guidance; AND VACO SMCS for Technical Concurrence.

B. SUBMITTALS - in addition with the requirements with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

(Note: The Contractor is encouraged, but not required, to submit separate technical submittal(s) outlining additional or separate technical approach(s) to the system requirements stated here-in as long as each alternate technical

document(s) is complete, separate, and submitted in precisely the same manner as outlined herein and meets the System Performance Standards. VA will review and rate each received alternate technical submittal in exactly the same procedure as outlined herein. Partial, add-on, or addenda type alternates will not be accepted or reviewed)

1. VA reserves the right to request the OEM to arrange for a VA Re-presentative (that includes SMCS-0050P2H3a) to see typical active systems in operation, when there has been no prior experience with the OEM or the type of equipment being submitted.
2. VA's approval (that includes SMCS-0050P2H3a certifications) shall be obtained for all equipment and material before delivery to the job site. Delivery, storage, or installation of equipment or material which has not had prior approval will not be permitted at the job site.
3. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
 - a. Mark the submittals, "SUBMITTED UNDER SECTION _____ ."
 - b. Submittals shall be marked to show specification reference including the section and paragraph numbers ALONG WITH CON-TRACT DRAWING REFERENCE.
 - c. Submit each section separately.
4. Each submittal shall include the following: Information that confirms compliance with contract require-ments. Include the OEM's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required draw-ings, and other Contractor data necessary for VA to ascertain the proposed equipment, materials and system design comply with the system's specification requirements.
 - a. OEM Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted THAT INLUDES ALL NECESSARY CODE COMPLIANCE FOR EACH ITEM OF SUBMITTED EQUIPMENT.
 - b. IF THE SUPPLIED CUTS DO NOT CONTAIN CODE COMPLIANCE (ie FCC, UL, IEEE, etc.), THE CONTACTOR SHALL PROVIDE THE TESTING LABATORY COMPLIANCE SHEETS FOR EACH SUBMITTED EQUIPMENT ITEM.
 - c. Surveys Required as a Part of the Technical Submittal:
 - 1) The Contractor shall provide the following System surveys that depict various system features and capacities required in addition to the on-site survey requirements described herein. Each survey shall be in writing and contain the following information (the formats are

suggestions and may be used for the initial Technical Submittal Survey requirements), as a minimum.

- 2) DAS Cable Design Plan: The DAS Communications Cabling System is in addition to the OEM and Contractor designed functional "Outside and Inside Vertical Riser (Backbone)" Conduit and shall occupy only conduits that were designated "for the DAS Communications Cable System."
 - a) The DAS Communications Cable System is to be provided as a part of the technical proposal that will form a fully viable and functioning TIP system.
 - b) DAS Communications Cable Plant Grounding: REFER TO 27 05 26, GROUNDING AND BONDING for COMMUNICATIONS SYSTEMS for MINIMUM DAS Grounding and Bonding requirements.
- 3) The minimum required DAS Cable Plant Equipment Locations (these are in addition to CFM PG 18-10, Electrical Design Manual, Articles 7 & 8, and Telecommunications One-Line Topology found in the end as a pull-out and Acronym Explanations; AND THE EQUIPMENT ROOM SIZING & LOCATIONS DEPICTED IN OI&T DESIGN GUIDE PG-18-12) are:

(Indicate here and at each point on the contract drawings)

EQUIPPED ITEM	CAPACITY	LOCATIONS
SPEP Points of Presence		
Required Location "A"		
Required Location "B"		
DAS Interface Location(s)		
Weatherproofing		
Security Requirements (Physical)		
MHs used to meet system design		
1.		
2.		
Others		
DAS Interface Location(s)		
Weatherproofing		
Security Requirements (Physical)		
Outside Grab / Pull Boxes used to meet system design		

1.		
2.		
Others		
DAS Interface Location(s)		
Weatherproofing		
Security Requirements (Physical)		
ENTRs (aka DEMARC - NOTE : THE DEMARC IS TO BE LOCATED IN THE MCR)		
Required Location "A"		
Required Location "B"		
Weatherproofing		
DAS Interface Location(s)		
Security Requirements (Physical)		
TER (if used)		
DAS Interface Location(s)		
Backup Batteries (aka UPS)		
Backup Generators (if needed)		
Telephone Console Operators Room		
Telephone Supervisor's Room / Office		
Main Power Source / Location		
Security Requirements (Physical)		
Emergency Systems Management		
Elevator Cab(s)		
Emergency Room		
Boiler Plant		
Security Control Room		
Nurses Station(s)		
Others		
MCR		
MCROR		
Backup Computer Room (if required)		
MCR Supervisor's Room / Office		
MCR's Operations Room / Office		
MCR's Sectional Room / Offices		

DAS Interface Location(s)		
Security Requirements (Physical)		
PCR		
SSCR		
Control Console(s) locations		
DAS Interface Location(s)		
Security Requirements (Physical)		
Others		
ECR		
Control Console(s) locations		
Main Power Source / Location		
DAS Interface Location(s)		
Security Requirements (Physical)		
Emergency / Disaster Control Room		
Main Power Source / Location		
DAS Interface Location(s)		
Security Requirements (Physical)		
STR(s), Equipment Rack/Cabinet(s) Location(s) & UPS Cabinet(s)		
1.		
2.		
Others		
Main Power Source / Location		
IDF & TIP Interface Location(s)		
Security Requirements (Physical)		
DAS interface location(s)		
NSs		
1.		
2.		
Others:		
Main Power Source / Location		
DAS Interface Location(s)		

Security Requirements (Physical)		
HER		
HEC(s)		
Emergency Communication Cabinet(s), Wall Enclosure(s), Roof, PCR & MCR cabling		
Others		
Main Power Source / Location		
DAS Interface Location(s)		
Security Requirements (Physical)		
Other locations required to meet system design		
1.		
2.		
3.		
DAS Telecommunications Outlets (TCOs)Locations		
<u>Depict each DAS TCO size and activated jacks here AND on the contract drawings for each TCO used in each room served by the Outside and Inside TIP</u>		
DAS Interface Location(s)		
1. Basement		
2. Ground Floor		
3. Each Additional Floor		
4. Interstitials		
5. Roof		
6. Others		

4) Vertical Riser (Backbone) DAS Cable System Design Plan:

- a) An OEM and Contractor designed functional DAS Cable System in accordance to the overall plan and plants that will form a part of the Facility's TIP shall be provided as a part of the technical proposal. A specific functioning Voice, Data and Special (FMS) DAS Communications cable distribution system shall coincide with the total growth items as described herein. It is the Contractor's responsibility to provide the Systems' entire DAS Cable System and

accessory requirements and engineer a functional DAS distribution system and equipment requirement plan.

- b) The minimum required DAS System Backbone Communications Cable and Equipment Locations are in addition to the locations described in CFM PG 18-10, Electrical Design Manual, Articles 7 & 8, and Telecommunications One-Line Topology found in the same document's end as a pull-out and Acronym Explanations.
- c) The minimum required "Vertical" DAS Cable Plant Equipment Locations (these are in addition to those described in CFM PG 18-10, Electrical Design Manual, Articles 7 & 8, and Telecommunications One-Line Topology found in the end as a pull-out and Acronym Explanations; AND THE EQUIPMENT ROOM SIZING & LOCATIONS DEPICTED IN OI&T DESIGN GUIDE PG-18-12) are:

(Indicate here and at each point on the contract drawings)

EQUIPPED ITEM	CAPACITY	50% GROWTH
STRs (each floor's vertical stacked TR)		
Elevator Core		
Penthouse(s)		
Basement		
Other		

5) Horizontal DAS Cable System Design Plan:

- a) An OEM and Contractor designed functional DAS Cable System in accordance to the overall plan and plants shall be provided as a part of the technical proposal. A specific functioning Voice, Data and Special (FMS) Communications DAS cable distribution system shall coincide with the total growth items as described herein. It is the Contractor's responsibility to provide the Systems' entire DAS Cable System and accessory requirements and engineer a functional TIP distribution system and equipment requirement plan.
- b) The minimum required DAS System Horizontal Communications Cable and Equipment Locations are in addition to the ones identified in CFM PG 18-10, Electrical Design Manual, Articles 7 & 8, and Telecommunications One-Line Topology found in the same document's end as a pull-out and Acronym Explanations.
- c) The minimum required "Horizontal" DAS Cable Plant Equipment Locations are in addition to the ones identified in CFM PG 18-10, Electrical Design Manual, Articles 7 & 8, and Telecommunications One-Line Topology found in the end as a pull-out and Acronym

Explanations; AND THE EQUIPMENT ROOM SIZING & LOCATIONS DEPICTED IN
OI&T DESIGN GUIDE PG-18-12).

d) Horizontal DAS Lateral Cables, at a minimum:

(Indicate here and at each point on the contract drawings)

EQUIPPED ITEM	EXPLANATION		5
TR NR	Identifies the number of cable pairs required to be provided for each floor.		
N	Identifies the number of cable pairs required to be provided for each floor.		
NUMBER OF CABLES	Identifies the number of strands in each run of fiber optic cable (TWO STRANDS PER		

	CABLE PAIR)		
TCOS (Room, Ceiling, Wall, etc)	Identifies the number of cable pairs required to be provided for each TCO.		
INSTALLED METHOD	Identifies the method of installation in accordance with as designated herein		
D	Interface Location(s)		

e. DAS Devices(s): The Contractor shall clearly and fully indicate this category for each device location and compare the total count to the locations identified as a part of the technical submittal and the contract drawings. Additionally, the Contractor shall indicate the total number of spares.

EQUIPPED ITEM	EXPLANATION	C	S
BUILDING	Identifies the building by number, title, or location, and MDF or IDF cabling is provided from		
BUILDING FLOOR	Identifies the floor by number (i.e. 1st, 2nd, etc.)		
TR RM NR	Identifies the room, by number, from which cabling shall be installed		
NUMBER OF	Identifies the number of jacks activated on each TCO along the DAS distribution		

ACTIVE TCOS	horizontal and vertical cable plant		
INSTALLED METHOD	Identifies the method of installation in accordance with as designated herein		
BIM Manager/Revit Specialist – West Sacramento BIM Manager or Revit Specialist with 10+ years of extensive architectural experience on large-scale commercial projects. Responsible for developing office Revit template standards and assisting with implementation. Represent company Revit committee and create Revit families in response to project needs. Assist project teams in Revit project setup for Architectural and Engineering disciplines. Project assistance including modeling and detailing with Revit as well as additional project related tasks as needed. Manage and distribute coordinated digital documents to the project team. This is a full-time position in our West Sacramento office. CSHQA is an EOE/AA employer.	Interface Location(s)		

f. Equipment Parts List (aka BOMs)

- 1) Each interface / connection point shall be provided with internal and external items to maintain a neat and orderly system of DAS equipment, wire, cable and conduit connections and routing that are in addition to

the locations in CFM's PG-18-10 Electrical Design Manual for VA Facilities Table 7-1 and Appendix B, Suggested Telecommunications Online Topology for technical assistance in identifying required TIP Interface Points and interconnecting conduit requirements. Identify and record for each SPDP and ENTR(s - aka DEMARC), TER, TOR, MCR, MCOR, PCR, SSC, ECR, ST(s), NS(s), HER, HEC, HEIC RPEC and DAS Cable Plant / Room / Area TCOs.

- 2) Contractor Furnished Equipment Lists (CFELs-BOMS): (See PART 1, SECTION 27 15 00, PARAGRAPH 1.8.4.f.1) for additional instructions)
 - a) The Contractor is required to provide a list of the DAS CFE equipment to be furnished. The quantity, make and model number of each DAS item is required. Select the required equipment items quantities that will satisfy the needs of the system as described herein and with the OEM's concurrence applied to the list(s), in writing.
 - b) The following equipment items are the minimum requirements of VA to provide an acceptable system described herein.

<u>1.</u> CFE ITEM NUMBER	NUMBER OF UNITS	DESCRIPTION
1.	As Required	SPEP Point(s) of entrance
2.	As Required	ENT (DEMARC to be in the //TER// //MCR//
2.	As Required	TER / TOR
3.	As Required	TCR
4.	As Required	MCR
5.	As Required	PCR
6.	As Required	ECR
7.	As Required	SSC
8.	As Required	PTS
9.	As Required	STRs for each floor
10.	As Required	NSs
11.	As Required	NER
12.m	As Required	HE
12.a	As Required	DAS TCO(s)
12.a.1	As Required	DAS Conduit(s)
12.a.1.a	As Required	Rigid
12.a.1.b	As Required	PVC
12.a.1.c	As Required	Interduct

12.a.1.d	As Required	Greenfield
12.a.1.e	As Required	Plastic Covered Flex
12.a.1.f	As Required	BX
12.a.1.g	As Required	OTHER TYPES
13.	As Required	DAS Cable Duct
13.a	As Required	Wire Duct
13.b	As Required	Path Ways
13.c	As Required	Race Ways
13.d	As Required	Wire Ways
14.	As Required	Telecommunications Approved Partitioned Cable Trays
14.a	As Required	Telecommunications Approved "Baskets"
14.b	As Required	Telecommunications Approved "Cable Ladders"
14.c	As Required	"Cable Hook(s) - ONLY WHEN SMCS 005OP2H3 APPROVED
14.d	As Required	"Cable Hanger(s) - ONLY WHEN SMCS 005OP2H3 APPROVED
15.e	As Required	"O" Ring(s) - ONLY WHEN SCMS 005OP2HE APPROVED
16.	As Required	Mounting Assembly(s)
16.a	As Required	Terminating Assembly(s)
17.	As Required	Cabinet(s) Assembly(s)
17.a	As Required	Environmental Cabinet(s) Assembly(s)
17.b	As Required	Distribution / Interface Cabinet(s)
17.c	As Required	Equipment Rack (aka Radio Relay)
18.	As Required	CCS Assembly(s)
18.a	As Required	Vertical
18.b	As Required	Horizontal
18.c	As Required	Room
18.d	As Required	Special Interface
19.	As Required	Distribution Frames
19.a	As Required	DAS Voice
19.b	As Required	DAS Data
19.c	As Required	Security

19.d	As Required	Emergency
19.e	As Required	Critical
20.	As Required	DAS Distribution Cables
20.a	As Required	Voice
20.b	As Required	Data
20.c	As Required	TWP
20.d	As Required	STP
20.e	As Required	Fiber-optic
20.f	As Required	Multi-mode
20.g	As Required	Single-mode
20.h	As Required	Baseband
20.i	As Required	Audio
20.j	As Required	Video
20.k	As Required	Other
21.a	As Required	DAS Security
21.b	As Required	TWP
21.c	As Required	STP
21.d	As Required	Fiber-optic
21.e	As Required	Multi-mode
21.f	As Required	Single-mode
21.g	As Required	Baseband
21.h	As Required	Audio
21.i	As Required	Video
21.j	As Required	Other
22.	As Required	DAS Emergency
22.a	As Required	TWP
22.b	As Required	STP
22.c	As Required	Fiber-optic
22.d	As Required	Multi-mode
22.e	As Required	Single-mode
22.f	As Required	Baseband
22.g	As Required	Audio
22.h	As Required	Video
22.i	As Required	Other
22.	As Required	DAS Critical
23.a	As Required	Emergency
23.b	As Required	TWP

23.c	As Required	STP
23.d	As Required	Fiber-optic
23.e	As Required	Multi-mode
23.f	As Required	Single-mode
23.g	As Required	Baseband
23.h	As Required	Audio
23.i	As Required	Video
23.j	As Required	Other
24.	As Required	DAS Special Communications
24.a	As Required	TWP
24.b	As Required	STP
24.c	As Required	Fiber-optic
24.d	As Required	Multi-mode
24.e	As Required	Single-mode
24.f	As Required	Baseband
24.g	As Required	Audio
24.h	As Required	Video
24.i	As Required	Coaxial (RF, Video, etc)
24j.j	As Required	Other
25.	As Required	DAS TCO(s) Connections / Patch
26.	As Required	STR(s)
27.	As Required	Environmental Requirements
28.	As Required	UPS Requirements
29.	As Required	Communications Grounding System
30.	1 each	Installation Kit
31.	1 each	Wire Management System
32.	As Required	DAS / TIP Interface Points and Systems
33. SPECIAL	Number Required by Specification and OEM	Provide System Spares as indicated in each equipment description

3) Government Furnished Equipment Lists (GFELs): (See PART 1, SECTION 27 15 00, PARAGRAPH 1.8.4.f.2) for additional instructions)

- a) The Contractor is required to provide a list of the DAS GFE equipment that has be approved to be used in the system. The quantity, make and model number of each item is required. Select the required equipment items quantities that will satisfy the needs

of the system as described herein and with the RE's & OEM's concurrence applied to the list(s), in writing. All GFE that is approved to be used in the system will have the same system Gruanty applied as described herein.

- b) The following DAS GFE equipment items are the ones that have been approved to meet the minimum requirements of VA to provide an acceptable system described herein.

c) GFE ITEM NUMBER	NUMBER OF UNITS	DESCRIPTION
<u>1.</u>		

g. Shop Drawings: Shall include wiring diagrams and installation details/pictorial of equipment indicating proposed location, layout and arrangement, control panels, accessories, piping, ductwork and other items that must be shown to ensure a co-ordinated installation.

- 1) Wiring diagrams shall identify circuit terminals and indicate the internal wiring for each item of equipment and the interconnection between each item of equipment.

a) Include elementary and interconnection wiring diagrams for communication and signal systems, control system and equipment assemblies.

b) All terminal points and wiring shall be identified on wiring diagrams and crossed referenced to the appropriate SPECIFICATION REQUIREMENT

- 2) Drawings shall indicate adequate clearance for operation, maintenance, and replacement of operating equipment devices.

- 3) Submittals shall include each nameplate data, size, capacity, applicable federal, military, industry, and technical society publication references.

- 4) The Contractor shall "update" the submitted shop drawings and wiring diagrams to form a "finished" system technical package as described herein.

h. Singular Number: Where any device or part of equipment is referred to herein in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

5. Certificates - provide the following certifications:

- a. Written certification from the OEM indicating the proposed supervisor of the installation and the proposed provider of the contract maintenance are

authorized representatives of the OEM. Include the individual's exact name and address and OEM credentials in the certification.

- b. Written certification from the OEM the installed wiring and connections/diagrams meet National and/or Government Life Safety Guidelines, NFPA, NEC, UL, this specification, and JCAHCO requirements and instructions, recommendations, and guidance set forth by the OEM for the proper performance of the System as described herein. VA will not approve any technical submittal without this certification.
 - c. Pre-acceptance Certification: This Contractor written certification shall be made in accordance with the test procedure out-lined in PART 3 and the material, system and test readings are in accordance with the specifications and drawings and have been properly installed. The Contractor shall include a statement He/ She understands this requirement and will comply at the time stated herein and approved by the RE. VA will not approve any final testing/ system proof of performance and SMCS compliance without this certification.
6. Manuals - Submit in addition to the requirements outlined in SECTION 01 00 00, GENERAL REQUIREMENTS, provide:
- a. Maintenance and Operation Manuals - submit as required for systems and equipment specified in the technical sections. Furnish four (4) copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one (1) complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.
 - b. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.
 - c. Provide a "Table of Contents" and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded.
 - d. The manuals shall include:
 - 1) Internal and interconnecting wiring and control diagrams with data to explain detailed system operation and control of the equipment.
 - 2) A control sequence describing startup, operation, and shut-down.

- 3) Description of the function of each principal item of equipment.
 - 4) Installation and maintenance instructions.
 - 5) Safety precautions.
 - 6) Drawings and illustrations.
 - 7) Testing methods.
 - 8) Performance data.
 - 9) Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.
 - 10) Appendix - list qualified permanent servicing organizations for support of the equipment, including addresses and certified qualifications.
7. Approvals will be based on complete submission of manuals together with shop drawings.
8. Samples - A sample of each of the following items shall be furnished to the COTR for approval and inventory prior to installation:
- a. One (1) each TCO Wall Outlet Box 4" x 4"x 2.5" with a six (6) jack outlet body with:

a. Two (2) each	telephone (or voice) RJ45 jacks installed and activated.
b. Two (2) each	multi-pin (or data) RJ45 jacks installed and activated.
c. Cover Plate	installed and each jack/port labeled.
d. Fiber optic	LC jack(s) in-stalled and activated.
e. Baseband, RF (F)/Video	RF (F), video (BNC)/audio (XL) jack(s) installed and activated. (NOTE - IF THE FIBER OPTIC AND BASEBAND [RF, AUDIO] ARE NOT REQUIRED; EACH TCO SHALL BE PROVIDED WITH TWO UNIVERSAL JACK PLUGS. THESE EXTRA PLUGS SHALL BE PROVIDED TO THE RE WITH A SEPARATE INVENTORY SHEET AND BOXED)

- b. One (1) each data patch panel, punch block or connection device CROSS CONNECTION SYSTEM (CCS) with RJ45 connectors installed.
- c. One (1) each telephone CCS with Insulation Displacement Connectors (IDC) and/or RJ45 connectors and cable terminal and management equipment installed.
- d. One (1) each fiber optic CCS patch panel or breakout box with cable management equipment and LC connectors installed.
- e. 305 mm (1 ft.) section of each type of conduit and pathway coupling, bushing and termination fitting indicating the UL or approved alternate testing seal.
- f. 610 mm (2 ft.) section of each raceway and pathway anchors, clamps and supports.
- g. One (1) each package of duct sealing compound.

- h. One (1) sheet of labeling and nomenclature design(s) and scheme(s).
- i. 610 mm (2 ft.) section of each copper cable to be used with OEM cable sweep tags specified herein with RJ-45 connectors installed.
- j. 610 mm (2 ft.) section of each fiber optic cable to be used with OEM cable sweep tags as specified herein with LC connectors installed.
- k. 610 mm (2 ft.) section of each analog RF, video coaxial and audio cable to be used with OEM cable sweep tags as specified herein and OEM specified connectors installed.

1.9 PROJECT RECORD DOCUMENTS (AKA AS BUILTS):

- A. In addition to the requirements of SECTION 01 33 23 - SHOP DRAWINGS, PRODUCT DATA AND SAMPLES, the following information is made a part of this document's requirements:
- B. Throughout progress of the Work, maintain an accurate record of changes in and on Contract Documents. Upon completion of Work, transfer recorded changes to a set of Project Record Documents.
- C. The floorplans shall be marked in pen to include the minimum following:
 - 1. Device locations with applied UL labels.
 - 2. Conduit, Cable, Junction Boxes, Interface Points and specific locations.
 - 3. SPSP and specific locations.
 - 4. Manhole(s) and specific location(s).
 - 5. Outside Communication Cable Ducts.
 - 6. ENTR (aka DEMARC) and specific location(s).
 - 7. TER interface equipment and specific location.
 - 8. PA interface equipment and specific location
 - 9. TCR interface equipment and specific location.
 - 10. MCR interface equipment and specific location.
 - 11. MCOR interface equipment and specific location.
 - 12. PCR interface equipment and specific location.
 - 13. ECR interface equipment and specific location.
 - 14. PTS interface equipment and specific location.
 - 15. SSC interface equipment and specific location
 - 16. STR interface equipment and specific locations.
 - 17. NS interface equipment and specific locations.
 - 18. HER interface equipment and specific location.
 - 19. HEC interface equipment and specific location.
 - 20. HEIC interface equipment and specific location.
 - 21. RPEC interface equipment and specific location.
 - 22. TCO equipment and specific locations.
 - 23. Inside Vertical and Horizontal conduit locations.

- 24. Wiring diagram(s).
- 25. Labeling and administration documentation.
- 26. Warranty certificate.
- 27. System test results.
- 28. System Completion MOU (if accomplished).
- D. Fifteen (15) working days prior to the acceptance test, the Contractor shall deliver four (4) complete sets of the Record Wiring Diagrams of the System to the RE. The diagrams shall show all inputs and outputs of electronic and passive equipment correctly identified according to the markers installed on the interconnecting cables, Equipment and room / area locations.
- E. The Record Wiring Diagrams shall be in hard copy and two (2) compact disk (CD) copies properly formatted to match the Facility's current operating version of Computer Aided Drafting (AutoCAD)//Rev IT 3D// system. The COTR will verify and inform the Contractor of the version of AutoCAD being used by the Facility.

1.10 USE OF THE SITE

- A. Use of the site shall be at the COTR's direction.
- B. Coordinate with the COTR for lay-down areas for product storage and administration areas.
- C. Coordinate work with the PC and their sub-contractors.
- D. Access to buildings wherein the work is performed shall be directed by the PC.

1.11 EQUIPMENT

- A. EQUIPMENT REQUIREMENTS: Where variations from the contract requirements are requested in accordance with the GENERAL CONDITIONS and SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.
- B. EQUIPMENT PROTECTION - equipment and materials shall be protected during shipment and storage against theft, physical damage, dirt, moisture, cold and rain:
 - 1. During installation, enclosures, equipment, controls, controllers, circuit protective devices, and other like items, shall be protected against entry of foreign matter; and be vacuum cleaned both inside and outside before testing and operating and repainting if required.
 - 2. Damaged equipment shall be, as determined by the COTR placed in first class operating condition or be returned to the source of supply for repair or replacement.
 - 3. Painted surfaces shall be protected with factory installed removable heavy craft paper, sheet vinyl or equal.

4. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas is not obvious.

C. EQUIPMENT INSTALLATION (for additional requirements, see PART 3): Equipment location shall be as close as practical to locations shown on the drawings.

1. Inaccessible Equipment - where the Government determines the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and re-installed as directed by the COTR at no additional cost to the Government.
2. "Conveniently accessible" - equipment is defined as being capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to: motors, pumps, belt guards, transformers, piping, ductwork, hard ceiling, piping, conduit, raceways, etc.

D. EQUIPMENT IDENTIFICATION - shall be installed with identification sign(s) and nameplate(s) which clearly indicate information required for use and maintenance of equipment; including, but not limited to:

1. Service Panels,
2. Faceplates.
3. Cross-connecting and jacks,
4. TIP cables,
5. Conduits and sleeves,
6. Telecommunication Grounding Bars, Conductors, Connections and System,
7. Firestop certifications,
8. Nameplates shall be laminated black phenolic resin with a white core with engraved lettering, a minimum of 6 mm (1/4 inch) high. Secure nameplates with screws. Nameplates that are furnished by the manufacturer as a standard catalog item, or where other method of identification is herein specified, are exceptions that will be considered by the RE and if approved, the Contractor will be given the RE's decision in writing.

E. DELIVERY, STORAGE, AND HANDLING

1. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft.
2. Store products in original containers.
3. Coordinate with the COTR for product storage. There may be little or no storage space available on site. Plan to potentially store materials off site.
4. Do not install damaged products. Remove damaged products from the site and replaced with new product at no cost to the Owner.

1.12 WORK PERFORMANCE

- A. Job site safety and worker safety is the responsibility of the Contractor.
- B. For work on existing stations, arrange, phase and perform work to assure communications service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- C. New work shall be installed and connected to existing work neatly and carefully. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- D. Coordinate location of equipment and pathways with other trades to minimize interferences. See the GENERAL CONDITIONS.

1.13 VA ACCEPTANCE OF SYSTEM MEMORANDUM OF UNDERSTANDING (MOU), CONTRACTORS WARRANTY/GUARANTEE

- A. MOU - shall be accomplished with written consensus and signatures of the PC; CFM RE / PM / PE / A/E; Facility's PM, CO / COTR & where re-quired, SMCS 0050P2H3a.
 - 1. Clearly states each system / equipment item / condition(s) needing attention.
 - 2. Attach the Punch List:
 - a. Initial Inspection document developed by SMCS 0050P2H3 during system proof of performance testing,
 - b. Contractor's documented compliance - listed item by item recorded and verified by VA's RE and Facility's Manager on the original Punch List.
 - 3. VA's Condition of Acceptance of the system language to be the last paragraph of the MOU stating (see PART 3, 3.2.E, Acceptance Test Conclusion for VA "Conditions of Acceptance").
 - a. Without acceptance - until the system fully meets the conditions of the contract; and the system's ownership / use / operation / Warranty / Guarantee to commence at the final acceptance date,
 - b. With conditional acceptance - stating condition(s) that needs addressed by the Contractor / OEM stating the system's ownership / use / operation may commence immediately and its War-ranty / Guarantee will commence at the final extended acceptance date,
 - c. Full acceptance - with the system's Ownership / Use / Operation / Warranty / Guarantee to commence at the agreed date of final acceptance.
- B. SYSTEM WARRANTY / GURANTY - Telecommunication systems are subject to the terms of "Warranty of Construction", FAR clause 52.246-21.
 - 1. Warranty - The Contractor shall pass through the OEM's equipment warranty for a period of one (1) year, (2) years for Life & Public Safety and Emergency System from the date of acceptance of the system by VA.
 - 2. Guaranty - the Contractor shall guarantee that system operation, all installed material and equipment will be free from defects, workmanship, and

will remain so for a period of one (1) year, (2) years for Life & Public Safety, Critical and Emergency System, from date of final acceptance of the System by the VA.

1.14 SYSTEM PERFORMANCE

- A. GENERAL GUIDELINES: The IWS, herein referred to as the system shall be a DAS. The system shall reliably distribute RF signals and wireless services throughout the specified RF ranges / bands / channels and throughout the specified coverage spaces / areas.
1. The System shall be implemented based on proven state-of-the-art technology that can seamlessly integrate with the rapid evolution of RF, Wireless Technologies and Business Applications.
 2. The System shall include a head-end subsystem. The head-end shall include a wideband RF transceiver(s) for each required RF for the DAS and be a common interface node. The DAS Head End shall be located in the HE Equipment Room and co-located with VA's FMS RF paging and two way radio systems, DAS PSRAS RF equipment, VA and other RF base stations from multiple cellular common carriers.
 3. The IWS shall have all active elements (aka remote units) in secured TRs located in the FMS portion to simplify maintenance and increase system physical security.
 - a. Locating active elements in or above ceilings is not acceptable.
 - b. Locations for active equipment outside the TRs shall be approved by the AHJ and RE.
 4. Radiating or "leaky" coax systems are not acceptable.
 5. Single Mode Fiber Optic cable, protected by conduit and telecommunications listed "partitioned" cable tray is the preferred transmission media for the DAS "trunk lines."
 6. DAS antenna coverage shall be depicted on the Contractor's Required Survey(s) and additionally shown on the contract drawings as described herein.
 7. The Contractor shall provide coverage antennas and/or "nodes" to meet the RF coverage and operational requirements described herein.
 8. The Contractor shall provide a predictive modeling coverage plan(s) showing the design RF coverage (signal strength) for each RF band required for the System.
 9. The Contractor shall provide plans indicating equipment, antenna, and / or component location(s), cable route(s) and other installation information - identify construction elements that would affect the System's performance (ie metallic ceiling materials, air ducts, piping, structural beams, rebar, etc).

10. The Contractor shall provide detail system one-line and functional block / line diagram(s).
- B. Where possible every building DAS should have two independent connections to the TIP Backbone Raceway.
 1. Each DAS connection should enter the building from opposite ends of the building.
 2. Each DAS connection should be brought in through separate TIP paths that provide two distinct DAS connections to the TIP backbone raceway giving each building a redundant connectivity in the case of a cable plant damage.
 3. Due to the number of critical, emergency and safety systems that are now run on the VA Low Voltage TIP it is imperative that we provide redundancy into the TIP. Services such as DAS, fire alarm signaling, Security swipe card door locks, Emergency Phones, Emergency 911, Code Blue, Duress Alarm, Patient / Staff Location, etc. require a highly available, high quality TIP.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR EQUIPMENT AND MATERIALS:

- A. Furnish and install a complete and fully functional DAS Equipment and cable distribution system for each: SPEP Points of Presence (2 ea), ENTRs (2 ea. - aka DEMARC - NOTE THE DEMARC SHALL BE PROVIDED IN THE MCR, Interface Location, TER, PA, TOR, MCR, BCR (if used), MCOR, PCR, SSC, ECC, EMCR, STR(s), NS(s), HER, HEC, HEIC, RPEC and TCO(s) WHOSE COMMUNICAITONS EQUIPMENT ROOM FITTINGS, INSIDE AND OUTSIDE (BACKBONE INCLUDING VERTICAL AND HORIZONTAL) CONDUIT DISTRIBUTION SYSTEMS WERE PROVIDED AS A PART OF SECTION 27 11 00. ADDITIONAL TIP CABLE INSTALLATIONS AND MOUNTING METHOD(S) ARE NOT ALLOWED UNLESS PREVIOUSLY APPROVED BY THE COTR AND SMCS 0050P2H3 IN WRITING.
- B. The specific location for the SPEP Point of Presence is Room G02B. Refer to floor plan for antenna locations.
- C. TCO(s): Deliver at all TCOs fully functional DAS communications cables and 4ea operational jacks (2ea for voice, 2ea for data) in the specific locations shown on the drawings (Note - the inside vertical (Backbone) functional communications cables are in addition to those provided by SECTION 27 10 00 - STRUCTURED (BACKBONE) COMMUNICATIONS CABLING EQUIPMENT AND SYSTEMS; and, horizontal (lateral) functional cables provided by SECTION 27 15 00 - COMMUNICATIONS HORIZONTAL CABLE EQUIPMENT AND SYSTEMS). IF THESE CABLES AND EQUIPMENT ARE FOUND NOT INSTALLED, IMMEDIATELY CONTACT THE COTR FOR SPECIFIC DIRECTION(S)).
 1. IN THE ABSENSE OF A/E IDENTIFIED TCO LOCATIONS / COUNTS SUBMITTED DURING THE PROJECTS' DESIGN PHASE(S) - PROVIDE A MINIMUM OF ONE (1) EACH FUNCTIONAL AND OPERATING TCO ON EACH WALL OF EACH DAS ROOM / AREA.

2. Provide activated special communications DAS functional jacks and corresponding plant, as dictated by the approved system design, in the unused jack space in each of the aforementioned TCOs.

D. The System shall include, but not be limited to: Directional (a.k.a. Hy-Gain), interior Omi-Directional antennas; coaxial (a.k.a. spiral line) cable and connectors; antenna masts; antenna multi-couplers; lightning protection system; HE and interface cabinets; RF terminals and amplifiers; UPS; electronic supervision functions and control consoles; system management, status reporting functions and control consoles; audio volume limiter or compressor; audio amplifiers; audio modulator, adapter, cable, wire and connectors; conduit, cable duct and/or partitioned cable tray; and, necessary passive devices such as fiberoptic and TWP (shielded or unshielded) cable with connectors; attenuators, combiners, traps, filters and splitters; microphones, headphones and/or speakers.

1. The System shall provide DAS two way radio communications from a minimum of the following services:

REQUIREMENTS	FUNCTIONS
a. Three (3) each	Emergency two-way emergency radio responder sub-systems (ie local fire department, police and EMS) to be operated by a separate RF connection to a common antenna coupling network, RF transmission line, and single outside antenna and provide appropriate interconnecting cabling to the system's control units.
b. Three (3) each	VAMC radio sub-systems (ie police, disaster/emergency, code blue paging) by only adding appropriate transmission lines and connecting them to three (3) ports on the aforementioned antenna coupler and provide appropriate interconnecting cabling to the system's control units.
c. Three (3) each	Future commercial cellular or radio sub-systems by only adding appropriate transmission lines and connecting them to three (3) unused ports on the aforementioned antenna coupler and provide appropriate interconnecting cabling to the

	system control units.
e. Three (3) each	Future radio sub-systems by only adding appropriate transmission lines and connecting them to three (3) unused ports on the aforementioned antenna coupler and provide appropriate interconnecting cabling to the system control units.
f. Plus,	The three (3) emergency responder radio sub-systems; three (3) VAMC radio sub-systems; three (3) future cell/commercial radio sub-systems and three (3) unused (or spare) antenna coupler port(s) shall function from the same outside antenna. <u>The system shall allow the installation of an additional antenna coupler at the present or future time when system expansion is require above the numbers identified herein.</u>

E. Please see PART 2, PARAGRAPH 2.1, SECTION 27 05 00 for additional requirements.

2.2 SYSTEM DESCRIPTION

A. The System shall meet the requirements of the AHJ for PSRAS functions and operation.

1. The DAS shall have active signal handling by using active element(s) that filter and amplify signals on RF specific band/channel basis to consistently deliver In House RF Services at the appropriate power levels in the locations described herein, depicted on the Contractor's Surveys and on as shown the contract drawings. When any of these mandatory requirements are found missing, contact the RE who will contact SMCS 0050P2H3 for directions.
2. Frequency Range: The system shall support all RFs between 150 mHz to 5,700 mHz.
3. The system shall distribute RF coverage at levels described herein in the following minimum areas of the building(s) and as listed herein:

REQUIREMENT	FUNCTION
a. Floor areas	Corridors, Lobbies, Concourse, Interstitial Spaces, Penthouses, Restrooms / Bathrooms, Elevator Lobbies & Shafts

b. External Building lobbies and floor area(s)	Bridges, tunnels and Building links, public spaces (ie courtyards, patios, etc)
c. General use spaces	ie break, staff, public, multipurpose rooms, etc
d. Excluded Areas	NO AREAS ARE EXCLUDED

4. The system shall be able to simultaneously support the following VA APPROVED minimum RF, wireless services, applications and / or technologies. The System shall:

- a. Distribute cellular channels with signal strength at least +8.0 dBm greater than the signal outside the building and at least -85 dBm "wall to wall" inside the building.
- b. Meet the:

REQUIREMENT	FUNCTION
1) Wireless Providers needs	ie NEXTELL/SPRINT, VERIZON, AT&T, T-MOBILE, ANY METRO PCS, ETC

- c. Support VA's FMS and other RF systems (RFs for the following radio systems shall be supported, at a minimum. The DAS Contractor shall confirm the RFs required at the time technical submittal submission and again at Facility opening):

REQUIREMENT	FUNCTION
1) Radio Pagers (aka pocket pagers) in the existing RF.	coordinate with SMCS 0050P2H3 for FCC Restrictions
2) 700 - 800 mHz	FCC Part 15- <u>Safety of Life</u> Restrictions
a) LTE	700 mHz
b) LMR	700 - 800 mHz
3) 800 - 900 mHz)	FCC Part 15-Safety of Life Restrictions
a) SMR	800 - 900 mHz
b) iDEN	800 / 900 mHz
c) Cellular	850 mHz
d) Broadband ISM	800 mHz - 2.4 GHz
e) Super Broadband	800 mHz - 2.9 GHz
f) Extreme Broadband	2.5 GHz - 5.7 GHz
4) One / two way radio paging (900 mHz)	FCC Part 15-Safety of Life Restrictions
5) AWS (1,700 / 2,100 mHz)	FCC Part 15-Safety of Life Restrictions
6) UPCS (1,920 - 1,930 mHz)	FCC Part 15-Safety of Life Restrictions
7) PSRAS Responder(s)	

a) The system shall distribute Public Safety Channels	with a signal strength that exceeds the minimum requirements specified herein and by the AHJ
b) 99 - 100% in house coverage	is expected in all areas of each building
<u>1.</u> Cellular coverage information	shall include expected dBm levels above the exterior macro
<u>2.</u> Note - 700 MHz based systems	now requires a minimum -75 dBm MIMO 2X2 throughout the cellular coverage areas.
c) Public Safety includes	VA, Local, City and State Police, County Sheriff, Emergency Medical Services (EMS), and Fire Departments
<u>1.</u> VHF (150 MHz)	no FCC restriction(s) if RF is assigned to VA
<u>2.</u> UHF (450 - 520 MHz)	no FCC restriction(s) if RF is assigned to VA
<u>3.</u> VA Police _____ MHz	no FCC restriction(s)
<u>4.</u> VA Engineering _____ MHz	no FCC restriction(s)
<u>5.</u> VA Emergency _____ MHz	no FCC restriction(s)
<u>6.</u> VA Disaster _____ MHz	no FCC Restriction(s)
<u>7.</u> Federal Trunking _____ MHz	no FCC restriction(s), FCC Part 25 listed requires MOU & CUP
<u>8.</u> Local PD _____ MHz	no FCC restriction(s), FCC Part 25 listed requires MOU & CUP
<u>9.</u> City PD _____ MHz	FCC restriction(s), FCC Part 25 listed requires MOU & CUP
<u>10.</u> State PD _____ MHz	no FCC restriction(s), FCC Part 25 listed requires MOU & CUP
<u>11.</u> County Sheriff _____ MHz	no FCC restriction(s), FCC Part 25 listed requires MOU & CUP
<u>12.</u> Fire Department(s) _____ MHz	no FCC restriction(s), FCC Part 25 listed requires MOU & CUP
<u>13.</u> Local EMS(s) _____ MHz	no FCC restriction(s), FCC Part 25 listed requires MOU & CUP
d) Other(s) _____ MHz	coordinate with SMCS 0050P2H3 for FCC Restrictions)

B. Specific Subsystems' Requirements: The system shall have the capability for separate control over each service (and wireless operator) to all the ability to adjust and control power levels without disturbing other services / operators. The System shall:

1. Support multiple services in modular architecture so services can be added or removed without:
 - a. Requiring new infrastructure,
 - b. Readjustment of signal power levels,
 - c. Disturbing existing services.
2. Enable services to be added without requiring additional cabling or antennas.
3. Not impede any management feature(s) or functionality or any attached network and / or device management system.
4. Allow for proactive management and end-to-end alarming of active equipment components, resulting in rapid problem identification and resolution.
5. Be able to be integrated with third party SNMP based element management system(s) vial a separate internet/POE and provide fault management information and functions throughout the DAS.
6. Cellular Services:
 - a. The System's transmission media will take many forms, from traditional of-air radio repeater, or Base Transceiver Station (BTS) to a tethered architecture consisting coaxial, fiber optic and/or hybrid fiber optic / coaxial base/trunk solution.
 - b. The DAS shall extend the common wireless carrier services from the head end equipment/system by interfacing to either a passive or active DAS that is deployed to and within each of the building structures. The following system design(s) are meant to be typical only. Prospective Contactors are expected to describe their DAS solution in detail described herein:
 - 1) The System shall support the use of Legacy Cellular Enhancement and technologies such as:
 - a) GSM,
 - b) EDGE,
 - c) UMTS-HSPA.
 - 2) The GPS Navigational Signal must be brought to the Base Station at the System's Head End to support LBS functionally.
7. The System shall support:
 - a. VA's Single ended and two-way, Non-IP communications radio systems,
 - b. Associated wireless devices that comply with FCC's and Regional regulatory authorities' emission rules for wireless devices.

(Note - refer to: FCC Advisory #A, Local Government Official's Guide to Transmitting Antenna RF Emission Safety Rules, Procedures and Practical Guidance, FCC's OET Bulletin 65, FCC Rule 47, Part 15 "Safety of Life prohibitions" and ANSI/IEEE C95.1-1992, Hazardous Emission document)

8. The System's input AC power shall be provided with and connected to an UPS. The UPS shall support the System operation (under a full load) for a minimum of one (1) hour. The UPS shall be connected to the Facility's Essential Generator Backed-up Electrical System (Note: depending on System design - there may be necessary to provide multiple UPS for the System).
9. The System shall be provided with an Electrical Supervision Capability that shall monitor all operating states of the System and each UPS. The supervision panel shall contain audible and visual and other devices that will notify maintenance personnel of System Failure(s) and types. The supervision function may be an integral part of the System's component(s); or a separate provided function / capability. The supervision system shall report to two (2) Alarm Panels at two (2) Facility locations (ie Telephone Operator, Security Console, Boiler Plant, MAS Duty Officer, etc) operated 24/7/365 via a System integrated or stand alone plant. Their locations are indicated on Part 2.1.B.
 - a. It is not acceptable to use the Facility's LAN/WAN for the supervision transportation media and management function until it is certified to meet NFPA Life Safety Code 101 and listed or label so accordingly by a NRTL (ie UL).
 - b. The electrical (or electronic) supervision function and alarm(s) shall be provided to a separate Supervision Alarm panel(s) in the FMS Bio-Medical Engineering Shop (or electronic shop if Bio-med does not provide support for the System).
 - c. The Supervision Alarm(s) shall not be cancelled until the trouble / fault has been corrected and the System has been restored to normal operation. The Visual Alarm(s) shall be continuous and the Audible Alarm(s) may be silenced via a controlled circuit that will re-occur the alarm at designated time intervals (ie adjustable form 2 - 30 minutes Maximum).
10. The System shall be designed to minimize cross talk, background processor noise, inter-modulation and other signal interference. The HE equipment shall be installed and interfaced according to the OEM HE schematic diagram for adjacent audio, video, data and RF channel operation.
11. Unless already existing, the contractor shall provide one (1) spare outside antenna with 100' of RF coaxial cable with connectors installed to be coiled, located and secured in the HE Room and be labeled "DAS EMERGENCY RESPONDER SPARE ANTENA."
12. The System shall be able to be accessed via the internet for remote monitoring, software upgrades and maintenance assistance. The internet connection shall be at only one location at the System Headend and controlled

by the Facility's OI&T Service. The failure of this approved "external connection" shall not affect the Systems' Performance and Operation.

C. Cabling

1. Fiber Optic cabling is specified herein and shall be provided on Special System Fiber Optic DAS / TIP Backbone diagrams. The Contractor shall identify in shop drawing submittal one-line riser diagram(s) indicating the mode and number of strands required.
2. 50 Ohm coaxial cable and terminations as specified herein.
3. A system distribution design that promotes "looping" the fiber optic and coaxial cables from location to location shall not be permitted. Each location and/or floor fiber optic and coaxial cable transmission line system shall be a "tap" design where each cable is fed from a device provided from a centrally corridor located lateral DAS trunk-line cable(s). Each location or floor lateral DAS trunk-line cable shall be connected to a vertical DAS trunk-line riser cable in the associated TR. Each vertical riser DAS trunk-line cable shall be connected to the HE input and/or output, depending on system design. Distribution (floor or riser) DAS amplifiers may be needed to satisfy the System's DAS received and/or transmit signal level requirements at each location. The provided DAS trunk line that routes throughout the interior of the Facility shall be separated from other systems and protected from damage by conduit and partitioned cable tray.
4. Each floor and/or office control and interface system shall be protected using conduit and partitioned cable tray. The use of open ladders, "J" hook, "O" rings, "U" clamps, etc is not allowed for installation of Emergency, and/or Support system cables.
5. Each floor and/or office control and interface system shall be provided in a "buss" design where each location's and/or floor's radio control console and/or control equipment is fed from centrally located (usually in the corridor) lateral trunk-line cables. Each signal closet shall contain a MIN of one terminal cabinet capable of connection to vertical trunk-line riser cables to lateral trunk-line cables in the associated signal closet and as shown on the drawings or recommended by the OEM.
6. Interface Cabinet Location (Consult Design Guide PG-18-10, Chapters 7 & 8 for specific instructions): Each cabinet shall be provided, protected, and located at the most central distribution system signal closet location to insure optimum origination, reception and control of all system signals. Each cabinet shall be provided with an internal active 120 VAC quad receptacle. Each cabinet shall be provided with a MIN of 610 mm (two feet) clearance from all obstructions in the signal closet where located. Each cabinet shall be

provided as required to meet the multiple audio channel and RF requirements and system performance standards.

D. Interference: There shall be no interference between the applications and wireless operators specified herein and with the Facility's equipment.

E. Telecommunication Rooms (TR): refer to CFM's EDM and OI&T Design Guide for this requirement if not specifically identified in the projects' construction documents.

2.3 MANUFACTURERS

A. The products specified shall be new; FCC AND NRTL (aka UL) listed, labeled and produced by OEM of record. An OEM of record shall be defined as a company whose main occupation is the manufacture for sale of the items of equipment supplied and which:

1. Maintains a manufacturer and bench stock of replacement parts for the item(s) submitted,
2. Maintains technical drawings and specifications; architectural, engineering, depot level repair and operating manuals for the items submitted,
3. Has published and distributed descriptive literature and equipment specifications on the items of equipment submitted at least 30 days prior to the Invitation for Bid (IFB),
4. Shall have equipment items that have been in satisfactory operation, on a minimum of three (3) installations of similar size, complexity and type as this project.
 - a. Materials and equipment furnished shall be of current production by OEM(s) regularly engaged in the manufacture of such items, for which replacement parts shall be available for at least five (5) years from the date of acceptance by VA.
 - b. When more than one unit of the same class of equipment is re-quired, the: equipment, cabling, terminating hardware, TCOs, and patch cords shall be sourced from the certifying OEM; OR at the OEM's direction, and support the System design, the OEM's quality control and validity of the OEM's warranty.
5. VA reserves the right to require the Contractor to submit a list of installations and contact information where the products have been in operation before approval as described in Paragraph 1.8 - "Technical Submittal" portion of this document.
 - a. Equipment Assemblies and Components
 - 1) Components of assembled units need not be products of the same OEM.

- 2) OEMs of equipment assemblies, which include components made by others, shall assume complete responsibility, warranty and guarantee for the final assembled unit as described herein.
- 3) Components shall be compatible with each other and with the total assembly for the intended service.
- 4) Constituent parts which are similar shall be the product of a single OEM.

b. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.

B. Specifications contained herein detail the SALIENT operating and performance characteristics of equipment in order for VA to distinguish acceptable items from unacceptable items of equipment. When an item of equipment is offered or furnished for which there is a specification contained herein, that item of equipment offered or furnished shall meet or exceed the specification.

C. Equipment Standards and Testing

1. The System has been defined herein as connected to systems identified and listed as Emergency Care performing Life Support, Emergency and Safety Functions. Therefore, at a minimum, the system shall conform to all aforementioned National and/or Local Life Safety Codes (which ever are the more stringent), NFPA, NEC, this specification, JCAHCO Life Safety Accreditation requirements, and the OEM recommendations, instructions, and guidelines.
2. The provided equipment required by the System design and approved technical submittal must conform with each NRTL (aka UL) standard in effect for the equipment, as of the date of acceptance of the technical submittal (OR the date when the COTR approved system equipment necessary to be replaced) and was technically reviewed and approved by SMCS.
 - a. Where a NRTL (aka UL) standard is in existence for equipment to be used in completion of this contract, the equipment must bear the approved UL Seal or Mark; OR the Seal or Mark of the NRTL Testing Laboratory that warrants the equipment has been tested in accordance with, and conforms to the UL standard(s).
 Contact DoL (OSHA) for an up to date list of NRTLs at:
http://www.osha.gov/dts/otpca/nrtl/faq_nrtl.html
 - b. The placement of the NRTL (aka UL) Seal or Mark shall be on a permanent part of the equipment that is not capable of being transported from one equipment item to another.

D. When Factory Testing is Determined Necessary:

1. VA shall have the option of witnessing factory tests. The Contractor shall notify the VA through the COTR a minimum of 21 days (aka three [3] weeks) prior to the OEMs making the factory tests.
2. The OEM shall furnish four (4) copies of certified test reports containing all test data to the RE prior to final inspection and not more than 30 days after completion of the tests.
3. When equipment fails to meet factory test and reinspection is required, the OEM shall be liable for all additional expenses, including expenses of the Government.

2.4 EQUIPMENT ITEMS

A. GENERAL REQUIREMENTS (see PART 2, PARAGRAPH 2.4, SECTION 27 05 11 for additional requirements): The equipment identified in this SECTION shall be the standard product(s) of an OEM regularly engaged in the manufacture of DAS and related products. All components used in the System shall be commercial quality products that comply with this document. Each component of equipment shall identify the OEM's name, model, serial number, FCC Listing and NRTL (aka UL) label or equal. The RE retains the right to reject products which reflect, in the COTR's opinion, sub-standard design practices, manufacturing procedures, support services, or warranty/guarantee policies. Refer to contract drawing(s) note(s) for additional OEM information.

1. All copper cables are not required to be plenum rated if run in protective conduit and not installed "Air Plenum Areas" designated by the COTR. If run outside of conduit, each fiber optic cable shall contain an inner wrap of Kynar or Teflon (or equal) plus a metal protective wrap (sometimes called 'armor') just inside the outside protective jacket.
2. Fiber Optic Transport: are not required to be plenum rated if run in protective conduit and not installed "Air Plenum Areas" designated by the COTR. When Fiber Optic Transport media is utilized; the IWS shall utilize single-mode with angle polished connectors (APC) to distribute DAS signals.
3. Broadband (Coaxial) Distribution: When Broadband Distribution is utilized; the IWS shall use coaxial cable in the horizontal runs and passive (ie non-powered) broadband antenna(s) in the respective area(s). The coaxial cables are not required to be plenum rated unless installed in designated "Air Plenum Locations."
4. Baseband (Video and Audio) Distribution: When Baseband Distribution is utilized; the IWS shall use TWP or STP cable in the horizontal runs and passive (ie non-powered) baseband equipment to compliment the DAS in respective area(s). The baseband cables are not required are not required to be plenum rated unless installed in designated "Air Plenum Locations."

5. The Contractor is responsible for pricing all accessories and miscellaneous equipment required to form a complete and operating DAS system (and sub - systems) with 40% growth / expansion THAT IS BASED ON THE TOTAL NUMBER OF WIRED HORIZONTAL ANTENNA POINTS PLUS THE CAPABILITY OF ADDING AN ADDITIONAL 40% OF ANTENNA POINTS AND SUPPORT EQUIPMENT WITHOUT DISTURBING THE SYSTEM'S INFRASTRUCTURE DESCRIBED HEREIN.

- a. The equipment quantities provided herein shall be as indicated on the drawings with the exception of the indicated spare equipment where all shall be listed on the BOM.
- b. Each system interface point shall be provided with internal and external items to maintain a neat and orderly system of equipment and conduit connections and routing (Refer to CFM's PG-18-10 Electrical Design Manual for VA Facilities, Table 7-1 and Appendix B, Suggested Telecommunications Oneline Topology; AND OI&T Design Guide for technical assistance in identifying required Interface Point(s) and interconnecting DAS internal plant conduit requirements.
- c. Conduit, 1.0" minimum ($\frac{3}{4}$ " may be allowed on a case by case basis by the COTR in writing) is required for all Life, Patient, Staff and Public Safety, Critical Service and Emergency Systems.
- d. Equipment Functional Characteristics

FUNCTIONS	CHARACTERISTICS
Input Voltage	105 to 130 VAC
POWER LINE FREQUENCY	60 HZ ± 2.0 HZ
Operating Temperature	0 to 50 degrees (°) Centigrade (C)
Humidity	80 percent (%) minimum rating

6. SPECIFIC EQUIPMENT DESIGNATED BY THE DAS SYSTEM DESIGN

a. Antenna Equipment and Materials

- 1) Antenna Site(s) & Installation: It is the responsibility of the Contractor to re-verify and certify each external and internal antenna installation required by the system, in writing (four [4] copies MIN), to the COTR 30 days prior to construction. The Contractor is required to provide all FAA, FCC and local licenses and permits for each radio antenna item(s) requiring such licenses and permits. Additionally, at a MIN, for each external antenna site that is 75' above average ground level (AGL) or taller than appurtenances and closer buildings or objects, the Contractor shall accomplish FCC Form 854, Application for Antenna Structure Registration, FAA Advisory Circular AC 70/7460-1, Obstruction Marking and Lighting and FAA Form 7460-1, Notice of

Proposed Construction and Alteration for each item requiring this registration. It is the Contractor's responsibility to contact the local licensing authority(s) to determine if the antenna installation requires additional hazard registration and accomplish all necessary documents.

- 2) THE SYSTEM PROOF OF PERFORMANCE AND VA CERTIFICATION TESTS WILL NOT BE CONDUCTED UNTIL THESE FORMS ARE ACCOMPLISHED AND SUBMITTED TO THE APPROPRIATE FEDERAL AUTHORITIES WITH COPIES PROVIDED TO THE RE, OR VAMC CO AND VACO SMCS (0050P2H3). The Contractor shall obtain onsite technical assistance from the OEM for installation of the external antenna(s) selected during the Field Site Visit. The Contractor shall provide the COTR a detailed written report of the findings of this visit for approval. The site visit and report shall be completed during the 30 days after issuance of the notice to proceed.
- 3) Wherever possible, external antenna equipment shall be mounted so that maintenance can be accomplished without the need to climb towers, ladders, cherry pickers, etc.
- 4) External Antenna Masts: Wall mounted DAS antenna mast(s) shall be rigid thick wall and have a minimum 3.0 inch (75mm) outside diameter (OD), of hot dip galvanized steel and capable of surviving MIN wind loads of 100 miles per hour (160 kilometers per hour) sustained winds with all DAS antenna equipment and mounting hardware installed, with up to 1/2 inch (12.7 mm) radial ice at the height required to provide the System performance, as described herein.
 - a) Wall mounted external masts shall be attached to building walls, penthouse walls or other solid parts of the building exterior free of all obstructions.
 - b) For building and penthouse walls, attach masts with not less than three (3) rust proofed brackets three (3) inches (76.2 mm) wide, 5/16 inch (7.79375 mm) thick, eight (8) inches (177.8254 mm) wide and spaced not less than 20 inches (508.0 mm) apart. Do not attach masts to catwalks or metal structures unless specifically approved. If allowed, masts shall be welded or bolted to the structure using an approved method of attachment. All connections shall be rustproof and painted to match the existing structure(s).
 - c) Fasten the mounting brackets with rust proofed through bolts of a minimum 7/16 inch (11.1125 mm) diameter, each anchored with two (2 - one on the inside and one on the outside of the wall), (8 inch (203.2 mm) square, 5/16 inch (7.9375 mm) thick rust proofed steel

back plates. Attachments to mortar or grout joints with lag bolts are not permitted. Securely tighten all mounting hardware, antenna hardware and terminals.

- d) Do not mount the mast(s) directly on the roofs of the building or penthouse unless specifically approved in writing by the RE prior to installation. Any approved roof attachment or penetration shall be resealed to prevent water leakage; using pitch pocket or other method approved by the roof OEM and Roofing Contractor.
- e) Do not install more than two (2) antennas on a single mast. Install separate masts, as required, with proper physical and frequency spacing between them and the antenna(s) installed. A MIN spacing shall be $1/2$ wavelength (\bullet) vertically and $5/8 \bullet$ horizontally (element tip to element tip) for the lowest operating frequency.
- f) Orient the antenna(s) to insure optimum signal receive level and S/N ratio.
- g) Weatherproof all connections with approved sealing compound. Electrical cloth or plastic tape are not acceptable and will not be approved.

5) Antenna Site Physical Protection

a) External

(1) Roof and/or Wall Type: When an antenna is installed on a building roof or wall that is accessible from the roof, signs shall be placed on all roof access points that say "Warning, Radio Antenna Radiation Hazard." The signs shall be professionally prepared, neat and permanent. The roof area where the antenna is installed shall be painted yellow or roped off with a yellow marker tape that indicates the approximate area of RF radiation.

(2) Each roof or attic access for the each antenna shall be controlled by the VA Police SMS Access Control System. The Police Chief will determine the appropriate number and individual(s) that are to be granted access in these areas.

- b) Internal DAS: The antenna shall be placed inside a protective enclosure designed specifically for the product. The antenna shall not be visible when installed in the enclosure in the area located. DAS cables to each antenna shall be installed in protective conduit (EMT or Flex) from each Antenna Enclosure to the associated "J" Box. Each DAS Antenna Enclosure shall be provided with two (2) safety wires connected between each enclosure to solid building supports.

6) Antenna Site Lightning Protection System: Each protection system shall be provided in its entirety totally and externally to the building. The use of internal electrical or communications grounding systems is not acceptable, will not be approved; and if found during the system's proof-of-performance tests, it will be removed and the test may be terminated and rescheduled at the contractor's expense.

a) Antenna, Mount & Mast: The antenna, antenna mount or mast and transmission line shall be grounded with cooper wire run external to the building and connected to the earth ground. If the antenna is to be installed in an area not protected by lightning rods or if the antenna is to be elevated above existing building's lighting rod protection, the Contractor shall immediately notify the COTR in writing regarding the lightning strike hazard.

b) RF Transmission Line and/or Coaxial Cable Lightning Protector: The protector shall be an in-line device equipped with screw type connectors to match the coaxial cable and dimensions specified. It shall be able to shunt high current surges to the earth ground protecting the system signal RF equipment. The protector shall have a minimal effect on the quality of the signal being received or transmitted. It shall be made of non-corrosive metal and be waterproof.

(1) Technical Characteristics

FUNCTIONS	CHARACTERISTICS
<u>a.</u> Peak Pulse Power	1,500 W @ 77° F
<u>b.</u> Protection Device	Gas Tube or as required by OEM
<u>c.</u> Dissipation	1.0 Milliseconds (mS)
<u>d.</u> Response Time	5.0 nano-Seconds (nS)
<u>e.</u> Connectors	As Specified
<u>f.</u> Ground Connection(s)	The protector shall be directly mounted, by a #4 ga. MIN self taping sheet metal screw, on a MIN 5/16" (7.9375 mm) thick, 4.0" (101.6 mm) high X 22.0" (609.6 mm) Long solid copper buss grounding plate mounted directly inside and anchored to the wall at the exact coaxial cable entrance. The grounding plate shall be connected by a #0 AWG Stranded Copper Wire, MIN, or as required by the OEM, and/or the RE connected to the FACILITY'S OUTSIDE LIGHTNING PROTECTION SYSTEM.

(2) Each lightning major ground point shall be connected with MIN #0 AWG stranded copper wire run external to the building and connected to the antenna site lightning ground described herein.

7) Antennas

a) External: The external antenna shall be specified by the OEM for the specific system function and physical location. Acceptable designs are: ground plane fed with continuous polarization adjustment and or spread spectrum type. The antenna size, gain and beam width shall be chosen for optimum performance to meet the specified path and System reliability parameters.

(1) Each antenna shall be installed to meet the wind load specifications and environmental conditions.

(2) Technical Characteristics

FUNCTIONS	CHARACTERISTICS
<u>a.</u> Operating Standards	As herein outlined and specified
<u>b.</u> Size	As required to fully satisfy system design
<u>c.</u> Gain	25 dB
<u>e.</u> Half Power Beam Width	As specified by the OEM
<u>f.</u> Front-to-Back Ratio (FBR)	40 dB
<u>g.</u> VSWR	1.15 or Less
<u>h.</u> RFI	None measurable
<u>i.</u> Wind Load Rating	40 LBS Per Square Foot (PSF) or 100 (160 kilometers) per hour

(3) RF Transmission Line (External) - Coaxial: The provided transmission line shall be coaxial, jacketed with fire resistant material when run outside of conduit and/or cable tray, or as required by system design and described by the OEM; and, if required, pressurized to the OEM's specifications.

(i) The cable shall be as specified by the OEM. If not specified by the OEM, it shall be provided with the proper impedance, be double shielded, and contain other characteristics to satisfy all equipment and system requirements.

(ii) Technical Characteristics

(1 Outside Diameter	As specified by the OEM
(2 Center Conductor	Solid (Stranded when OEM specified) Copper, Silver Coated
(3 Outer Conductor (or Braid)	Braided Copper (solid when OEM specified) providing 100% coverage and EMI shielding
(4 Insulation	Cellular Polyethylene with air passages
(5 Jacket	Polyethylene; Teflon or Kynar (when required)

(iii) Attenuation:

Frequency (mHz)	Attn/dB per 100 ft (MAX)
100	2.5
200	3.5
400	5.0
890	8.0

(iv) External Antenna Feed Through: A feed through shall be provided for all Coaxial, Spiral line and/or other System wire/cable penetrations of exterior building walls or roofs. The feed through(s) shall be waterproof, sleeved, OEM recommended and RE approved.

b) Internal: Each DAS antenna shall be specified by the OEM for the specific system function and physical location. Acceptable designs are: ground plane fed with continuous polarization adjustment and or spread spectrum type. The antenna size, gain and beam width shall be chosen for optimum performance to meet the specified path and System reliability parameters. Each antenna shall be installed to meet the local environmental (outside and inside) conditions.

(1) Environmental

FUNCTIONS	CHARACTERISTICS
(a Application	Indoor
(b Operating Temperature	40°C to +60°C (40°F to +140°F)
(c Relative Humidity	Up to 100%

(2) Mechanical

FUNCTIONS	CHARACTERISTICS
(a Application	50 Ohm "N" type
(b Mounting	Thru-hole ceiling (typical)
(c Relative Humidity	Up to 100%
(d Radome	Required, ABS, UV resistant
(e Pigtail Cable	Required, plenum (if not protected) flexible with connectors installed

(3) Regulatory Compliance

FUNCTIONS	CHARACTERISTICS
(a RoHS	2002/95/EC (minimum)

(4) Omni-Directional Antenna: Omni-Directional Coverage Antenna(s) shall feature a multi-band design that accommodates multiple RF band and channels in a single unit.

(i) RF Band One (1)

FUNCTIONS	CHARACTERISTICS
-----------	-----------------

(1 RF Range	690 – 800 mHz
(2 VSWR	• 1.8:1
(3 Gain	• 1.5 dBi
(4 Max input power	OEM Specified
(5 Impedance	50 Ohms
(6 Beamwidth:	
(a Vertical	80° nominal
(b Horizontal	360° Omni-directional
(7 Return Loss	•11 dB, maximum,
(8 RFI	None measurable
(9 Wind Load Rating:	
(a External	40 LBS Per Square Foot (PSF) or 100 MPH
(b Internal	Not Applicable

(ii) RF Band Two (2)

FUNCTIONS	CHARACTERISTICS
(1 RF Range	
(a	710 – 2,700 mHz
(b	800 – 950 mHz
(2 VSWR	• 1.8:1
(3 Gain	
(a • 1.5 dBi	800 – 950 mHz
(b • 5.0 dBi	1,710 – 2,700 mHz
(4 Max input power	OEM Specified
(5 Impedance	50 Ohms
(6 Beamwidth:	
(a Vertical	70° nominal
(b Horizontal	360° Omni-directional
(7 Return Loss	•14 dB, maximum,
(8 RFI	None measurable
(9 Wind Load Rating:	
(a External	40 LBS Per Square Foot (PSF) or 100 MPH
(b Internal	Not Applicable

(iii) RF Bands Three (3) and four (4):

FUNCTIONS	CHARACTERISTICS
(1 RF Range	
(a 150 – 250 mHz,	(or per OEM direction)
(b 260 – 400 mHz	(or per OEM direction)

(c 450 - 750 mHz	(or per OEM direction)
(2 VSWR	• 1.5:1 all bands
(3 Gain	
(a • 1.5 dBi	150 - 750 Mhz
(b • 3.0 dBi	800 mHz - 2.8 GHz (broadband)
(c • 7.0 dBi	2.4 - 4.5 GHz (very broadband)
(d • 18.0 dBi	3.0 - 5.7 GHz (extreme broadband)
(4 Max input power	OEM Specified
(5 Impedance	50 Ohms
(6 Beamwidth:	
(a Vertical	70° nominal
(b Horizontal	360° Omni-directional
(7 Return Loss	•14 dB, maximum,
(8 RFI	None measurable
(9 Wind Load Rating:	
(a External	40 LBS Per Square Foot (PSF) or 100 MPH
(b Internal	Not Applicable

(5) Directional Coverage Antenna(s): shall feature a multi-band design that accommodates multiple RF band and channels in a single unit.

(i) RF Band One (1):

FUNCTIONS	CHARACTERISTICS
(1 RF Range	690 - 800 mHz
(2 VSWR	• 1.8:1
(3 Gain	• 5.0 dBi
(4 Max input power	50W MAX
(5 Impedance	50 Ohms
(6 Beamwidth:	
(a Vertical	Polarization
(b Horizontal	110° nominal
(7 Return Loss	•11 dB, maximum,
(8 RFI	None measurable
(9 Wind Load Rating:	
(a External	40 LBS Per Square Foot (PSF) or 100 MPH
(c Internal	Not Applicable

(ii) RF Band Two (2):

FUNCTIONS	CHARACTERISTICS
(1 RF Range	
(a	710 - 2,700 mHz
(b	800 - 950 mHz
(2 VSWR	• 1.5:1
(3 Gain	
(a • 1.5 dBi	All channels
(4 Max input power	50W MAX
(5 Impedance	50 Ohms
(6 Beamwidth:	
(a Vertical	Polarized
(b Horizontal	90° nominal
(7 Return Loss	•14 dB, maximum,
(8 RFI	None measurable
(9 Wind Load Rating:	
(a External	40 LBS Per Square Foot (PSF) or 100 MPH
(b Internal	Not Applicable

(iii) RF Bands Three (3) and four (4):

FUNCTIONS	CHARACTERISTICS
(1 RF Range	
(a 150 - 250 mHz,	(or per OEM direction)
(b 260 - 400 mHz	(or per OEM direction)
(c 450 - 750 mHz	(or per OEM direction)
(d 800 mHz - 2.8 GHz (broadband)	(or per OEM direction)
(e 2.4 - 4.5 GHz (very broadband)	(or per OEM direction)
(f 3.0 - 5.7 GHz (extreme broadband)	(or per OEM direction)
(2 VSWR	• 1.5:1 all bands (or per OEM direction)
(3 Gain	
(a • 1.5 dBi	150 - 750 mHz
(b • 3.0 dBi	800 mHz - 2.8 GHz (broadband)

(c • 7.0 dBi	2.4 – 4.5 GHz (very broadband)
(d • 18.0 dBi	3.0 – 5.7 GHz (extreme broadband)
(e • 7.0 dBi	2.4 – 4.5 GHz (very broadband)
(f • 3.0 dBi	800 MHz – 2.8 GHz (broadband)
(4 Max input power	50W MAX
(5 Impedance	50 Ohms
(6 Beamwidth:	
(a Vertical	Polarized
(b Horizontal	60 – 70° nominal
(7 Return Loss	•14 dB, maximum,
(8 RFI	None measurable
(9 Wind Load Rating:	
(a External	40 LBS Per Square Foot (PSF) or 100 MPH
(b Internal	Not Applicable

b. Head End (HE) Equipment

1) DAS Equipment Room/Location

- a) The Contractor shall confirm each HE room/location depicted on the contract drawings conforms to the MIN requirements outlined in CFM's Design Manual PG-18-10 – Chapter 7 and OI&T Design (a copy can be obtained from the RE or SMCS [0050P2H3]).
- b) Any noted deviation(s) shall be provided to the RE in writing for an official determination concerning each noted item and how it/they will affect the system.
- c) The RE shall contact SMCS (0050P2H3) for technical assistance and the A/E for structural assistance.

B. CABINET WITH INTERNAL EQUIPMENT MOUNTING RAIL(S)(DO NOT DELETE): shall be lockable, fabricated of heavy 16 gauge (ga) steel, and have fully adjustable internal equipment mounting racks and/or rails that allows front panel equipment mounting and access.

1. Each equipment mounting rail shall be able to provide an internal cabinet ground for each installed equipment when the equipment is properly bolted to the rail.
2. Additionally, connect each equipment grounding terminal to a separate mounting hole on the equipment mounting rail to the right as one looks at it from the rear with a minim #12 AWG stranded copper wire with protective jacket.

3. It shall have baked-on iron phosphate primer and baked enamel paint finish in a color to be selected by the RE or FMS Service Chief.
4. It shall be floor or wall mounted with knock-out holes for cable entrance(s) and conduit connections, contain ventilation ports and a quiet fan with non disposable air filter for equipment cooling.
5. Each cabinet shall be keyed alike and four (4) keys shall be provided to the RE for each 10 cabinets used when the VA accepts the System.
6. A minimum of one (1) cabinet shall be provided with blank rack space, for additional expansion equipment. Blank panels shall be installed to cover any open or unused rack space. In addition, provide two (2) 120 VAC power strips connected to surge protector(s), a ventilation fan with non-disposable air filter, and a conduit or cable duct interfaced to adjacent cabinet(s) and local room wire management system, as part of this cabinet.
 - a. Blank panels shall be color matched to the cabinet, 1/8in. (3.175 mm) thick aluminum with vertical dimensions in increments of one rack unit (RU) or 1.75in. (44.8469 mm) with mounting holes spaced to correspond to EIA 19in. (482.6 mm) rack dimensions.
 - b. Single standard larger size blank panels shall be used to fill unused panel or rack spaces in lieu of numerous types. One blank 1.75in. (44.8469 mm) high blank panel shall be installed between each item of equipment.
7. Provide internal cabinet communications grounding system and connect to communications ground buss bar with a minimum #6 AWG stranded copper wire with protective covering(see PART 2, PARAGRAPH 2.4.B).
 - a. Each cabinet shall be grounded to the communications grounding system.
 - b. Connect the communications system grounding wire to a cabinet provided ground terminal or with a bolt(s) screwed into one mounting hole of each equipment mounting rail (refer to PARAGRAPH 2.9 HEREIN).

8. Technical Characteristics

Overall Height	2,180 mm (85 7/8in.), maximum
Overall Depth	650 mm (25 1/2in.), maximum
Overall Width	535 mm (21 1/16in.), maximum
Front Panel Opening Width	480 mm (19in.), EIA horizontal
Hole Spacing	per EIA and Industry Standards

9. Internal Cabinet Components (MINIMUM REQUIRED)

- a. AC power outlet strip(s - DO NOT DELETE):
 - 1) Two (2) Power outlet strips shall be provided as directed by the OEM. The additional spare equipment cabinet with no installed items in the cabinet shall contain two (2) AC strips with a minimum of 10 ea. AC

power outlets. Each strip shall be mounted inside and at the rear of the cabinet. It shall contain "U" grounded AC outlets for distributing AC power to the installed electronic equipment. The strip shall be self-contained in a metal enclosure and may be provided with a 2 M (6 ft.) long (maximum) connecting cord with three prong plug.

2) Technical Characteristics:

- a) Power capacity 20 Ampere (AMP), 120 VAC continuous duty.
- b) Wire gauge: Three conductor, #12 AWG copper.

b. Cabinet AC Power Line Surge Protector and Filter:

- 1) Each cabinet shall be equipped with a AC Surge Protector and Line Filter. The Protector and Filter shall be housed in one single enclosure. The Protector and Filter shall perform instantaneous regulation of the AC input voltage and isolate and filter any noise present on the AC input line. The unit shall be equipped with AC voltage and current surge protectors to prevent damage to the electronic equipment from power line induced voltage spikes, surges, lightning, etc. It shall be cabinet mounted and the cabinet AC power strip (maximum of two [2] strips) may be connected to it as long as the system design is met.

2) Technical Characteristics

Input Voltage range	120 VAC \pm 15%
Power capacity	20 AMP, 120 VAC
Voltage output regulation	\pm 3.0%
Circuit breaker	15 AMP, may be self contain
Noise filtering	Greater than -45 dB
AC outlets	Four (4) duplex grounded types, minimum
Response time	5.0 ns
Suppression	
Surge	10,000 A
Noise	
Common	-40 dB
Differential	-45 dB

3) Specific requirements for current and surge protection shall include:

- a) Voltage protection threshold, line to neutral, starts at no more than 220 Volts peak. The transient voltage shall not exceed 300 volts peak. The Contractor shall furnish documentation on peak clamping voltage as a function of transient AMP.

- b) Peak power dissipation minimum 35 Joules per phase, as measured for 1.0 mS at sub branch panels, 100 Joules per phase at branch panels and 300 Joules per phase at service entrance panels. The Contractor shall furnish an explanation of how the ratings were measured or empirically derived.
- c) Surge protector must not short circuit the AC power line at any time.
- (1) The primary surge protection components must be silicon semiconductors. Secondary stages, if used, may include other types of devices.
- (2) Surge protectors shall incorporate a visual device which indicates whether the surge suppression component(s) is (are) functioning.
- (3) Surge protection devices shall be UL listed.
- (4) Voltage and current surge protectors shall be provided on all ancillary equipment provided by the Contractor.
- d) Power dissipation 12,000 Watts (W) for 1.0 mS (or 12 Joules).
- e) Voltage protection threshold starts at not more than 100 VAC.
- c. Uninterruptible Power Supply (UPS): Each cabinet shall be provided with an internal UPS. This item may be combined with the Surge Protector & Filter in PART 2, PARAGRAPH 2.4.I.8.b as long as the 50% expansion is met. The UPS shall provide at least two hours if working with an emergency / safety system reserve capacity, in the event of Facility Primary or Emergency AC Power failure.
- 1) The UPS shall include, but not be limited to:

a) Protection switch	Required to automatically protect the UPS unit and associated equipment connected to it. This function is required to be a part of the System's electronic supervision requirements.
b) First/fast charge unit	Must provide clean predictable charge voltage / current when needed. This function is required to be a part of the System's electronic supervision requirements.
c) Over Voltage/Current protect	Must not short circuit the AC power line at any time. This function is required to be a part of the System's electronic supervision requirements.
d) Trickle charge unit	Must be capable of maintaining a suitable internal battery charge without damaging the batteries.
e) Internally mounted	Per OEM's direction.

f) Proper ventilation	Not override the cabinets' venti-lation system.
g) Power change from AC input	Shall be accomplished without interruption to the communications link or subsystem being protected. This change of state shall generate visual and aural alarms in its Electrical Supervision System.
h) Electrical supervision	Required - must be audible and visual locally and remotely to annunciating panel(s) via direct connection for trouble indication

C. ENVIRONMENTAL CABINET (if selected): The Contractor shall provide this enclosure in lieu of a standard equipment cabinet identified in Paragraph 2.4.B to meet system design in hostile TR locations as identified in CFM's OI&T Design Guide and locations as shown on the drawings.

1. The enclosure shall fully sustain the installed, including electronic, equipment in the same manner as the standard cabinet identified in Paragraph 2.4.B. Additionally, the enclosure shall fully support all installed equipment as if they were in a standalone air handling area regardless of the local area's air handling capabilities.
2. The enclosure shall be an OEM's fully assembled unit.
3. If more than two enclosures are required in any system location, those enclosures shall be OEM assembled for consolidating or combining two or more enclosures in a single unit to meet system space and equipment handling designs plus maintain OSHA spacing requirements.
4. Technical Characteristics

a. Environmental control	Automatic, heating and/or cooling, as required
b. Temperature conditions (rated at 1,300 W of install equipment heat generation):	
c. Internal Range	Maintains 80° to 105° of internal heat conditions, maximum
d. External Range	100° \pm 25°, maximum
e. Forced air unit	Required with non disposable air filter unobstructed and uninterruptible
f. Air conditioning	As required, fully internal mounted
g. Heater	As required, fully internal mounted
h. Uninterruptible power supply	As required, fully internal mounted
i. Front door	Full length, see through, EMI resistant, and lockable
j. Rear door	Full length, non-see through, EMI resistant, and lockable
k. Conduit wiring entrance	TOP AND/OR BOTTOM, FULLY SEALED

l. Input power	2 ea. minimum 120 VAC @ 20A, maximum, independent circuit, conduit for fixed or armored cable for moveable installations
m. Dimensions:	
n. Height	1980 mm (78in.), maximum
o. Width	635 mm (25in.), maximum
p. Depth	965 mm (38in.), maximum
q. Front panel opening	480 mm (19in.), w/ EIA mounting hole spacing

D. DISTRIBUTION OR SYSTEM INTERFACE CABINET: The cabinet shall be constructed of heavy 16 ga cold rolled steel, have top and side panels and hinged front and rear (front door only if wall mounted) doors.

1. It shall have baked-on iron phosphate primer and baked enamel paint finish in a color to be selected by the using FMS Chief or the RE, contain integral and adjustable predrilled rack mounting rails or frame that allows front panel equipment mounting and access.
2. When all equipment, doors and panels are installed, snap-in-place chrome trim strip covers are required to be installed that will cover all front panel screw fasteners.
3. It shall be equipped the same as the equipment cabinet.

4. Technical Characteristics

a. Overall height	2,180 mm (85 7/8in.), maximum
b. Overall depth	650 mm (25 1/2in.), maximum
c. Overall width	535 mm (21 1/16in.), maximum
d. Equipment vertical mounting space	1,960 mm (77 1/8in.), maximum
e. Front panel horizontal	484 mm (19 1/16in.), maximum width

E. STAND ALONE EQUIPMENT RACK (or sometimes called Radio Relay Rack): The rack shall be constructed of heavy 16 ga cold rolled steel and have fully adjustable equipment front mounting rails that allows front panel equipment mounting and access.

1. It shall have baked-on iron phosphate primer and baked enamel paint finish in a color to be selected by the using FMS Chief or the RE. It shall be floor or wall mounted or mounted on casters as directed by the RE.

2. Technical Characteristics

a. Overall Height	2,180 mm (85 7/8in.), maximum
b. Overall Depth	650 mm (25 1/2in.), maximum
c. Overall Width	535 mm (21 1/16in.), maximum

d. Front Panel Opening	480 mm (19in.), EIA horizontal width
e. Hole Spacing	per EIA and Industry Standards

F. WIRES AND CABLES

1. CONTROL WIRING: Is not required to be plenum rated when installed in conduit. It is required to be plenum rated when installed in designated "Air Plenum" spaces / areas. Wiring that is routed in cable trays via pathways that is not rated "Air Plenum" locations, the wiring is not required to be plenum rated; only when pathways pass through "Air Plenum" spaces/areas, the wiring shall be plenum rated.
 - a. Unless otherwise specified in other Specifications Sections of the TIP specifications (re SECTIONS 27 05 11, 27 11 00, 27 13 00 & 27 15 00), control wiring shall be as specified for power and lighting wiring, except the minimum size shall be not less than No. 16 AWG.
 - b. Control wiring shall be large enough so that the voltage drop under "turn-on" conditions does not adversely affect operation of the controls.
2. COMMUNICATIONS AND SIGNAL WIRING: Is not required to be plenum rated when installed in conduit. It is required to be plenum rated when installed in designated "Air Plenum" spaces / areas. Wiring that is routed in cable trays via pathways that is not rated "Air Plenum" locations, the wiring is not required to be plenum rated; only when pathways pass through "Air Plenum" spaces/areas, the wiring shall be plenum rated. The wires:
 - a. Shall conform to the recommendations of the OEMs of the communication and signal systems; however, not less than what is shown.
 - b. Shown is for typical systems. Provide wiring as required for the systems being furnished.
 - c. Multi-conductor construction shall have the conductors color coded per TIA/TIA 569.
 - d. Shall provide minimum grade of service of BICSI Category 5E. If the Facility desires enhanced grade(s) of service, it must be fully identified and justified at the beginning of the project, during the Project's initial design phase.
3. COPPER CONDUCTOR CABLE: Is defined as solid copper conductors, covered with an extruded solid insulating compound. Insulated conductors shall be twisted into pairs which are then stranded or oscillated to form a cylindrical core. The copper cable is not required to be plenum rated when installed in conduit. It is required to be plenum rated when installed in designated "Air Plenum" spaces / areas. Wiring that is routed in cable trays via pathways that is not rated "Air Plenum" locations, the wiring is not required to be

plenum rated; only when pathways pass through "Air Plenum" spaces/areas, the wiring shall be plenum rated.

- a. For special high frequency applications, the cable core shall be separated into compartments.
- b. Cable shall be completed by the application of a:
 - 1) Suitable core wrapping material,
 - 2) Corrugated copper or plastic coated aluminum shield, and
 - 3) Overall extruded jacket.
- c. The contractor shall verify distances between splice points prior to ordering cable in specific cut lengths. Gauge of conductor shall determine the range of numbers of pairs specified (ie):
 - 1) 19 gauge (6 to 400 pairs),
 - 2) 22 gauge (6 to 1,200 pairs),
 - 3) 24 gauge (6 to 2,100 pairs),
 - 4) 26 gauge (6 to 3,000 pairs).
- d. Each copper cable shall meet or exceed the following specifications for the specific type of cable:
 - 1) Each cable reel shall be sweep tested and certified by the OEM by tags affixed to each reel. The Contractor shall turn over all sweep tags to the RE or PM. Additionally, the Contractor shall provide a 610 mm (2 ft.) sample of each provided cable, to the RE and receive approval before installation.
 - 2) Cables installed in any outside location (i.e. above ground, underground in conduit, ducts, pathways, etc.) shall be filled with a waterproofing compound between outside jacket (not immediately touching any provided armor) and inter conductors to seal punctures in the jacket and protect the conductors from moisture.
 - 3) The Contractor shall provide all Systems cables that are OEM recommended and insure the approved System expansion is met.
- e. Data Multi-Conductor (Digital): The cable shall be multi-conductor, shielded or unshielded cable with stranded conductors. The cable shall be able to handle the power and voltage used over the distance required.
 - 1) It shall meet BICSI Category 5e service at a minimum.
 - 2) Technical Characteristics:

REQUIREMENT	FUNCTION
a) Wire size	22 AWG, minimum
b) Working shield	350 V
c) Bend radius	10X the cable outside diameter

d) Impedance	100 Ohms \pm 15%, BAL
e) Bandwidth	100 mHz, minimum
F) DC RESISTANCE	10.0 Ohms/100M, maximum
g) Shield coverage	
h) Overall Outside (if OEM specified)	100%
i) Individual Pairs (if OEM specified)	100%
j) Attenuation	
k) Frequency in mHz	dB per 305 M (1,000ft.), maximum
0.7	5.2
1.0	6.5
4.0	14.0
8.0	19.0
16.0	26.0
20.0	29.0
25.0	33.0
31.0	36.0
62.0	52.0
100.0	68.0

f. Remote Control: The remote control cable shall be multi-conductor with stranded (solid is permissible) conductors.

- 1) The cable shall be able to handle the power and voltage necessary to control specified system equipment from a remote location.
- 2) The cable shall be NRTL listed and pass the FR-1 vertical flame test, at a minimum.
- 3) Each conductor shall be color-coded.
- 4) Combined multi-conductor and coaxial cables are acceptable for this installation, as long as all system performance standards are met.
- 5) Technical Characteristics

REQUIREMENT	FUNCTION
a) Length	As required, in 1K (3,000 m.) reels minimum
b) Connectors	As required by system design
c) Size	18 AWG, minimum, Outside 20 AWG, minimum, Inside
d) Color coding	Required, EIA industry standard
f) Bend radius	10X the cable outside diameter

g) Impedance	As required
h) Shield coverage	As required by OEM specification
i) Attenuation	
j) Frequency in MHz	dB per 305 M (1,000ft.), maximum
0.7	5.2
1.0	6.5
4.0	14.0
8.0	19.0
16.0	26.0
20.0	29.0
25.0	33.0
31.0	36.0
50.0	52.0

4. FIBER OPTIC CABLE: Is not required to be plenum rated when installed in conduit. It is required to be plenum rated when installed in designated "Air Plenum" spaces / areas. Wiring that is routed in cable trays via pathways that is not rated "Air Plenum" locations, the wiring is not required to be plenum rated; only when pathways pass through "Air Plenum" spaces/areas, the wiring shall be plenum rated.

a. Single-mode

- 1) 8/125-um, 0.10 aperture 1,310 nm fiber optic cable in accordance with TIA-492CAAA,
- 2) 8/125-um, 0.10 aperture 1,550 nm fiber optic cable in accordance with TIA-492E000.

b. Multimode

- 1) 62.5/125-um, Bell System Standard, 0.275 aperture fiber optic cable in accordance with TIA-492AAAA, TIA-472D000, and ICEA S-87-640, OR
- 2) 50/125-um, American (NOT EUROPEAN) Standard, 0.275 aperture fiber optic cable that is optically enhanced in accordance with TIA-492AAAB, including any special requirements made necessary by using this specialized design (re PART 1, PARAGRAPH 1.4.E.3.h for minimum performance).

- c. Strength Members: Provide central, non-metallic strength members with sufficient tensile strength for installation and residual rated loads to meet the applicable performance requirements in accordance with ICEA S-87-640. The strength member is included to serve as a cable core foundation to reduce strain on the fibers, and shall not serve as a pulling strength member.

- d. Shielding or Other Metallic Covering: Provide bare aluminum or coated aluminum, dual tape covering or shield in accordance with ICEA S-87-640.
- e. Fiber optic cable: Shall be specifically designed for inside or outside use with loose buffered construction. Provide fiber optic color code in accordance with TIA/EIA-598.
- f. Performance Requirements: Provide fiber optic cable with optical and mechanical performance requirements in accordance with ICEA S-87-640.
 - 1) End to End Link Performance as listed in Annex E of ANSI/ TIA/ EIA SP-2840A.
 - 2) The cabling system must conform to the current issue of Industry Standard ANSI/TIA/EIA 568C.
 - 3) The system shall support all applications for which it is designed, including, at a minimum ATM 155 Mbps for BICSI Certified Category 5E (see PART 2, PARAGRAPH 2.4.C.4), during the lifetime of the certified system.
 - 4) Quality and installation methods used shall be equal to or better than that found in the BICSI TDM Manual.
 - 5) VA demands strict adherence to the performance specifications listed in ANSI/TIA/EIA SP-2840A, 568B and 569B.
 - 6) New construction AND major renovations of telecommunications spaces and pathways shall conform to EIA/TIA 569B, at a minimum.
 - a) In cases of renovations in historic or otherwise restrictive buildings; where it has been determined as impossible to follow the above stated guidelines, the exceptions must not modify the maximum distances set forth in ANSI/TIA/EIA SP-2840A, 568C and 569B and must not in any way affect the performance of the entire cabling system.
 - b) Modification to administrative issues requires written approval(s) from COTR; with concurrence from the OEM, Contractor, SMCS and Using Authority(s).
- G. TEMPORARY DAS TIP PATHS: (ie overhead tracks, road / path bridges, etc.) for copper, fiberoptic, RF, coaxial and designated electrical cables that are used to maintain Facility Communications Service in force during construction and shall be installed so as to not present a pedestrian and traffic (including construction) safety hazard.
 - 1. TIP temporary cable installations are not required to meet Industry Standards; but, each must be reviewed and approved, in writing, by the COTR with concurrences from SMCS 0050P2H3, the Facility OI&T and Safety Officer, prior to installation. The Contractor shall:

- a. Be responsible for all work associated with each temporary TIP path installation required by system design; and, for its/their removal when determined no longer necessary,
 - b. Survey the outside TIP locations usually encountered, but are not limited to: Roads, driveways, marked paths, Hi traffic passageways, personnel walkways, etc, and provide the COTR a plan for the temporary path, and
 - c. Ensure each temporary TIP path is installed so as to not present a pedestrian and vehicle safety hazard.
- H. DAS CROSS-CONNECTION SYSTEM (CCS) EQUIPMENT BREAKOUT, TERMINATION CONNECTOR (OR BULKHEAD), AND PATCH PANELS (ARE IN ADDITIONA TO THE TIP CCS REQUIREMENTS): Each DAS CCS requires the use of a single tool, has the fewest amount of parts, and the least amount of assembly or projected trouble shooting time during the life of the system.
- 1. The CCS system used at each ENT (aka DEMARC), TER & MCR, MCOR, PCR, ECR, SCC, HER, STR's, TR's. The IDF shall force cross-connect cable slack management through adherence to the OEM's installation methods, provided cable management systems, and as described herein, so that moves, adds, and changes can be administered easily and cost effectively.
 - 2. The connector panel(s) shall be made of flat smooth 3.175 mm (1/8 in.) thick solid aluminum, custom designed, fitted and installed in the cabinet. Bulkhead equipment connectors shall be mounted on the panel to enable all cabinet equipment's signal, control, and coaxial cables to be connected through the panel. Each panel shall be color matched to the cabinet installed.
 - 3. Voice (or Telephone): The DAS CSS for voice or telephone service shall be Bell/ATT Telephone Industry Standard rated 110A (minimum) punch blocks for voice or telephone, and control wiring in lieu of patch panels, each being certified for BISCII Category 6 service.
 - a. IDC punch blocks (with internal RJ45 jacks) are acceptable for use in all DAS CCS and shall be specifically designed for BISCII Category 6 telecommunications service and the size and type of UTP cable used as described herein.
 - b. Punch block strips shall be secured to an OEM designed physical anchoring unit on a wall location in the DEMARC, MCR, TER, STRs, TRs & HER's DAS Vertical Cross Connection System (VCCS) & Horizontal Cross Connection System (HCCS) ARE IN ADDITION TO RIP V&HCCS REQUIREMENTS.
 - c. Console, cabinet, rail, panel, etc. mounting is allowed at the OEM recommendation and as approved by the COTR.
 - d. Punch blocks shall not be used for Class II or 120 VAC power wiring.

e. Technical Characteristics

Horizontal rows	100, minimum
Terminals per row	4, minimum
Terminal protector	required for each used or unused terminal
Insulation splicing	required between each row of terminals
Wire management	Required, internal
Spares	25% circuit capacity by extra rows or punch blocks

4. Digital (or High Speed Data): The DAS CCS shall be a patch panel with modular female RJ45 jacks installed in rows.

a. Patch panels and RJ45 jacks shall be specifically designed for BISC Category 6 telecommunications service and the size and type of UTP or STP cable used.

b. Each panel shall be 480 mm (19in.) horizontal EIA rack mountable dimensions with EIA standard spaced vertical mounting holes.

c. Technical Characteristics

Horizontal rows	2 or 4, minimum
Jacks per row	24, minimum
Type of jacks	RJ45, female
Terminal protector	required for each used or unused jack
Insulation	required between each row of jacks
Product Reference	Ortronics Mdl. OR-B51004983 for four rows and OR-S51004912 for two rows, or equal
Wire management	Required, internal
Spares	25% circuit expansion jacks or extra jack panel(s)

5. Fiber Optic Distribution Panel (aka Light Wave Shelf) The panel shall be provided with pre-punched chassis mounting holes, contained in a metal enclosure with lockable & tinted see-thru protection cover.

a. This panel is not allowed to be used for 120 VAC power connections.

b. Technical Characteristics

Height	4 rack units (RUs), 176 mm (7.0 in.)
Width	484 mm (19 1/16in.), EIA minimum
Horizontal Rows	6 ea, minimum
Vertical Rows	12 ea, minimum
Total Connectors	72 ea, minimum
Connector Type	AT&T/Bell Standard "LC" female, or equal
Produce Reference	AT&T LST1U-072/7, or equal

Wire management	Required, internal
Spares	25% circuit expansion jacks or extra jack panel(s)

6. Mounting Strips and Blocks

a. Barrier Strips: Barrier strips are approved for AC power, data, voice, and control cable or wires. Barrier strips shall accommodate the size and type of audio spade (or fork type) lugs used with insulating and separating strips between the terminals for securing separate wires in a neat and orderly fashion. Each cable or wire end shall be provided with an audio spade lug, which is connected to an individual screw terminal on the barrier strip. The barrier strips shall be surface secured to a console, cabinet, rail, panel, etc. 120 VAC power wires shall not be connected to signal barrier strips.

b. Technical Characteristics

Terminal size	6-32, minimum
Terminal Count	ANY COMBINATION
Wire size	20 AWG, minimum
Voltage handling	100 V, minimum
Protective connector cover	Required for Class II and 120 VAC power connections

7. Solderless Connectors: The connectors (or fork connectors) shall be crimp-on insulated lug to fit a 6-32 minimum screw terminal. The fork connector shall be installed using a standard lug-crimping tool.

8. Punch Blocks: As a minimum, Industry Standard 110 type punch blocks are approved for data, voice, and control wiring. Punch blocks shall be specifically designed for the size and type of wire used. Punch block strips shall be secured to a console, cabinet, rail, panel, etc. Punch blocks shall not be used for Class II or 120 VAC power wiring.

9. Wire Wrap Strips: Industry Standard wire wrap strips (16.5 mm (0.065in.) wire wrap minimum) are approved for data, voice and control wiring. Wire wrap strips shall be secured to a cabinet, rail, panel, etc. Wire wrap strips shall not be used for Class II or 120 VAC power wiring.

10. Analog Audio or Control System: Product reference of a Government Approved (US State Department) type is Telewire, PUP-17 with pre-punched chassis mounting holes arranged in two horizontal rows.

a. This panel may be used for audio, control cable, and Class II Low Voltage Wiring installations when provided with the proper connectors.

b. This panel is not allowed to be used for 120 VAC power connections.

c. Technical Characteristics

Height	Two rack units (RUs), 88 mm (3.5in.) minimum
Width	484 mm (19 1/16in.), EIA minimum
Number of connections	12 pairs, minimum
Connectors	
Audio Service	Use RCA 6.35 mm (1/4in.) Phono, XL or Barrier Strips, surface mounted with spade lugs (punch block or wire wrap type strips are acceptable alternates for barrier strips as long as system design is maintained and RE approved)
Control Signal Service	Barrier strips surface mounted with spade lugs (punch block or wire wrap type strips are acceptable alternates for barrier strips as long as system design is maintained and RE approved)
Low voltage power (class II)	Barrier strips with spade lugs and clear full length plastic cover, surfaced mounted
Fiber optic	"LC" Stainless steel, female

I. TELECOMMUNICATIONS OUTLETS (TCO): Is the final outlet/connector for the interface between the horizontal wiring and the designated room/area TCO locations. The Contractor shall clearly and fully indicate this category for each TCO location and compare the total count to the locations identified herein as a part of the technical submittal. Additionally, the Contractor shall indicate the total number of spares.

1. The System shall be capable of receiving the specified telephone (or voice) and data signals acquired from the LEC, FTS contracted carrier and computer system, and shall process and distribute them to the designated TCO's described herein and as shown on the drawings.
2. Each designated room/area shall be supplied with a TCO outlet/ connector (aka modular jack or RJ-45) for connection to the TIP Horizontal Cable Plant. All TCO outlet/connectors shall be installed in an appropriate faceplate designated by the OEM. All TCO outlet/connectors shall be complete with faceplate and attached permanently to a fixed structure, such as building walls, utility poles or modular furniture partitions.
3. The TCO shall be modular in construction and able to accept six (6) modular connection jacks mounted in a separate 100mm (4in.) x 100mm (4in.) x 63mm (2.5in.) steel outlet box with a labeled six (6) position modular faceplate.
4. The TCO Eight (8) position modular outlet/connectors (aka RJ45 jacks) shall accept six (6) position modular plugs (RJ1 1 or RJ1/2) while providing proper electrical connection and not damaging the jack. The OEM shall warrant all eight (8) position modular jack used in such a manner to be usable for 8 position modular plugs in the future.

5. The TCO shall be activated with one (1) minimum 4 pair UTP cable that will sustain minimum Category 6 communications service connected to the respective TR HCCS.
6. A second 100mm (4in.) x 100mm (4in.) x 63mm (2.5in.) steel outlet box with a stainless steel or color matched faceplate shall be provided adjacent to and attached to the activated outlet box for system expansion.
7. In order to allow normal expansion of service during the life of the TIP system, flush work area TCOs shall provide sufficient density to support up to a maximum of:
 - a. Four (4) jacks/ connectors per single gang TCO,
 - b. Eight (8) jacks/connectors per double gang TCO, and
 - c. Surface mount TCO's shall provide up to four (4) jacks/ connectors.
8. A non-impact termination method using a full-cycle terminating tool-having exhibiting both tactile and audible feedback to indicate proper termination shall be used. High impact tools are not acceptable and will not be approved. Terminated conductor ends shall be properly trimmed to assure a minimum clearance of 0.250 in. between the conductors of adjacent modules.
9. TCO face plates shall be clean in appearance and OEM recommended for the service it's performing. Mounting hardware shall not be visible on the faceplate. Color coded modules shall be employed and colors shall comply with the requirements of EIA/TIA 606B.
10. The room/area TCO outlet/connectors shall not cause or create "resonance" on short cable runs as described in the Field Testing TSB 67 (Draft 13 section 7.8 Short Links/Channels).
11. Each TCO outlet/connector shall require (or specifically not allow more than) only one single connection to the TIP Horizontal Cable serving its location as per TIA/EIA 568C standard.
12. Flush mounted TCO faceplates shall accommodate modular TCO outlet/connectors and be available in four (4) connectors per single gang TCO.
 - a. The modular TCO outlet/connectors available shall include a minimum of four active (4) UTP eight (8) position (RJ-45).
 - b. All TCO's shall be made of OEM approved high impact plastic.
13. The same modular TCO outlet/connectors as found in the flush and surface mount TCOs shall be installable in utility poles and modular furniture using OEM faceplates or adapters for this purpose. Each TCO shall house at least four (4) active TCO modular RJ-45 outlet/connectors.
14. The same modular TCO outlet/connectors as found in the flush and surface telecommunications outlets shall be installable in readily available single gang and double gang stainless steel faceplates using OEM faceplates or

adapters for this purpose. The eight (8) position modular UTP TCO outlet/connector and its pin assignments shall meet the requirements described in TIA/EIA 568C as T568A.

15. Each TCO shall be uniquely labeled as described herein. The label shall form an integral part of the faceplate.
16. For PBPU installations, the cover plate shall be the unit's OEM approved.
17. Each TCO with appropriate jacks installed shall be provided by the Contractor in each designated location and as shown on the drawings.
 - a. If the TCO's are not shown on the drawings, at a minimum, one (1) TCO shall be provided on each room wall, associated with an active 120 VAC duplex outlet shall be provided.
 - b. The contractor shall provide a minimum of one spare TCO per 25% of the total system count (whichever is greater) to the RE as System Expansion/Maintenance items.
18. TCO Connection (aka Patch) Cables
 - a. Telephone (aka voice): The Contractor shall provide one (1) voice connection (Patch) cable for each TCO telephone jack and HCCS Patch Panel (if provided by system design) in the System with 15% spares.
 - b. The telephone (voice) connection cable shall connect the telephone instrument to one of the TCO telephone (voice) jacks. The Contractor shall not provide telephone instrument(s) or equipment.
 - c. Technical Characteristics

Length	1.8M (6ft.), minimum
Cable	Voice Grade
Connector	RJ-11/45 compatible male on each end
Size	24 AWG, minimum
Color coding	Required, telephone industry standard

- d. Data (aka Digital): The Contractor shall provide one (1) data connection cable for each DAS TCO data jack and CCS patch panel in the system with 15% spares.
 - 1) The data connection cable shall connect a data instrument to the TCO data jack and perform data signal interconnection on the CCS patch panel. DAS TCOs ARE IN ADDITION TO THE TIP REQUIRED TCOs.
 - 2) The Contractor shall not provide active data terminal(s)/ equipment.
 - 3) Technical Characteristics

Length	1.8M (6 ft.), minimum
Cable	Data grade Category Six
Connector	RJ-45 male on each end

Color coding	Required, data industry standard
Size	24 AWG, minimum

e. Fiber Optic: The Contractor shall provide one (1) fiberoptic connection cable for each DAS TCO fiber optic jack and CCS patch panel in the System with 15% spares.

- 1) The connection cable shall connect a fiber optic instrument to the DAS TCO fiber optic jack and perform voice, data or HDTV interconnection on the CCS patch panel. The Contractor shall not provide fiber optic instrument(s)/equipment.

2) Technical Characteristics

Length	1.8M (6 ft.), minimum
Cable	Flexible single conductor with jacket
Connector	ST male on each end
Size	To fit single mode or multimode cable

f. RF: The Contractor shall provide one (1) RF coaxial cable connection cable for each DAS TCO RF connector and CCS patch panel in the System with 1 5% spares.

- 1) The RF coaxial connection cable shall connect a RF instrument to the DAS TCO RF jack and perform HDTV signal interconnection on the HCCS patch panel (if provided).

2) Technical Characteristics

Length	1.8M (6 ft.), minimum
Cable	Flexible RG-6/U, minimum
Connector	"F" male on each end //

J. COMMON EQUIPMENT ITEMS

1. Conduits

a. Rigid galvanized steel	Shall Conform to UL 6, ANSI C80.1.
b. Rigid aluminum	Shall Conform to UL 6, ANSI C80.5.
c. Rigid intermediate steel (IMC)	Shall Conform to UL 1242, ANSI C80.6.
d. EMT	Shall Conform to UL 797, ANSI C80.3. Maximum size not to exceed 105 mm (4 inch) and shall be permitted only with cable rated 600 volts or less.
e. Flexible galvanized steel	Shall Conform to UL 1.
f. Liquid-tight flexible metal	Shall Conform to UL 360.
g. Direct burial plastic	Shall conform to UL 651 and UL 651A, and heavy wall PVC or high density polyethylene (<u>PE</u>).

2. Conduit Fittings

a. Rigid steel and IMC	
(1) Fittings	Shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
(a) Sealing	Threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.
(2) Standard threaded couplings, locknuts, bushings, and elbows	Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
(3) Locknuts	Bonding type with sharp edges for digging into the metal wall of an enclosure.
(4) Bushings	Metallic insulating type, consisting of an insulating insert molded or locked into the metal body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
(5) Erickson (union-type) and set screw type couplings	Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
(6)	Must be OEM approved.
b. EMT	Shall meet the requirements of UL 514B and ANSI/ NEMA FB1
(1) fittings	Only steel or malleable iron materials are acceptable.
(2) Couplings and connectors	Concrete tight and rain tight, with connectors having insulated throats. Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller. Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches). Use set screws of case-hardened steel with hex head and cup point to firmly seat in wall of conduit for positive grounding.
(3)	Must be OEM approved.
c. Flexible steel	Conform to UL 514B. Only steel or malleable iron materials are acceptable.
(1) Clamp type,	Must be provided with insulated throat.
(2)	Must be OEM approved.
d. Liquid-tight flexible metal	Shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
(1)	Only steel or malleable iron materials are acceptable.

(2)	Must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
(3)	Must be OEM approved.
e. Rigid aluminum	Malleable iron, steel or aluminum alloy materials; Zinc or cadmium plate iron or steel fittings. Aluminum fittings containing more than 0.4 per-cent copper are prohibited.
(1) Locknuts and bushings	As specified for rigid steel and IMC conduit.
(2) Set screw fittings	Not permitted for use with aluminum conduit.
(3) Indent type connectors or couplings	Are Prohibited.
(4) Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal"	Are prohibited.
(5)	Must be OEM approved.
e. Direct burial plastic conduit fittings	
(1)	Fittings shall meet the requirements of UL 514C and NEMA TC3.
(2)	As recommended by the conduit OEM.
f. Expansion and deflection couplings:	
(1) Conform	To UL 467 and UL 514B.
(2) Accommodates	19 mm (0.75 inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
g. Include internal flexible metal braid sized to guarantee conduit ground continuity and fault currents	In accordance with UL 467, and the NEC code tables for ground conductors.
h. Jacket	Must be flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.

3. Conduit Supports

a. Parts and hardware	Zinc-coat or provide equivalent corrosion protection.
b. Individual Conduit Hangers	Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
c. Multiple conduit (trapeze) hangers	Not less than 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 12 gage steel, cold formed, lipped channels; with not less than 9 mm (3/8 inch) diameter steel hanger rods.
d. Solid Masonry and Concrete Anchors	Self-drilling expansion shields, or machine bolt expansion.

4. Junction, and Pull Boxes

a. Conforms	To UL-50 and UL-514A.
b. Cast metal	Where required by the NEC or shown, and equipped with rustproof boxes.
c. Sheet metal boxes	Galvanized steel, except where otherwise shown.
d. Flush mounted	Wall or ceiling boxes shall be installed with raised covers so that front face of raised cover is flush with the wall or ceiling. Surface mounted wall or ceiling boxes shall be installed with surface style flat or raised covers.

5. Telecommunications Pathways and Spaces - comply with TIA/EIA-569-A.

a. Cable trays	Shall be provided and utilized in the system to manage cable in an orderly fashion. Cable management shall be installed in racks and on walls as per OEM's recommendations. Appropriate fire barriers shall be placed around the cables in the sleeves, and unused sleeves shall be properly fire stop-ped.
b. Cable Duct	Equip with hinged covers, except where removable covers are allowed by specific authorization from the RE in writing.
c. Cable Duct Fittings	As recommended by the Cable Duct OEM.
d. Surface Metal Raceway	Shall conform to UL 5 and be "telecommunications service" rated with approved length-way partitions and cable straps to prevent wires and cables from changing from one partitioned pathway to another.
e. Surface Metal Raceway fittings	As recommended by the Raceway OEM.
f. Wireway, Metal or Approved Plastic	Shall be "telecommunications service" rated with approved length way partitions and cable straps to prevent wires and cables from changing from one partitioned pathway to another.
g. Wireway, Approved "Basket"	Shall be "telecommunications service" rated with approved length way partitions and cable straps to prevent wires and cables from changing from one partitioned pathway to another.
h. Wireway Fittings	As recommended by the Wireway OEM.

6. Interduct

- a. Inside Plant Innerduct shall be listed and marked for installation in plenum airspaces and shall be a minimum 1.0" (25mm) inside diameter.
- 1) Plenum innerducts shall be constructed of low smoke emission, flame retardant PVC.
 - 2) All Innerducts shall be furnished with factory installed nylon pull ropes.

- 3) Plenum innerducts shall have a UL 94 V-O rating for flame spreading limitation.
- 4) All innerduct reel lengths shall be provided as necessary to insure that ducts are continuous; one piece runs from ENT to MH; MH to MH; DEMARC to MCR/TER; TR to TR. No innerduct connectors will be allowed between rooms.
- 5) Pulling accessories used for innerduct shall be compatible with materials being pulled. Accessories shall be furnished as required to complete the installation, including but not limited to, inner duct lubricants, spreaders, applicators, grips, swivels, harnesses, and line missiles (aka blown air).
- 6) Each segment of innerduct shall extend at least 12.0" (300mm) inches beyond the end of the service conduit tie and/or cable tray. Innerduct ends shall be neatly restrained with wall mount clamps and sealed when cable is installed.

K. WIRE LUBRICATING COMPOUND

1. Suitable for the wire insulation and conduit it is used, and shall not harden or become adhesive.
2. Shall not be used on wire for isolated type electrical power systems.
3. SHALL BE USED ONLY AT THE OEM'S DIRECTON FOR NURSE CALL, PA, FA, SECURITY MANAGEMENT AND OTHER LIKE EMERGENCY SYSTEMS.

L. FIREPROOFING TAPE

1. The tape shall consist of a flexible, conformable fabric of organic composition coated one side with flame-retardant elastomer.
2. The tape shall be self-extinguishing and shall not support combustion. It shall be arc-proof and fireproof.
3. The tape shall not deteriorate when subjected to water, gases, salt water, sewage, or fungus and be resistant to sunlight and ultraviolet light.
4. The finished application shall withstand a 200-ampere arc for not less than 30 seconds.
5. Securing tape: Glass cloth electrical tape not less than 0.18 mm (7 mils) thick, and 19 mm (3/4 inch) wide.

2.5 WIRE MANAGEMENT SYSTEM AND EQUIPMENT

- A. Wire Management System: The system(s) shall be provided as the man-agement center of the respective cable system: TER, MCR, TR, HE, SCR, ECC, EMCC, etc. It shall perform as a platform to house peripheral equipment in a standard relay rack(s), equipment, distribution, in-terface cabinet(s) and wall mounting boards, panels or rails. It shall be arranged in a manner as to provide

convenient access to all installed Facilities Management Service (FMS), OI&T and other equipment.

1. All cables and connections shall be at the rear and/or top of each system interface to conduits, patch panels, punch blocks, wire wrap strips, barrier strip, etc.
2. Each system shall be custom configured to meet the System design and user needs. The MIN required is a rack, cabinet, or wall mounted TIA/EIA 19" wide and two RUs high.

B. Wire Management Equipment - the wire management equipment shall be the focal point of each wire management system. It shall provide an orderly interface between outside and inside wires and cables (where used), distribution and interface wires and cables, inter-connection wires and cables and associated equipment, jumper cables, and provide a uniform connection media for all system fire retardant wires and cables and other subsystems.

1. It shall be fully compatible and interface to each cable tray, duct, pathway, wireway, or conduit used in the system.
2. All interconnection or distribution wires and cables shall enter the system at the top (or from a wireway in the floor) via a over-head protection system and be uniformly routed down either side (or both at the same time) of the frames side protection system then laterally via a anchoring or routing shelf for termination on the rear of each respective terminating assembly.

a. Vertical Cable Management	Required, 4" X 5" duct style MIN, mounts to side or between 19" equipment racks, mounts in the front or rear of equipment racks or cabinets, contains cover to protect cables, has slots on each side for cable ingress and egress.
(1) Wall Brackets	Required - 19" wide and 6" deep MIN, accepts and mounts standard TIA/EIA 19" wide patch panels, mounting blocks, etc., hinged on one side to allow rear cable access.
(2) Floor Frames	Required - in very high density cable locations (ie PBX, TER, TR, MCR rooms), single or double sided metal construction, bolt mountable for floor applications, compatible for 300 pair, 66, 110 or 110A blocks, maintains MIN 6" high vertical cable channels, prevents opens, crosses or shorts in cables attached to it
b. Horizontal Cable Management	
(1) Combination Organizers	TIA/EIA minimum Category 5E, 19" rack width, in one RU (1.75") multiples to suite system design, front and rear cable routing rings

	required, six MIN.
(2) Cable Bars	
(a) Flat type	Required - 19" rack width rear or front cabinet or rack mount-able, contains cable tie bars and/or wire saddles.
(b) Duct type	Required - 19" rack width rear (1" X 4" MIN) or front (1 ½" X 3" MIN) cabinet or rack mount-able; alternate 2" X 4" MIN rear and 3" X 3" front MIN ducts are allowed, each duct in multiple of 1.0 RU (1.75") height.
(3) Cable Hangers	ALLOWED TO SUPPLEMENT CONDUIT RUNS - DO NOT USE FOR EMERGENCY/ LIFE & PUBLIC SAFETY/ CRITICAL SERVICE COMMUNICATION CABLES - <u>THESE ARE REQUIRED TO BE IN CONDUIT.</u>
(a) Wall Mountable	WHEN APPROVED - in open cable runs, 3" X 2.5" 2.5" MIN, wall or ceiling mountable, allows cables to be installed and re-moved from hanger, black color metal or high impact plastic construction MIN required.
(b) Bar Type	WHEN APPROVED - in open cable runs shall be compliment TO AC-CESS Type 66, 110 OR 110A block cable loops; screw mountable required.
(c) Rack Mountable	Required - above and or inside 19" cabinet panels where wire looms are not provided, allows quick cable attachment or removal, screw mountable.
(4) "J" Hooks & "O" Rings or "S" Clips	ALLOWED ONLY FOR CONDUIT - DO NOT USE FOR ANY EMERGENCY/LIFE & PUBLIC SAFETY/CRITICAL SERVICE COMMUNICATION CABLES - <u>THESE ARE REQUIRED TO BE IN CONDUIT.</u> WHEN APPROVED - in open CONDUIT runs, screw mountable only, 1.5" X 2" MIN, each ITEM shall support a MIN of ONE 1.0" CONDUIT..
(5) Cable Ladder	WHEN APPROVED - shall nominally be 12 in. (305 mm) wide, rung spacing of 9" (225 mm) and be certified / listed for telecom-munications service.
(6) Cable Support	NRTL labeled for support of minimum Category 5E cabling, designed to prevent degradation of cable per-formance and pin - points that could damage cable.
c. Vertical or Horizontal Cable Management	
(1) Cable Ties	Required - 4" MIN length, black in color, ultraviolet resis-tant.
(2) Cable Tie Mounting De-vices	

(a) Adhesive Backed	Required - square style 0.5" X 0.5" MIN, allows two MAX cable ties to be attached in either direction, attaches directly to metal or slick surfaces, requires additional screw when mounted to wood or wall back-board.
(b) Screw Type	Required - rectangle style 0.5" X 0.75" MIN, allows one cable tie to be attached in only one direction, requires wood or dry-wall screw for wall or backboard mounting or sheet metal screw for metal mounting.
(c) Screw Anchor Type	Required - rectangle style 0.5 X 0.75" MIN with mounting hole on one end, allows one cable to be attached in only one direction, requires wood or drywall screw for wall or backboard mounting or sheet metal screw for metal mounting.
(3) Cable Clips	WHEN APPROVED - in open CONDUIT runs, nail able or screw mount-able designed with arch to fit CONDUIT diameter without da-mageing the CONDUIT; plastic white or black color allowed.
(4) Wire Spools	WHEN APPROVED - in open cable runs, round in design with flange on outside to prevent cables from falling off spool, screw mountable via center of spool
(5) Spiral Cable Wrapping	Required - when cable ties are not used to secure all cables, 0.5" OD MIN, weather proof Polyethylene construction MIN required, neatly bonds all loose cables in one bundle without damaging cables, allows cable to ingress and egress from the bundle through the wraps.
(6) Wire Clips and Clamps	Required - when cable ties are not used on short runs, adhesive backed, requires screw mounting to wall or back boards OR metal.
(7) Support Brackets	Provided with cable tie slots for fastening cable ties to Lacing Bars / Brackets.

2.6 ENVIRONMENTAL REQUIREMENTS:

- A. Technical submittals shall identify the environmental specifications for housing the system. These environmental specifications shall identify the requirements for initial and expanded system configurations for:
- B. Floor loading for batteries and cabinets.
- C. Minimum floor space and ceiling heights.
- D. Minimum size of doors for equipment passage.
- E. Power requirements: The bidders shall provide the specific voltage, amperage, phases, and quantities of circuits required.
- F. Air conditioning, heating, and humidity requirements. The Contractor shall identify the ambient temperature and relative humidity operating ranges required preventing equipment damage.

- G. Air conditioning requirements (expressed in BTU per hour, based on adequate dissipation of generated heat to maintain required room and equipment standards).
- H. Proposed floor plan based on the expanded system configuration of the Contractor's proposed PBX (if used) for this Facility.
- I. Conduit size requirement (between equipment room and console room).

2.7 INSTALLATION KIT:

- A. The kit(s) shall be provided that, at a MIN, includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks, wiring blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire terminal or wiring block.
- B. Unfinished or unlabeled wire connections shall not be allowed and the system will not be accepted if these types of practices are used.
- C. All unused partially opened installation kit boxes, coaxial cable reels, conduit, cable tray, and /or cable duct bundles, wire rolls, and physical installation hardware shall be turned over to the RE. THIS IS NOT AN ACCEPTABLE ALTERNATE TO THE INDIVIDUAL SPARE EQUIPMENT UNLESS the MIN spare items are provided in these counts meets the levels described herein.
- D. The MIN required installation kits are as follows:

FUNCTIONS	CHARACTERISTICS
1. System Grounding	The grounding kit shall include all cable and installation hardware required. All radio equipment shall be connected to earth ground via internal building wiring, according to the NEC. This includes, but is not limited to:
a. Coaxial Cable Shields and Center Conductor	Only use the Building's Outside Lightning Grounding System.
b. Coaxial / System Cable Lightning Protectors	Only use the Building's Outside Lightning Grounding System.
c. Control Cable Shields	Only use the Building's Inside Signal Grounding System.
d. Data Cable Shields	Only use the Building's Inside Signal Grounding System.
e. Equipment Racks	Only use the Building's Inside Signal Grounding System.
f. Equipment Cabinets	Only use the Building's Inside Signal Grounding System.
g. Conduits	Only use the Building's Inside Signal Grounding System.

h. Cable Duct	Only use the Building's Inside Signal Grounding System.
i. Cable Trays	Only use the Building's Inside Signal Grounding System.
j. Power Panels	Only use the Building's Inside Signal Grounding System
k. Connector Panels	Only use the Building's Inside Signal Grounding System
2. COAXIAL CABLES	The coaxial cable kit shall include all coaxial connectors, cable tying straps, heat shrink tabbing, hangers, clamps, etc., required to accomplish a neat and secure installation.
3. WIRE AND CABLES	The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, wiring blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.
4. CONDUIT, CABLE DUCT AND CABLE TRAY	The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this document.
5. EQUIPMENT INTERFACE	The equipment kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface systems and sub-systems according to the OEM requirements and this document.
6. LABELS / LABELING	The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to completely and correctly label each sub-system according to the OEM requirements, record drawings, and this document - see Labeling Kit, Part 2, Section 2.8.
7. WIRE MANAGEMENT	The wire management kit shall include any item (i.e. cable wrap, guides, hangers, holders, forms, etc.) in sufficient quantity to provide a neat and orderly wire and cable installation between and inside all system components.
8. DOCUMENTATION	The documentation requirement of the Installation Kit shall include any item or quantity of items, computer discs, record drawings, equipment, maintenance, and operation manuals, and OEM materials needed to completely and correctly provide the system documentation as required by this specification document and explained herein.

2.8 LABELING

- A. Labels: Provide labeling for equipment, new cabling and termination hardware located within the Facility in accordance with TIA/EIA-606. Handwritten labeling is unacceptable. Stenciled lettering for cable and termination hardware shall be provided using either thermal ink transfer process or laser printer.
1. Cable Tag Installation: Install cable tags for each TIP cable or wire located in manholes, handholes, and vaults including each splice. Tag new wire and cable provided under this contract and existing wire and cable which are indicated to have splices and terminations provided by this contract. The labeling of TIP cable tag identifiers shall be in accordance with TIA/EIA-606B. Do not provide handwritten letters. Install cable tags so that they are clearly visible without disturbing any cabling or wiring in the manholes, handholes, and vaults.
 2. Equipment Labels: System equipment shall be permanently labeled with contrasting plastic laminate or Bakelite material. System equipment shall be labeled on the face of the unit corresponding to its source. Provide number, location, and letter designation of nameplates as indicated. Fasten nameplates to the device with a minimum of two (2) sheet-metal screws or two (2) rivets (Alternates to the nameplates will be considered during the technical submittal approval process).
 3. Clearly, consistently, logically and permanently mark switches, connectors, jacks, relays, receptacles and electronic and other equipment.
 4. Engrave and paint fill all receptacle panels using 1/8" (minimum) high lettering and contrasting paint.
 5. For rack-mounted equipment, use engraved Lamacoid labels with white 1/8" (minimum) high lettering on black background. Label the front and back of all rack-mounted equipment.
 6. Where multiple pieces of equipment reside in the same rack group, clearly and logically label each indicating to which room, channel, receptacle location, etc. they correspond.
 7. Permanently label cables at each end, including intra-rack connections. Labels shall be covered by the same, transparent heat-shrink tubing covering the end of the overall jacket. Alternatively, computer generated labels of the type which include a clear protective wrap may be used.
 8. Contractor's name shall appear no more than once on each continuous set of racks. The Contractor's name shall not appear on wall plates or portable equipment.
- B. Ensure each OEM supplied item of equipment has appropriate NRTL (aka UL) Labels / Marks for the service the equipment is performed permanently attached /

marked. EQUIPMENT INSTALLED NOT BEARING THESE MARKS WILL NOT BE ALLOWED TO BE A PART OF THE SYSTEM. THE CONTRACTOR SHALL BEAR ALL COSTS REQUIRED TO PROVIDE REPLACEMENT EQUIPMENT WITH APPROVED UL MARKS.

2.9 COMMUNICATIONS SYSTEM GROUND:

- A. In addition to the requirements outlined in SECTION 27 05 26 - GROUNDING AND BONDING FOR COMMUNICAITONS SYSTEMS, the contractor shall provide a circulating system "Signal Ground" that is separate from other Facility grounding systems (i.e. electrical, lightning, building, etc.) as described herein.
- B. Proper communications system grounding and bonding shall be provided for each: SPDP of Presence, ENTR (DEMARC), TER, TOR, MCR, MCOR, PCR, SCC, ECR, EMCR, STR(s), HER, TRs, TCOs; and insure all internal telecommunications equipments installed in these areas are connected to it as described herein.
- C. Reference shall be made to proper codes and standards, such that all grounding systems must comply with all applicable National, Regional, and Local Building and Electrical codes. The most stringent code of these governing bodies shall apply.
- D. Technical Characteristics

1. Connectors	Enclosed Circular Coated, Sealed and Plated Copper MIN #0 AWG Lug, or as specified by the RE
2. Wire	Stranded Copper # 0 AWG (minimum) with protective jacket, or as specified by the RE

2.10 LIGHTNING PROTECTION SYSTEM/GROUND:

- A. In addition to SECTION 26 41 00 - FACILITY LIGHTNING PROTECTION requirements, the contractor shall provide a lightning protection connection system for the communications systems / circuits totally and externally to the building. The use of internal electrical or signal grounding systems is not acceptable and will not be approved. The Contractor shall provide this system if it is not previously provided as a part of the contract.
- B. System Building Inputs, Aerial Cables and Underground Cables: These locations and equipment items shall be grounded with cooper wire run external to the building and connected to the earth ground. If the location and/or equipment item is to be installed in an area not protected by lightning rods or if the location and / or equipment item is to be elevated above existing lightning rod protection, the Contractor shall immediately notify the COTR in writing regarding the lightning strike hazard.
- C. Technical Characteristics

1. Connections	To the Facility's Lightning Protection System as required by the COTR (if no Facility system is present - the contractor shall provide a separate Minimum #0 AWG stranded copper wire grounding cable secured and connected outside of the building to the earth as specified by the COTR)
2. Connectors	Enclosed Circular Coated, Sealed and Plated Copper Minimum #0 AWG Lug, or as specified by the COTR.
3. Signal Wire/ Cable Grounding Protectors	Provided according to the OEM's recommendations for the specific cable, circuit or system's wires and cables. Each protector shall be connected to the lightning protection system as aforementioned.

D. System Building Inputs, Aerial Cables and Underground Cables: These locations and equipment items shall be grounded with cooper wire run external to the building and connected to the earth ground. If the location and/or equipment item is to be installed in an area not protected by lightning rods or if the location and / or equipment item is to be elevated above existing lighting rod protection, the Contractor shall immediately notify the COTR in writing regarding the lightning strike hazard.

E. Technical Characteristics

Connections	To the Facility's Lightning Protection System as required by the RE (if no Facility system is present - the contractor shall provide a separate Minimum #0 AWG stranded copper wire grounding cable secured and connected outside of the building to the earth as specified by the COTR)
Connectors	Enclosed Circular Coated, Sealed and Plated Copper Minimum #0 AWG Lug, or as specified by the COTR
Grounding Protectors	Provided according to the OEM's recommendations for the specific cable, circuit or system's wires and cables. Each protector shall be connected to the lightning protection system as aforementioned.

PART 3 - EXECUTION

3.1 INSTALLATION:

A. The Contractor shall use the criteria and requirements of this PART to complete the detailed installation of the System. The Design shall include computer RF modeling and site surveys as described herein. The Contractor shall be able to show design RF signal level(s) to sub-room precision for all room(s) /area(s) within the approved defined coverage area(s). The RE shall provide the Contractor with compatible drawings from the project Architect. If the drawings

are within BIM then it is the responsibility of the Contractor to modify the BIM Model for use in their wireless modeling which shall include, at a minimum, the creation of 2-D Floor Plans, Reflected Ceiling Plans (RCP) and elevations.

B. GENERAL SYSTEM INSTALLATION

1. After the contract's been awarded, and within the time period specified in the contract, the Contractor shall deliver the total system in a manner that fully complies with the requirements of this specification. The Contractor shall make no substitutions or changes in the System without written approval from the RE and PM.
2. The Contractor shall install all equipment and systems in a manner that complies with accepted industry standards of good practice, OEM instructions, the requirements of this specification, and in a manner which does not constitute a safety hazard. The Contractor shall insure that all installation personnel understands and complies with all the requirements of this specification.
3. The Contractor shall provide written verification to the RE at time of installation, that the type of wire/cable being provided is recommended and approved by the OEM. The Contractor is responsible for providing the proper size and type of cable duct and/or conduit and wiring even though the actual installation may be by another subcontractor.
4. Active electronic component equipment shall consist of solid state components, be rated for continuous duty service, comply with the requirements of FCC and NRTL standards for DAS equipment, systems, and service.
5. All passive distribution equipment shall meet or exceed -80 dB radiation shielding specifications.
6. All passive equipment shall be connected according to the OEM's specifications to insure future correct termination, isolation, impedance match, and signal level balance at each telephone/data outlet.
7. The Contractor shall install suitable filters, traps, directional couplers, splitters, TR's, and pads for minimizing interference and for balancing the System. Items used for balancing and minimizing interference shall be able to pass DAS control, Lightwave (fiber optic), RF, Video, HDTV, Security, Emergency, Safety and Nurse Call signals in the frequency bands selected, in the direction specified, with low loss, and high isolation, and with minimal delay of specified frequencies and signals. The Contractor shall provide all equipment necessary to meet the requirements outlined herein and the System performance standards.

8. Noise filters and surge protectors shall be provided for each equipment interface cabinet, switch equipment cabinet, control console, local, and remote active equipment locations to ensure protection from input primary AC power surges and noise glitches are not induced into low Voltage data circuits.
9. Where TCOs are installed adjacent to each other, install one outlet for each instrument.
10. All lines shall be terminated in a suitable manner to facilitate future expansion of the System as described (re 50% and expansion information) described in PART 2, PARAGRAPHS 2.4.A; 2.4.B.5; 2.4.B.8.c; 2.4.F.3.d.20; 2.4.F.3.e.3); 2.4.J.6 & 2.4.J.7 . There shall be a minimum of one (1) spare:
 - a. 25 pair UTP cable (current installed AWG),
 - b. 25 pair STP control cable (current installed AWG),
 - c. Six (6) pair single mode fiberoptic cable,
 - 1) 8/125-um; 0.10 Aperture; 1,300-nM; per TIA 492CAAA,
 - 2) 8/125-um; 0.10 Aperture; 1,550-nM; per TIA 492E000,
 - d. 12 pair multi-mode fiberoptic cable,
 - 1) 62.5/125-um; per TIA 4922AAA, 472D000, and ICEA S-87-640,
 - 2) 50/125-um; Optically Enhanced American (not European) Standard; per TIA 492AAAB.
 - e. Each cable shall be provided at each distribution point shown on the TIP drawings.
11. Terminating resistors or devices shall be used to terminate all unused branches, outlets, equipment ports of the System, and shall be devices designed for the purpose of terminating fiber optic or twisted pair, and coaxial, and lightwave cables carrying telephone and data, and analog signals in telephone and data, and analog video, and lightwave systems.
12. Equipment installed outdoors shall be weatherproof or installed in weatherproof enclosures with hinged doors and locks with two matching keys (NOTE ALL CABINET LOCKS SHALL BE VENDING MACHINE TYPE LOCKS LIKE KEYED WITH INDOOR CABINETS).
13. Equipment installed indoors shall be installed in metal cabinets with hinged doors and locks with two matching keys (NOTE ALL CABINET LOCKS SHALL BE VENDING MACHINE TYPE LOCKS LIKE KEYED WITH OUTDOOR CABINETS).
14. All interconnecting twisted pair, fiber optic or coaxial cables shall be terminated on equipment terminal boards, punch blocks, breakout boxes, splice blocks, and unused equipment ports/taps shall be terminated according to the OEM's instructions for telephone cable systems without adapters. The

Contractor shall not leave unused or spare twisted pair wire, fiber optic, or coaxial cable unterminated, unconnected, loose or unsecured

15. Color code all distribution wiring to conform to the Telephone Industry standard, EIA/TIA, and this document, whichever is the more stringent. At a minimum, all equipment, cable duct and/or conduit, enclosures, wiring, terminals, and cables shall be clearly and permanently labeled according to and using the provided record drawings, to facilitate installation and maintenance.
16. Connect the System's primary input AC power to the Facility' Critical Branch of the Emergency AC power distribution system as shown on the plans or if not shown on the plans consult with RE regarding a suitable circuit location prior to bidding.
17. Plug-in connectors shall be provided to connect all equipment, except coaxial cables and interface points. Coaxial cable distribution points and RF transmission lines shall use coaxial cable connections recommended by the cable OEM and approved by the System OEM. Base-band cable systems shall utilize barrier terminal screw type connectors, at a minimum. Crimp type connectors installed with a ratchet type installation tool are and acceptable alternate as long as the cable dress, pairs, shielding, grounding, and connections and labeling are provided the same as the barrier terminal strip connectors. Tape of any type, wire nuts, or solder type connections are unacceptable and will not be approved.
18. All equipment faceplates utilized in the System shall be stainless steel, anodized aluminum, or UL approved cycolac plastic for the areas where provided.

B. CONDUIT AND SIGNAL DUCTS

1. Conduit

- a. The Contractor shall employ the latest installation practices and materials. The Contractor shall provide conduit, junction boxes, connectors, sleeves, weather heads, pitch pockets, and associated sealing materials not specifically identified in this document as GFE. Conduit penetrations of walls, ceilings, floors, interstitial space, fire barriers, etc., shall be sleeved and sealed. The minimum conduit size shall be as described herein.
- b. All telecommunications emergency, critical, life support and safety cables shall be installed in separate conduit and/or signal ducts (exception from the separate conduit requirement to allow telecommunications cables to be installed in telecommunications approved partitioned cable tray may be granted in writing by the COTR if requested). The determination as to

which SECTION 27 & 28 SYSTEM ARE RATED FOR EMERGENCY SERVICE CAN BE FOUND IN PART 1 OF THIS DOCUMENT. Conduits shall be provided as described herein and in accordance with Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and NEC Articles 517 for Critical Care and 800 for Communications systems, at a minimum.

- c. When metal, plastic covered, etc., flexible cable protective armor or systems are specifically authorized to be provided for use in the System, their installation guidelines and standards shall be as specified herein, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and the NEC.
 - d. When "innerduct" flexible cable protective systems is specifically authorized to be provided for use in the System, it's installation guidelines and standards shall be as the specified herein, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and the NEC.
 - e. Conduit (including GFE) fill shall not exceed 40%. Each conduit end shall be equipped with a protective insulator or sleeve to cover the conduit end, connection nut or clamp, to protect the wire or cable during installation and remaining in the conduit. Electrical power conduit shall be installed in accordance with the NEC. AC power conduit shall be run separate from communications conduit.
 - f. Ensure that Critical Care Nurse Call, PA, DAS, Radio Paging, Police Two-Way Radio, Police Security Management, Emergency and Safety Systems (as identified by NEC Section 517 & 800; and UL) are completely separated and mechanically protected from all other systems by conduit and approved telecommunications partitioned cable tray or baskets.
2. Signal Duct, Cable Duct, or Cable Tray
- a. The Contractor shall use existing conduit, signal duct, cable duct, and/or cable tray, when identified and approved by the COTR.
 - b. Approved signal and/or cable duct shall be a minimum size of 100 mm x 100 mm (4 in. X 4 in.) inside diameter with removable tops or sides, as appropriate. Protective sleeves, guides or barriers are required on all sharp corners, openings, anchors, bolts or screw ends, junction, interface and connection points.
 - c. Approved cable tray shall be fully covered, mechanically and physically telecommunications approved partitioned for multiple electronic circuits use, and be NRTL listed and labeled for use with telecommunication circuits and/or systems. The COTR shall approve width and height dimensions.

C. CONNECTORS: Circuits, transmission lines, and signal extensions shall have continuity, correct connection and polarity. A uniform polarity shall be maintained between all points in the system.

1. Wires:

- a. Wire ends shall be neatly formed and where insulation has been cut, heat shrink tubing shall be employed to secure the insulation on each wire. Tape of any type is not acceptable.
- b. Audio spade lugs shall be installed on each wire (including spare or unused) end and connect to screw terminals of appropriate size barrier strips.
- c. AC barrier strips shall be provided with a protective cover to prevent accidental contact with wires carrying live AC current.
- d. Punch blocks are approved for signal, not AC wires.
- e. Wire Nut or "Scotch Lock" connectors are not acceptable for signal wire installation.

2. Cables: Each connector shall be designed for the specific size cable being used and installed with the OEM's approved installation tool. Typical system cable connectors include; but, are not limited to: Audio spade lug, punch block, wire wrap, etc.

3. Line or Microphone Audio: Each connector shall be installed according to the cable or connector OEM's instructions and use the OEM's approved installation tool. Install the connector's to provide and maintain the following audio signal polarity:

- a. XLR type connectors Signal or positive conductor is pin 3; common or neutral conductor is pin 2; ground conductor is pin 1.
- b. Two and 3 conductor 1/4" Signal or positive conductor is tip; neutral or 1/8" Phono plugs conductor is ring and ground or shield and jacks conductor is sleeve.
- c. RCA Phono Plugs the Signal or positive conductor is tip; and Jacks neutral or shield conductor is sleeve.

4. Speaker Line Audio:

- a. Each connector shall be installed according to the cable, transformer or speaker OEM instructions and using the OEM's approved installation tool. The Contractor shall ensure each speaker is properly phased and connected in the same manner throughout the System using two conductor type wires.
- b. One of the conductors shall be color coded to aid in establishing speaker signal polarity. Each speaker line shall be permanently soldered or audio spade lug connected to each appropriate speaker or line matching

transformer connection terminal. Speaker line connection to each audio amplifier shall use audio spade lugs, as described herein.

D. AC POWER: AC power wiring shall be run separately from communications cable.

E. GROUNDING (SEE PARAGRAPH 2.9 HEREIN FOR THIS REQUIREMENT)

F. EQUIPMENT ASSEMBLY

1. Cabinets: Each cabinet/enclosure shall be: floor or wall mounted with standard knockout holes for conduit connections or cable entrance; provide for ventilation of the equipment; have front and rear locking doors (except wall mounted cabinets that require only a front locking door); power outlet strip(s), and connector or patch panel(s).
 - a. Rack (including freestanding radio relay) mounted equipment shall be installed in the enclosure's equipment adjustable mounting rails with equipment normally requiring adjustment or observation mounted so operational adjustment(s) can be conveniently made.
 - 1) Heavy equipment shall be mounted with rack slides or rails allowing servicing from the front of the enclosure. Heavy equipment shall not depend only upon front panel mounting screws for support.
 - 2) Equipment shall be provided with sufficient cable slack to permit servicing by removal of the installed equipment from the front of the enclosure.
 - 3) A color matched blank panel (spacer) of 44 mm (1.75 in.) high, shall be installed between each piece of equipment (active or passive) to insure adequate air circulation.
 - 4) The enclosure shall be designed for efficient equipment cooling and air ventilation. Each console or cabinet shall be equipped with a quiet fan and non-disposable air filter.
 - b. Enclosures and racks shall be installed plumb and square. Each shall be permanently attached to the building structure and held firmly in place. Fifteen inches of front vertical space opening shall be provided for additional equipment.
 - c. Signal connector, patch, and bulkhead panels (i.e.: audio, data, control, analog video, etc.) shall be connected so that outputs from each source, device or system component shall enter the panel at the top row of jacks, beginning left to right as viewed from the front, which will be called "inputs". Each connection to a load, device or system component shall exit the panel at the bottom row of jacks, beginning left to right as viewed from the front, which will be called "outputs".

- d. Equipment located indoors shall be installed in metal racks or enclosures with hinged doors to allow access for maintenance without causing interference to other nearby equipment.
 - e. Cables shall enter the equipment racks or enclosures in such a manner that allows all doors or access panels to open and close without disturbing or damaging the cables.
 - f. All distribution hardware shall be securely mounted in a manner that allows access to the connections for testing and provides sufficient room for the doors or access panels to open and close without disturbing the cables.
2. UPS: It is acceptable to power all TER, MCR, TR & STRs FMS Equipment from single battery backup system, in lieu of individual cabinet mounted UPS, as long as the system performance standards are met.
- a. If this option is used it is acceptable to provide one AC input surge protector to isolate the battery backup system from the Facility's Emergency AC Generator Circuit as long as it is properly sized and the system performance standards are met; AND has electrical supervision provided as described herein.

G. LABELING/LABELS (SEE PARAGRAPH 2.8 HEREIN FOR THIS REQUIREMENT)

H. LIGHTNING PROTECTION SYSTEM (SEE PARAGRAPH 2.10 HEREIN FOR THIS REQUIREMENT)

3.2 TESTS

- A. INTERIM INSPECTION: At approximately 40-50% of installation at the direction of the CFM PE, PM, SRE or RE (Additional inspection(s) may be required at the direction of the CFM PE, PM, SRE or RE):
- 1. This inspection shall verify the equipment and system being provided adheres to the installation and technical requirements of this document.
 - a. The interim inspection will be conducted by an OEM and factory-certified contractor representative; AND witnessed by the COTR Facility AND SMCS 0050P2H3 Representatives.
 - b. Each item of installed equipment shall be checked to insure appropriate NRTL (UL) listing labels and markings are in place.
 - c. This inspection shall verify cabling terminations in all telecommunications and head end rooms and at workstation locations adhere to color code for T568A pin assignments and cabling connections are in compliance with ANSI/EIA/TIA standards.
 - d. Visually confirm Category 6 cable marking at TCOs, CCSs locations and patch cords.

2. The entire communications circulating ground system and each TGB, the separate earth ground point and lightning protection system shall be reviewed.
 3. Cable tray, conduit and path/wire-way installation practice shall be reviewed.
 4. Perform fiber optical cable field inspection tests via attenuation measurements on factory reels and provide results along with manufacturer certification for factory reel tests. Remove failed cable reels from project site upon attenuation test failure.
 5. The Contractor shall notify the COTR, in writing, of the estimated date the Contractor expects to be ready for the interim inspection, at least 20 working days before the requested inspection start date.
 6. Results of the interim inspection shall be provided to the CFM PE, PM, SRE and COTR.
 - a. If major or multiple deficiencies are discovered, a second interim inspection may be required before permitting the Contractor to continue with the system installation until the present deficiency(s) are corrected.
 - b. The COTR shall determine if an additional inspection(s) is/are required: OR if the Contractor will be allowed to proceed with the installation.
 - c. In either case, re-inspection of the deficiency(s) noted during the interim inspection(s), will be part of the proof of performance test final acceptance test.
 - d. The interim inspection shall not affect the Systems' completion date unless directed by the COTR.
 - e. The COTR shall ensure all test documents become a part of the Systems' documentation.
- B. PRETESTING: Upon completing the installation of the System, the Contractor shall align and balance the system. The Contractor shall pretest the entire system.
1. Pretesting Procedure:
 - a. During the system pretest, the Contractor shall verify (utilizing the approved spectrum analyzer and test equipment) that the System is fully operational and meets all the system performance requirements of this standard.
 - b. The Contractor shall pretest and verify that all System functions and specification requirements are met and operational, no unwanted aural effects, such as signal distortion, noise pulses, glitches, audio hum, poling noise, etc. are present. The Contractor shall measure and record

the aural carrier levels of each system DAS and data channel, at each of the following points in the system:

- 1) Utility Provider Entrance.
 - 2) Buried Conduit Duct(s) locations (if required).
 - 3) Manhole(s) & Grab Boxes (if required).
 - 4) ENR (aka DEMARC).
 - 5) PBX (if used) Interconnections.
 - 6) MCR Interconnections.
 - 7) MCOR Interconnections.
 - 8) TER Interconnections.
 - 9) TOR Interconnections.
 - 10) PCR Interconnections.
 - 11) ECR Interconnections.
 - 12) SCR Interconnections.
 - 13) System interface(s) in locations listed herein.
 - 14) System Grounding.
 - 15) Waterproofing.
 - 16) UPS Areas.
 - 17) Other(s) as required by AHJ (SMCS 0050P2H3).
2. The Contractor shall provide four (4) copies of the recorded system pretest measurements and the written certification that the System is ready for the formal acceptance test shall be submitted to the COTR.

C. ACCEPTANCE TEST: After the System has been pretested and the Contractor has submitted the pretest results and certification to the COTR, then the Contractor shall schedule an acceptance test date and give the COTR 30 day's written notice prior to the date the acceptance test is expected to begin.

1. The System shall be tested in the presence of the COTR. The System shall be tested utilizing the approved test equipment to certify proof of performance and Life Safety compliance.
2. The System shall be tested to certify proof of performance and FCC compliance. The test shall verify that the total System meets all the requirements of this specification. The notification of the acceptance test shall include the expected length (in time) of the test.
3. The acceptance test shall be performed on a "go-no-go" basis. Only those contractor minor adjustments required to show proof of performance shall be allowed.
 - a. The test shall demonstrate and verify that the installed System does comply with all requirements of this specification under operating conditions.

- b. The System shall be rated as either acceptable or unacceptable at the conclusion of the test.
 - c. Failure of any part of the System that precludes completion of system testing, and which cannot be repaired in four (4) hours, shall be cause for terminating the acceptance test of the System. Repeated failures that result in a cumulative time of eight (8) hours to affect repairs shall cause the entire System to be declared unacceptable.
4. If it is determined the system will require retesting, System Retest shall be rescheduled at the convenience of the COTR and all costs borne by the Contractor at the direction of the COTR.

D. Acceptance Test Procedure

1. Physical and Mechanical Inspection

- a. The Government Representative(s) and SMCS 0050P2H3 will tour all major areas where the System is and all sub-systems are completely and properly installed to insure they are operationally ready for proof of performance testing. A system inventory including available spare parts will be taken at this time. Each item of installed equipment shall be checked to ensure appropriate UL certification labels are affixed.
- b. The System diagrams, record drawings, equipment manuals, Telecommunications Infrastructure Plant (TIP) Auto CAD Disks, intermediate, and pretest results shall be formally inventoried and reviewed.
- c. Failure of the System to meet the installation requirements of this specification shall be grounds for terminating all testing.

2. Operational Test

- a. After the Physical and Mechanical Inspection of each DAS location listed in 3.2.D.1, terminating, mounting and interface equipment shall be checked to verify that it meets all FCC requirements outlined herein. A spectrum analyzer shall be utilized to accomplish this requirement.
- b. The DAS Cable distribution system shall be checked at each interface, junction, and distribution point to insure all meets the standards outlined herein.
- c. Each DAS location shall be functionally tested at the same time utilizing the Spectrum Analyzer.
- d. Once these tests have been completed, each installed DAS sub-system function shall be tested as a unified, functioning and fully operating system.

3. Individual Item Test: The VACO SMCS 0050P2H3 Government Representative will select individual items of DAS equipment for detailed proof of performance

testing until 100% of the System has been tested and found to meet the contents of this specification. Each DAS item shall meet or exceed the minimum requirements of this document

E. Test Conclusion: (see Part 1.13.A.3 for VA "Conditions of Acceptance"): At the conclusion of the Acceptance Test, using the generated punch list (or discrepancy list) the COTR and the Contractor shall jointly agree to the results of the test, and reschedule testing on deficiencies and shortages with the COTR. Any retesting to comply with these specifications will be done at the Contractor's expense.

1. Please refer to PART 1, PARAGRAPH 1.13 VA ACCEPANCE OF SYSTEM MOU, CONTRACTORS WARRANTY / GUARANTEE: SUB-PARAGRAPH 1.13.A.3 for VA Conditions of System Acceptance.
2. If the System is declared unacceptable without conditions, all rescheduled testing expenses will be borne by the Contractor.

F. CONNECTING TO THE IWS / DAS SYSTEM

1. The Contractor shall manage and collect all FCC License / Listings and provide them to the COTR when VA's accepts the System.
2. MANAGE EACH WSP'S CONNECTION TO THE SYSTEM: The Contractor shall represent the VAMC during negotiations with each WSP, insure all VA / GSA Land Management and Conditional Use Permits / Agreements are completed and approved by COTR, coordinate site preparation, assist with each WSPs' installation, and coordinate connection of each WSP to the System. Each WSP's integration to the System, shall be turn-key and shall include BDS(s), donor antenna(s), installation materials/equipment, wire management and updated system drawings.
3. MANAGE EACH VAMNC CONNECTION(s) TO THE SYSTEM: The Contractor shall coordinate site preparation, assist with each pre approved FMS installation, and coordinate connection of each FMS radio / wireless system to the System. Each FMS integration to the System, shall be turn-key and shall include BDS(s), donor antenna(s), installation materials/equipment, wire management and updated system drawings.
4. MANAGE ADDITIONAL SERVICE CONNECTION(S) TO THE SYSTEM: The Contractor shall represent the VAMC during negotiations with each Service, insure all VA / GSA Land Management and Conditional Use Permits / Agreements are completed and approved by COTR, coordinate site preparation, assist with the Service installation, and coordinate connection of each Service to the System. Each Service integration to the system, shall be turn-key and shall include BDS(s), donor antenna(s), installation materials/equipment, wire management and updated system drawings.

3.3 TRAINING: IN ADDITION TO THE TRAINING PROVIDED IN ACCORDANCE WITH ARTICLE, INSTRUCTIONS, OF SECTION 01 00 00, GENERAL REQUIREMENTS):

- A. Furnish the services of a factory-trained engineer or technician for a total of two (2) each four (4) hour classes to instruct designated Facility personnel. Instruction shall include cross connection, corrective, and preventive maintenance of the System and equipment.
- B. Before the System can be accepted by the COTR, this training must be accomplished. Training will be scheduled at the convenience of the COTR.
- C. Training shall be provided for the particular equipment(s) or system(s) as required in each associated specification and described as follows:
 - 1. A training schedule shall be developed and submitted by the contractor and approved by the COTR at least 30 days prior to the planned training.
 - 2. Provide thorough training of all staff assigned to those units receiving new DAS (other) communications equipment(s) and system(s). A separate training room will be set up that allows this type of individualized training utilizing in-service training unit, prior to opening of the new Facility or cut over of the new system.
 - 3. Provide the following minimum training times and durations:
 - a. Four (4) Weeks prior to the Facility opening for Engineering Staff (in 8-hour increments) - split evenly over 3 weeks and day and night shifts. Coordinate schedule with the COTR.
 - b. One (1) Week prior to the Facility opening for IT Staff (in 8-hour increments) - both day and night shifts. Coordinate schedule with the COTR.
 - c. During the Facility opening four (4) hours for supervisors and system administrators. Coordinate schedule(s) with the COTR.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 28 05 00
COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This Section, Common Work Results for Electronic Safety and Security (ESS), applies to all sections of Division 28.
- B. Salvage and reinstall existing and furnish and install new devices as required to maintain existing fully functional, electronic safety and security cabling system(s), equipment and approved accessories in accordance with the specification section(s), drawing(s), and referenced publications. Capacities and ratings of cable and other items and arrangements for the specified items are shown on each system's required Bill of Materials (BOM) and verified on the approved system drawing(s). If there is a conflict between contract's specification(s) and drawings(s), the contract's specification requirements shall prevail.
- C. The Contractor shall modify the existing fully functional and operating ESS to include, programming, configuration, documentation, and testing as required herein and the respective Safety and Security System Specification(s). The Contractor shall provide calculations and analysis to support design and engineering decisions as specified in submittals. The Contractor shall provide and pay all labor, materials, and equipment, sales and gross receipts and other taxes. The Contractor shall secure and pay for plan check fees, permits, other fees, and licenses necessary for the execution of work as applicable for the project. Give required notices; the Contractor will comply with codes, ordinances, regulations, and other legal requirements of public authorities, which bear on the performance of work.
- D. The existing security system includes but is not limited to: physical access control, intrusion detection, duress alarms, elevator control interface, video assessment and surveillance, video recording and storage, delayed egress, personal protection system, intercommunication system, fire alarm interface, equipment cabinetry, dedicated photo badging system and associated live camera, report printer, photo badge printer, and uninterruptible power supplies (UPS) interface. Operator training shall not be required as part of the Security Contractors scope and shall be provided by the Owner. The Security Contractor shall still be required to provide necessary maintenance and troubleshooting manuals as well as submittals as identified herein. The work shall include the procurement and installation of electrical wire and cables, the installation and testing of all system components. Inspection, testing,

demonstration, and acceptance of equipment, software, materials, installation, documentation, and workmanship, shall be as specified herein. The Contractor shall provide all associated installation support, including the provision of primary electrical input power circuits.

- E. Repair Service Replacement Parts On-site service during the warranty period shall be provided as specified under "Emergency Service". The Contractor shall guarantee all parts and labor for a term of one (1) year, unless dictated otherwise in this specification from the acceptance date of the system as described in Part 5 of this Specification. The Contractor shall be responsible for all equipment, software, shipping, transportation charges, and expenses associated with the service of the system for one (1) year. The Contractor shall provide 24-hour telephone support for the software program at no additional charge to the owner. Software support shall include all software updates that occur during the warranty period.
- F. Section Includes:
 - 1. Description of Work for Electronic Security Systems,
 - 2. Electronic security equipment coordination with relating Divisions,
 - 3. Submittal Requirements for Electronic Security,
 - 4. Miscellaneous Supporting equipment and materials for Electronic Security,
 - 5. Electronic security installation requirements.

1.2 RELATED WORK

- A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.
- B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.
- C. Section 08 51 13 - ALUMINUM WINDOWS. Requirements for window installation.
- D. Section 08 71 00 - DOOR HARDWARE. Requirements for door installation.
- E. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.
- F. Section 14 24 00 - HYDRAULIC ELEVATORS. Requirements for elevators.
- G. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. Requirements for connection of high voltage.
- H. Section 26 05 21 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.
- I. Section 26 05 33 - RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS. Requirements for infrastructure.
- J. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

- K. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.
- L. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.
- M. Section 28 08 00 - COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS. Requirements for Commissioning.
- N. Section 28 13 00 - PHYSICAL ACCESS CONTROL SYSTEMS (PACS). For physical access control integration.
- O. Section 28 16 00 - INTRUSION DETECTION SYSTEM (IDS). Requirements for alarm systems.
- P. Section 28 23 00 - VIDEO SURVEILLANCE. Requirements for security camera systems.
- Q. Section 28 26 00 - ELECTRONIC PERSONAL PROTECTION SYSTEM (EPPS). Requirements for emergency and interior communications.

1.3 DEFINITIONS

- A. AGC: Automatic Gain Control.
- B. Basket Cable Tray: A fabricated structure consisting of wire mesh bottom and side rails.
- C. BICSI: Building Industry Consulting Service International.
- D. CCD: Charge-coupled device.
- E. Central Station: A PC with software designated as the main controlling PC of the security access system. Where this term is presented with initial capital letters, this definition applies.
- F. Channel Cable Tray: A fabricated structure consisting of a one-piece, ventilated-bottom or solid-bottom channel section.
- G. Controller: An intelligent peripheral control unit that uses a computer for controlling its operation. Where this term is presented with an initial capital letter, this definition applies.
- H. COTR: Contracting Officer's Technical Representative.
- I. CPU: Central processing unit.
- J. Credential: Data assigned to an entity and used to identify that entity.
- K. DGP: Data Gathering Panel - component of the Physical Access Control System capable to communicate, store and process information received from readers, reader modules, input modules, output modules, and Security Management System.
- L. DTS: Digital Termination Service: A microwave-based, line-of-sight communications provided directly to the end user.
- M. EMI: Electromagnetic interference.
- N. EMT: Electric Metallic Tubing.
- O. ESS: Electronic Security System.

- P. File Server: A PC in a network that stores the programs and data files shared by users.
- Q. GFI: Ground fault interrupter.
- R. IDC: Insulation displacement connector.
- S. Identifier: A credential card, keypad personal identification number or code, biometric characteristic, or other unique identification entered as data into the entry-control database for the purpose of identifying an individual. Where this term is presented with an initial capital letter, this definition applies.
- T. I/O: Input/Output.
- U. Intrusion Zone: A space or area for which an intrusion must be detected and uniquely identified, the sensor or group of sensors assigned to perform the detection, and any interface equipment between sensors and communication link to central-station control unit.
- V. Ladder Cable Tray: A fabricated structure consisting of two longitudinal side rails connected by individual transverse members (rungs).
- W. LAN: Local area network.
- X. LCD: Liquid-crystal display.
- Y. LED: Light-emitting diode.
- Z. Location: A Location on the network having a PC-to-Controller communications link, with additional Controllers at the Location connected to the PC-to-Controller link with RS-485 communications loop. Where this term is presented with an initial capital letter, this definition applies.
- AA. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control and signaling power-limited circuits.
- BB. M-JPEG: Motion - Joint Photographic Experts Group.
- CC. MPEG: Moving picture experts group.
- DD. NEC: National Electric Code
- EE. NEMA: National Electrical Manufacturers Association
- FF. NFPA: National Fire Protection Association
- GG. NTSC: National Television System Committee.
- HH. NRTL: Nationally Recognized Testing Laboratory.
- II. Open Cabling: Passing telecommunications cabling through open space (e.g., between the studs of a wall cavity).
- JJ. PACS: Physical Access Control System; A system comprised of cards, readers, door controllers, servers and software to control the physical ingress and egress of people within a given space

- KK. PC: Personal computer. This acronym applies to the Central Station, workstations, and file servers.
- LL. PCI Bus: Peripheral component interconnect; a peripheral bus providing a high-speed data path between the CPU and peripheral devices (such as monitor, disk drive, or network).
- MM. PDF: (Portable Document Format.) The file format used by the Acrobat document exchange system software from Adobe.
- NN. RCDD: Registered Communications Distribution Designer.
- OO. RFI: Radio-frequency interference.
- PP. RIGID: Rigid conduit is galvanized steel tubing, with a tubing wall that is thick enough to allow it to be threaded.
- QQ. RS-232: An TIA/EIA standard for asynchronous serial data communications between terminal devices. This standard defines a 25-pin connector and certain signal characteristics for interfacing computer equipment.
- RR. RS-485: A TIA/EIA standard for multipoint communications.
- SS. Solid-Bottom or Non-ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal side rails, and a bottom without ventilation openings.
- TT. SMS: Security Management System - A SMS is software that incorporates multiple security subsystems (e.g., physical access control, intrusion detection, closed circuit television, intercom) into a single platform and graphical user interface.
- UU. TCP/IP: Transport control protocol/Internet protocol incorporated into Microsoft Windows.
- VV. Trough or Ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings sufficient for the passage of air and using 75 percent or less of the plan area of the surface to support cables.
- WW. UPS: Uninterruptible Power Supply
- XX. UTP: Unshielded Twisted Pair
- YY. Workstation: A PC with software that is configured for specific limited security system functions.

1.4 QUALITY ASSURANCE

- A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.
- B. Product Qualification:
 - 1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.

2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

C. Contractor Qualification:

1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of five (5) years experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Security Management System's (PACS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner's permission and representative, to verify the quality of installation and the references' level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to install, program, and service the PACS. The Contractor shall only utilize factory-trained technicians to install, terminate and service controller/field panels and reader modules. The technicians shall have a minimum of five (5) continuous years of technical experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within 60 miles of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include appropriate diagnostic equipment to perform diagnostic procedures. The COTR reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.
2. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.
3. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination and testing.

- D. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 GENERAL ARRANGEMENT OF CONTRACT DOCUMENTS

- A. The Contract Documents supplement to this specification indicates approximate locations of equipment. The installation and/or locations of the equipment and devices shall be governed by the intent of the design; specification and Contract Documents, with due regard to actual site conditions, recommendations, ambient factors affecting the equipment and operations in the vicinity. The Contract Documents are diagrammatic and do not reveal all offsets, bends, elbows, components, materials, and other specific elements that may be required for proper installation. If any departure from the contract documents is deemed necessary, or in the event of conflicts, the Contractor shall submit details of such departures or conflicts in writing to the owner or owner's representative for his or her comment and/or approval before initiating work.
- B. Anything called for by one of the Contract Documents and not called for by the others shall be of like effect as if required or called by all, except if a provision clearly designed to negate or alter a provision contained in one or more of the other Contract Documents shall have the intended effect. In the event of conflicts among the Contract Documents, the Contract Documents shall take precedence in the following order: the Form of Agreement; the Supplemental General Conditions; the Special Conditions; the Specifications with attachments; and the drawings.

1.6 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage or installation of equipment or material which has not had prior approval will not be permitted at the job site.
- C. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
 2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
 3. Submit each section separately.

D. The submittals shall include the following:

1. Information that confirms compliance with contract requirements.
Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.
2. Parts list which shall include those replacement parts recommended by the equipment manufacturer, quantity of parts, current price and availability of each part.

E. Submittals shall be in full compliance of the Contract Documents. All submittals shall be provided in accordance with this section.

Submittals lacking the breadth or depth these requirements will be considered incomplete and rejected. Submissions are considered multidisciplinary and shall require coordination with applicable divisions to provide a complete and comprehensive submission package. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted. Additional general provisions are as follows:

1. The Contractor shall schedule submittals in order to maintain the project schedule. For coordination drawings refer to Specification Section 01 33 10 - Design Submittal Procedures, which outline basic submittal requirements and coordination. Section 01 33 10 shall be used in conjunction with this section.
2. The Contractor shall identify variations from requirements of Contract Documents and state product and system limitations, which may be detrimental to successful performance of the completed work or system.
3. Each package shall be submitted at one (1) time for each review and include components from applicable disciplines (e.g., electrical work, architectural finishes, door hardware, etc.) which are required to produce an accurate and detailed depiction of the project.
4. Manufacturer's information used for submittal shall have pages with items for approval tagged, items on pages shall be identified, and capacities and performance parameters for review shall be clearly marked through use of an arrow or highlighting. Provide space for review stamps.

5. Technical Data Drawings shall be in the latest version of AutoCAD®, drawn accurately, and in accordance with VA CAD Standards CAD Standard Application Guide, and VA BIM Guide. FREEHAND SKETCHES OR COPIED VERSIONS OF THE CONSTRUCTION DOCUMENTS WILL NOT BE ACCEPTED. The Contractor shall not reproduce Contract Documents or copy standard information as the basis of the Technical Data Drawings. If departures from the technical data drawings are subsequently deemed necessary by the Contractor, details of such departures and the reasons thereof shall be submitted in writing to the COTR for approval before the initiation of work.
6. Packaging: The Contractor shall organize the submissions according to the following packaging requirements.
 - a. Binders: For each manual, provide heavy duty, commercial quality, durable three (3) ring vinyl covered loose leaf binders, sized to receive 8.5 x 11 in paper, and appropriate capacity to accommodate the contents. Provide a clear plastic sleeve on the spine to hold labels describing the contents. Provide pockets in the covers to receive folded sheets.
 - 1) Where two (2) or more binders are necessary to accommodate data; correlate data in each binder into related groupings according to the Project Manual table of contents. Cross-referencing other binders where necessary to provide essential information for communication of proper operation and/or maintenance of the component or system.
 - 2) Identify each binder on the front and spine with printed binder title, Project title or name, and subject matter covered. Indicate the volume number if applicable.
 - b. Dividers: Provide heavy paper dividers with celluloid tabs for each Section. Mark each tab to indicate contents.
 - c. Protective Plastic Jackets: Provide protective transparent plastic jackets designed to enclose diagnostic software for computerized electronic equipment.
 - d. Text Material: Where written material is required as part of the manual use the manufacturer's standard printed material, or if not available, specially prepared data, neatly typewritten on 8.5 inches by 11 inches 20 pound white bond paper.
 - e. Drawings: Where drawings and/or diagrams are required as part of the manual, provide reinforced punched binder tabs on the drawings and bind them with the text.
 - 1) Where oversized drawings are necessary, fold the drawings to the same size as the text pages and use as a foldout.
 - 2) If drawings are too large to be used practically as a foldout, place the drawing, neatly folded, in the front or rear pocket

of the binder. Insert a type written page indicating the drawing title, description of contents and drawing location at the appropriate location of the manual.

- 3) Drawings shall be sized to ensure details and text is of legible size. Text shall be no less than 1/16" tall.
- f. Manual Content: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.
- 1) Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.
 - 2) Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.
 - 3) The manuals shall include:
 - a) Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
 - b) A control sequence describing start-up, operation, and shutdown.
 - c) Description of the function of each principal item of equipment.
 - d) Installation and maintenance instructions.
 - e) Safety precautions.
 - f) Diagrams and illustrations.
 - g) Testing methods.
 - h) Performance data.
 - i) Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.

- j) Appendix; list qualified permanent servicing organizations for support of the equipment, including addresses and certified qualifications.
- g. Binder Organization: Organize each manual into separate sections for each piece of related equipment. At a minimum, each manual shall contain a title page, table of contents, copies of Product Data supplemented by drawings and written text, and copies of each warranty, bond, certifications, and service Contract issued. Refer to Group I through V Technical Data Package Submittal requirements for required section content.
- h. Title Page: Provide a title page as the first sheet of each manual to include the following information; project name and address, subject matter covered by the manual, name and address of the Project, date of the submittal, name, address, and telephone number of the Contractor, and cross references to related systems in other operating and/or maintenance manuals.
- i. Table of Contents: After the title page, include a type written table of contents for each volume, arranged systematically according to the Project Manual format. Provide a list of each product included, identified by product name or other appropriate identifying symbols and indexed to the content of the volume. Where more than one (1) volume is required to hold data for a particular system, provide a comprehensive table of contents for all volumes in each volume of the set.
- j. General Information Section: Provide a general information section immediately following the table of contents, listing each product included in the manual, identified by product name. Under each product, list the name, address, and telephone number of the installer and maintenance Contractor. In addition, list a local source for replacement parts and equipment.
- k. Drawings: Provide specially prepared drawings where necessary to supplement the manufacturers printed data to illustrate the relationship between components of equipment or systems, or provide control or flow diagrams. Coordinate these drawings with information contained in Project Record Drawings to assure correct illustration of the completed installation.
- l. Manufacturer's Data: Where manufacturer's standard printed data is included in the manuals, include only those sheets that are pertinent to the part or product installed. Mark each sheet to identify each part or product included in the installation. Where more than one (1) item in tabular format is included, identify each item, using appropriate references from the Contract

- Documents. Identify data that is applicable to the installation and delete references to information which is not applicable.
- m. Where manufacturer's standard printed data is not available and the information is necessary for proper operation and maintenance of equipment or systems, or it is necessary to provide additional information to supplement the data included in the manual, prepare written text to provide the necessary information. Organize the text in a consistent format under a separate heading for different procedures. Where necessary, provide a logical sequence of instruction for each operating or maintenance procedure. Where similar or more than one product is listed on the submittal the Contractor shall differentiate by highlighting the specific product to be utilized.
 - n. Calculations: Provide a section for circuit and panel calculations.
 - o. Loading Sheets: Provide a section for DGP Loading Sheets.
 - p. Certifications: Provide section for Contractor's manufacturer certifications.
7. Contractor Review: Review submittals prior to transmittal. Determine and verify field measurements and field construction criteria. Verify manufacturer's catalog numbers and conformance of submittal with requirements of contract documents. Return non-conforming or incomplete submittals with requirements of the work and contract documents. Apply Contractor's stamp with signature certifying the review and verification of products occurred, and the field dimensions, adjacent construction, and coordination of information is in accordance with the requirements of the contract documents.
8. Resubmission: Revise and resubmit submittals as required within 15 calendar days of return of submittal. Make resubmissions under procedures specified for initial submittals. Identify all changes made since previous submittal.
9. Product Data: Within 15 calendar days after execution of the contract, the Contractor shall submit for approval a complete list of all of major products proposed for use. The data shall include name of manufacturer, trade name, model number, the associated contract document section number, paragraph number, and the referenced standards for each listed product.
- F. Group 1 Technical Data Package: Group I Technical Data Package shall be one submittal consisting of the following content and organization.

Refer to VA Special Conditions Document for drawing format and content requirements. The data package shall include the following:

1. Section I - Drawings:

- a. General - Drawings shall conform to VA CAD Standards Guide. All text associated with security details shall be 1/8" tall and meet VA text standard for AutoCAD™ drawings.
- b. Cover Sheet - Cover sheet shall consist of Project Title and Address, Project Number, Area and Vicinity Maps.
- c. General Information Sheets - General Information Sheets shall consist of General Notes, Abbreviations, Symbols, Wire and Cable Schedule, Project Phasing, and Sheet Index.
- d. Floor Plans - Floor plans shall be produced from the Architectural backgrounds issued in the Construction Documents. The contractor shall receive floor plans from the prime A/E to develop these drawing sets. Security devices shall be placed on drawings in scale. All text associated with security details shall be 1/8" tall and meet VA text standard for AutoCAD™ drawings. Floor plans shall identify the following:
 - 1) Security devices by symbol,
 - 2) The associated device point number (derived from the loading sheets),
 - 3) Wire & cable types and counts
 - 4) Conduit sizing and routing
 - 5) Conduit riser systems
 - 6) Device and area detail call outs
- e. Architectural details - Architectural details shall be produced for each device mounting type (door details for EECS and IDS, Intrusion Detection system (motion sensor, vibration, microwave Motion Sensor and Camera mounting,
- f. Riser Diagrams - Contractor shall provide a riser diagram indicating riser architecture and distribution of the SMS throughout the facility (or area in scope).
- g. Block Diagrams - Contractor shall provide a block diagram for the entire system architecture and interconnections with SMS subsystems. Block diagram shall identify SMS subsystem (e.g., electronic entry control, intrusion detection, closed circuit television, intercom, and other associated subsystems) integration; and data transmission and media conversion methodologies.
- h. Interconnection Diagrams - Contractor shall provide interconnection diagram for each sensor, and device component.

Interconnection diagram shall identify termination locations, standard wire detail to include termination schedule. Diagram shall also identify interfaces to other systems such as elevator control, fire alarm systems, and security management systems.

i. Security Details:

- 1) Panel Assembly Detail - For each panel assembly, a panel assembly details shall be provided identifying individual panel component size and content.
- 2) Panel Details - Provide security panel details identify general arrangement of the security system components, backboard size, wire through size and location, and power circuit requirements.
- 3) Device Mounting Details - Provide mounting detailed drawing for each security device (physical access control system, intrusion detection, video surveillance and assessment, and intercom systems) for each type of wall and ceiling configuration in project. Device details shall include device, mounting detail, wiring and conduit routing.
- 4) Details of connections to power supplies and grounding
- 5) Details of surge protection device installation
- 6) Sensor detection patterns - Each system sensor shall have associated detection patterns.
- 7) Equipment Rack Detail - For each equipment rack, provide a scaled detail of the equipment rack location and rack space utilization. Use of BISCII wire management standards shall be employed to identify wire management methodology. Transitions between equipment racks shall be shown to include use vertical and horizontal ladder rack system.
- 8) Security Control Room - The contractor shall provide a layout plan for the existing Security Control Room. The layout plan shall identify all equipment and details associated with the installation.
- 9) Operator Console - The contractor shall provide a layout plan for the existing Operator Console. The layout plan shall identify all equipment and details associated with the installation. Equipment room - the contractor shall provide a layout plan for the equipment room. The layout plan shall identify all equipment and details associated with the installation.
- 10) Equipment Room - Equipment room details shall provide architectural, electrical, mechanical, plumbing, IT/Data and

associated equipment and device placements both vertical and horizontally.

- j. Electrical Panel Schedule - Electrical Panel Details shall be provided for all SMS systems electrical power circuits. Panel details shall be provided identifying panel type (Standard, Emergency Power, Emergency/Uninterrupted Power Source, and Uninterrupted Power Source Only), panel location, circuit number, and circuit amperage rating.
- k. Door Schedule - A door schedule shall be developed for each door equipped with electronic security components. At a minimum, the door schedule shall be coordinated with Division 08 work and include the following information:
 - 1) Item Number
 - 2) Door Number (Derived from A/E Drawings)
 - 3) Floor Plan Sheet Number
 - 4) Standard Detail Number
 - 5) Door Description (Derived from Loading Sheets)
 - 6) Data Gathering Panel Input Number
 - 7) Door Position or Monitoring Device Type & Model Number
 - 8) Lock Type, Model Number & Power Input/Draw (standby/active)
 - 9) Card Reader Type & Model Number
 - 10) Shunting Device Type & Model Number
 - 11) Sounder Type & Model Number
 - 12) Manufacturer
 - 13) Misc. devices as required
 - a) Delayed Egress Type & Model Number
 - b) Intercom
 - c) Camera
 - d) Electric Transfer Hinge
 - e) Electric Pass-through device
 - 14) Remarks column indicating special notes or door configurations
- 2. Camera Schedule - A camera schedule shall be developed for each camera. Contractors shall coordinate with the COTR to determine camera starting numbers and naming conventions. All drawings shall identify wire and cable standardization methodology. Color coding of all wiring conductors and jackets is required and shall be communicated consistently throughout the drawings package submittal. At a minimum, the camera schedule shall include the following information:
 - a. Item Number
 - b. Camera Number

- c. Naming Conventions
 - d. Description of Camera Coverage
 - e. Camera Location
 - f. Floor Plan Sheet Number
 - g. Camera Type
 - h. Mounting Type
 - i. Standard Detail Reference
 - j. Power Input & Draw
 - k. Power Panel Location
 - l. Remarks Column for Camera
3. Section II - Data Gathering Panel Documentation Package
- a. Contractor shall provide Data Gathering Panel (DGP) input and output documentation packages for review at the Shop Drawing submittal stage and also with the as-built documentation package.
The documentation packages shall be provided in both printed and magnetic form at both review stages.
 - b. The Contractor shall provide loading sheet documentation package for the associated DGP, including input and output boards for all field panels associated with the project. Documentation shall be provided in current version Microsoft Excel spreadsheets following the format currently utilized by VA. A separate spreadsheet file shall be generated for each DGP and associated field panels.
 - c. The spreadsheet names shall follow a sequence that shall display the spreadsheets in numerical order according to the DGP system number. The spreadsheet shall include the prefix in the file name that uniquely identifies the project site. The spreadsheet shall detail all connected items such as card readers, alarm inputs, and relay output connections. The spreadsheet shall include an individual section (row) for each panel input, output and card reader. The spreadsheet shall automatically calculate the system numbers for card readers, inputs, and outputs based upon data entered in initialization fields.
 - d. All entries must be verified against the field devices. Copies of the floor plans shall be forwarded under separate cover.
 - e. The DGP spreadsheet shall include an entry section for the following information:
 - 1) DGP number
 - 2) First Reader Number
 - 3) First Monitor Point Number
 - 4) First Relay Number
 - 5) DGP, input or output Location
 - 6) DGP Chain Number

- 7) DGP Cabinet Tamper Input Number
 - 8) DGP Power Fail Input Number
 - 9) Number of Monitor Points Reserved For Expansion Boards
 - 10) Number of Control Points (Relays) Reserved For Expansion Boards
- f. The DGP, input module and output module spreadsheets shall automatically calculate the following information based upon the associated entries in the above fields:
- 1) System Numbers for Card Readers
 - 2) System Numbers for Monitor Point Inputs
 - 3) System Numbers for Control Points (Relays)
 - 4) Next DGP or input module First Monitor Point Number
 - 5) Next DGP or output module First Control Point Number
- g. The DGP spreadsheet shall provide the following information for each card reader:
- 1) DGP Reader Number
 - 2) System Reader Number
 - 3) Cable ID Number
 - 4) Description Field (Room Number)
 - 5) Description Field (Device Type i.e.: In Reader, Out Reader, etc.)
 - 6) Description Field
 - 7) DGP Input Location
 - 8) Date Test
 - 9) Date Passed
 - 10) Cable Type
 - 11) Camera Numbers (of cameras viewing the reader location)
- h. The DGP and input module spreadsheet shall provide the following information for each monitor point (alarm input).
- 1) DGP Monitor Point Input Number
 - 2) System Monitor Point Number
 - 3) Cable ID Number
 - 4) Description Field (Room Number)
 - 5) Description Field (Device Type i.e.: Door Contact, Motion Detector, etc.)
 - 6) DGP or input module Input Location
 - 7) Date Test
 - 8) Date Passed
 - 9) Cable Type
 - 10) Camera Numbers (of associated alarm event preset call-ups)
- i. The DGP and output module spreadsheet shall provide the following information for each control point (output relay).

- 1) DGP Control Point (Relay) Number
 - 2) System (Control Point) Number
 - 3) Cable ID Number
 - 4) Description Field (Room Number)
 - 5) Description Field (Device: Lock Control, Local Sounder, etc.)
 - 6) Description Field
 - 7) DGP or OUTPUT MODULE Output Location
 - 8) Date Test
 - 9) Date Passed Cable Type
 - 10) Camera Number (of associated alarm event preset call-ups)
- j. The DGP, input module and output module spreadsheet shall include the following information or directions in the header and footer:
- 1) Header
 - a) DGP Input and Output Worksheet
 - b) Enter Beginning Reader, Input, and Output Starting Numbers and Sheet Will Automatically Calculate the Remaining System Numbers.
 - 2) Footer
 - a) File Name
 - b) Date Printed
 - c) Page Number
4. Section III - Construction Mock-up: In areas with exposed EMT/Conduit Raceways, contractor shall conceal raceway as much as practical and unobtrusively. In addition, historic significance must be considered to determine installation means and methods for approval by the owner.
5. Section IV - Manufacturers' Data: The data package shall include manufacturers' data for all materials and equipment, including sensors, local processors and console equipment provided under this specification.
6. Section V - System Description and Analysis: The data package shall include system descriptions, analysis, and calculations used in sizing equipment required by these specifications. Descriptions and calculations shall show how the equipment will operate as a system to meet the performance requirements of this specification. The data package shall include the following:
- a. Central processor memory size; communication speed and protocol description; rigid disk system size and configuration; flexible disk system size and configuration; back-up media size and configuration; alarm response time calculations; command response time calculations; start-up operations; expansion capability and

method of implementation; sample copy of each report specified; and color photographs representative of typical graphics.

- b. Software Data: The data package shall consist of descriptions of the operation and capability of the system, and application software as specified.
 - c. Overall System Reliability Calculations: The data package shall include all manufacturers' reliability data and calculations required to show compliance with the specified reliability.
7. Section VI - Certifications & References: All specified manufacturer's certifications shall be included with the data package. Contractor shall provide Project references as outlined in Paragraph 1.4 "Quality Assurance".

G. Group II Technical Data Package

- 1. The Contractor shall prepare a report of "Current Site Conditions" and submit a report to the COTR documenting changes to the site, particularly those conditions that affect performance of the system to be installed. The Contractor shall provide specification sheets, or written functional requirements to support the findings, and a cost estimate to correct those site changes or conditions which affect the installation of the system or its performance. The Contractor shall not correct any deficiency without written permission from the COTR.
- 2. System Configuration and Functionality: The contractor shall provide the results of the meeting with VA to develop system requirements and functionality including but not limited to:
 - a. Baseline configuration
 - b. Access levels
 - c. Schedules (intrusion detection, physical access control, holidays, etc.)
 - d. Badge database
 - e. System monitoring and reporting (unit level and central control)
 - f. Naming conventions and descriptors

H. Group III Technical Data Package

- 1. Development of Test Procedures: The Contractor will prepare performance test procedures for the system testing. The test procedures shall follow the format of the VA Testing procedures and be customized to the contract requirements. The Contractor will deliver the test procedures to the COTR for approval at least 60 calendar days prior to the requested test date.

I. Group IV Technical Data Package

- 1. Performance Verification Test
 - a. Based on the successful completion of the pre-delivery test, the Contractor shall finalize the test procedures and report forms for

the performance verification test (PVT) and the endurance test. The PVT shall follow the format, layout and content of the pre-delivery test. The Contractor shall deliver the PVT and endurance test procedures to the COTR for approval. The Contractor may schedule the PVT after receiving written approval of the test procedures. The Contractor shall deliver the final PVT and endurance test reports within 14 calendar days from completion of the tests. Refer to Part 3 of this section for System Testing and Acceptance requirements.

2. Training Documentation

- a. New Facilities and Major Renovations: Familiarization training shall be provided for new equipment or systems. Training can include site familiarization training for VA technicians and administrative personnel. Training shall include general information on new system layout including closet locations, turnover of the completed system including all documentation, including manuals, software, key systems, and full system administration rights. Lesson plans and training manuals training shall be oriented to type of training to be provided.

3. System Configuration and Data Entry:

- a. The contractor is responsible for providing all system configuration and data entry for the SMS and subsystems (e.g., video matrix switch, intercom, digital video recorders, network video recorders). All data entry shall be performed per VA standards & guidelines. The Contractor is responsible for participating in all meetings with the client to compile the information needed for data entry. These meetings shall be established at the beginning of the project and incorporated in to the project schedule as a milestone task. The contractor shall be responsible for all data collection, data entry, and system configuration. The contractor shall collect, enter, & program and/or configure the following components:
 - 1) Physical Access control system components,
 - 2) All intrusion detection system components,
 - 3) Video surveillance, control and recording systems,
 - 4) Intercom systems components,
 - 5) All other security subsystems shown in the contract documents.
- b. The Contractor is responsible for compiling the card access database for the VA employees, including programming reader configurations, access shifts, schedules, exceptions, card classes and card enrollment databases.
- c. Refer to Part 3 for system programming requirements and planning guidelines.

4. Graphics: Based on CAD as-built drawings developed for the construction project, create all map sets showing locations of all alarms and field devices. Graphical maps of all alarm points installed under this contract including perimeter and exterior alarm points shall be delivered with the system. The Contractor shall create and install all graphics needed to make the system operational. The Contractor shall utilize data from the contract documents, Contractor's field surveys, and all other pertinent information in the Contractor's possession to complete the graphics. The Contractor shall identify and request from the COTR, any additional data needed to provide a complete graphics package. Graphics shall have sufficient level of detail for the system operator to assess the alarm. The Contractor shall supply hard copy, color examples at least 203.2 x 254 mm (8 x 10 in) of each type of graphic to be used for the completed Security system. The graphics examples shall be delivered to the COTR for review and approval at least 90 calendar days prior to the scheduled date the Contractor requires them.

J. Group V Technical Data Package: Final copies of the manuals shall be delivered to the COTR as part of the acceptance test. The draft copy used during site testing shall be updated with any changes required prior to final delivery of the manuals. Each manual's contents shall be identified on the cover. The manual shall include names, addresses, and telephone numbers of each sub-contractor installing equipment or systems, as well as the nearest service representatives for each item of equipment for each system. The manuals shall include a table of contents and tab sheets. Tab sheets shall be placed at the beginning of each chapter or section and at the beginning of each appendix. The final copies delivered after completion of the endurance test shall include all modifications made during installation, checkout, and acceptance. Six (6) hard-copies and one (1) soft copy on CD of each item listed below shall be delivered as a part of final systems acceptance.

1. Functional Design Manual: The functional design manual shall identify the operational requirements for the entire system and explain the theory of operation, design philosophy, and specific functions. A description of hardware and software functions, interfaces, and requirements shall be included for all system operating modes. Manufacturer developed literature may be used; however, shall be produced to match the project requirements.
2. Equipment Manual: A manual describing all equipment furnished including:
 - a. General description and specifications; installation and checkout procedures; equipment electrical schematics and layout drawings;

system schematics and layout drawings; alignment and calibration procedures; manufacturer's repair list indicating sources of supply; and interface definition.

3. Software Manual: The software manual shall describe the functions of all software and include all other information necessary to enable proper loading, testing, and operation. The manual shall include:
 - a. Definition of terms and functions; use of system and applications software; procedures for system initialization, start-up, and shutdown; alarm reports; reports generation, database format and data entry requirements; directory of all disk files; and description of all communications protocols including data formats, command characters, and a sample of each type of data transfer.
4. Operator's Manual: The operator's manual shall fully explain all procedures and instructions for the operation of the system, including:
 - a. Computers and peripherals; system start-up and shutdown procedures; use of system, command, and applications software; recovery and restart procedures; graphic alarm presentation; use of report generator and generation of reports; data entry; operator commands' alarm messages, and printing formats; and system access requirements.
5. Maintenance Manual: The maintenance manual shall include descriptions of maintenance for all equipment including inspection, recommend schedules, periodic preventive maintenance, fault diagnosis, and repair or replacement of defective components.
6. Spare Parts & Components Data: At the conclusion of the Contractor's work, the Contractor shall submit to the COTR a complete list of the manufacturer's recommended spare parts and components required to satisfactorily maintain and service the systems, as well as unit pricing for those parts and components.
7. Operation, Maintenance & Service Manuals: The Contractor shall provide two (2) complete sets of operating and maintenance manuals in the form of an instructional manual for use by the VA Security Guard Force personnel. The manuals shall be organized into suitable sets of manageable size. Where possible, assemble instructions for similar equipment into a single binder. If multiple volumes are required, each volume shall be fully indexed and coordinated.
8. Equipment and Systems Maintenance Manual: The Contractor shall provide the following descriptive information for each piece of equipment, operating system, and electronic system:
 - a. Equipment and/or system function.
 - b. Operating characteristics.

- c. Limiting conditions.
 - d. Performance curves.
 - e. Engineering data and test.
 - f. Complete nomenclature and number of replacement parts.
 - g. Provide operating and maintenance instructions including assembly drawings and diagrams required for maintenance and a list of items recommended to stock as spare parts.
 - h. Provide information detailing essential maintenance procedures including the following: routine operations, trouble shooting guide, disassembly, repair and re-assembly, alignment, adjusting, and checking.
 - i. Provide information on equipment and system operating procedures, including the following; start-up procedures, routine and normal operating instructions, regulation and control procedures, instructions on stopping, shut-down and emergency instructions, required sequences for electric and electronic systems, and special operating instructions.
 - j. Manufacturer equipment and systems maintenance manuals are permissible.
9. Project Redlines: During construction, the Contractor shall maintain an up-to-date set of construction redlines detailing current location and configuration of the project components. The redline documents shall be marked with the words 'Master Redlines' on the cover sheet and be maintained by the Contractor in the project office. The Contractor will provide access to redline documents anytime during the project for review and inspection by the COTR or authorized Office of Protection Services representative. Master redlines shall be neatly maintained throughout the project and secured under lock and key in the contractor's onsite project office. Any project component or assembly that is not installed in strict accordance with the drawings shall be so noted on the drawings. Prior to producing Record Construction Documents, the contractor will submit the Master Redline document to the COTR for review and approval of all changes or modifications to the documents. Each sheet shall have COTR initials indicating authorization to produce "As Built" documents. Field drawings shall be used for data gathering & field changes. These changes shall be made to the master redline documents daily. Field drawings shall not be considered "master redlines".
10. Record Specifications: The Contractor shall maintain one (1) copy of the Project Specifications, including addenda and modifications issued, for Project Record Documents. The Contractor shall mark the Specifications to indicate the actual installation where the installation varies substantially from that indicated in the Contract

Specifications and modifications issued. (Note related Project Record Drawing information where applicable). The Contractor shall pay particular attention to substitutions, selection of product options, and information on concealed installations that would be difficult to identify or measure and record later. Upon completion of the mark ups, the Contractor shall submit record Specifications to the COTR. As with master relines, Contractor shall maintain record specifications for COTR review and inspection at anytime.

11. Record Product Data: The Contractor shall maintain one (1) copy of each Product Data submittal for Project Record Document purposes. The Data shall be marked to indicate the actual product installed where the installation varies substantially from that indicated in the Product Data submitted. Significant changes in the product delivered to the site and changes in manufacturer's instructions and recommendations for installation shall be included. Particular attention will be given to information on concealed products and installations that cannot be readily identified or recorded later. Note related Change Orders and mark up of Record Construction Documents, where applicable. Upon completion of mark up, submit a complete set of Record Product Data to the COTR.
12. Miscellaneous Records: The Contractor shall maintain one (1) copy of miscellaneous records for Project Record Document purposes. Refer to other Specifications for miscellaneous record-keeping requirements and submittals concerning various construction activities. Before substantial completion, complete miscellaneous records and place in good order, properly identified and bound or filed, ready for use and reference. Categories of requirements resulting in miscellaneous records include a minimum of the following:
 - a. Certificates received instead of labels on bulk products.
 - b. Testing and qualification of tradesmen. ("Contractor's Qualifications")
 - c. Documented qualification of installation firms.
 - d. Load and performance testing.
 - e. Inspections and certifications.
 - f. Final inspection and correction procedures.
 - g. Project schedule
13. Record Construction Documents (Record As-Built)
 - a. Upon project completion, the contractor shall submit the project master redlines to the COTR prior to development of Record construction documents. The COTR shall be given a minimum of a thirty (30) day review period to determine the adequacy of the master redlines. If the master redlines are found suitable by the

COTR, the COTR will initial and date each sheet and turn redlines over to the contractor for as built development.

- b. The Contractor shall provide the COTR a complete set of "as-built" drawings and original master redlined marked "as-built" blue-line in the latest version of AutoCAD drawings unlocked on DVD. The as-built drawing shall include security device number, security closet connection location, data gathering panel number, and input or output number as applicable. All corrective notations made by the Contractor shall be legible when submitted to the COTR. If, in the opinion of the COTR, any redlined notation is not legible, it shall be returned to the Contractor for re-submission at no extra cost to the Owner. The Contractor shall organize the Record Drawing sheets into manageable sets bound with durable paper cover sheets with suitable titles, dates, and other identifications printed on the cover. The submitted as built shall be in editable formats and the ownership of the drawings shall be fully relinquished to the owner.
 - c. Where feasible, the individual or entity that obtained record data, whether the individual or entity is the installer, sub-contractor, or similar entity, is required to prepare the mark up on Record Drawings. Accurately record the information in a comprehensive drawing technique. Record the data when possible after it has been obtained. For concealed installations, record and check the mark up before concealment. At the time of substantial completion, submit the Record Construction Documents to the COTR. The Contractor shall organize into bound and labeled sets for the COTR's continued usage. Provide device, conduit, and cable lengths on the conduit drawings. Exact in-field conduit placement/routings shall be shown. All conduits shall be illustrated in their entire length from termination in security closets; no arrowed conduit runs shall be shown. Pull box and junction box sizes are to be shown if larger than 100mm (4 inch).
- K. FIPS 201 Compliance Certificates
1. Provide Certificates for all software components and device types utilizing credential verification. Provide certificates for:
 - a. Card Readers
 - b. PIV Middleware
 - c. Template Matcher
 - d. Electromagnetically Opaque Sleeve
 - e. Certificate Management
 - 1) CAK Authentication System
 - 2) PIV Authentication System

3) Certificate Validator

4) Cryptographic Module

- L. Approvals will be based on complete submission of manuals together with shop drawings.
- M. After approval and prior to installation, furnish the COTR with one sample of each of the following:
 - 1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
 - 2. Each type of conduit and pathway coupling, bushing and termination fitting.
 - 3. Conduit hangers, clamps and supports.
 - 4. Duct sealing compound.
- N. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.
- O. In addition to the requirement of SUBMITTALS, the VA reserves the right to request the manufacturer to arrange for a VA representative to see typical active systems in operation, when there has been no prior experience with the manufacturer or the type of equipment being submitted.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute (ANSI)/ International Code Council (ICC):
 - A117.1Standard on Accessible and Usable Buildings and Facilities
- C. American National Standards Institute (ANSI)/ Security Industry Association (SIA):
 - AC-03Access Control: Access Control Guideline Dye Sublimation Printing Practices for PVC Access Control Cards
 - CP-01-00Control Panel Standard-Features for False Alarm Reduction
 - PIR-01-00Passive Infrared Motion Detector Standard - Features for Enhancing False Alarm Immunity

- TVAC-01CCTV to Access Control Standard - Message Set
for System Integration
- D. American National Standards Institute (ANSI)/Electronic Industries
Alliance (EIA):
- 330-09Electrical Performance Standards for CCTV
Cameras
- 375A-76Electrical Performance Standards for CCTV
Monitors
- E. American National Standards Institute (ANSI):
- ANSI S3.2-99Method for measuring the Intelligibility of
Speech over Communications Systems
- F. American Society for Testing and Materials (ASTM)
- B1-07Standard Specification for Hard-Drawn Copper
Wire
- B3-07Standard Specification for Soft or Annealed
Copper Wire
- B8-04Standard Specification for Concentric-Lay-
Stranded Copper Conductors, Hard, Medium-Hard,
or Soft
- C1238-97 (R03)Standard Guide for Installation of Walk-Through
Metal Detectors
- D2301-04Standard Specification for Vinyl Chloride
Plastic Pressure Sensitive Electrical Insulating
Tape
- G. Architectural Barriers Act (ABA), 1968
- H. Department of Justice: American Disability Act (ADA)
28 CFR Part 36-2010 ADA Standards for Accessible Design
- I. Department of Veterans Affairs:
- VHA National CAD Standard Application Guide, 2006
- VA BIM Guide, V1.0 10
- J. Federal Communications Commission (FCC):
- (47 CFR 15) Part 15 Limitations on the Use of Wireless
Equipment/Systems
- K. Federal Information Processing Standards (FIPS):
- FIPS-201-1Personal Identity Verification (PIV) of Federal
Employees and Contractors
- L. Federal Specifications (Fed. Spec.):
- A-A-59544-08Cable and Wire, Electrical (Power, Fixed
Installation)
- M. Government Accountability Office (GAO):

- GAO-03-8-02Security Responsibilities for Federally Owned
and Leased Facilities
- N. Homeland Security Presidential Directive (HSPD):
- HSPD-12Policy for a Common Identification Standard for
Federal Employees and Contractors
- O. Institute of Electrical and Electronics Engineers (IEEE):
- 81-1983IEEE Guide for Measuring Earth Resistivity,
Ground Impedance, and Earth Surface Potentials
of a Ground System
- 802.3af-08Power over Ethernet Standard
- 802.3at-09Power over Ethernet (PoE) Plus Standard
- C2-07National Electrical Safety Code
- C62.41-02IEEE Recommended Practice on Surge Voltages in
Low-Voltage AC Power Circuits
- C95.1-05Standards for Safety Levels with Respect to
Human Exposure in Radio Frequency
Electromagnetic Fields
- P. International Organization for Standardization (ISO):
- 7810Identification cards - Physical characteristics
- 7811Physical Characteristics for Magnetic Stripe
Cards
- 7816-1Identification cards - Integrated circuit(s)
cards with contacts - Part 1: Physical
characteristics
- 7816-2Identification cards - Integrated circuit cards
- Part 2: Cards with contacts -Dimensions and
location of the contacts
- 7816-3Identification cards - Integrated circuit cards
- Part 3: Cards with contacts - Electrical
interface and transmission protocols
- 7816-4Identification cards - Integrated circuit cards
- Part 11: Personal verification through
biometric methods
- 7816-10Identification cards - Integrated circuit cards
- Part 4: Organization, security and commands
for interchange
- 14443Identification cards - Contactless integrated
circuit cards; Contactless Proximity Cards
Operating at 13.56 MHz in up to 5 inches
distance

- 15693Identification cards -- Contactless integrated
circuit cards - Vicinity cards; Contactless
Vicinity Cards Operating at 13.56 MHz in up to
50 inches distance
- 19794Information technology - Biometric data
interchange formats
- Q. National Electrical Contractors Association
 - 303-2005Installing Closed Circuit Television (CCTV)
Systems
- R. National Electrical Manufacturers Association (NEMA):
 - 250-08Enclosures for Electrical Equipment (1000 Volts
Maximum)
 - TC-3-04PVC Fittings for Use with Rigid PVC Conduit and
Tubing
 - FB1-07Fittings, Cast Metal Boxes and Conduit Bodies
for Conduit, Electrical Metallic Tubing and
Cable
- S. National Fire Protection Association (NFPA):
 - 70-11 National Electrical Code (NEC)
 - 731-08Standards for the Installation of Electric
Premises Security Systems
 - 99-2005Health Care Facilities
- T. National Institute of Justice (NIJ)
 - 0601.02-03Standards for Walk-Through Metal Detectors for
use in Weapons Detection
 - 0602.02-03Hand-Held Metal Detectors for Use in Concealed
Weapon and Contraband Detection
- U. National Institute of Standards and Technology (NIST):
 - IR 6887 V2.1Government Smart Card Interoperability
Specification (GSC-IS)
 - Special Pub 800-37Guide for Applying the Risk Management Framework
to Federal Information Systems
 - Special Pub 800-63Electronic Authentication Guideline
 - Special Pub 800-73-3 ...Interfaces for Personal Identity Verification (4
Parts)
 -Pt. 1- End Point PIV Card Application Namespace,
Data Model & Representation
 -Pt. 2- PIV Card Application Card Command
Interface
 -Pt. 3- PIV Client Application Programming
Interface

-Pt. 4- The PIV Transitional Interfaces & Data Model Specification
- Special Pub 800-76-1 ...Biometric Data Specification for Personal Identity Verification
- Special Pub 800-78-2 ...Cryptographic Algorithms and Key Sizes for Personal Identity Verification
- Special Pub 800-79-1 ...Guidelines for the Accreditation of Personal Identity Verification Card Issuers
- Special Pub 800-85B-1 ..DRAFTPIV Data Model Test Guidelines
- Special Pub 800-85A-2 ..PIV Card Application and Middleware Interface Test Guidelines (SP 800-73-3 compliance)
- Special Pub 800-96PIV Card Reader Interoperability Guidelines
- Special Pub 800-104A ...Scheme for PIV Visual Card Topography
- V. Occupational and Safety Health Administration (OSHA):
 - 29 CFR 1910.97Nonionizing radiation
- W. Section 508 of the Rehabilitation Act of 1973
- X. Security Industry Association (SIA):
 - AG-01Security CAD Symbols Standards
- Y. Underwriters Laboratories, Inc. (UL):
 - 1-05Flexible Metal Conduit
 - 5-04Surface Metal Raceway and Fittings
 - 6-07Rigid Metal Conduit
 - 44-05Thermoset-Insulated Wires and Cables
 - 50-07Enclosures for Electrical Equipment
 - 83-08Thermoplastic-Insulated Wires and Cables
 - 294-99The Standard of Safety for Access Control System Units
 - 305-08Standard for Panic Hardware
 - 360-09Liquid-Tight Flexible Steel Conduit
 - 444-08Safety Communications Cables
 - 464-09Audible Signal Appliances
 - 467-07Electrical Grounding and Bonding Equipment
 - 486A-03Wire Connectors and Soldering Lugs for Use with Copper Conductors
 - 486C-04Splicing Wire Connectors
 - 486D-05Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations
 - 486E-00Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
 - 493-07Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable
 - 514A-04Metallic Outlet Boxes

- 514B-04Fittings for Cable and Conduit
- 51-05Schedule 40 and 80 Rigid PVC Conduit
- 609-96Local Burglar Alarm Units and Systems
- 634-07Standards for Connectors with Burglar-Alarm
Systems
- 636-01Standard for Holdup Alarm Units and Systems
- 639-97Standard for Intrusion-Detection Units
- 651-05Schedule 40 and 80 Rigid PVC Conduit
- 651A-07Type EB and A Rigid PVC Conduit and HDPE Conduit
- 752-05Standard for Bullet-Resisting Equipment
- 797-07Electrical Metallic Tubing
- 827-08Central Station Alarm Services
- 1037-09Standard for Anti-theft Alarms and Devices
- 1635-10Digital Alarm Communicator System Units
- 1076-95Standards for Proprietary Burglar Alarm Units
and Systems
- 1242-06Intermediate Metal Conduit
- 1479-03Fire Tests of Through-Penetration Fire Stops
- 1981-03Central Station Automation System
- 2058-05High Security Electronic Locks
- 60950Safety of Information Technology Equipment
- 60950-1Information Technology Equipment - Safety - Part
1: General Requirements
- Z. Uniform Federal Accessibility Standards (UFAS) 1984
- AA. United States Department of Commerce:
 - Special Pub 500-101 ...Care and Handling of Computer Magnetic Storage
Media

1.8 COORDINATION

- A. Coordinate arrangement, mounting, and support of electronic safety and security equipment:
 - 1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
 - 2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
 - 3. To allow right of way for piping and conduit installed at required slope.
 - 4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.
- B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

- C. Coordinate location of access panels and doors for electronic safety and security items that are behind finished surfaces or otherwise concealed.

1.9 MAINTENANCE & SERVICE

A. General Requirements

- 1. The Contractor shall provide all services required and equipment necessary to maintain the entire integrated electronic security system in an operational state as specified for a period of one (1) year after formal written acceptance of the system. The Contractor shall provide all necessary material required for performing scheduled adjustments or other non-scheduled work. Impacts on facility operations shall be minimized when performing scheduled adjustments or other non-scheduled work. See also General Project Requirements.

B. Description of Work

- 1. The adjustment and repair of the security system includes all software updates, panel firmware, and the following new items: computers equipment, communications transmission equipment and data transmission media (DTM), local processors, security system sensors, physical access control equipment, facility interface, signal transmission equipment, and video equipment.

C. Personnel

- 1. Service personnel shall be certified in the maintenance and repair of the selected type of equipment and qualified to accomplish all work promptly and satisfactorily. The COTR shall be advised in writing of the name of the designated service representative, and of any change in personnel. The COTR shall be provided copies of system manufacturer certification for the designated service representative.

D. Schedule of Work

- 1. The work shall be performed during regular working hours, Monday through Friday, excluding federal holidays.

E. System Inspections

- 1. These inspections shall include:
 - a. The Contractor shall perform two (2) minor inspections at six (6) month intervals or more if required by the manufacturer, and two (2) major inspections offset equally between the minor inspections to effect quarterly inspection of alternating magnitude.
 - 1) Minor Inspections shall include visual checks and operational tests of all console equipment, peripheral equipment, local processors, sensors, electrical and mechanical controls, and adjustments on printers.
 - 2) Major Inspections shall include all work described for Minor Inspections and the following: clean all system equipment and

local processors including interior and exterior surfaces; perform diagnostics on all equipment; operational tests of the CPU, switcher, peripheral equipment, recording devices, monitors, picture quality from each camera; check, walk test, and calibrate each sensor; run all system software diagnostics and correct all problems; and resolve any previous outstanding problems.

F. Emergency Service

1. The owner shall initiate service calls whenever the system is not functioning properly. The Contractor shall provide the Owner with an emergency service center telephone number. The emergency service center shall be staffed 24 hours a day 365 days a year. The Owner shall have sole authority for determining catastrophic and non-catastrophic system failures within parameters stated in General Project Requirements.
 - a. For catastrophic system failures, the Contractor shall provide same day four (4) hour service response with a defect correction time not to exceed eight (8) hours from [notification] [arrival on site]. Catastrophic system failures are defined as any system failure that the Owner determines will place the facility(s) at increased risk.
 - b. For non-catastrophic failures, the Contractor within eight (8) hours with a defect correction time not to exceed 24 hours from notification.

G. Operation

1. Performance of scheduled adjustments and repair shall verify operation of the system as demonstrated by the applicable portions of the performance verification test.

H. Records & Logs

1. The Contractor shall maintain records and logs of each task and organize cumulative records for each component and for the complete system chronologically. A continuous log shall be submitted for all devices. The log shall contain all initial settings, calibration, repair, and programming data. Complete logs shall be maintained and available for inspection on site, demonstrating planned and systematic adjustments and repairs have been accomplished for the system.

I. Work Request

1. The Contractor shall separately record each service call request, as received. The record shall include the serial number identifying the component involved, its location, date and time the call was

received, specific nature of trouble, names of service personnel assigned to the task, instructions describing the action taken, the amount and nature of the materials used, and the date and time of commencement and completion. The Contractor shall deliver a record of the work performed within five (5) working days after the work was completed.

J. System Modifications

1. The Contractor shall make any recommendations for system modification in writing to the COTR. No system modifications, including operating parameters and control settings, shall be made without prior written approval from the COTR. Any modifications made to the system shall be incorporated into the operation and maintenance manuals and other documentation affected.

K. Software

1. The Contractor shall provide all software updates when approved by the Owner from the manufacturer during the installation and 12-month warranty period and verify operation of the system. These updates shall be accomplished in a timely manner, fully coordinated with the system operators, and incorporated into the operations and maintenance manuals and software documentation. There shall be at least one (1) scheduled update near the end of the first year's warranty period, at which time the Contractor shall install and validate the latest released version of the Manufacturer's software. All software changes shall be recorded in a log maintained in the unit control room. An electronic copy of the software update shall be maintained within the log. At a minimum, the contractor shall provide a description of the modification, when the modification occurred, and name and contact information of the individual performing the modification. The log shall be maintained in a white 3 ring binder and the cover marked "SOFTWARE CHANGE LOG".

1.10 MINIMUM REQUIREMENTS

- A. References to industry and trade association standards and codes are minimum installation requirement standards.
- B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.11 DELIVERY, STORAGE, & HANDLING

- A. Equipment and materials shall be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:
 1. During installation, enclosures, equipment, controls, controllers, circuit protective devices, and other like items, shall be protected

- against entry of foreign matter; and be vacuum cleaned both inside and outside before testing and operating and repainting if required.
 - 2. Damaged equipment shall be, as determined by the COTR, placed in first class operating condition or be returned to the source of supply for repair or replacement.
 - 3. Painted surfaces shall be protected with factory installed removable heavy craft paper, sheet vinyl or equal.
 - 4. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.
- B. Central Station, Workstations, and Controllers:
- 1. Store in temperature and humidity controlled environment in original manufacturer's sealed containers. Maintain ambient temperature between 10 to 30 deg C (50 to 85 deg F), and not more than 80 percent relative humidity, non-condensing.
 - 2. Open each container; verify contents against packing list, and file copy of packing list, complete with container identification for inclusion in operation and maintenance data.
 - 3. Mark packing list with designations which have been assigned to materials and equipment for recording in the system labeling schedules generated by cable and asset management system.
 - 4. Save original manufacturer's containers and packing materials and deliver as directed under provisions covering extra materials.

1.12 PROJECT CONDITIONS

- A. Environmental Conditions: System shall be capable of withstanding the following environmental conditions without mechanical or electrical damage or degradation of operating capability:
- 1. Interior, Controlled Environment: System components, except central-station control unit, installed in temperature-controlled interior environments shall be rated for continuous operation in ambient conditions of 2 to 50 deg C (36 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, non-condensing. NEMA 250, Type 1 enclosure.
 - 2. Interior, Uncontrolled Environment: System components installed in non-temperature-controlled interior environments shall be rated for continuous operation in ambient conditions of -18 to 50 deg C (0 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, non-condensing. NEMA 250, Type 4X enclosures.
 - 3. Exterior Environment: System components installed in locations exposed to weather shall be rated for continuous operation in ambient conditions of -34 to 50 deg C (-30 to 122 deg F) dry bulb and 20 to

90 percent relative humidity, condensing. Rate for continuous operation where exposed to rain as specified in NEMA 250, winds up to 137 km/h (85 mph) and snow cover up to 610 mm (24 in) thick. NEMA 250, Type 4X enclosures.

4. Hazardous Environment: System components located in areas where fire or explosion hazards may exist because of flammable gases or vapors, flammable liquids, combustible dust, or ignitable fibers shall be rated, listed, and installed according to NFPA 70.
5. Corrosive Environment: For system components subjected to corrosive fumes, vapors, and wind-driven salt spray in coastal zones, provide NEMA 250, Type 4X enclosures.
- B. Security Environment: Use vandal resistant enclosures in high-risk areas where equipment may be subject to damage.
- C. Console: All console equipment shall, unless noted otherwise, be rated for continuous operation under ambient environmental conditions of 15.6 to 29.4 deg C (60 to 85 deg F) and a relative humidity of 20 to 80 percent.

1.13 EQUIPMENT AND MATERIALS

- A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.
- B. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.
- C. Equipment Assemblies and Components:
 1. Components of an assembled unit need not be products of the same manufacturer.
 2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
 3. Components shall be compatible with each other and with the total assembly for the intended service.
 4. Constituent parts which are similar shall be the product of a single manufacturer.
- D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.
- E. When Factory Testing Is Specified:
 1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the COTR a minimum of 15 working days prior to the manufacturers making the factory tests.

2. Four copies of certified test reports containing all test data shall be furnished to the COTR prior to final inspection and not more than 90 days after completion of the tests.
3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.14 ELECTRICAL POWER

- A. Electrical power of 120 Volts Alternating Current (VAC) shall be indicated on the Division 26 drawings. Additional locations requiring primary power required by the security system shall be shown as part of these contract documents. Primary power for the security system shall be configured to switch to emergency backup sources automatically if interrupted without degradation of any critical system function. Alarms shall not be generated as a result of power switching, however, an indication of power switching on (on-line source) shall be provided to the alarm monitor. The Security Contractor shall provide an interface (dry contact closure) between the PACS and the Uninterruptible Power Supply (UPS) system so the UPS trouble signals and main power fail appear on the PACS operator terminal as alarms.
- B. Failure of any on-line battery shall be detected and reported as a fault condition. Battery backed-up power supplies shall be provided sized for 8 hours of operation at actual connected load. Requirements for additional power or locations shall be included with the contract to support equipment and systems offered. The following minimum requirements shall be provided for power sources and equipment.
 1. Emergency Generator
 - a. Report Printers: Unit Control Room
 - b. Video Monitors: Unit Control Room
 - c. Intercom Stations
 - d. Radio System
 - e. Lights: Unit Control Room, Equipment Rooms, & Security Offices
 - f. Outlets: Security Outlets dedicated to security equipment racks or security enclosure assemblies.
 - g. Security Device Power Supplies (DGP, VASS, Card Access, Lock Power, etc.) powered from the security closets or remotely: various locations
 - h. Telephone/Radio Recording Equipment: Unit Control Room.
 - i. VASS Camera Power Supplies: Security Closets
 - j. VASS Pan/Tilt Units: Various Locations
 - k. VASS Outdoor Housing Heaters and Blowers: Various Sites
 - l. Intercom Master Control System

- m. Fiber Optic Receivers/Transmitters
- n. Outlets that charge handheld radios
- 2. Uninterruptible Power Supply (UPS) on Emergency Power
 - a. The following 120VAC circuits shall be provided by others. The Security Contractor shall coordinate exact locations with the Electrical Contractor:
 - 1) Security System Monitors and Keyboards: Control Room
 - 2) CPU: Control Equipment Room
 - 3) Communications equipment: Control Equipment Room and various sites.
 - 4) VASS Matrix Switcher: Control Equipment Room
 - 5) VASS: Control Equipment Room
 - 6) Digital Video Recorders, encoders & decoders: Control Room
 - 7) All Equipment Room racked equipment.
 - 8) Network switches

1.15 TRANSIENT VOLTAGE SUPPRESSION, POWER SURGE SUPPLESION, & GROUNDING

- A. Transient Voltage Surge Suppression: All cables and conductors extending beyond building façade, except fiber optic cables, which serve as communication, control, or signal lines shall be protected against Transient Voltage surges and have Transient Voltage Surge Suppression (TVSS) protection. The TVSS device shall be UL listed in accordance with Standard TIA 497B installed at each end. Lighting and surge suppression shall be a multi-strike variety and include a fault indicator. Protection shall be furnished at the equipment and additional triple solid state surge protectors rated for the application on each wire line circuit shall be installed within 914.4 mm (3 ft) of the building cable entrance. Fuses shall not be used for surge protection. The inputs and outputs shall be tested in both normal mode and common mode to verify there is no interference.
 - 1. A 10-microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 volts and a peak current of 60 amperes.
 - 2. An 8-microsecond rise time by 20-microsecond pulse width waveform with a peak voltage of 1000 volts and a peak current of 500 amperes.
 - 3. Maximum series current: 2 AMPS. Provide units manufactured by Advanced Protection Technologies, model # TE/FA 10B or TE/FA 20B.
 - 4. Operating Temperature and Humidity: -40 to 85 deg C (-40 to 185 deg F), 0 to 95 percent relative humidity.
- B. Grounding and Surge Suppression
 - 1. The Security Contractor shall provide grounding and surge suppression to stabilize the voltage under normal operating conditions. To ensure the operation of over current devices, such as fuses, circuit breakers, and relays, under ground-fault conditions.

2. Security Contractor shall engineer and provide proper grounding and surge suppression as required by local jurisdiction and prevailing codes and standards referenced in this document.
3. Principal grounding components and features. Include main grounding buses and grounding and bonding connections to service equipment.
4. Details of interconnection with other grounding systems. The lightning protection system shall be provided by the Security Contractor.
5. Locations and sizes of grounding conductors and grounding buses in electrical, data, and communication equipment rooms and closets.
6. AC power receptacles are not to be used as a ground reference point.
7. Any cable that is shielded shall require a ground in accordance with the best practices of the trade and manufactures installation instructions.
8. Protection should be provided at both ends of cabling.

1.16 COMPONENT ENCLOSURES

A. Construction of Enclosures

1. Consoles, power supply enclosures, detector control and terminal cabinets, control units, wiring gutters, and other component housings, collectively referred to as enclosures, shall be so formed and assembled as to be sturdy and rigid.
2. Thickness of metal in-cast and sheet metal enclosures of all types shall not be less than those in Tables I and II, UL 611. Sheet steel used in fabrication of enclosures shall be not less than 14 gauge. Consoles shall be 16-gauge.
3. Doors and covers shall be flanged. Enclosures shall not have pre-punched knockouts. Where doors are mounted on hinges with exposed pins, the hinges shall be of the tight pin type or the ends of hinge pins shall be tack welded to prevent removal. Doors having a latch edge length of less than 609.6 mm (24 in) shall be provided with a single construction core. Where the latch edge of a hinged door is more than 609.6 mm (24 in) or more in length, the door shall be provided with a three-point latching device with construction core; or alternatively with two, one located near each end.
4. Any ventilator openings in enclosures and cabinets shall conform to the requirements of UL 611. Unless otherwise indicated, sheet metal enclosures shall be designed for wall mounting with tip holes slotted. Mounting holes shall be in positions that remain accessible when all major operating components are in place and the door is open, but shall be inaccessible when the door is closed.
5. Covers of pull and junction boxes provided to facilitate initial installation of the system shall be held in place by tamper proof

Torx Center post security screws. Stenciled or painted labels shall be affixed to such boxes indicating they contain no connections. These labels shall not indicate the box is part of the Electronic Security System (ESS).

B. Consoles & Equipment Racks: All consoles and vertical equipment racks shall include a forced air-cooling system to be provided by others.

1. Vertical Equipment Racks:

- a. The forced air blowers shall be installed in the vented top of each cabinet and shall not reduce usable rack space.
- b. The forced air fan shall consist of one fan rated at 105 CFM per rack bay and noise level shall not exceed 55 decibels.
- c. Vertical equipment racks are to be provided with full sized clear plastic locking doors and vented top panels as shown on contract drawings.

2. Console racks:

- a. Forced air fans shall be installed in the top rear of each console bay. The forced air fan shall consist of one fan rated at 105 CFM mounted to a 133mm vented blank panel the noise level of each fan shall not exceed 55 decibels. The fans shall be installed so air is pulled from the bottom of the rack or cabinet and exhausted out the top.
- b. Console racks are to be provided with flush mounted hinged rear doors with recessed locking latch on the bottom and middle sections of the consoles. Provide code access to support wiring for devices located on the work surfaces.

C. Tamper Provisions and Tamper Switches:

1. Enclosures, cabinets, housings, boxes and fittings or every product description having hinged doors or removable covers and which contain circuits, or the integrated security system and its power supplies shall be provided with cover operated, corrosion-resistant tamper switches.
2. Tamper switches shall be arranged to initiate an alarm signal that will report to the monitoring station when the door or cover is moved. Tamper switches shall be mechanically mounted to maximize the defeat time when enclosure covers are opened or removed. It shall take longer than 1 second to depress or defeat the tamper switch after opening or removing the cover. The enclosure and tamper switch shall function together in such a manner as to prohibit direct line of sight to any internal component before the switch activates.
3. Tamper switches shall be inaccessible until the switch is activated. Have mounting hardware concealed so the location of the switch cannot be observed from the exterior of the enclosure. Be connected

to circuits which are under electrical supervision at all times, irrespective of the protection mode in which the circuit is operating. Be spring-loaded and held in the closed position by the door or cover and be wired so they break the circuit when the door cover is disturbed. Tamper circuits shall be adjustable type screw sets and shall be adjusted by the contractor to eliminate nuisance alarms associated with incorrectly mounted tamper device shall annunciate prior to the enclosure door opening (within 1/4 " tolerance. The tamper device or its components shall not be visible or accessing with common tools to bypass when the enclosure is in the secured mode.

4. The single gang junction boxes for the portrait alarming and pull boxes with less than 102 square mm will not require tamper switches.
5. All enclosures over 305 square mm shall be hinged with an enclosure lock.
6. Control Enclosures: Maintenance/Safety switches on control enclosures, which must be opened to make routing maintenance adjustments to the system and to service the power supplies, shall be push/pull-set automatic reset type.
7. Provide one (1) enclosure tamper switch for each 609 linear mm of enclosure lock side opening evenly spaced.
8. All security screws shall be Torx-Post Security Screws.
9. The contractor shall provide the owner with two (2) torx-post screwdrivers.

1.17 ELECTRONIC COMPONENTS

- A. All electronic components of the system shall be of the solid-state type, mounted on printed circuit boards conforming to UL 796. Boards shall be plug-in, quick-disconnect type. Circuitry shall not be so densely placed as to impede maintenance. All power-dissipating components shall incorporate safety margins of not less than 25 percent with respect to dissipation ratings, maximum voltages, and current-carrying capacity.

1.18 SUBSTITUTE MATERIALS & EQUIPMENT

- A. Where variations from the contract requirements are requested in accordance with the GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.
- B. In addition to this Section the Security Contractor shall also reference Section II, Products and associated divisions. The COTR shall have

final authority on the authorization or refusal of substitutions. If there are no proposed substitutions, a statement in writing from the Contractor shall be submitted to the COTR stating same. In the preparation of a list of substitutions, the following information shall be included, as a minimum:

1. Identity of the material or devices specified for which there is a proposed substitution.
2. Description of the segment of the specification where the material or devices are referenced.
3. Identity of the proposed substitute by manufacturer, brand name, catalog or model number and the manufacturer's product name.
4. A technical statement of all operational characteristic expressing equivalence to items to be substituted and comparison, feature-by-feature, between specification requirements and the material or devices called for in the specification; and Price differential.

C. Materials Not Listed: Furnish all necessary hardware, software, programming materials, and supporting equipment required to place the specified major subsystems in full operation. Note that some supporting equipment, materials, and hardware may not be described herein.

Depending on the manufacturers selected by the COTR, some equipment, materials and hardware may not be contained in either the Contract Documents or these written specifications, but are required by the manufacturer for complete operation according to the intent of the design and these specifications. In such cases, the COTR shall be given the opportunity to approve the additional equipment, hardware and materials that shall be fully identified in the bid and in the equipment list submittal. The COTR shall be consulted in the event there is any question about which supporting equipment, materials, or hardware is intended to be included.

D. Response to Specification: The Contractor shall submit a point-by-point statement of compliance with each paragraph of the security specification. The statement of compliance shall list each paragraph by number and indicate "COMPLY" opposite the number for each paragraph where the Contractor fully complies with the specification. Where the proposed system cannot meet the requirements of the paragraph, and does not offer an equivalent solution, the offers shall indicate "DOES NOT COMPLY" opposite the paragraph number. Where the proposed system does not comply with the paragraph as written, but the bidder feels it will accomplish the intent of the paragraph in a manner different from that described, the offers shall indicate "COMPARABLE". The offers shall include a statement fully describing the "comparable" method of

satisfying the requirement. Where a full and concise description is not provided, the offered system shall be considered as not complying with the specification. Any submission that does not include a point-by-point statement of compliance, as described above, shall be disqualified. Submittals for products shall be in precise order with the product section of the specification. Submittals not in proper sequence will be rejected.

1.19 LIKE ITEMS

- A. Where two or more items of equipment performing the same function are required, they shall be exact duplicates produced by one manufacturer. All equipment provided shall be complete, new, and free of any defects.

1.20 WARRANTY

- A. The Contractor shall, as a condition precedent to the final payment, execute a written guarantee (warranty) to the COTR certifying all contract requirements have been completed according to the final specifications. Contract drawings and the warranty of all materials and equipment furnished under this contract are to remain in satisfactory operating condition (ordinary wear and tear, abuse and causes beyond his control for this work accepted) for one (1) year from the date the Contractor received written notification of final acceptance from the COTR. Demonstration and training shall be performed prior to system acceptance. All defects or damages due to faulty materials or workmanship shall be repaired or replaced without delay, to the COTR's satisfaction, and at the Contractor's expense. The Contractor shall provide quarterly inspections during the warranty period. The contractor shall provide written documentation to the COTR on conditions and findings of the system and device(s). In addition, the contractor shall provide written documentation of test results and stating what was done to correct any deficiencies. The first inspection shall occur 90 calendar days after the acceptance date. The last inspection shall occur 30 calendar days prior to the end of the warranty. The warranty period shall be extended until the last inspection and associated corrective actions are complete. When equipment and labor covered by the Contractor's warranty, or by a manufacturer's warranty, have been replaced or restored because of it's failure during the warranty period, the warranty period for the replaced or repaired equipment or restored work shall be reinstated for a period equal to the original warranty period, and commencing with the date of completion of the replacement or restoration work. In the event any manufacturer customarily provides a warranty period greater than one (1) year, the Contractor's warranty shall be for the same duration for that component.

1.21 SINGULAR NUMBER

- A. Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIALS

- A. All equipment associated within the Security Control Room, Security Console and Security Equipment Room shall be UL 827, UL 1981, and UL 60950 compliant and rated for continuous operation. Environmental conditions (i.e. temperature, humidity, wind, and seismic activity) shall be taken under consideration at each facility and site location prior to installation of the equipment.
- B. All equipment shall operate on a 120 or 240 volts alternating current (VAC); 50 Hz or 60 Hz AC power system unless documented otherwise in subsequent sections listed within this specification. All equipment shall have a back-up source of power that will provide a minimum of 8 hours of run time in the event of a loss of primary power to the facility.
- C. The system shall be designed, installed, and programmed in a manner that will allow for ease of operation, programming, servicing, maintenance, testing, and upgrading of the system.
- D. All equipment and materials for the system will be compatible to ensure correct operation.

2.2 EQUIPMENT ITEMS

- A. The Security Management System shall provide full interface with all components of the security subsystem as follows:
 - 1. Shall allow for communication between the Physical Access Control System and Database Management and all subordinate work and monitoring stations, enrollment centers for badging and biometric devices as part of the PACS, local annunciation centers, the electronic Security Management System (SMS), and all other VA redundant or backup command center or other workstations locations.
 - 2. Shall provide automatic continuous communication with all systems that are monitored by the SMS, and shall automatically annunciate any communication failures or system alarms to the SMS operator providing identification of the system, nature of the alarm, and location of the alarm.
 - 3. Controlling devices shall be utilized to interface the SMS with all field devices.

4. The Security control room and security console will be supported by an uninterrupted power supply (UPS) or dedicated backup generator power circuit.
 5. The Security Equipment room, Security Control Room, and Security Operator Console shall house the following equipment i.e. refer to individual master specifications for each security subsystem's specific requirements:
 - a. Security Console Bays and Equipment Racks
 - b. Security Network Server and Workstation
 - c. CCTV Monitoring, Controlling, and Recording Equipment
 - d. PACS Monitoring and Controlling Equipment
 - e. IDS Monitoring and Controlling Equipment
 - f. Security Access Detection Monitoring Equipment
 - g. EPPS Monitoring and Controlling Equipment
 - h. Main Panels for all Security Systems
 - i. Power Supply Units (PSU) for all field devices
 - j. Life safety and power monitoring equipment
 - k. All other building systems deemed necessary by the VA to include, but not limited to, heating, ventilation and air conditioning (HVAC), elevator control, portable radio, fire alarm monitoring, and other potential systems.
 - l. Police two-way radio control consoles/units.
- B. Wires and Cables:
1. Shall meet or exceed the manufactures recommendation for power and signals.
 2. Shall be carried in an enclosed conduit system, utilizing electromagnetic tubing (EMT) to include the equivalent in flexible metal, rigid galvanized steel (RGS) to include the equivalent of liquid tight, polyvinylchloride (PVC) schedule 40 or 80.
 3. All conduits will be sized and installed per the NEC. All security system signal and power cables that traverse or originate in a high security office space will contained in either EMT or RGS conduit.
 4. All conduit, pull boxes, and junction boxes shall be marked with colored permanent tape or paint that will allow it to be distinguished from all other infrastructure conduit.
 5. Conduit fills shall not exceed 50 percent unless otherwise documented.
 6. A pull string shall be pulled along and provided with signal and power cables to assist in future installations.

7. At all locations where there is a wall penetration or core drilling is conducted to allow for conduit to be installed, fire stopping materials shall be applied to that area.
8. High voltage and signal cables shall not share the same conduit and shall be kept separate up to the point of connection. High voltage for the security subsystems shall be any cable or sets of cables carrying 30 VDC/VAC or higher.
9. For all equipment that is carrying digital data between the Security Control Room, Security Equipment Room, Security Console, or at a remote monitoring station, it shall not be less than 20 AWG and stranded copper wire for each conductor. The cable or each individual conductor within the cable shall have a shield that provides 100% coverage. Cables with a single overall shield shall have a tinned copper shield drain wire.

2.3 FIBER OPTIC EQUIPMENT

- A. 8 Channel Fiber Optic Transceivers (Video & PTZ Control)
 1. The field-located and central-located fiber optic transceivers shall utilize wave division multiplexing to transmit and receive video and data pan-tilt-zoom control signals over two standard 62.5/125 multimode fibers.
 2. The units shall be capable of operating over a range of 2 km.
 3. The units shall be NTSC color compatible.
 4. The units shall support data rates up to 64 Kbps.
 5. The units shall be surface or rack mountable.
 6. The units shall be UL listed.
 7. The units shall meet or exceed the following specifications:
 - a. Video
 - 1) Input/Output: 1 volt pk-pk (75 ohms)
 - 2) Input/Output Channels: 8
 - 3) Bandwidth: 10 Hz - 6.5 MHz per channel
 - 4) Differential Gain: <2%
 - 5) Differential Phase: <0.7°
 - 6) Tilt: <1%
 - 7) Signal to Noise Ratio: 60 dB
 - b. Data (Control)
 - 1) Data Channels: 2
 - 2) Data Format: RS-232, RS-422, 2 wire or 4 wire RS-485 with Tri-State Manchester Bi-Phase and SensorNet
 - 3) Data Rate: DC - 100 kbps (NRZ)
 - 4) Bit Error Rate: < 1 in 10⁻⁹ @ Maximum Optical Loss Budget
 - 5) Operating Mode: Simplex or Full-Duplex

- 6) Wavelength: 1310/1550 nm, Multimode or Singlemode
- 7) Optical Emitter: Laser Diode
- 8) Number of Fibers: 1

c. Connectors

- 1) Optical: ST
- 2) Power and Data: Terminal Block with Screw Clamps
- 3) Video: BNC (Gold Plated Center-Pin)

d. Electrical and Mechanical

- 1) Power: 12 VDC @ 500 mA (stand-alone)
- 3) Current Protection: Automatic Resettable Solid-State Current Limiters

e. Environmental

- 1) MTBF: > 100,000 hours
- 2) Operating Temp: -40 to 74 deg C (-40 to 165 deg F)
- 3) Storage Temp: -40 to 85 deg C (-40 to 185 deg F)
- 4) Relative Humidity: 0% to 95% (non-condensing)

B. Fiber Optic Transmitters: The central-located fiber optic transmitters shall utilize wave division multiplexing to transmit video and signals over standard 62.5/125 multimode fibers.

- 1. The units shall be capable of operating over a range of 4.8 km.
- 2. The units shall be NTSC color compatible.
- 3. The units shall support data rates up to 64 Kbps.
- 4. The units shall be surface or rack mountable.
- 5. The units shall be UL listed.
- 6. The units shall meet or exceed the following specifications:

a. Video

- 1) Input: 1 volt pk-pk (75 ohms)
- 2) Bandwidth: 5Hz - 10 MHz
- 3) Differential Gain: <5%
- 4) Tilt: <1%
- 5) Signal-Noise: 60db
- 6) Wavelength: 850nm
- 7) Number of Fibers: 1
- 8) Operating Temp: -20 to 70 deg C (-4 to 158 deg F)
- 9) Connectors:
 - a) Power: Female plug with screw clamps
 - b) Video: BNC
 - c) Optical: ST
- 10) Power: 12 VDC

C. Fiber Optic Receivers: The field-located fiber optic receivers shall utilize wave division multiplexing to receive video signals over standard 62.5/125 multimode fiber.

1. The units shall be capable of operating over a range of 4.8 km.
2. The units shall be NTSC color compatible.
3. The units shall support data rates up to 64 Kbps.
4. The units shall be surface or rack mountable.
5. The units shall be UL listed.
6. The units shall meet or exceed the following specifications:

a. Video

- 1) Output: 1 volt pk-pk (75 ohms)
- 2) Bandwidth: 5Hz - 10 MHz
- 3) Differential Gain: <5%
- 4) Tilt: <1%
- 5) Signal-Noise: 60dB
- 6) Wavelength: 850nm
- 7) Number of Fibers: 1
- 8) Surface Mount: 106.7 x 88.9 x 25.4 mm (4.2 x 3.5 x 1 in)
- 9) Operating Temp: -20 to 70 deg C (-4 to 158 deg F)
- 10) Connectors:
- 11) Power: Female plug block with screw clamps
- 12) Video: BNC
- 13) Optical: ST
- 14) Power: 12 VAC8 Channel Fiber Optic Transcievers (Video&PTZ Control)

D. Fiber Optic Sub Rack with Power Supply

1. The Card Cage Rack shall provide high-density racking for fiber-optic modules. The unit shall be designed to mount in standard 483 mm (19 in) instrument racks and to accommodate the equivalent of 15 1-inch modules.

a. Specifications

- 1) Card Orientation: Vertical
- 2) Construction: Aluminum
- 3) Current Consumption: 0.99 A
- 4) Humidity: 95.0 % RH
- 5) Input Power: 100-240 VAC, 60/50 Hz
- 6) Mounting: Mounts in standard 483 mm (19 in) rack using four (4) screws (optional wall brackets purchased separately)
- 7) Number of Outputs: 1.0
- 8) Number of Slots 15.0

- 9) Operating Temperature: -40 to +75 deg C (-40.0 to 167.0 deg F)
- 10) Output Voltage: 13.5 V
- 11) Output Current 6.0 A
- 12) Power Dissipation: 28.0 W
- 13) Power Factor: 48.0
- 14) Power Supply: (built-in)
- 15) Rack Units: 3RU
- 16) Redundant Capability: Yes
- 17) Weight: 2.43 kg (5.35 lb)
- 18) Width: 483 mm (19.0 in)

2.4 TRANSIENT VOLTAGE SURGE SUPPRESSION DEVICES (TVSS) AND SURGE SUPPRESSION

A. Transient Voltage Surge Suppression

1. All cables and conductors extending beyond building perimeter, except fiber optic cables, which serve as communication, control, or signal lines shall be protected against Transient Voltage surges and have Transient Voltage surge suppression protection (TVSS) UL listed in accordance with Standard 497B installed at each end. Lighting and surge suppression shall be a multi-strike variety and include a fault indicator. Protection shall be furnished at the equipment and additional triple solid state surge protectors rated for the application on each wire line circuit shall be installed within 915 mm (36 in) of the building cable entrance. Fuses shall not be used for surge protection. The inputs and outputs shall be tested in both normal mode and common mode using the following waveforms:
 - a. A 10-microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 volts and a peak current of 60 amperes.
 - b. An 8-microsecond rise time by 20-microsecond pulse width waveform with a peak voltage of 1000 volts and a peak current of 500 amperes.
 - c. Maximum series current: 2 AMPS. Provide units manufactured by Advanced Protection Technologies, model # TE/FA 10B or TE/FA 20B or approved equivalent.
 - d. Operating Temperature and Humidity: -40 to + 85 deg C (-40 to 185 deg F), and 0 to 95 percent relative humidity, non-condensing.

B. Physical Access Control Systems

1. Suppressors shall be installed on AC power at the point of service and shall meet the following criteria:
 - a. UL1449 2nd Edition, 2007, listed
 - b. UL1449 S.V.R. of 400 Volts or lower

- c. Status Indicator Light(s)
 - d. Minimum Surge Current Capacity: 40,000 Amps (8 x 20 μ sec)
 - e. Maximum Continuous Current: 15 Amps
 - f. MCOV: 125 VAC
 - g. Service Voltage: 110-120 VAC
2. Suppressors shall be installed on the Low Voltage circuit at both the point of entrance and exit of the building. Suppressors shall meet the following criteria:
 - a. UL 497B
 - b. Minimum Surge Current Capacity: 2,000 Amps per pair
 - c. Maximum Continuous Current: 5 Amps
 - d. MCOV: 33 Volts
 - e. Service Voltage: 24Volts
 3. Suppressors shall be installed on the communication circuit between the access controller and card reader at both the entrance and exit of the building. Suppressors shall meet the following criteria:
 - a. Conforms with UL497B standards (where applicable)
 - b. Clamp level for 12 and 24V power: 18VDC / 38VDC
 - c. Clamp level for Data/LED: 6.8VDC
 - d. Service Voltage for Power: 12VDC/24VDC
 - e. Service Voltage for Data/LED: <5VDC
 - f. Clamp level - PoE Access Power: 72V
 - g. Clamp level - PoE Access Data: 7.9V
 - h. Service Voltage - PoE Access: 48VAC - 54VAC
 - i. Service Voltage - PoE Data: <5VDC
- C. Intercom Systems
1. Suppressors shall be installed on the AC power at the point of service and shall meet the following criteria:
 - a. UL 1449 Listed
 - b. UL 1449 S.V.R. of 400 Volts or lower
 - c. Diagnostic Indicator Light(s)
 - d. Integrated ground terminating post (where case/chassis ground exists)
 - e. Minimum Surge Current Capacity of 13,000 Amps (8 x 20 μ Sec)
 2. Suppressors shall be installed on incoming central office lines and shall meet the following criteria:
 - a. UL 497A Listed
 - b. Multi Stage protection design
 - c. Auto-reset current protection not to exceed 2 Amps per pair
 - d. Minimum Surge Current of 500 Amps per pair (8 x 20 μ Sec)

3. Suppressors shall be installed on all telephone/intercom circuits that enter or leave separate buildings and shall meet the following criteria:
 - a. UL 497A Listed (where applicable)
 - b. UL 497B Listed (horns, strobes, speakers or communication circuits over 300 feet)
 - c. Multi Stage protection design
 - d. Auto-reset over-current protection not to exceed 5 Amps per pair
 - e. Minimum Surge Current of 1000 Amps per pair (8 x 20 μ Sec)

D. Intrusion Detection Systems

1. Suppressors shall be installed on AC at the point of service and shall meet the following criteria:
 - a. UL 1449, 2nd Edition 2007, listed
 - b. UL 1449 S.V.R. of 400 Volts or lower
 - c. Status Indicator Lights
 - d. Center screw for terminating Class II transformers
 - e. Minimum Surge Current Capacity of 32,000 Amps (8 x 20 μ Sec)
2. Suppressors shall be installed on all Telephone Communication Interface circuits and shall meet the following criteria:
 - a. UL 497A Listed
 - b. Multi Stage protection design
 - c. Surge Current Capacity: 9,000 Amps (8x20 μ Sec)
 - d. Clamp Voltage: 130Vrms
 - e. Auto reset current protection not to exceed 150 milliAmps
3. Suppressors shall be installed on all burglar alarm initiating and signaling loops and addressable circuits which enter or leave separate buildings. The following criteria shall be met:
 - a. UL 497B for data communications or annunciation (powered loops)
 - b. Fail-short/fail-safe mode.
 - c. Surge Current Capacity: 9,000 Amps (8x20 μ Sec)
 - d. Clamp Voltage: 15 Vrms
 - e. Joule Rating: 76 Joules per pair (10x1000 μ Sec)
 - f. Auto-reset current protection not to exceed 150 milliAmps for UL 497A devices.

E. Video Surveillance System

1. Protectors shall be installed on coaxial cable systems on points of entry and exit from separate buildings. Suppressors shall be installed at each exterior camera location and include protection for 12 and/or 24 volt power, data signal and motor controls (for Pan, Tilt and Zoom systems). SPDs shall protect all modes herein mentioned and contain all modes in a single unit system. Protection

for all systems mentioned above shall be incorporated at the head end equipment. Additionally a minimum 450VA battery back up shall be used to protect the DVR or VCR and monitor. Protectors shall meet the following criteria:

a. Head-End Power

- 1) UL 1778, cUL (Battery Back Up)
- 2) Minimum Surge Current Capacity: 65,000 Amps (8x20µsec)
- 3) Minimum of two (2) NEMA 5-15R Receptacles (one (1) AC power only, one (1) with UPS)
- 4) All modes protected (L-N, L-G, N-G)
- 5) EMI/RFI Filtering
- 6) Maximum Continuous Current: 12 Amps

b. Camera Power

- 1) Minimum Surge Current Capacity: 1,000 Amps (8x20µsec); 240 Amps for IP Video/PoE cameras
- 2) Screw Terminal Connection
- 3) All protection modes L-G (all Lines)
- 4) MCOV <40VAC

c. Video And Data

- 1) Surge Current Capacity 1,000 Amps per conductor
- 2) "BNC" Connection (Coax)
- 3) Protection modes: L-G (Data), Center Pin-G, Shield-G (Coax)
- 4) Band Pass 0-2GHz
- 5) Insertion Loss <0.3dB

F. Grounding and Surge Suppression

1. The Security Contractor shall provide grounding and surge suppression to stabilize the voltage under normal operating conditions. This is to ensure the operation of over current devices, such as fuses, circuit breakers, and relays, underground-fault conditions.
2. The Contractor shall engineer, provide, and install proper grounding and surge suppression as required by local jurisdiction and prevailing codes and standards, referenced in this document.
3. Principal grounding components and features shall include: main grounding buses, grounding, and bonding connections to service equipment.
4. The Contractor shall provide detail drawings of interconnection with other grounding systems including lightning protection systems.
5. The Contractor shall provide details of locations and sizes of grounding conductors and grounding buses in electrical, data, and communication equipment rooms and closets.
6. AC power receptacles are not to be used as a ground reference point.

7. Any cable that is shielded shall require a ground in accordance with applicable codes, the best practices of the trade, and all manufactures' installation instructions.

G. 120 VAC Surge Suppression

1. Continuous Current: Unlimited (parallel connection)
2. Max Surge Current: 13,500 Amps
3. Protection Modes: L - N, L - G, N - G
4. Warranty: Ten Year Limited Warranty
5. Dimension: 73.7 x 41.1 x 52.1 mm (2.90 x 1.62 x 2.05 in)
6. Weight: 2.88 g (0.18 lbs)
7. Housing: ABS

2.5 INSTALLATION KIT

A. General:

1. The kit shall be provided that, at a minimum, includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, and/or cable tray, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire wrap terminal or punch block. Unfinished or unlabeled wire connections shall not be allowed. All unused and partially opened installation kit boxes, coaxial, fiber-optic, and twisted pair cable reels, conduit, cable tray, and/or cable duct bundles, wire rolls, physical installation hardware shall be turned over to the COTR. The following sections outline the minimum required installation sub-kits to be used:

2. System Grounding:

- a. The grounding kit shall include all cable and installation hardware required. All head end equipment and power supplies shall be connected to earth ground via internal building wiring, according to the NEC.
- b. This includes, but is not limited to:
 - 1) Coaxial Cable Shields
 - 2) Control Cable Shields
 - 3) Data Cable Shields
 - 4) Equipment Racks
 - 5) Equipment Cabinets
 - 6) Conduits
 - 7) Cable Duct blocks
 - 8) Cable Trays
 - 9) Power Panels
 - 10) Grounding
 - 11) Connector Panels

3. Coaxial Cable: The coaxial cable kit shall include all coaxial connectors, cable tying straps, heat shrink tabbing, hangers, clamps, etc., required to accomplish a neat and secure installation.
4. Wire and Cable: The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, punch blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.
5. Conduit, Cable Duct, and Cable Tray: The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this document.
6. Equipment Interface: The equipment kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface the systems with the identified sub-system(s) according to the OEM requirements and this document.
7. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to label each subsystem according to the OEM requirements, as-installed drawings, and this document.
8. Documentation: The documentation kit shall include any item or quantity of items, computer discs, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to provide the system documentation as required by this document and explained herein.

PART 3 - EXECUTION

3.1 COMMON REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATION

- A. Comply with NECA 1.
- B. Measure indicated mounting heights to bottom of unit for suspended items and to center of unit for wall-mounting items.
- C. Headroom Maintenance: If mounting heights or other location criteria are not indicated, arrange and install components and equipment to provide maximum possible headroom consistent with these requirements.
- D. Equipment: Install to facilitate service, maintenance, and repair or replacement of components of both electronic safety and security equipment and other nearby installations. Connect in such a way as to facilitate future disconnecting with minimum interference with other items in the vicinity.
- E. Right of Way: Give to piping systems installed at a required slope.
- F. Equipment location shall be as close as practical to locations shown on the drawings.

G. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
2. "Conveniently accessible" is defined as being capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

3.2 FIRESTOPPING

- A. Apply firestopping to penetrations of fire-rated floor and wall assemblies for electronic safety and security installations to restore original fire-resistance rating of assembly. Firestopping materials and installation requirements are specified in Division 07 Section 07 84 00 "Firestopping."

3.3 DEMONSTRATION AND TRAINING

- A. Training shall be provided in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
- B. Training shall be provided for the particular equipment or system as required in each associated specification.
- C. A training schedule shall be developed and submitted by the contractor and approved by the COTR at least 30 days prior to the planned training.
- D. Provide services of manufacturer's technical representative for <insert hours> hours to instruct VA personnel in operation and maintenance of units.

3.4 WORK PERFORMANCE

- A. Job site safety and worker safety is the responsibility of the contractor.
- B. For work on existing stations, arrange, phase and perform work to assure electronic safety and security service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- C. New work shall be installed and connected to existing work neatly and carefully. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- D. Coordinate location of equipment and conduit with other trades to minimize interferences. See the GENERAL CONDITIONS.

3.5 SYSTEM PROGRAMMING

A. General Programming Requirements

1. This following section shall be used by the contractor to identify the anticipated level of effort (LOE) required setup, program, and configure the Electronic Security System (ESS). The contractor shall be responsible for providing all setup, configuration, and programming to include data entry for the Security Management System (SMS) and subsystems (e.g., video matrix switch, intercoms, digital video recorders, intrusion devices, including integration of subsystems to the SMS (e.g., camera call up, time synchronization, intercoms). System programming for existing or new SMS servers shall not be conducted at the project site.

B. Level of Effort for Programming

1. The Contractor shall perform and complete system programming (including all data entry) at an offsite location using the Contractor's own copy of the SMS software. The Contractor's copy of the SMS software shall be of the Owners current version. Once system programming has been completed, the Contractor shall deliver the data to the COTR on data entry forms and an approved electronic medium, utilizing data from the contract documents. The completed forms shall be delivered to the COTR for review and approval at least 90 calendar days prior to the scheduled date the Contractor requires it. The Contractor shall not upload system programming until the COTR has provided written approval. The Contractor is responsible for backing up the system prior to uploading new programming data. Additional programming requirements are provided as follows:
 - a. Programming for New SMS Server: The contractor shall provide all other system related programming. The contractor will be responsible for uploading personnel information (e.g., ID Cards backgrounds, names, access privileges, personnel photos, access schedules, personnel groupings) along with coordinating with COTR for device configurations, standards, and groupings. VA shall provide database to support Contractor's data entry tasks. The contractor shall anticipate a weekly coordination meeting and working with COTR to ensure data uploading is performed without incident of loss of function or data loss.

- b. Programming for Existing SMS Servers: The contractor shall perform all related system programming except for personnel data as noted. The contractor will not be responsible for uploading personnel information (e.g., ID Cards backgrounds, names, access privileges, access schedules, personnel groupings). The contractor shall anticipate a weekly coordination meeting and working alongside of COTR to ensure data uploading is performed without incident of loss of function or data loss. System programming for SMS servers shall be performed by using the Contractor's own server and software. These servers shall not be connected to existing devices or systems at any time.
2. The Contractor shall identify and request from the COTR, any additional data needed to provide a complete and operational system as described in the contract documents.
3. Contractor and COTR coordination on programming requires a high level of coordination to ensure programming is performed in accordance with VA requirements and programming uploads do not disrupt existing systems functionality. The contractor shall anticipate a minimum a weekly coordination meeting. Contractor shall ensure data uploading is performed without incident of loss of function or data loss. The following Level of Effort Chart is provided to communicate the expected level of effort required by contractors on VA ESS projects. Calculations to determine actual levels of effort shall be confirmed by the contractor before project award.

Description of Systems	Description of Tasks						
	Develop System Loading Sheets	Coordination	Initial Set-up Configuration	Graphic Maps	System Programming	Final Checks	Level of Effort (Typical Tasks)
SMS Setup & Configuration	e.g., program monitoring stations, programming networks, interconnections between CCTV, intercoms, time synchronization	e.g., retrieve IP addresses, naming conventions, standard event descriptions, programming templates, coordinate special system needs	e.g., Load system Operating System and Application software, general system configurations	e.g., develop naming conventions, develop file folders, confirming accuracy of AutoCAD Floor Plans, convert file into jpeg file	e.g., program monitoring stations, programming networks, interconnections between CCTV, intercoms, time synchronization	e.g., check all system diagnostics (e.g., clients, panels)	Load and set-up 4-6 CDs and configure servers (to configure Loading and Configuring software Administrative account, audit log, Keystrokes, mouse clicks, multi-screen configuration
Electronic Entry Control Systems	e.g., setup of device, door groups & schedules, REX, Locks, link graphics	e.g., confirming device configurations, naming conventions, event description and narratives	e.g., enter data from loading sheets; configure components, link events, cameras, and graphics		e.g., setup of device, door groups & schedules, REX, Locks, link graphics	e.g., performing entry testing to confirm correct set-up and configuration	e.g., creating a door, door configuration, adding request to exit, door monitors and relays, door timers, door related events (e.g., access, access denied, forced open, held open), linkages, controlled areas, advanced door monitoring, time zones, sequence of operations

Intrusion Detection Systems	e.g., enter door groups & schedules, link devices - REX, lock, & graphics	e.g., confirming device configurations , naming conventions, event description and narratives	e.g., enter data from loading sheets; configure components, link events, cameras, and graphics		e.g., enter door groups & schedules, link devices - REX, lock, & graphics	e.g., walk test, device position, and masking	e.g., setting up monitoring and control points (e.g., motion sensors, glassbreaks, vibration sensor, strobes, sounders) creating intrusion zones, creating arm/disarm panel, timed sequences, time zones, icon placements on graphic maps, clearance levels, events (e.g., armed, disarmed, zone violation, device alarm activations), LCD reader messages,	
CCTV Systems	e.g., programming call-ups recording	e.g., confirming device configurations , naming conventions	e.g., enter data from loading sheets; camera naming convention, sequences, configure components)		e.g., programming call-ups recording	e.g., confirm area of coverage, call-up per event generated and recording rates	e.g., setting up cameras points, recording ratios (e.g., normal, alarm event) timed recording, linkages, maps placements, call-ups	
Intercoms Systems	e.g., programming events & call-ups	e.g., confirming device configurations , naming conventions, event description and narratives	e.g., enter data from loading sheets; configure components, link events, cameras, and graphics		e.g., programming events & call-ups	e.g., confirm operation, SMS event generation and camera call-up	e.g., setup linkages, events for activations, device troubles, land devices on graphic maps	
Console Monitoring Components	N/A	per monitor	per monitor		per graphic map	N/A	per monitor	N/A
Note: Programming tasks are supported through the contractor's development of the Technical Data Package Submittals.								

Table 1 Contractor Level of Effort

3.6 TESTING AND ACCEPTANCE

A. Performance Requirements

1. General:

- a. The Contractor shall perform contract field, performance verification, and endurance testing and make adjustments of the completed security system when permitted. The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform all testing. Written notification of planned testing shall be given to the COTR at least 60 calendar days prior to the test and after the Contractor has received written approval of the specific test procedures.
- b. The COTR shall witness all testing and system adjustments during testing. Written permission shall be obtained from the COTR before proceeding with the next phase of testing. Original copies of all data produced during performance verification and endurance testing shall be turned over to the COTR at the conclusion of each phase of testing and prior to COTR approval of the test.

2. Test Procedures and Reports: The test procedures, compliant w/ VA standard test procedures, shall explain in detail, step-by-step actions and expected results demonstrating compliance with the requirements of the specification. The test reports shall be used to document results of the tests. The reports shall be delivered to the COTR within seven (7) calendar days after completion of each test.

B. The inspection and test will be conducted by a factory-certified contractor representative and witnessed by a Government Representative. The results of the inspection will be officially recorded by a designated Government Representative and maintained on file by the COTR, until completion of the entire project. The results will be compared to the Acceptance Test results.

C. Contractor's Field Testing (CFT)

1. The Contractor shall calibrate and test all equipment, verify DTM operation, place the integrated system in service, and test the integrated system. Ground rods installed by this Contractor within the base of camera poles shall be tested as specified in IEEE STD 142. The Contractor shall test all security systems and equipment, and provide written proof of a 100% operational system before a date is established for the system acceptance test. Documentation package for CFT shall include completed (fully annotated details of test details) for each device and system tested, and annotated loading sheets documenting complete testing to COTR approval. CFT test

documentation package shall conform to submittal requirements outlined in this Section. The COTR's acceptance testing procedures.

The Contractor shall provide the COTR with a written listing of all equipment and software indicating all equipment and components have been tested and passed. The Contractor shall deliver a written report to the COTR stating the installed complete system has been calibrated, tested, and is ready to begin performance verification testing; describing the results of the functional tests, diagnostics, and calibrations; and the report shall also include a copy of the approved acceptance test procedure. Performance verification testing shall not take place until written notice by contractor is received certifying that a contractors field test was successful.

D. Performance Verification Test (PVT)

1. Test team:

a. After the system has been pretested and the Contractor has submitted the pretest results and certification to the COTR, then the Contractor shall schedule an acceptance test to date and give the COTR written, notice as described herein, prior to the date the acceptance test is expected to begin. The system shall be tested in the presence of a Government Representative, an OEM certified representative, representative of the Contractor and other approved by the COTR. The system shall be tested utilizing the approved test equipment to certify proof of performance, FCC, UL and Emergency Service compliance. The test shall verify that the total system meets all the requirements of this specification. The notification of the acceptance test shall include the expected length (in time) of the test.

2. The Contractor shall demonstrate the completed Physical Access Control System PACS complies with the contract requirements. In addition, the Contractor shall provide written certification that the system is 100% operational prior to establishing a date for starting PVT. Using approved test procedures, all physical and functional requirements of the project shall be demonstrated and shown. The PVT will be stopped and aborted as soon as 10 technical deficiencies are found requiring correction. The Contractor shall be responsible for all travel and lodging expenses incurred for out-of-town personnel required to be present for resumption of the PVT. If the acceptance test is aborted, the re-test will commence from the beginning with a retest of components previously tested and accepted.

3. The PVT, as specified, shall not begin until receipt of written certification that the Contractors Field Testing was successful.

This shall include certification of successful completion of testing as specified in paragraph "Contractor's Field Testing", and upon successful completion of testing at any time when the system fails to perform as specified. Upon termination of testing by the COTR or Contractor, the Contractor shall commence an assessment period as described for Endurance Testing Phase II.

4. Upon successful completion of the acceptance test, the Contractor shall deliver test reports and other documentation, as specified, to the COTR prior to commencing the endurance test.
5. Additional Components of the PVT shall include:
 - a. System Inventory
 - 1) All Device equipment
 - 2) All Software
 - 3) All Logon and Passwords
 - 4) All Cabling System Matrices
 - 5) All Cable Testing Documents
 - 6) All System and Cabinet Keys
 - b. Inspection
 - 1) Contractor shall record an inspection punch list noting all system deficiencies. The contractor shall prepare an inspection punch list format for COTR's approval.
 - 2) As a minimum the punch list shall include a listing of punch list items, punch list item location, description of item problem, date noted, date corrected, and details of how item was corrected.
6. Partial PVT - At the discretion of COTR, the Performance Verification Test may be performed in part should a 100% compliant CFT be performed. In the event that a partial PVT will be performed instead of a complete PVT; the partial PVT shall be performed by testing 10% of the system. The contractor shall perform a test of each procedure on select devices or equipment.

E. Endurance Test

1. The Contractor shall demonstrate the specified probability of detection and false alarm rate requirements of the completed system. The endurance test shall be conducted in phases as specified below. The endurance test shall not be started until the COTR notifies the Contractor, in writing, that the performance verification test is satisfactorily completed, training as specified has been completed, and correction of all outstanding deficiencies has been satisfactorily completed. VA shall operate the system 24 hours per day, including weekends and holidays, during Phase I and Phase III endurance testing. VA will maintain a log of all system deficiencies. The COTR may terminate testing at any time the system

fails to perform as specified. Upon termination of testing, the Contractor shall commence an assessment period as described for Phase II. During the last day of the test, the Contractor shall verify the appropriate operation of the system. Upon successful completion of the endurance test, the Contractor shall deliver test reports and other documentation as specified to the COTR prior to acceptance of the system.

2. Phase I (Testing): The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized in writing by the COTR. If the system experiences no failures, the Contractor may proceed directly to Phase III testing after receiving written permission from the COTR.
3. Phase II (Assessment):
 - a. After the conclusion of Phase I, the Contractor shall identify all failures, determine causes of all failures, repair all failures, and deliver a written report to the COTR. The report shall explain in detail the nature of each failure, corrective action taken, results of tests performed, and recommend the point at which testing should be resumed.
 - b. After delivering the written report, the Contractor shall convene a test review meeting at the job site to present the results and recommendations to the COTR. The meeting shall not be scheduled earlier than five (5) business days after the COTR receives the report. As part of this test review meeting, the Contractor shall demonstrate all failures have been corrected by performing appropriate portions of the performance verification test. Based on the Contractor's report and the test review meeting, the COTR will provide a written determine of either the restart date or require Phase I be repeated.
4. Phase III (Testing): The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized in writing by the COTR.
5. Phase IV (Assessment):
 - a. After the conclusion of Phase III, the Contractor shall identify all failures, determine causes of all failures, repair all failures, and deliver a written report to the COTR. The report shall explain in detail the nature of each failure, corrective action taken, results of tests performed, and recommend the point at which testing should be resumed.

- b. After delivering the written report, the Contractor shall convene a test review meeting at the job site to present the results and recommendations to the COTR. The meeting shall not be scheduled earlier than five (5) business days after receipt of the report by the COTR. As a part of this test review meeting, the Contractor shall demonstrate that all failures have been corrected by repeating appropriate portions for the performance verification test. Based on the review meeting the test should not be scheduled earlier than five (5) business days after the COTR receives the report. As a part of this test review meeting, the Contractor shall demonstrate all failures have been corrected by repeating appropriate portions of the performance verification test. Based on the Contractor's report and the test review meeting, the COTR will provide a written determine of either the restart date or require Phase III be repeated. After the conclusion of any re-testing which the COTR may require, the Phase IV assessment shall be repeated as if Phase III had just been completed.
- F. Exclusions
- 1. The Contractor will not be held responsible for failures in system performance resulting from the following:
 - a. An outage of the main power in excess of the capability of any backup power source provided the automatic initiation of all backup sources was accomplished and that automatic shutdown and restart of the PACS performed as specified.
 - b. Failure of an Owner furnished equipment or communications link, provided the failure was not due to Contractor furnished equipment, installation, or software.
 - c. Failure of existing Owner owned equipment, provided the failure was not due to Contractor furnished equipment, installation, or software.

- - - E N D - - -

SECTION 28 05 13
CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the finishing, installation, connection, testing and certification the conductors and cables required for a fully functional for electronic safety and security (ESS) system.

1.2 RELATED WORK

- A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.
- B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.
- C. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.
- D. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- E. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SECURITY AND SAFETY. Requirements for infrastructure.

1.3 DEFINITIONS

- A. BICSI: Building Industry Consulting Service International.
- B. EMI: Electromagnetic interference.
- C. IDC: Insulation displacement connector.
- D. Ladder Cable Tray: A fabricated structure consisting of two longitudinal side rails connected by individual transverse members (rungs).
- E. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control and signaling power-limited circuits.
- F. Open Cabling: Passing telecommunications cabling through open space (e.g., between the studs of a wall cavity).
- G. RCDD: Registered Communications Distribution Designer.
- H. Solid-Bottom or Nonventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal side rails, and a bottom without ventilation openings.
- I. Trough or Ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings sufficient for the passage of air and using 75 percent or less of the plan area of the surface to support cables.
- J. UTP: Unshielded twisted pair.

1.4 QUALITY ASSURANCE

A. See section 28 05 00, Paragraph 1.4.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

1. Manufacturer's Literature and Data: Showing each cable type and rating.
2. Certificates: Two weeks prior to final inspection, deliver to the Resident Engineer/COTR four copies of the certification that the material is in accordance with the drawings and specifications and diagrams for cable management system.
3. Shop Drawings: Cable tray layout, showing cable tray route to scale, with relationship between the tray and adjacent structural, electrical, and mechanical elements. Include the following:
 - a. Vertical and horizontal offsets and transitions.
 - b. Clearances for access above and to side of cable trays.
 - c. Vertical elevation of cable trays above the floor or bottom of ceiling structure.
 - d. Load calculations to show dead and live loads as not exceeding manufacturer's rating for tray and its support elements.
 - e. System labeling schedules, including electronic copy of labeling schedules that are part of the cable and asset identification system of the software specified in Parts 2 and 3.
4. Wiring Diagrams. Show typical wiring schematics including the following:
 - a. Workstation outlets, jacks, and jack assemblies.
 - b. Patch cords.
 - c. Patch panels.
5. Cable Administration Drawings: As specified in Part 3 "Identification" Article.
6. Project planning documents as specified in Part 3.
7. Maintenance Data: For wire and cable to include in maintenance manuals.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by the basic designation only.

- B. American Society of Testing Material (ASTM):
 - D2301-04Standard Specification for Vinyl Chloride
Plastic Pressure Sensitive Electrical Insulating
Tape
- C. Federal Specifications (Fed. Spec.):
 - A-A-59544-08Cable and Wire, Electrical (Power, Fixed
Installation)
- D. National Fire Protection Association (NFPA):
 - 70-11National Electrical Code (NEC)
- E. Underwriters Laboratories, Inc. (UL):
 - 44-05Thermoset-Insulated Wires and Cables
 - 83-08Thermoplastic-Insulated Wires and Cables
 - 467-07Electrical Grounding and Bonding Equipment
 - 486-03Wire Connectors and Soldering Lugs for Use with
Copper Conductors
 - 486C-04Splicing Wire Connectors
 - 486D-05Insulated Wire Connector Systems for Underground
Use or in Damp or Wet Locations
 - 486E-00Equipment Wiring Terminals for Use with Aluminum
and/or Copper Conductors
 - 493-07Thermoplastic-Insulated Underground Feeder and
Branch Circuit Cable
 - 514B-04Fittings for Cable and Conduit
 - 1479-03Fire Tests of Through-Penetration Fire Stops

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Test cables upon receipt at Project site.
 - 1. Test optical fiber cable to determine the continuity of the strand
end to end. Use optical-fiber flashlight or optical loss test set.
 - 2. Test optical fiber cable on reels. Use an optical time domain
reflectometer to verify the cable length and locate cable defects,
splices, and connector; include the loss value of each. Retain test
data and include the record in maintenance data.
 - 3. Test each pair of UTP cable for open and short circuits.

1.8 PROJECT CONDITIONS

- A. Environmental Limitations: Do not deliver or install UTP, optical
fiber, and coaxial cables and connecting materials until wet work in
spaces is complete and dry, and temporary HVAC system is operating and
maintaining ambient temperature and humidity conditions at occupancy
levels during the remainder of the construction period.

PART 2 - PRODUCTS

2.1 GENERAL

- A. General: All cabling locations shall be in conduit systems as outlined in Division 28 unless a waiver is granted in writing or an exception is noted on the construction drawings.
- B. Support of Open Cabling: NRTL labeled for support of Category 6 cabling, designed to prevent degradation of cable performance and pinch points that could damage cable.
 - 1. Support brackets with cable tie slots for fastening cable ties to brackets.
 - 2. Lacing bars, spools, J-hooks, and D-rings.
 - 3. Straps and other devices.
- C. Cable Trays:
 - 1. Cable Tray Materials: Metal, suitable for indoors, and protected against corrosion by powder coat paint finish, color black or approved submittal.
 - 2. Basket Cable Trays: 24 inches (600 mm) wide and 4 inches (100 mm) deep. Wire mesh spacing shall not exceed 2 by 4 inches (50 by 100 mm).
 - 3. Ladder Cable Trays: Nominally 12 inches (455 mm) wide, and a rung spacing of 12 inches (305 mm) with 6-inch (150 mm) bolt on cable retaining bars.
- D. Conduit and Boxes: Comply with requirements in Division 28 Section "Conduits and Backboxes for Electrical Systems."
 - 1. Outlet boxes shall be no smaller than 2 inches (50 mm) wide, 3 inches (75 mm) high, and 2-1/2 inches (64 mm) deep.

2.2 BACKBOARDS

- A. Backboards: Plywood, fire-retardant treated, 3/4 by 48 by 96 inches (19 by 1220 by 2440 mm). Comply with requirements for plywood backing panels in Division 06 Section "Rough Carpentry".

2.3 UTP CABLE

- A. Description: 100-ohm, 4-pair UTP, formed into 25-pair binder groups covered with a blue thermoplastic jacket.
 - 1. Comply with ICEA S-90-661 for mechanical properties.
 - 2. Comply with TIA/EIA-568-C.1 for performance specifications.
 - 3. Comply with TIA/EIA-568-C.2, Category 6.
 - 4. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444 and NFPA 70 for the following types:
 - a. Communications, General Purpose: Type CM or CMG.

- b. Communications, Plenum Rated: Type CMP, complying with NFPA 262.
- c. Communications, Riser Rated: Type CMR, complying with UL 1666.
- d. Communications, Limited Purpose: Type CMX.
- e. Multipurpose: Type MP or MPG.
- f. Multipurpose, Plenum Rated: Type MPP, complying with NFPA 262.
- g. Multipurpose, Riser Rated: Type MPR, complying with UL 1666.

2.4 UTP CABLE HARDWARE

- A. UTP Cable Connecting Hardware: IDC type, using modules designed for punch-down caps or tools. Cables shall be terminated with connecting hardware of the same category or higher.
- B. Connecting Blocks: Modular jacks for Category 6.

2.5 OPTICAL FIBER CABLE

- A. Description: Existing Multimode, 62.5/125-micrometer, 24-fiber, tight buffer, optical fiber cable.
 - 1. Comply with ICEA S-83-596 for mechanical properties.
 - 2. Comply with TIA/EIA-568-B.3 for performance specifications.
 - 3. Comply with TIA/EIA-492AAAA-A for detailed specifications.
 - 4. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444, UL 1651, and NFPA 70 for the following types:
 - a. Plenum Rated, Nonconductive: Type OFNP, complying with NFPA 262.
 - b. Riser Rated, Nonconductive: Type OFNR [or OFNP], complying with UL 1666.
 - c. Plenum Rated, Conductive: Type OFCP [or OFNP], complying with NFPA 262.
 - d. Riser Rated, Conductive: Type OFCR [; or OFNR, OFCP, or OFNP], complying with UL 1666.
 - 5. Maximum Attenuation: [3.50] <Insert number> dB/km at 850 nm; [1.5] <Insert number> dB/km at 1300 nm.
 - 6. Minimum Modal Bandwidth: 160 MHz-km at 850 nm; 500 MHz-km at 1300 nm.
- B. Jacket:
 - 1. Jacket Color: Orange for 62.5/125-micrometer cable.
 - 2. Cable cordage jacket, fiber, unit, and group color shall be according to TIA/EIA-598-B.
 - 3. Imprinted with fiber count, fiber type, and aggregate length at regular intervals not to exceed 40 inches (1000 mm).

2.6 OPTICAL FIBER CABLE HARDWARE

- A. Cable Connecting Hardware: Meet the Optical Fiber Connector Intermateability Standards (FOCIS) specifications of TIA/EIA-604-2, TIA/EIA-604-3-A, and TIA/EIA-604-12. Comply with TIA/EIA-568-C.3.

1. Quick-connect, simplex Type ST on existing or duplex if replaced with new Type LC connectors. Insertion loss shall be not more than 0.75 dB.
2. Type SFF connectors may be used in termination racks, panels, and equipment packages.

2.7 COAXIAL CABLE

- A. General Coaxial Cable Requirements: Broadband type, recommended by cable manufacturer specifically for broadband data transmission applications. Coaxial cable and accessories shall have 75-ohm nominal impedance with a return loss of 20 dB maximum from 7 to 806 MHz.
- B. RG-11/U: NFPA 70, Type CATV.
 1. No. 14 AWG, solid, copper-covered steel conductor.
 2. Gas-injected, foam-PE insulation.
 3. Double shielded with 100 percent aluminum polyester tape and 60 percent aluminum braid.
 4. Jacketed with sunlight-resistant, black PVC or PE.
 5. Suitable for outdoor installations in ambient temperatures ranging from minus 40 to plus 85 deg C.
- C. RG-6/U: NFPA 70, Type CATV or CM.
 1. No. 16 AWG, solid, copper-covered steel conductor; gas-injected, foam-PE insulation.
 2. Double shielded with 100 percent aluminum-foil shield and 60 percent aluminum braid.
 3. Jacketed with black PVC or PE.
 4. Suitable for indoor installations.
- D. NFPA and UL compliance, listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 1655, and with NFPA 70 "Radio and Television Equipment" and "Community Antenna Television and Radio Distribution" Articles. Types are as follows:
 1. CATV Cable: Type CATV.
 2. CATV Plenum Rated: Type CATVP, complying with NFPA 262.
 3. CATV Riser Rated: Type CATVR, complying with UL 1666.
 4. CATV Limited Rating: Type CATVX.

2.8 COAXIAL CABLE HARDWARE

- A. Coaxial-Cable Connectors: Type BNC, 75 ohms.

2.9 RS-232 CABLE

- A. Standard Cable: NFPA 70, Type CM.
 1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
 2. Polypropylene insulation.

3. Individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage.
 4. PVC jacket.
 5. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
 6. Flame Resistance: Comply with UL 1581.
- B. Plenum-Rated Cable: NFPA 70, Type CMP.
1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
 2. Plastic insulation.
 3. Individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage.
 4. Plastic jacket.
 5. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
 6. Flame Resistance: Comply with NFPA 262.

2.10 RS-485 CABLE

- A. Standard Cable: NFPA 70, Type CM.
1. Paired, 2 pairs, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors.
 2. PVC insulation.
 3. Unshielded.
 4. PVC jacket.
 5. Flame Resistance: Comply with UL 1581.
- B. Plenum-Rated Cable: NFPA 70, Type CMP.
1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
 2. Fluorinated ethylene propylene insulation.
 3. Unshielded.
 4. Fluorinated ethylene propylene jacket.
 5. Flame Resistance: NFPA 262, Flame Test.

2.11 LOW-VOLTAGE CONTROL CABLE

- A. Paired Lock Cable: NFPA 70, Type CMG.
1. 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors.
 2. PVC insulation.
 3. Unshielded.
 4. PVC jacket.
 5. Flame Resistance: Comply with UL 1581.
- B. Plenum-Rated, Paired Lock Cable: NFPA 70, Type CMP.
1. 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors.
 2. PVC insulation.
 3. Unshielded.

- 4. PVC jacket.
- 5. Flame Resistance: Comply with NFPA 262.
- C. Paired Lock Cable: NFPA 70, Type CMG.
 - 1. 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors.
 - 2. PVC insulation.
 - 3. Unshielded.
 - 4. PVC jacket.
 - 5. Flame Resistance: Comply with UL 1581.
- D. Plenum-Rated, Paired Lock Cable: NFPA 70, Type CMP.
 - 1. 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors.
 - 2. Fluorinated ethylene propylene insulation.
 - 3. Unshielded.
 - 4. Plastic jacket.
 - 5. Flame Resistance: NFPA 262, Flame Test.

2.12 CONTROL-CIRCUIT CONDUCTORS

- A. Class 1 Control Circuits: Stranded copper, Type THHN-THWN, in raceway complying with UL 83.
- B. Class 2 Control Circuits: Stranded copper, power-limited cable, concealed in building finishes power-limited tray cable, in cable tray complying with UL 83.
- C. Class 3 Remote-Control and Signal Circuits: Stranded copper, Type TW or TF, complying with UL 83.

2.13 FIRE ALARM WIRE AND CABLE

- A. General Wire and Cable Requirements: NRTL listed and labeled as complying with NFPA 70, Article 760.
- B. Signaling Line Circuits: Twisted, shielded pair, not less than No. 18 AWG.
 - 1. Circuit Integrity Cable: Twisted shielded pair, NFPA 70, Article 760, Classification CI, for power-limited fire alarm signal service Type FPL. NRTL listed and labeled as complying with UL 1424 and UL 2196 for a 2-hour rating.
- C. Non-Power-Limited Circuits: Solid-copper conductors with 600-V rated, 75 deg C, color-coded insulation.
 - 1. Low-Voltage Circuits: No. 16 AWG, minimum.
 - 2. Line-Voltage Circuits: No. 12 AWG, minimum.
 - 3. Multiconductor Armored Cable: NFPA 70, Type MC, copper conductors, Type TFN/THHN conductor insulation, copper drain wire, copper armor with outer jacket with red identifier stripe, NTRL listed for fire

alarm and cable tray installation, plenum rated, and complying with requirements in UL 2196 for a 2-hour rating.

2.14 IDENTIFICATION PRODUCTS

- A. Comply with UL 969 for a system of labeling materials, including label stocks, laminating adhesives, and inks used by label printers.

2.15 SOURCE QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to evaluate cables.
- B. Factory test UTP and optical fiber cables on reels according to TIA/EIA-568-C.1.
- C. Factory test UTP cables according to TIA/EIA-568-C.2.
- D. Factory test multimode optical fiber cables according to TIA/EIA-526-14-A and TIA/EIA-568-C.3.
- E. Factory sweep test coaxial cables at frequencies from 5 MHz to 1 GHz. Sweep test shall test the frequency response, or attenuation over frequency, of a cable by generating a voltage whose frequency is varied through the specified frequency range and graphing the results.
- F. Cable will be considered defective if it does not pass tests and inspections.
- G. Prepare test and inspection reports.

2.16 WIRE LUBRICATING COMPOUND

- A. Suitable for the wire insulation and conduit it is used with, and shall not harden or become adhesive.
- B. Shall not be used on wire for isolated type electrical power systems.

2.17 FIREPROOFING TAPE

- A. The tape shall consist of a flexible, conformable fabric of organic composition coated one side with flame-retardant elastomer.
- B. The tape shall be self-extinguishing and shall not support combustion. It shall be arc-proof and fireproof.
- C. The tape shall not deteriorate when subjected to water, gases, salt water, sewage, or fungus and be resistant to sunlight and ultraviolet light.
- D. The finished application shall withstand a 200-ampere arc for not less than 30 seconds.
- E. Securing tape: Glass cloth electrical tape not less than 0.18 mm (7 mils) thick, and 19 mm (3/4 inch) wide.

PART 3 - EXECUTION

3.1 INSTALLATION OF CONDUCTORS AND CABLES

- A. Comply with NECA 1.
- B. General Requirements for Cabling:
 - 1. Comply with TIA/EIA-568-C.1.
 - 2. Comply with BICSI ITSIM, Ch. 6, "Cable Termination Practices."

3. Install 110-style IDC termination hardware unless otherwise indicated.
4. Terminate all conductors; no cable shall contain un-terminated elements. Make terminations only at indicated outlets, terminals, and cross-connect and patch panels.
5. Cables may not be spliced. Secure and support cables at intervals not exceeding 30 inches (760 mm) and not more than 6 inches (150 mm) from cabinets, boxes, fittings, outlets, racks, frames, and terminals.
6. Bundle, lace, and train conductors to terminal points without exceeding manufacturer's limitations on bending radii, but not less than radii specified in BICSI ITSIM, "Cabling Termination Practices" Chapter. Install lacing bars and distribution spools.
7. Do not install bruised, kinked, scored, deformed, or abraded cable. Do not splice cable between termination, tap, or junction points. Remove and discard cable if damaged during installation and replace it with new cable.
8. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used for heating.
9. Pulling Cable:
 - a. Comply with BICSI ITSIM, Ch. 4, "Pulling Cable." Monitor cable pull tensions.
 - b. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling of cables.
 - c. Use ropes made of nonmetallic material for pulling feeders.
 - d. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached directly to the conductors, as approved by the COTR.
 - e. Pull in multiple cables together in a single conduit.
- C. Splice cables and wires where necessary only in outlet boxes, junction boxes, or pull boxes.
 1. Splices and terminations shall be mechanically and electrically secure.
 2. Where the Government determines that unsatisfactory splices or terminations have been installed, remove the devices and install approved devices at no additional cost to the Government.
- D. Seal cable and wire entering a building from underground, between the wire and conduit where the cable exits the conduit, with a non-hardening approved compound.
- E. Unless otherwise specified in other sections install wiring and connect to equipment/devices to perform the required functions as shown and specified.
- F. Except where otherwise required, install a separate power supply circuit for each system so that malfunctions in any system will not affect other systems.

- G. Where separate power supply circuits are not shown, connect the systems to the nearest panel boards of suitable voltages, which are intended to supply such systems and have suitable spare circuit breakers or space for installation.
- H. Install a red warning indicator on the handle of the branch circuit breaker for the power supply circuit for each system to prevent accidental de-energizing of the systems.
- I. System voltages shall be 120 volts or lower where shown on the drawings or as required by the NEC.
- J. UTP Cable Installation:
 - 1. Comply with TIA/EIA-568-C.2.
 - 2. Do not untwist UTP cables more than 1/2 inch (12 mm) from the point of termination to maintain cable geometry.
- K. Optical Fiber Cable Installation:
 - 1. Comply with TIA/EIA-568-C.3.
 - 2. Cable shall be terminated on connecting hardware that is rack or cabinet mounted.
- L. Open-Cable Installation:
 - 1. Install cabling with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.
 - 2. Suspend copper cable not in a wireway or pathway a minimum of 8 inches (200 mm) above ceilings by cable supports not more than 48 inches (1200 mm) apart.
 - 3. Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items.
- M. Separation from EMI Sources:
 - 1. Comply with BICSI TDMM and TIA/EIA-569-B recommendations for separating unshielded copper voice and data communication cable from potential EMI sources, including electrical power lines and equipment.
 - 2. Separation between open communications cables or cables in nonmetallic raceways and unshielded power conductors and electrical equipment shall be as follows:
 - a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 5 inches (127 mm).
 - b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 12 inches (300 mm).
 - c. Electrical Equipment Rating More Than 5 kVA: A minimum of 24 inches (600 mm).

3. Separation between communications cables in grounded metallic raceways and unshielded power lines or electrical equipment shall be as follows:
 - a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 2-1/2 inches (64 mm).
 - b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 6 inches (150 mm).
 - c. Electrical Equipment Rating More Than 5 kVA: A minimum of 12 inches (300 mm).
4. Separation between communications cables in grounded metallic raceways and power lines and electrical equipment located in grounded metallic conduits or enclosures shall be as follows:
 - a. Electrical Equipment Rating Less Than 2 kVA: No requirement.
 - b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 3 inches (75 mm).
 - c. Electrical Equipment Rating More Than 5 kVA: A minimum of 6 inches (150 mm).
5. Separation between Cables and Electrical Motors and Transformers, 5 kVA or HP and Larger: A minimum of 48 inches (1200 mm).
6. Separation between Cables and Fluorescent Fixtures: A minimum of 5 inches (127 mm).

3.2 FIRE ALARM WIRING INSTALLATION

- A. Comply with NECA 1 and NFPA 72.
- B. Wiring Method: Install wiring in metal raceway according to Division 26 Section CONDUITS AND BACKBOXES FOR ELECTRICAL SYSTEMS."
 1. Install plenum cable in environmental air spaces, including plenum ceilings.
 2. Fire alarm circuits and equipment control wiring associated with the fire alarm system shall be installed in a dedicated raceway system. This system shall not be used for any other wire or cable.
- C. Wiring Method:
 1. Cables and raceways used for fire alarm circuits, and equipment control wiring associated with the fire alarm system, may not contain any other wire or cable.
 2. Fire-Rated Cables: Use of 2-hour, fire-rated fire alarm cables, NFPA 70, Types MI and CI, is permitted.
 3. Signaling Line Circuits: Power-limited fire alarm cables may be installed in the same cable or raceway as signaling line circuits.
- D. Wiring within Enclosures: Separate power-limited and non-power-limited conductors as recommended by manufacturer. Install conductors parallel with or at right angles to sides and back of the enclosure. Bundle,

lace, and train conductors to terminal points with no excess. Connect conductors that are terminated, spliced, or interrupted in any enclosure associated with the fire alarm system to terminal blocks. Mark each terminal according to the system's wiring diagrams. Make all connections with approved crimp-on terminal spade lugs, pressure-type terminal blocks, or plug connectors.

- E. Cable Taps: Use numbered terminal strips in junction, pull, and outlet boxes, cabinets, or equipment enclosures where circuit connections are made.
- F. Color-Coding: Color-code fire alarm conductors differently from the normal building power wiring. Use one color-code for alarm circuit wiring and another for supervisory circuits. Color-code audible alarm-indicating circuits differently from alarm-initiating circuits. Use different colors for visible alarm-indicating devices. Paint fire alarm system junction boxes and covers red.
- G. Risers: Install at least two vertical cable risers to serve the fire alarm system. Separate risers in close proximity to each other with a minimum one-hour-rated wall, so the loss of one riser does not prevent the receipt or transmission of signals from other floors or zones.
- H. Wiring to Remote Alarm Transmitting Device: 1-inch (25-mm) conduit between the fire alarm control panel and the transmitter. Install number of conductors and electrical supervision for connecting wiring as needed to suit monitoring function.

3.3 CONTROL CIRCUIT CONDUCTORS

- A. Minimum Conductor Sizes:
 - 1. Class 1 remote-control and signal circuits, No. 14 AWG.
 - 2. Class 2 low-energy, remote-control and signal circuits, No. 16 AWG.
 - 3. Class 3 low-energy, remote-control, alarm and signal circuits, No. 12 AWG.

3.4 CONNECTIONS

- A. Comply with requirements in Division 28 Section, PHYSICAL ACCESS CONTROL for connecting, terminating, and identifying wires and cables.
- B. Comply with requirements in Division 28 Section "INTRUSION DETECTION" for connecting, terminating, and identifying wires and cables.
- C. Comply with requirements in Division 28 Section "VIDEO SURVEILLANCE" for connecting, terminating, and identifying wires and cables.
- D. Comply with requirements in Division 28 Section "ELECTRONIC PERSONAL PROTECTION SYSTEMS" for connecting, terminating, and identifying wires and cables.
- E. Comply with requirements in Division 28 Section "FIRE DETECTION AND ALARM" for connecting, terminating, and identifying wires and cables.

3.5 FIRESTOPPING

- A. Comply with requirements in Division 07 Section "PENETRATION FIRESTOPPING."
- B. Comply with TIA/EIA-569-B, "Firestopping" Annex A.
- C. Comply with BICSI TDMM, "Firestopping Systems" Article.

3.6 GROUNDING

- A. For communications wiring, comply with ANSI-J-STD-607-B and with BICSI TDMM, "Grounding, Bonding, and Electrical Protection" Chapter.
- B. For low-voltage wiring and cabling, comply with requirements in Division 28 Section "GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY."

3.7 IDENTIFICATION

- A. Identify system components, wiring, and cabling complying with TIA/EIA-606-A.
- B. Install a permanent wire marker on each wire at each termination.
- C. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.
- D. Wire markers shall retain their markings after cleaning.
- E. In each handhole, install embossed brass tags to identify the system served and function.

3.8 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Perform tests and inspections.
- C. Tests and Inspections:
 - 1. Visually inspect UTP and optical fiber cable jacket materials for UL or third-party certification markings. Inspect cabling terminations to confirm color-coding for pin assignments, and inspect cabling connections to confirm compliance with TIA/EIA-568-C.1.
 - 2. Visually inspect cable placement, cable termination, grounding and bonding, equipment and patch cords, and labeling of all components.
 - 3. Test UTP cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors. Test operation of shorting bars in connection blocks. Test cables after termination but not cross connection.
 - a. Test instruments shall meet or exceed applicable requirements in TIA/EIA-568-C.2. Perform tests with a tester that complies with performance requirements in "Test Instruments (Normative)" Annex, complying with measurement accuracy specified in "Measurement Accuracy (Informative)" Annex. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.

4. Optical Fiber Cable Tests:

- a. Test instruments shall meet or exceed applicable requirements in TIA/EIA-568-C.1. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.
- b. Link End-to-End Attenuation Tests:
 - 1) Multimode Link Measurements: Test at 850 or 1300 nm in 1 direction according to TIA/EIA-526-14-A, Method B, One Reference Jumper.
 - 2) Attenuation test results for links shall be less than 2.0 dB. Attenuation test results shall be less than that calculated according to equation in TIA/EIA-568-C.1.

5. Coaxial Cable Tests: Comply with requirements in Division 27 Section "Master Antenna Television System."

- D. Document data for each measurement. Print data for submittals in a summary report that is formatted using Table 10.1 in BICSI TDMM as a guide, or transfer the data from the instrument to the computer, save as text files, print, and submit.
- E. End-to-end cabling will be considered defective if it does not pass tests and inspections.
- F. Prepare test and inspection reports.

3.9 EXISTING WIRING

- A. Unless specifically indicated on the plans, existing wiring shall not be reused for the new installation. Only wiring that conforms to the specifications and applicable codes may be reused. If existing wiring does not meet these requirements, existing wiring may not be reused and new wires shall be installed.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 28 05 26
GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the finishing, installation, connection, testing and certification of the grounding and bonding required for a fully functional Electronic Safety and Security (ESS) system.
- B. "Grounding electrode system" refers to all electrodes required by NEC, as well as including made, supplementary, grounding electrodes.
- C. The terms "connect" and "bond" are used interchangeably in this specification and have the same meaning

1.2 RELATED WORK

- A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.
- B. Section 28 05 00 - REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS. For general electrical requirements, quality assurance, coordination, and project conditions that are common to more than one section in Division 28.
- C. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for low voltage power and lighting wiring.
- D. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY.

1.3 SUBMITTALS

- A. Submit in accordance with Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.
- B. Shop Drawings:
 - 1. Clearly present enough information to determine compliance with drawings and specifications.
 - 2. Include the location of system grounding electrode connections and the routing of aboveground and underground grounding electrode conductors.
- C. Test Reports: Provide certified test reports of ground resistance.
- D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the COTR:
 - 1. Certification that the materials and installation are in accordance with the drawings and specifications.
 - 2. Certification by the contractor that the complete installation has been properly installed and tested.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. American Society for Testing and Materials (ASTM):
 - B1-07Standard Specification for Hard-Drawn Copper Wire
 - B3-07Standard Specification for Soft or Annealed Copper Wire
 - B8-04Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
- C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):
 - 81-1983IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System
 - C2-07National Electrical Safety Code
- D. National Fire Protection Association (NFPA):
 - 70-11National Electrical Code (NEC)
 - 99-2005Health Care Facilities
- E. Underwriters Laboratories, Inc. (UL):
 - 44-05Thermoset-Insulated Wires and Cables
 - 83-08Thermoplastic-Insulated Wires and Cables
 - 467-07Grounding and Bonding Equipment
 - 486A-486B-03Wire Connectors

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

- A. Equipment grounding conductors shall be stranded wire for sizes #12 and larger. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes 25 mm² (4 AWG) and larger shall be permitted to be identified per NEC.
- B. Bonding conductors shall be stranded wire for sizes #12 and larger.

2.2 GROUND RODS

- A. Copper clad steel, 19 mm (3/4-inch) diameter by 3000 mm (10 feet) long, conforming to UL 467.
- B. Quantity of rods shall be as required to obtain the specified ground resistance.

2.3 SPLICES AND TERMINATION COMPONENTS

- A. Components shall meet or exceed UL 467 and be clearly marked with the manufacturer, catalog number, and permitted conductor size(s).2.4 ground connections
- B. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.
- C. Above Grade:
 - 1. Bonding Jumpers: Compression-type connectors, using zinc-plated fasteners and external tooth lockwashers.
 - 2. Connection to Building Steel: Exothermic-welded type connectors.
 - 3. Ground Busbars: Two-hole compression type lugs, using tin-plated copper or copper alloy bolts and nuts.
 - 4. Rack and Cabinet Ground Bars: One-hole compression-type lugs, using zinc-plated or copper alloy fasteners.
 - 5. Bolted Connectors for Conductors and Pipes: Copper or copper alloy, pressure type with at least two bolts.
 - a) Pipe Connectors: Clamp type, sized for pipe.
 - 6. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.

2.4 EQUIPMENT RACK AND CABINET GROUND BARS

- A. Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks with minimum dimensions of 4 mm thick by 19 mm wide (3/8 inch x ¾ inch).

2.5 GROUND TERMINAL BLOCKS

- A. At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide screw lug-type terminal blocks.

2.6 SECURITY CONTROL ROOM GROUND

- A. Provide 50mm² (1/0 AWG) stranded copper grounding conductor(s) color coded with a green jacket, bolted at the Room's Communications System Grounding Electrode Cooper Plate and circulate to each equipment rack ground buss bar through the wire management system. Connect each equipment rack, wire management system's cable tray, ladder, etc. to the circulating ground wire with a minimum 25mm² (4AWG) stranded Cooper Wire, color coded with a green jacket.

1. Connect each equipment rack ground buss bar to the circulating ground wire as indicated in 2.9.A, and
2. Connect each additional room item to the circulating ground wire as indicated in 2.9.A.

PART 3 - EXECUTION

3.1 GENERAL

- A. Ground in accordance with the NEC, as shown on drawings, and as specified herein.
- B. Equipment Grounding: Metallic structures, including ductwork and building steel, enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

- A. Make grounding connections, which are buried or otherwise normally inaccessible (except connections for which periodic testing access is required) by exothermic weld.

3.3 CORROSION INHIBITORS

- A. When making ground and ground bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.4 CONDUCTIVE PIPING

- A. Bond all conductive piping systems, interior and exterior, to the building to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.

3.5 COMPUTER ROOM/SECURITY EQUIPMENT ROOM GROUNDING

- A. Conduit: Ground and bond metallic conduit systems as follows:
 1. Ground metallic service conduit and any pipes entering or being routed within the computer room at each end using 16 mm² (6AWG) bonding jumpers.
 2. Bond at all intermediate metallic enclosures and across all joints using 16 mm² (6 AWG) bonding jumpers.

3.6 WIREWAY GROUNDING

- A. Ground and Bond Metallic Wireway Systems as follows:
 1. Bond the metallic structures of wireway to provide 100 percent electrical continuity throughout the wireway system by connecting a 16 mm² (6 AWG) bonding jumper at all intermediate metallic enclosures and across all section junctions.

2. Install insulated 16 mm² (6 AWG) bonding jumpers between the wireway system bonded as required in paragraph 1 above, and the closest building ground at each end and approximately every 16 meters (50 feet).
3. Use insulated 16 mm² (6 AWG) bonding jumpers to ground or bond metallic wireway at each end at all intermediate metallic enclosures and cross all section junctions.
4. Use insulated 16 mm² (6 AWG) bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 15 meters.

3.7 LIGHTNING PROTECTION SYSTEM

- A. Bond the lightning protection system to earth ground externally to the building. Under no condition shall the electrical system's third of fourth ground electrode system, or the telecommunications system circulating ground system be connected to the lightning protection system. The Facility's structural steel may be used to connected the lightning protection system at the direction of the COTR certified by an independent certified grounding contractor.

3.8 EXTERIOR LIGHT/CAMERA POLES

- A. Provide 20 ft. (6.1 M) of No. 4 bare copper coiled at bottom of pole base excavation prior to pour, plus additional unspliced length in and above foundation as required to reach pole ground stud.

3.9 GROUND RESISTANCE

- A. Grounding system resistance to ground shall not exceed 5 ohms. Make any modifications or additions to the grounding electrode system necessary for compliance without additional cost to the Government. Final tests shall ensure that this requirement is met.
- B. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized and shall be made in normally dry conditions not fewer than 48 hours after the last rainfall. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together below grade. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

- C. Services at power company interface points shall comply with the power company ground resistance requirements.

3.10 GROUNDING FOR RF/EMI CONTROL

- A. Install bonding jumpers to bond all conduit, cable trays, sleeves and equipment for low voltage signaling and data communications circuits. Bonding jumpers shall consist of 100 mm (4 inches) wide copper strip or two 6 mm² (10 AWG) copper conductors spaced minimum 100 mm (4 inches) apart. Use 16 mm² (6 AWG) copper where exposed and subject to damage.
- B. Comply with the following when shielded cable is used for data circuits.
 - 1. Shields shall be continuous throughout each circuit.
 - 2. Connect shield drain wires together at each circuit connection point and insulate from ground. Do not ground the shield.
 - 3. Do not connect shields from different circuits together.
 - 4. Shield shall be connected at one end only. Connect shield to signal reference at the origin of the circuit. Consult with equipment manufacturer to determine signal reference.

3.11 LABELING

- A. Comply with requirements in Division 26 Section "ELECTRICAL IDENTIFICATION" Article for instruction signs. The label or its text shall be green.
- B. Install labels at the telecommunications bonding conductor and grounding equalizer and at the grounding electrode conductor where exposed.
 - 1. Label Text: "If this connector or cable is loose or if it must be removed for any reason, notify the facility manager."

3.12 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Tests and Inspections:
 - 1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
 - 2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
 - 3. Test completed grounding system at each location where a maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal at individual ground rods. Make tests at ground rods before any conductors are connected.

- a. Measure ground resistance no fewer than two full days after last trace of precipitation and without soil being moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance.
- b. Perform tests by fall-of-potential method according to IEEE 81.
- C. Grounding system will be considered defective if it does not pass tests and inspections.
- D. Prepare test and inspection reports.
- E. Report measured ground resistances that exceed the following values:
 - 1. Power Distribution Units or Panel boards Serving Electronic Equipment: 3 ohm(s).
- F. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Architect promptly and include recommendations to reduce ground resistance.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 28 05 28.33
CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the finishing, installation, connection, testing certification of the conduit, fittings, and boxes to form a complete, coordinated, raceway system(s). Conduits and when approved separate UL Certified and Listed partitioned telecommunications raceways are required for a fully functional Electronic Safety and Security (ESS) system. Raceways are required for all electronic safety and security cabling unless shown or specified otherwise.
- B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

- A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.
- B. Section 07 84 00 - FIRESTOPPING. Requirements for sealing around penetrations to maintain the integrity of fire rated construction.
- C. Section 07 92 00 - JOINT SEALANTS. Requirements for sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.
- D. Section 09 91 00 - PAINTING. Requirements for identification and painting of conduit and other devices.
- E. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. For general electrical requirements, general arrangement of the contract documents, coordination, quality assurance, project conditions, equipment and materials, and items that is common to more than one section of Division 28.
- F. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

1.3 DEFINITIONS

- A. EMT: Electrical metallic tubing.
- B. ENT: Electrical nonmetallic tubing.
- C. EPDM: Ethylene-propylene-diene terpolymer rubber.
- D. FMC: Flexible metal conduit.
- E. IMC: Intermediate metal conduit.
- F. LFMC: Liquidtight flexible metal conduit.
- G. LFNC: Liquidtight flexible nonmetallic conduit.
- H. NBR: Acrylonitrile-butadiene rubber.
- I. RNC: Rigid nonmetallic conduit.

1.4 QUALITY ASSURANCE

- A. Refer to Paragraph 1.4 Quality Assurance, in Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

1.5 SUBMITTALS

- A. Submit in accordance with Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Furnish the following:
- B. Shop Drawings:
1. Size and location of main feeders;
 2. Size and location of panels and pull boxes
 3. Layout of required conduit penetrations through structural elements.
 4. The specific item proposed and its area of application shall be identified on the catalog cuts.
- C. Certification: Prior to final inspection, deliver to the COTR four copies of the certification that the material is in accordance with the drawings and specifications and has been properly installed.
- D. Product Data: For surface raceways, wireways and fittings, floor boxes, hinged-cover enclosures, and cabinets.
- E. Shop Drawings: For the following raceway components. Include plans, elevations, sections, details, and attachments to other work.
1. Custom enclosures and cabinets.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. National Electrical Manufacturers Association (NEMA):
- TC-3-04PVC Fittings for Use with Rigid PVC Conduit and
Tubing
- FB1-07Fittings, Cast Metal Boxes and Conduit Bodies
for Conduit, Electrical Metallic Tubing and
Cable
- C. National Fire Protection Association (NFPA):
- 70-11National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
- 1-05Flexible Metal Conduit
- 5-04Surface Metal Raceway and Fittings
- 6-07Rigid Metal Conduit
- 50-07Enclosures for Electrical Equipment
- 360-09Liquid-Tight Flexible Steel Conduit

467-07	Grounding and Bonding Equipment
514A-04	Metallic Outlet Boxes
514B-04	Fittings for Cable and Conduit
514C-02	Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
651-05	Schedule 40 and 80 Rigid PVC Conduit
651A-07	Type EB and A Rigid PVC Conduit and HDPE Conduit
797-07	Electrical Metallic Tubing
1242-06	Intermediate Metal Conduit

PART 2 - PRODUCTS

2.1 GENERAL

- A. Conduit Size: In accordance with the NEC, but not less than 20 mm (3/4 inch) unless otherwise shown.

2.2.CONDUIT

- A. Rigid galvanized steel: Shall Conform to UL 6, ANSI C80.1.
- B. Rigid intermediate steel conduit (IMC): Shall Conform to UL 1242, ANSI C80.6.
- C. Electrical metallic tubing (EMT): Shall Conform to UL 797, ANSI C80.3.
Maximum size not to exceed 105 mm (4 inches) and shall be permitted only with cable rated 600 volts or less.
- D. Flexible galvanized steel conduit: Shall Conform to UL 1.
- E. Liquid-tight flexible metal conduit: Shall Conform to UL 360.

2.3.WIREWAYS AND RACEWAYS

- A. Surface metal raceway: Shall Conform to UL 5.

2.4.CONDUIT FITTINGS

- A. Rigid steel and IMC conduit fittings:
 1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
 2. Standard threaded couplings, locknuts, bushings, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
 3. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
 4. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
 5. Erickson (union-type) and set screw type couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.

6. Sealing fittings: Threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.

B. Electrical metallic tubing fittings:

1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
2. Only steel or malleable iron materials are acceptable.
3. Couplings and connectors: Concrete tight and rain tight, with connectors having insulated throats. Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller. Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches). Use set screws of case-hardened steel with hex head and cup point to firmly seat in wall of conduit for positive grounding.
4. Indent type connectors or couplings are prohibited.
5. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.

C. Flexible steel conduit fittings:

1. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
2. Clamp type, with insulated throat.

D. Liquid-tight flexible metal conduit fittings:

1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
2. Only steel or malleable iron materials are acceptable.
3. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.

E. Surface metal raceway fittings: As recommended by the raceway manufacturer.

F. Expansion and deflection couplings:

1. Conform to UL 467 and UL 514B.
2. Accommodate, 19 mm (0.75 inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
3. Include internal flexible metal braid sized to guarantee conduit ground continuity and fault currents in accordance with UL 467, and the NEC code tables for ground conductors.
4. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.

2.5 CONDUIT SUPPORTS

- A. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.
- B. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
- C. Multiple conduit (trapeze) hangers: Not less than 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 12 gage steel, cold formed, lipped channels; with not less than 9 mm (3/8 inch) diameter steel hanger rods.
- D. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

2.6 OUTLET, JUNCTION, AND PULL BOXES

- A. UL-50 and UL-514A.
- B. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.
- C. Nonmetallic Outlet and Device Boxes: NEMA OS 2.
- D. Metal Floor Boxes: Cast or sheet metal, semi-adjustable, rectangular.
- E. Sheet metal boxes: Galvanized steel, except where otherwise shown.
- F. Flush mounted wall or ceiling boxes shall be installed with raised covers so that front face of raised cover is flush with the wall. Surface mounted wall or ceiling boxes shall be installed with surface style flat or raised covers.

2.7 CABINETS

- A. NEMA 250, Type 1, galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.
- B. Hinged door in front cover with flush latch and concealed hinge.
- C. Key latch to match panelboards.
- D. Metal barriers to separate wiring of different systems and voltage.
- E. Accessory feet where required for freestanding equipment.

2.8 WIREWAYS

- A. Equip with hinged covers, except where removable covers are shown.

2.9 SLEEVES FOR RACEWAYS

- A. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, galvanized steel, plain ends.
- B. Sleeves for Rectangular Openings: Galvanized sheet steel with minimum 0.052- or 0.138-inch (1.3- or 3.5-mm) thickness as indicated and of length to suit application.
- C. Coordinate sleeve selection and application with selection and application of firestopping specified in Division 07 84 00 "FIRESTOPPING."

2.10 GROUT

- A. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107, factory-packaged, nonmetallic aggregate grout, noncorrosive, nonstaining, mixed with water to consistency suitable for application and a 30-minute working time.

PART 3 - EXECUTION**3.1 PENETRATIONS**

- A. Cutting or Holes:
 1. Locate holes in advance where they are proposed in the structural sections such as ribs or beams. Obtain the approval of the COTR prior to drilling through structural sections.
 2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not allowed, except where permitted by the COTR as required by limited working space.
- B. Fire Stop: Where conduits, wireways, and other electronic safety and security raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING, with rock wool fiber or silicone foam sealant only. Completely fill and seal clearances between raceways and openings with the fire stop material.
- C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight as specified in Section 07 92 00, "JOINT SEALANTS".

3.2 INSTALLATION, GENERAL

- A. Install conduit as follows:
 1. In complete runs before pulling in cables or wires.
 2. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
 3. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
 4. Cut square with a hacksaw, ream, remove burrs, and draw up tight.
 5. Mechanically continuous.
 6. Independently support conduit at 2.4 m (8 foot) on center. Do not use other supports i.e., (suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts).
 7. Support within 300 mm (12 inches) of changes of direction, and within 300 mm (12 inches) of each enclosure to which connected.

8. Close ends of empty conduit with plugs or caps at the rough-in stage to prevent entry of debris, until wires are pulled in.
 9. Conduit installations under fume and vent hoods are prohibited.
 10. Secure conduits to cabinets, junction boxes, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
 11. Flashing of penetrations of the roof membrane is specified in Section 07 60 00, "FLASHING AND SHEET METAL".
 12. Unless otherwise indicated on the drawings or specified herein, all conduits shall be installed concealed within finished walls, floors and ceilings.
- B. Conduit Bends:
1. Make bends with standard conduit bending machines.
 2. Conduit hickey may be used for slight offsets, and for straightening stubbed out conduits.
 3. Bending of conduits with a pipe tee or vise is prohibited.
- C. Layout and Homeruns:
1. Install conduit with wiring, including homeruns, as shown.
 2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the COTR.
- D. Fire Alarm:
1. Fire alarm conduit shall be painted red (a red "top-coated" conduit from the conduit manufacturer may be used in lieu of painted conduit) in accordance with the requirements of Section 28 31 00, "FIRE DETECTION AND ALARM".

3.3 CONCEALED WORK INSTALLATION

- A. In Concrete:
1. Conduit: Rigid steel, IMC or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel or vapor barriers.
 2. Align and run conduit in direct lines.
 3. Install conduit through concrete beams only when the following occurs:
 - a. Where shown on the structural drawings.
 - b. As approved by the COTR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
 4. Installation of conduit in concrete that is less than 75 mm (3 inch) thick is prohibited.

- a. Conduit outside diameter larger than 1/3 of the slab thickness is prohibited.
 - b. Space between conduits in slabs: Approximately six conduit diameters apart, except one conduit diameter at conduit crossings.
 - c. Install conduits approximately in the center of the slab so that there will be a minimum of 19 mm (3/4 inch) of concrete around the conduits.
- 5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to insure low resistance ground continuity through the conduits. Tightening set screws with pliers is prohibited.
- B. Furred or Suspended Ceilings and in Walls:
 - 1. Conduit for conductors above 600 volts:
 - a. Rigid steel or rigid aluminum.
 - b. Aluminum conduit mixed indiscriminately with other types in the same system is prohibited.
 - 2. Conduit for conductors 600 volts and below:
 - a. Rigid steel, IMC, or EMT. Different type conduits mixed indiscriminately in the same system is prohibited.
 - 3. Align and run conduit parallel or perpendicular to the building lines.
 - 4. Tightening set screws with pliers is prohibited.

3.4 EXPOSED WORK INSTALLATION

- A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.
- B. Conduit for Conductors 600 volts and below:
 - 1. Rigid steel, IMC, or EMT. Different type of conduits mixed indiscriminately in the system is prohibited.
- C. Align and run conduit parallel or perpendicular to the building lines.
- D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
- E. Support horizontal or vertical runs at not over 2400 mm (eight foot) intervals.
- F. Surface metal raceways: Use only where shown.
- G. Painting:
 - 1. Paint exposed conduit as specified in Section 09 91 00, "PAINTING".

2. Paint all conduits containing cables rated over 600 volts safety orange. Refer to Section 09 91 00, "PAINTING" for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (two inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

3.5 EXPANSION JOINTS

- A. Conduits 75 mm (3 inches) and larger, that are secured to the building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.
- B. Provide conduits smaller than 75 mm (3 inches) with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 125 mm (5 inch) vertical drop midway between the ends. Flexible conduit shall have a copper green ground bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for 375 mm (15 inches) and larger conduits are acceptable.
- C. Install expansion and deflection couplings where shown.

3.6 CONDUIT SUPPORTS, INSTALLATION

- A. Safe working load shall not exceed 1/4 of proof test load of fastening devices.
- B. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.
- C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 90 kg (200 pounds). Attach each conduit with U-bolts or other approved fasteners.
- D. Support conduit independently of junction boxes, pull boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.
- E. Fasteners and Supports in Solid Masonry and Concrete:
 1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
 2. Existing Construction:
 - a. Steel expansion anchors not less than 6 mm (1/4 inch) bolt size and not less than 28 mm (1-1/8 inch) embedment.
 - b. Power set fasteners not less than 6 mm (1/4 inch) diameter with depth of penetration not less than 75 mm (3 inches).
 - c. Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.
- F. Hollow Masonry: Toggle bolts are permitted.
- G. Bolts supported only by plaster or gypsum wallboard are not acceptable.

- H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
- I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
- J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.
- K. Spring steel type supports or fasteners are prohibited for all uses except: Horizontal and vertical supports/fasteners within walls.
- L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.7 BOX INSTALLATION

- A. Boxes for Concealed Conduits:
 - 1. Flush mounted.
 - 2. Provide raised covers for boxes to suit the wall or ceiling, construction and finish.
- B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling in operations.
- C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
- D. Outlet boxes in the same wall mounted back-to-back are prohibited. A minimum 600 mm (24 inch), center-to-center lateral spacing shall be maintained between boxes).
- E. Minimum size of outlet boxes is 50 mm (2 inches) handy box by 55 mm (2-1/8 inches) deep, with device covers for the wall material and thickness involved.
- F. On all junction box covers, identify the system with machine printed label, "ESS".
- H. Label all covers of signal boxes with telecommunication room name where conduits terminate.

3.8 ELECTRONIC SAFETY AND SECURITY CONDUIT

- A. Install the electronic safety and security raceway system as shown on drawings.
- B. Minimum conduit size of 19 mm (3/4 inch), but not less than the size shown on the drawings.
- C. All conduit ends shall be equipped with insulated bushings.
- D. All conduits within buildings shall include pull boxes after every two 90 degree bends. Size boxes per the NEC.

- E. Vertical conduits/sleeves through closets floors shall terminate not less than 75 mm (3 inches) below the floor and not less than 75 mm (3 inches) below the ceiling of the floor below.
- F. Terminate conduit runs to/from a backboard in a closet or interstitial space at the top or bottom of the backboard. Conduits shall enter communication closets next to the wall and be flush with the backboard.
- G. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections such as ribs or beams.
- H. All empty conduits located in communications closets or on backboards shall be sealed with a standard non-hardening duct seal compound to prevent the entrance of moisture and gases and to meet fire resistance requirements.
- I. Conduit runs shall contain no more than four quarter turns (90 degree bends) between pull boxes/backboards. Minimum radius of communication conduit bends shall be as follows (special long radius):

Sizes of Conduit Trade Size	Radius of Conduit Bends mm, Inches
$\frac{3}{4}$	150 (6)
1	230 (9)
1-1/4	350 (14)
1-1/2	430 (17)
2	525 (21)
2-1/2	635 (25)
3	775 (31)
3-1/2	900 (36)
4	1125 (45)

- J. Furnish and pull wire in all empty conduits. (Sleeves through floor are exceptions).
- K. For boxes installed in metal stud construction, use rigid support metal bar hangers or metal bar fasteners attached to two studs. Screwing boxes directly to joists or studs is not acceptable.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 28 13 00
PHYSICAL ACCESS CONTROL SYSTEM

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the salvage of devices on an existing access control system and the finishing, installation, connection, testing and certification of new and salvaged devices that complete and fully operating Physical Access Control System, hereinafter referred to as the PACS.
- B. This Section includes a Physical Access Control System consisting of a system server, one or more networked workstation computers, operating system and application software, and field-installed Controllers connected by a high-speed electronic data transmission network. The PACS shall have the following:
 - 1. Physical Access Control:
 - a. Regulating access through doors and one elevator.
 - b. Anti-passback
 - c. Visitor assignment
 - d. Surge and tamper protection
 - e. Secondary alarm annunciator
 - f. Existing credential cards and readers
 - g. Push-button switches
 - h. RS-232 ASCII interface
 - i. Existing credential creation and credential holder database and management
 - j. Monitoring of field-installed devices
 - k. Interface with paging, elevator control and video surveillance systems.
 - l. Reporting
 - 2. Security:
 - a. Real-time guard tour.
 - b. Time and attendance.
 - c. Video and camera control.
- C. System Architecture:
 - 1. The existing level system is operational throughout the campus. Portions of the network will be removed from service and reinstalled without affecting the remainder of the system.

- D. PACS shall provide secure and reliable identification of Federal employees and contractors by utilizing credential authentication per FIPS-201.
- E. Physical Access Control System (PACS) shall consist of:
1. Existing head-end equipment server,
 2. One or more existing networked PC-based workstations,
 3. Existing Physical Access Control System and Database Management Software,
 4. Existing credential validation software/hardware,
 5. Existing field installed controllers,
 6. Existing PIV Middleware,
 7. Existing card readers,
 8. Existing PIV cards,
 9. Existing supportive information system,
 10. Existing door locks and sensors,
 11. Existing power supplies,
 12. Interfaces with:
 - a. Video Surveillance and Assessment System,
 - b. Automatic door operators,
 - c. Intrusion Detection System,
 - d. Intercommunication System
 - e. Fire Protection System,
 - f. Elevator Controls,
 - g. Panic/Duress Alarm,
 13. Tamper sensors of fire extinguisher cabinets,
 14. Existing personal protection system.
- F. Existing head-end equipment server, workstations and controllers are connected by a high-speed electronic data transmission network.
- G. Information system supporting PACS , Head-End equipment server, workstations, network switches, routers and controllers comply with FIPS 200 requirements (Minimum Security Requirements for Federal Information and Information Systems) and NIST Special Publication 800-53 (Recommended Security Controls for Federal Information Systems).
- H. Existing PACS system supports;
1. Multiple credential authentication modes,
 2. Bidirectional communication with the reader,
 3. Incident response policy implementation capability; system shall have capability to automatically change access privileges for

certain user groups to high security areas in case of incident/emergency.

4. Visitor management,
- I. All security relevant decisions shall be made on "secure side of the door". Secure side processing shall include;
 1. Challenge/response management,
 2. PKI path discovery and validation,
 3. Credential identifier processing,
 4. Authorization decisions.
- J. For locations where secure side processing is not applicable the tamper switches and certified cryptographic processing shall be provided per FIPS-140-2.
- K. System Software: Based on Lenel on Guard central-station, workstation operating system, server operating system, and application software.
- L. Software and controllers are capable of matching full 56 bit FASC-N plus minimum of 32 bits of public key certificate data.
- M. Software has the following capabilities:
 1. Multiuser multitasking to allow for independent activities and monitoring to occur simultaneously at different workstations.
 2. Support authentication and enrolment;
 - a. PIV verification,
 - b. Expiration date check,
 - c. Biometric check,
 - d. Digital photo display/check,
 - e. Validate digital signatures of data objects (Objects are signed by the Trusted Authority
 - f. Private key challenge (CAK & PAK to verify private key public key pairs exist and card is not a clone)
 3. Support CRL validation via OCSP or SCVP on a scheduled basis and automatically deny access to any revoked credential in the system.
 4. Graphical user interface to show pull-down menus and a menu tree format that complies with interface guidelines of Microsoft Windows operating system.
 5. System license shall be for the entire system and shall include capability for future additions that are within the indicated system size limits specified in this Section.

6. System shall have open architecture that allows importing and exporting of data and interfacing with other systems that are compatible with existing operating system.
7. Operator login and access shall be utilized via integrated smart card reader and password protection.

N. Systems Networks:

1. A standalone system network shall interconnect all components of the system. This network shall include communications between a central station and any peer or subordinate workstations, enrollment stations, local annunciation stations, portal control stations or redundant central stations.

O. Number of points:

1. PACS shall support multiple autonomous regional servers that can connect to a master command and controller server.
2. Unlimited number of access control readers, unlimited number of inputs or outputs, unlimited number of client workstations, unlimited number of cardholders.
3. Total system solution to enable enterprise-wide, networked, multi-user access to all system resources via a wide range of options for connectivity with the customer's existing LAN and WAN.

P. Console Network:

1. Console network, if required, shall provide communication between a central station and any subordinate or separate stations of the system. Where redundant central or parallel stations are required, the console network shall allow the configuration of stations as master and slave. The console network may be a part of the field device network or may be separate depending upon the manufacturer's system configuration.

Q. Network(s) connecting PCs and Controllers shall comply with NIST Special Publication 800-53 (Recommended Security Controls for Federal Information Systems) and consist of one or more of the following:

1. Local area, IEEE 802.3 Fast Ethernet [10 BASE-T] [100 BASE-TX], star topology network based on TCP/IP.
2. Direct-connected, RS-232 cable from the COM port of the Central Station to the first Controller, then RS-485 to interconnect the remainder of the Controllers at that Location.

1.2 RELATED WORK

- A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.
- B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.
- C. Section 08 71 00 - DOOR HARDWARE. Requirements for door installation.
- D. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.
- E. Section 14 24 00 - HYDRAULIC ELEVATORS. Requirements for elevators.
- F. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
Requirements for connection of high voltage.
- G. Section 26 05 21 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.
- H. Section 26 05 33 - RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS.
Requirements for infrastructure.
- I. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. For general requirements that are common to more than one section in Division 28.
- J. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.
- K. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.
- L. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.
- M. Section 28 13 16 - ACCESS CONTROL SYSTEM AND DATABASE MANAGEMENT.
Requirements for control and operation of all security systems.
- N. Section 28 16 00 - INTRUSION DETECTION SYSTEM (IDS). Requirements for alarm systems.
- O. Section 28 23 00 - VIDEO SURVEILLANCE. Requirements for security camera systems.
- P. Section 28 26 00 - ELECTRONIC PERSONAL PROTECTION SYSTEM (EPPS).
Requirements for emergency and interior communications.
- Q. Section 28 31 00 - FIRE DETECTION AND ALARM. Requirements for integration with fire detection and alarm system.

1.3 QUALITY ASSURANCE

- A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1.

1.4 SUBMITTALS

- A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1.

1.5 APPLICABLE PUBLICATIONS

- A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1.

1.6 DEFINITIONS

- A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1.

1.7 COORDINATION

- A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1.

1.8 MAINTENANCE & SERVICE

- A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1.

1.9 PERFORMANCE REQUIREMENTS

- A. PACS shall provide support for multiple authentication modes and bidirectional communication with the reader. PACS shall provide implementation capability for enterprise security policy and incident response.
- B. All processing of authentication information must occur on the "safe side" of a door
- C. Physical Access Control System shall provide access to following Security Areas:
 - 1. Controlled
 - 2. Limited
 - 3. Exclusion
- D. PACS shall provide:
 - 1. One authentication factor for access to Controlled security areas
 - 2. Two authentication factors for access to Limited security areas
 - 3. Three authentication factors for access to Exclusion security areas
- E. PACS shall provide Credential Validation and Path Validation per NIST 800-116.
- F. The PACS System shall have an Enterprise Path Validation Module (PVM) component that processes X.509 certification paths composed of X.509 v3 certificates and X.509 v2 CRLs. The PVM component MUST support the following features:
 - 1. Name chaining;
 - 2. Signature chaining;
 - 3. Certificate validity;

4. Key usage, basic constraints, and certificate policies certificate extensions;
 5. Full CRLs; and
 6. CRLs segmented on names.
- G. Distributed Processing: System shall be a fully distributed processing system so that information, including time, date, valid codes, access levels, and similar data, is downloaded to Controllers so that each Controller makes access-control decisions for that Location. Do not use intermediate Controllers for physical access control. If communications to Central Station are lost, all Controllers shall automatically buffer event transactions until communications are restored, at which time buffered events shall be uploaded to the Central Station.
- H. Data Capacity:
1. 130 different card-reader formats.
 2. 999 comments.
 3. 16 graphic file types for importing maps.
- I. Location Capacity:
1. 128 reader-controlled doors.
 2. 50,000 total access credentials.
 3. 2048 supervised alarm inputs.
 4. 2048 programmable outputs.
 5. 32,000 custom action messages per Location to instruct operator on action required when alarm is received.
- J. System Network Requirements:
1. Interconnect system components and provide automatic communication of status changes, commands, field-initiated interrupts, and other communications required for proper system operation.
 2. Communication shall not require operator initiation or response, and shall return to normal after partial or total network interruption such as power loss or transient upset.
 3. System shall automatically annunciate communication failures to the operator and identify the communication link that has experienced a partial or total failure.
- K. Field equipment shall include Controllers, sensors, and controls. Controllers shall serve as an interface between the Central Station and sensors and controls. Data exchange between the Central Station and the Controllers shall include down-line transmission of commands,

software, and databases to Controllers. The up-line data exchange from the Controller to the Central Station shall include status data such as intrusion alarms, status reports, and entry-control records.

Controllers are classified as alarm-annunciation or entry-control type.

- L. System Response to Alarms: Field device network shall provide a system end-to-end response time of 1 second(s) or less for every device connected to the system. Alarms shall be annunciated at the Central Station within 1 second of the alarm occurring at a Controller or device controlled by a local Controller, and within 100 ms if the alarm occurs at the Central Station. Alarm and status changes shall be displayed within 100 ms after receipt of data by the Central Station. All graphics shall be displayed, including graphics-generated map displays, on the console monitor within 5 seconds of alarm receipt at the security console. This response time shall be maintained during system heavy load.
- M. False Alarm Reduction: The design of Central Station and Controllers shall contain features to reduce false alarms. Equipment and software shall comply with SIA CP-01.
- N. Error Detection: A cyclic code error detection method shall be used between Controllers and the Central Station, which shall detect single- and double-bit errors, burst errors of eight bits or less, and at least 99 percent of all other multibit and burst error conditions. Interactive or product error detection codes alone will not be acceptable. A message shall be in error if one bit is received incorrectly. System shall retransmit messages with detected errors. A two-digit decimal number shall be operator assignable to each communication link representing the number of retransmission attempts. When the number of consecutive retransmission attempts equals the assigned quantity, the Central Station shall print a communication failure alarm message. System shall monitor the frequency of data transmission failure for display and logging.
- O. Data Line Supervision: System shall initiate an alarm in response to opening, closing, shorting, or grounding of data transmission lines.
- P. Door Hardware Interface: Coordinate with Division 08 Sections that specify door hardware required to be monitored or controlled by the PACS. The Controllers in this Section shall have electrical characteristics that match the signal and power requirements of door hardware. Integrate door hardware specified in Division 08 Sections to

function with the controls and PC-based software and hardware in this Section.

- Q. References to industry and trade association standards and codes are minimum installation requirement standards.
- R. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.10 EQUIPMENT AND MATERIALS

- A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1.

1.11 WARRANTY OF CONSTRUCTION.

- A. Warrant PACS work subject to the Article "Warranty of Construction" of FAR clause 52.246-21.
- B. Demonstration and training shall be performed prior to system acceptance.

1.12 GENERAL REQUIREMENTS

- A. For general requirements that are common to more than one section in Division 28 refer to Section 28 05 00, REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS.
- B. General requirements applicable to this section include:
 - 1. General Arrangement Of Contract Documents,
 - 2. Delivery, Handling and Storage,
 - 3. Project Conditions,
 - 4. Electrical Power,
 - 5. Lightning, Power Surge Suppression, and Grounding,
 - 6. Electronic Components,
 - 7. Substitute Materials and Equipment, and
 - 8. Like Items.

PART 2 - PRODUCTS

2.1 GENERAL

- A. All equipment and materials for the system will be compatible to ensure correct operation as outlined in FIPS 201, March 2006 and HSPD-12.
- B. The security system characteristics listed in this section will serve as a guide in selection of equipment and materials for the PACS. If updated or more suitable versions are available then the COTR will approve the acceptance of prior to an installation.
- C. PACS equipment shall meet or exceed all requirements listed below.

D. A PACS shall be comprised of, but not limited to, the following components:

1. Physical Access Control System
2. Surge and Tamper Protection
3. Controllers (Data Gathering Panel)
4. Keypads
5. Card Readers
6. System Sensors and Related Equipment
7. Push Button Switches
8. Interfaces
9. Door and Gate Hardware interface
10. RS-232 ASCII Interface
11. Floor Select Elevator Control
12. Video and Camera Control
13. Cables
14. Transformers

2.2 SECURITY MANAGEMENT SYSTEM (SMS)

- A. Is existing and allows the configuration of an enrollment and badging, alarm monitoring, administrative, asset management, digital video management, intrusion detection, visitor enrollment, remote access level management, and integrated client workstations or any combination of all or some.
- B. Is expandable to support an unlimited number of individual module or integrated client workstations. All access control field hardware, including Data Gathering Panels(DGP), shall be connected to all physical access control system workstation on the network.
- C. Has the ability to compose, file, maintain, update, and print reports for either individuals or the system as follows.
 1. Individual reports that consist of an employee's name, office location, phone number or direct extension, and normal hours of operation. The report shall provide a detail listing of the employee's daily events in relation to accessing points within a facility.
 2. System reports shall be able to produce information on a daily/weekly/monthly basis for all events, alarms, and any other activity associated with a system user.
- D. Provides full interface and control of the PACS to include the following subsystems within the PACS:

1. Public Key Infrastructure
 2. Card Management
 3. Identity and Access Management
 4. Personal Identity Verification
- E. Has the following features or compatibilities:
1. The ability to be operated locally or remotely via a LAN, WAN, internet, or intranet.
 2. Event and Alarm Monitoring
 3. Database Partitioning
 4. Ability to fully integrate with all other security subsystems
 5. Enhanced Monitoring Station with Split Screen Views
 6. Alternate and Extended Shunt by Door
 7. Escort Management
 8. Enhanced IT-based Password Protection
 9. N-man Rule and Occupancy Restrictions
 10. Open Journal Data Format for Enhanced Reporting
 11. Automated Personnel Import
 12. ODBC Support
 13. Windows 2000 Professional, Windows Server 2003, Windows XP Professionals for Servers, Windows 7
 14. Field-Level Audit Trail
 15. Cardholder Access Events

2.3 APPLICATION SOFTWARE

- A. System Software: Based on 32-bit, Microsoft Windows central-station and workstation operating system and application software. Software shall have the following features:
1. Multiuser multitasking to allow independent activities and monitoring to occur simultaneously at different workstations.
 2. Graphical user interface to show pull-down menus and a menu tree format.
 3. Capability for future additions within the indicated system size limits.
 4. Open architecture that allows importing and exporting of data and interfacing with other systems that are compatible with operating system.
 5. Password-protected operator and smart card login and access.

B. Controller Software:

1. Controllers shall operate as an autonomous intelligent processing unit. Controllers shall make decisions about physical access control, alarm monitoring, linking functions, and door locking schedules for its operation, independent of other system components. Controllers shall be part of a fully distributed processing control network. The portion of the database associated with a Controller and consisting of parameters, constraints, and the latest value or status of points connected to that Controller, shall be maintained in the Controller.
2. Functions: The following functions shall be fully implemented and operational within each Controller:
 - a. Monitoring inputs.
 - b. Controlling outputs.
 - c. Automatically reporting alarms to the Central Station.
 - d. Reporting of sensor and output status to Central Station on request.
 - e. Maintaining real time, automatically updated by the Central Station at least once a day.
 - f. Communicating with the Central Station.
 - g. Executing Controller resident programs.
 - h. Diagnosing.
 - i. Downloading and uploading data to and from the Central Station.
3. Controller Operations at a Location:
 - a. Location: Up to 64 Controllers connected to RS-485 communications loop. Globally operating I/O linking and anti-passback functions between Controllers within the same Location without central-station or workstation intervention. Linking and anti-passback shall remain fully functional within the same Location even when the Central Station or workstations are off line.
 - b. In the event of communications failure between the Central Station and a Location, there shall be no degradation in operations at the Controllers at that Location. The Controllers at each Location shall be connected to a memory buffer with a capacity to store up to 10,000 events; there shall be no loss of transactions in system history files until the buffer overflows.

- c. Buffered events shall be handled in a first-in-first-out mode of operation.

4. Individual Controller Operation:

- a. Controllers shall transmit alarms, status changes, and other data to the Central Station when communications circuits are operable. If communications are not available, Controllers shall function in a stand-alone mode and operational data, including the status and alarm data normally transmitted to the Central Station, shall be stored for later transmission to the Central Station. Storage capacity for the latest 1024 events shall be provided at each Controller.
- b. Card-reader ports of a Controller shall be custom configurable for at least 120 different card-reader or keypad formats. Multiple reader or keypad formats may be used simultaneously at different Controllers or within the same Controller.
- c. Controllers shall provide a response to card-readers or keypad entries in less than 0.25 seconds, regardless of system size.
- d. Controllers that are reset, or powered up from a nonpowered state, shall automatically request a parameter download and reboot to its proper working state. This shall happen without any operator intervention.
- e. Initial Startup: When Controllers are brought on-line, database parameters shall be automatically downloaded to them. After initial download is completed, only database changes shall be downloaded to each Controller.
- f. Failure Mode: On failure for any reason, Controllers shall perform an orderly shutdown and force Controller outputs to a predetermined failure mode state, consistent with the failure modes shown and the associated control device.
- g. Startup After Power Failure: After power is restored, startup software shall initiate self-test diagnostic routines, after which Controllers shall resume normal operation.
- h. Startup After Controller Failure: On failure, if the database and application software are no longer resident, Controllers shall not restart, but shall remain in the failure mode until repaired. If database and application programs are resident, Controllers shall immediately resume operation. If not, software shall be restored automatically from the Central Station.

5. Communications Monitoring:

- a. System shall monitor and report status of RS-485 communications loop or TCP/IP communication status of each Location.
 - b. Communication status window shall display which Controllers are currently communicating, a total count of missed polls since midnight, and which Controller last missed a poll.
 - c. Communication status window shall show the type of CPU, the type of I/O board, and the amount of RAM memory for each Controller.
6. Operating systems shall include a real-time clock function that maintains seconds, minutes, hours, day, date, and month. The real-time clock shall be automatically synchronized with the Central Station at least once a day to plus or minus 10 seconds. The time synchronization shall be automatic, without operator action and without requiring system shutdown.

C. PC-to-Controller Communications:

- 1. Central-station or workstation communications shall use the following:
 - a. Direct connection using serial ports of the PC.
 - b. TCP/IP LAN network interface cards.
 - c. Dial-up modems for connections to Locations.
- 2. Serial Port Configuration: Each serial port used for communications shall be individually configurable for "direct communications," "modem communications incoming and outgoing," or "modem communications incoming only"; or as an ASCII output port.
- 3. Multiport Communications Board: Use if more than two serial ports are needed.
 - a. Expandable and modular design. Use a 4-, 8-, or 16-serial port configuration that is expandable to 32 or 64 serial ports.
 - b. Connect the first board to an internal PCI bus adapter card.
- 4. Direct serial, TCP/IP, and dial-up communications shall be alike in the monitoring or control of system, except for the connection that must first be made to a dial-up Location.
- 5. TCP/IP network interface card shall have an option to set the poll frequency and message response time-out settings.
- 6. PC-to-Controller and Controller-to-Controller communications (direct, dial-up, or TCP/IP) shall use a polled-communication protocol that checks sum and acknowledges each message. All

communications shall be verified and buffered and retransmitted if not acknowledged.

D. Direct Serial or TCP/IP PC-to-Controller Communications:

1. Communication software on the PC shall supervise the PC-to-Controller communications link.
2. Loss of communications to any Controller shall result in an alarm at all PCs running the communications software.
3. When communications are restored, all buffered events shall automatically upload to the PC, and any database changes shall be automatically sent to the Controller.

E. Controller-to-Controller Communications:

1. Controller-to-Controller Communications: RS-485, 4-wire, point-to-point, regenerative (repeater) communications network methodology.
2. RS-485 communications signal shall be regenerated at each Controller.

F. Database Downloads:

1. All data transmissions from PCs to a Location, and between Controllers at a Location, shall include a complete database checksum to check the integrity of the transmission. If the data checksum does not match, a full data download shall be automatically retransmitted.
2. If a Controller is reset for any reason, it shall automatically request and receive a database download from the PC. The download shall restore data stored at the Controller to their normal working state and shall take place with no operator intervention.

G. Operator Interface:

1. Inputs in system shall have two icon representations, one for the normal state and one for the abnormal state.
2. When viewing and controlling inputs, displayed icons shall automatically change to the proper icon to display the current system state in real time. Icons shall also display the input's state, whether armed or bypassed, and if the input is in the armed or bypassed state due to a time zone or a manual command.
3. Outputs in system shall have two icon representations, one for the secure (locked) state and one for the open (unlocked) state.
4. Icons displaying status of the I/O points shall be constantly updated to show their current real-time condition without prompting by the operator.

5. The operator shall be able to scroll the list of I/Os and press the appropriate toolbar button, or right click, to command the system to perform the desired function.
6. Graphic maps or drawings containing inputs, outputs, and override groups shall include the following:
 - a. Database to import and store full-color maps or drawings and allow for input, output, and override group icons to be placed on maps.
 - b. Maps to provide real-time display animation and allow for control of points assigned to them.
 - c. System to allow inputs, outputs, and override groups to be placed on different maps.
 - d. Software to allow changing the order or priority in which maps will be displayed.
7. Override Groups Containing I/Os:
 - a. System shall incorporate override groups that provide the operator with the status and control over user-defined "sets" of I/Os with a single icon.
 - b. Icon shall change automatically to show the live summary status of points in that group.
 - c. Override group icon shall provide a method to manually control or set to time zone points in the group.
 - d. Override group icon shall allow the expanding of the group to show icons representing the live status for each point in the group, individual control over each point, and the ability to compress the individual icons back into one summary icon.
8. Schedule Overrides of I/Os and Override Groups:
 - a. To accommodate temporary schedule changes that do not fall within the holiday parameters, the operator shall have the ability to override schedules individually for each input, output, or override group.
 - b. Each schedule shall be composed of a minimum of two dates with separate times for each date.
 - c. The first time and date shall be assigned the override state that the point shall advance to, when the time and date become current.
 - d. The second time and date shall be assigned the state that the point shall return to, when the time and date become current.

9. Copy command in database shall allow for like data to be copied and then edited for specific requirements, to reduce redundant data entry.

H. Operator Access Control:

1. Control operator access to system controls through three password-protected operator levels. System operators and managers with appropriate password clearances shall be able to change operator levels for operators.
2. Three successive attempts by an operator to execute functions beyond their defined level during a 24-hour period shall initiate a software tamper alarm.
3. A minimum of 32 passwords shall be available with the system software. System shall display the operator's name or initials in the console's first field. System shall print the operator's name or initials, action, date, and time on the system printer at login and logoff.
4. The password shall not be displayed or printed.
5. Each password shall be definable and assignable for the following:
 - a. Commands usable.
 - b. Access to system software.
 - c. Access to application software.
 - d. Individual zones that are to be accessed.
 - e. Access to database.

I. Operator Commands:

1. Command Input: Plain-language words and acronyms shall allow operators to use the system without extensive training or data-processing backgrounds. System prompts shall be a word, a phrase, or an acronym.
2. Command inputs shall be acknowledged and processing shall start in not less than 1 second(s).
3. Tasks that are executed by operator's commands shall include the following:
 - a. Acknowledge Alarms: Used to acknowledge that the operator has observed the alarm message.
 - b. Place Zone in Access: Used to remotely disable intrusion alarm circuits emanating from a specific zone. System shall be structured so that console operator cannot disable tamper circuits.

- c. Place Zone in Secure: Used to remotely activate intrusion alarm circuits emanating from a specific zone.
 - d. System Test: Allows the operator to initiate a system-wide operational test.
 - e. Zone Test: Allows the operator to initiate an operational test for a specific zone.
 - f. Print reports.
 - g. Change Operator: Used for changing operators.
 - h. Security Lighting Controls: Allows the operator to remotely turn on/off security lights.
 - i. Display Graphics: Used to display any graphic displays implemented in the system. Graphic displays shall be completed within 20 seconds from time of operator command.
 - j. Run system tests.
 - k. Generate and format reports.
 - l. Request help with the system operation.
 - 1) Include in main menus.
 - 2) Provide unique, descriptive, context-sensitive help for selections and functions with the press of one function key.
 - 3) Provide navigation to specific topic from within the first help window.
 - 4) Help shall be accessible outside the applications program.
 - m. Entry-Control Commands:
 - 1) Lock (secure) or unlock (open) each controlled entry and exit up to four times a day through time-zone programming.
 - 2) Arm or disarm each monitored input up to four times a day through time-zone programming.
 - 3) Enable or disable readers or keypads up to twice a day through time-zone programming.
 - 4) Enable or disable cards or codes up to four times per day per entry point through access-level programming.
4. Command Input Errors: Show operator input assistance when a command cannot be executed because of operator input errors. Assistance screen shall use plain-language words and phrases to explain why the command cannot be executed. Error responses that require an operator to look up a code in a manual or other document are not acceptable. Conditions causing operator assistance messages include the following:

- a. Command entered is incorrect or incomplete.
- b. Operator is restricted from using that command.
- c. Command addresses a point that is disabled or out of service.
- d. Command addresses a point that does not exist.
- e. Command is outside the system's capacity.

J. Alarms:

1. System Setup:

- a. Assign manual and automatic responses to incoming point status change or alarms.
- b. Automatically respond to input with a link to other inputs, outputs, operator-response plans, unique sound with use of WAV files, and maps or images that graphically represent the point location.
- c. 60-character message field for each alarm.
- d. Operator-response-action messages shall allow message length of at least 65,000 characters, with database storage capacity of up to 32,000 messages. Setup shall assign messages to access point, sensor and duress alarm.
- e. Secondary messages shall be assignable by the operator for printing to provide further information and shall be editable by the operator.
- f. Allow 25 secondary messages with a field of 4 lines of 60 characters each.
- g. Store the most recent 1000 alarms for recall by the operator using the report generator.

2. Software Tamper:

- a. Annunciate a tamper alarm when unauthorized changes to system database files are attempted. Three consecutive unsuccessful attempts to log onto system shall generate a software tamper alarm.
- b. Annunciate a software tamper alarm when an operator or other individual makes three consecutive unsuccessful attempts to invoke functions beyond their authorization level.
- c. Maintain a transcript file of the last 5000 commands entered at the each Central Station to serve as an audit trail. System shall not allow write access to system transcript files by any person, regardless of their authorization level.
- d. Allow only acknowledgment of software tamper alarms.

3. Read access to system transcript files shall be reserved for operators with the highest password authorization level available in system.
 4. Animated Response Graphics: Highlight alarms with flashing icons on graphic maps; display and constantly update the current status of alarm inputs and outputs in real time through animated icons.
 5. Multimedia Alarm Annunciation: WAV files to be associated with alarm events for audio annunciation or instructions.
 6. Alarm Handling: Each input may be configured so that an alarm cannot be cleared unless it has returned to normal, with options of requiring the operator to enter a comment about disposition of alarm. Allow operator to silence alarm sound when alarm is acknowledged.
 7. Alarm Automation Interface: High-level interface to Central Station alarm automation software systems. Allows input alarms to be passed to and handled by automation systems in same manner as burglar alarms, using an RS-232 ASCII interface.
 8. CCTV Alarm Interface: Allow commands to be sent to CCTV systems during alarms (or input change of state) through serial ports.
 9. Camera Control: Provides operator ability to select and control cameras from graphic maps.
- K. Alarm Monitoring: Monitor sensors, Controllers, and DTS circuits and notify operators of an alarm condition. Display higher-priority alarms first and, within alarm priorities, display the oldest unacknowledged alarm first. Operator acknowledgment of one alarm shall not be considered acknowledgment of other alarms nor shall it inhibit reporting of subsequent alarms.
1. Displayed alarm data shall include type of alarm, location of alarm, and secondary alarm messages.
 2. Printed alarm data shall include type of alarm, location of alarm, date and time (to nearest second) of occurrence, and operator responses.
 3. Maps shall automatically display the alarm condition for each input assigned to that map, if that option is selected for that input location.
 4. Alarms initiate a status of "pending" and require the following two handling steps by operators:

- a. First Operator Step: "Acknowledged." This action shall silence sounds associated with the alarm. The alarm remains in the system "Acknowledged" but "Un-Resolved."
 - b. Second Operator Step: Operators enter the resolution or operator comment, giving the disposition of the alarm event. The alarm shall then clear.
5. Each workstation shall display the total pending alarms and total unresolved alarms.
6. Each alarm point shall be programmable to disallow the resolution of alarms until the alarm point has returned to its normal state.
7. Alarms shall transmit to Central Station in real time, except for allowing connection time for dial-up locations.
8. Alarms shall be displayed and managed from a minimum of four different windows.
 - a. Input Status Window: Overlay status icon with a large red blinking icon. Selecting the icon will acknowledge the alarm.
 - b. History Log Transaction Window: Display name, time, and date in red text. Selecting red text will acknowledge the alarm.
 - c. Alarm Log Transaction Window: Display name, time, and date in red. Selecting red text will acknowledge the alarm.
 - d. Graphic Map Display: Display a steady colored icon representing each alarm input location. Change icon to flashing red when the alarm occurs. Change icon from flashing red to steady red when the alarm is acknowledged.
9. Once an alarm is acknowledged, the operator shall be prompted to enter comments about the nature of the alarm and actions taken. Operator's comments may be manually entered or selected from a programmed predefined list, or a combination of both.
10. For locations where there are regular alarm occurrences, provide programmed comments. Selecting that comment shall clear the alarm.
11. The time and name of the operator who acknowledged and resolved the alarm shall be recorded in the database.
12. Identical alarms from same alarm point shall be acknowledged at same time the operator acknowledges the first alarm. Identical alarms shall be resolved when the first alarm is resolved.
13. Alarm functions shall have priority over downloading, retrieving, and updating database from workstations and Controllers.

14. When a reader-controlled output (relay) is opened, the corresponding alarm point shall be automatically bypassed.
- L. Monitor Display: Display text and graphic maps that include zone status integrated into the display. Colors are used for the various components and current data. Colors shall be uniform throughout the system.
1. Color Code:
 - a. FLASHING RED: Alerts operator that a zone has gone into an alarm or that primary power has failed.
 - b. STEADY RED: Alerts operator that a zone is in alarm and alarm has been acknowledged.
 - c. YELLOW: Advises operator that a zone is in access.
 - d. GREEN: Indicates that a zone is secure and that power is on.
 2. Graphics:
 - a. Support 32,000 graphic display maps and allow import of maps from a minimum of 16 standard formats from another drawing or graphics program.
 - b. Allow I/O to be placed on graphic maps by the drag-and-drop method.
 - c. Operators shall be able to view the inputs, outputs, and the point's name by moving the mouse cursor over the point on graphic map.
 - d. Inputs or outputs may be placed on multiple graphic maps. The operator shall be able to toggle to view graphic map associated with inputs or outputs.
 - e. Each graphic map shall have a display-order sequence number associated with it to provide a predetermined order when toggled to different views.
 - f. Camera icons shall have the ability to be placed on graphic maps that, when selected by an operator, will open a video window, display the camera associated with that icon, and provide pan-tilt-zoom control.
 - g. Input, output, or camera placed on a map shall allow the ability to arm or bypass an input, open or secure an output, or control the pan-tilt-zoom function of the selected camera.
- M. System test software enables operators to initiate a test of the entire system or of a particular portion of the system.

1. Test Report: The results of each test shall be stored for future display or printout. The report shall document the operational status of system components.

N. Anti-Passback:

1. System shall have global and local anti-passback features, selectable by location. System shall support hard and soft anti-passback.
2. Hard Anti-Passback: Once a credential holder is granted access through a reader with one type of designation (IN or OUT), the credential holder may not pass through that type of reader designation until the credential holder passes through a reader of opposite designation.
3. Soft Anti-Passback: Should a violation of the proper IN or OUT sequence occur, access shall be granted, but a unique alarm shall be transmitted to the control station, reporting the credential holder and the door involved in the violation. A separate report may be run on this event.
4. Timed Anti-Passback: A Controller capability that prevents an access code from being used twice at the same device (door) within a user-defined amount of time.
5. Provide four separate zones per Location that can operate without requiring interaction with the host PC (done at Controller). Each reader shall be assignable to one or all four anti-passback zones. In addition, each anti-passback reader can be further designated as "Hard," "Soft," or "Timed" in each of the four anti-passback zones. The four anti-passback zones shall operate independently.
6. The anti-passback schemes shall be definable for each individual door.
7. The Master Access Level shall override anti-passback.
8. System shall have the ability to forgive (or reset) an individual credential holder or the entire credential holder population anti-passback status to a neutral status.

O. Visitor Assignment:

1. Provide for and allow an operator to be restricted to only working with visitors. The visitor badging subsystem shall assign credentials and enroll visitors. Allow only access levels that have been designated as approved for visitors.

2. Provide an automated log of visitor name, time and doors accessed, and whom visitor contacted.
3. Allow a visitor designation to be assigned to a credential holder.
4. PACS shall be able to restrict the access levels that may be assigned to credentials that are issued to visitors.
5. Allow operator to recall visitors' credential holder file, once a visitor is enrolled in the system.
6. The operator may designate any reader as one that deactivates the credential after use at that reader. The history log shall show the return of the credential.
7. System shall have the ability to use the visitor designation in searches and reports. Reports shall be able to print all or any visitor activity.

P. Time and Attendance:

1. Time and attendance reporting shall be provided to match IN and OUT reads and display cumulative time in for each day and cumulative time in for length of the report.
2. Shall be provided to match IN and OUT reads and display cumulative time in for each day and cumulative time in for length of the report.
3. System software setup shall allow designation of selected access-control readers as time and attendance hardware to gather the clock-in and clock-out times of the users at these readers.
 - a. Reports shall show in and out times for each day, total in time for each day, and a total in time for period specified by the user.
 - b. Allow the operator to view and print the reports, or save the report to a file.
 - c. Alphabetically sort reports on the person's last name, by Location or location group. Include all credential holders or optionally select individual credential holders for the report.

- Q. System Redundancy & High Availability: The system shall provide multiple levels of communications redundancy and failover for all PACS hosted controllers, digital video recorders, and client workstations. The PACS shall be capable of automatically re-routing communications to alternate computers across the system without operator intervention.

1. PACS system configuration with a single application/ database server shall provide at a minimum the following redundancy and failover capability:
 - a. The PACS shall provide communications redundancy and failover for network-attached devices. Each network attached device shall have one or more alternative communication sever(s) that can provide hosting in case of primary communications server failure.
 - b. In case of primary communications server failure, the system shall automatically re-route network-attached devices to their designated backup communications servers to allow continuous system operations without loss of alarm and event transaction processing during failover.
 - c. Network-attached devices which transition to backup communications servers, shall be able to be redirected back to their default primary servers, once the primary communications servers have been restored.
2. PACS system configuration with multiple regional application/ database servers shall provide at a minimum the following redundancy and failover capability:
 - a. The PACS shall support the same level of communications redundancy and failover for network-attached devices per regional application/database server, allowable to span across regional application/database servers in the event of a regional application/database server failure.
 - b. In case of a regional application/database server failure, client workstations shall be able to failover to their designated backup regional application/database server to allow continuous system operations.
 - c. In case of a regional application/database server failure, upon server restoration, the ISMS shall automatically update and synchronize the regional application/database server.
 - d. Client workstations which transition to a backup regional application/database server, shall be able to be redirected back to their default regional application/database server, once the regional application/database server functions have been restored.

2.4 SURGE AND TAMPER PROTECTION

- A. Refer to 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

2.5 CONTROLLERS

- A. Controllers: Intelligent peripheral control unit, complying with UL 294, that stores time, date, valid codes, access levels, and similar data downloaded from the Central Station or workstation for controlling its operation.
- B. Subject to compliance with requirements in this Article, manufacturers may use multipurpose Controllers.
- C. Battery Backup: Sealed, lead acid; sized to provide run time during a power outage of 90 minutes, complying with UL 924.
- D. Alarm Annunciation Controller:
 - 1. The Controller shall automatically restore communication within 10 seconds after an interruption with the field device network[with dc line supervision on each of its alarm inputs].
 - a. Inputs: Monitor dry contacts for changes of state that reflect alarm conditions. Provides at least eight alarm inputs, which are suitable for wiring as normally open or normally closed contacts for alarm conditions.
 - b. Alarm-Line Supervision:
 - 1) Supervise the alarm lines by monitoring each circuit for changes or disturbances in the signal, and for conditions as described in UL 1076 for line security equipment using dc change measurements. System shall initiate an alarm in response to an abnormal current, which is a dc change of 10 percent or more for longer than 500 ms.
 - 2) Transmit alarm-line-supervision alarm to the Central Station during the next interrogation cycle after the abnormal current condition.
 - c. Outputs: Managed by Central Station software.
 - 2. Auxiliary Equipment Power: A GFI service outlet inside the Controller enclosure.
- E. Entry-Control Controller:
 - 1. Function: Provide local entry-control functions including one- and two-way communications with access-control devices such as card readers, keypads, biometric personal identity verification devices,

- door strikes, magnetic latches, gate and door operators, and exit push-buttons.
- a. Operate as a stand-alone portal Controller using the downloaded database during periods of communication loss between the Controller and the field-device network.
 - b. Accept information generated by the entry-control devices; automatically process this information to determine valid identification of the individual present at the portal:
 - 1) On authentication of the credentials or information presented, check privileges of the identified individual, allowing only those actions granted as privileges.
 - 2) Privileges shall include, but not be limited to, time of day control, day of week control, group control, and visitor escort control.
 - c. Maintain a date-, time-, and Location-stamped record of each transaction. A transaction is defined as any successful or unsuccessful attempt to gain access through a controlled portal by the presentation of credentials or other identifying information.
2. Inputs:
- a. Data from entry-control devices; use this input to change modes between access and secure.
 - b. Database downloads and updates from the Central Station that include enrollment and privilege information.
3. Outputs:
- a. Indicate success or failure of attempts to use entry-control devices and make comparisons of presented information with stored identification information.
 - b. Grant or deny entry by sending control signals to portal-control devices and mask intrusion alarm annunciation from sensors stimulated by authorized entries.
 - c. Maintain a date-, time-, and Location-stamped record of each transaction and transmit transaction records to the Central Station.
 - d. Door Prop Alarm: If a portal is held open for longer than 20 seconds, alarm sounds.
4. With power supplies sufficient to power at voltage and frequency required for field devices and portal-control devices.

5. Data Line Problems: For periods of loss of communications with Central Station, or when data transmission is degraded and generating continuous checksum errors, the Controller shall continue to control entry by accepting identifying information, making authentication decisions, checking privileges, and controlling portal-control devices.
 - a. Store up to 1000 transactions during periods of communication loss between the Controller and access-control devices for subsequent upload to the Central Station on restoration of communication.

2.6 PIV MIDDLEWARE

- A. PIV Middleware shall provide three-factor authentication, including biometric matching using a fingerprint capture device capable of single fingerprint capture. Unit shall enable digital certificates can to be verified by security personnel using the issuer's certificate authority, SCVP, OCSP responder/repeater, or the TSA hot list for TWIC cardholders. All cards shall be validated using FIPS-201 challenge-response protocol in order to identify forged or cloned cards. PIV Middleware solution shall validate all PIV, TWIC, NG CAC, and FRAC cards. TWIC card FASC-Ns shall also be verified against a live or cached TSA hot list.
- B. PIV Middleware shall have ability to:
 1. Verify cardholder identity and validates FIPS 201-compliant PIV-II, next-generation (NG) CAC, TWIC, or FRAC credentials in real-time
 2. Perform three-factor authentication of cardholder using PIN, biometrics, and certificate (or serial numbers) detecting forged or cloned cards
 3. Enroll FASC-N, photo, and pertinent cardholder information into PACS software
 4. Automatically suspend a cardholder's badge if his or her PIV, TWIC, or CAC card certificate serial number is on the Certificate Revocation List (CRL)
 5. Upload a cardholder transaction audit trail to central database or exports it to a .csv file for centralized transaction management
 6. Be compatible with biometric mobile terminal for off-site verification and enrollment
 7. Re-validate imported cardholder certificates on a periodic basis via the Internet

8. Operate with commercial, off-the-shelf (COTS) FIPS 201 PIV-II and ANSI INCITS 378-compliant fingerprint capture devices
 9. Revalidate imported cardholder certificates at regular intervals, ensuring that the credentials used in PACS system are backed by a valid set of digital certificates. Digital certificates are verified against local OCSP repeater/validation authority using the issuer's validation authority, or Microsoft Crypto Application Programming Interface (API) on Windows XP SP3 or Vista.
 10. Certificate Manager shall fully support SCVP and OCSP for fast, online validation.
 11. Provide verification of TWIC credentials against a live TSA hot list.
 12. Support uploading local transactions to a central database for consolidated activity reporting. This application shall support a variety of ODBC- or ADO-compliant databases, including Oracle, SQL Server 2005, Informix, DB2, and Firebird.
 13. Provide user with ability to produce canned transaction log queries as well as creating queries directly from the SQL database.
- C. PIV Middleware PC requirements:
1. PIV Middleware software shall operate on Intel-based PC with minimum 1.8 GHz CPU, 1 GB RAM, 40 GB hard disk, and Microsoft Windows XP SP2 with Microsoft .NET Framework 2.0
 2. Unit shall fingerprint capture devices and smart card reader.
- D. PIV Middleware shall be FIPS 201 approved product.

2.7 CARD READERS

- A. Power: Card reader shall be powered from its associated Controller, including its standby power source.
- B. Response Time: Card reader shall respond to passage requests by generating a signal that is sent to the Controller. Response time shall be 800ms or less ms or less, from the time the card reader finishes reading the credential card until a response signal is generated.
- C. Enclosure: Suitable for surface, semiflush, or pedestal mounting. Mounting types shall additionally be suitable for installation in the following locations:
 1. Indoors, controlled environment.
 2. Indoors, uncontrolled environment.

3. Outdoors, with built-in heaters or other cold-weather equipment to extend the operating temperature range as needed for operation at the site.
- D. Display: LED or other type of visual indicator display shall provide visual and audible status indications and user prompts. Indicate power on/off, whether user passage requests have been accepted or rejected, and whether the door is locked or unlocked.
- E. Shall be utilized for controlling the locking hardware on a door and allows for reporting back to the main control panel with the time/date the door was accessed, the name of the person accessing the point of entry, and its location.
- F. Will be fully programmable and addressable, locally and remotely, and hardwired to the system.
- G. Shall be individually home run to the main panel.
- H. Shall be installed in a manner that they comply with:
 1. The Uniform Federal Accessibility Standards (UFAS)
 2. The Americans with Disabilities Act (ADA)
 3. The ADA Standards for Accessible Design
- I. Shall support a variety of card readers that must encompass a wide functional range. The PACS may combine any of the card readers described below for installations requiring multiple types of card reader capability (i.e., card only, card and/or PIN, card and/or biometrics, card and/or pin and/or biometrics, supervised inputs, etc.). These card readers shall be available in the approved technology to meet FIPS 201, and is ISO 14443 A or B, ISO/IEC 7816 compliant. The reader output can be Wiegand, RS-22, 485 or TCP/IP.
- J. Shall be housed in an aluminum bezel with a wide lead-in for easy card entry.
- K. Shall contain read head electronics, and a sender to encode digital door control signals.
- L. LED's shall be utilized to indicate card reader status and access status.
- M. Shall be able to support a user defined downloadable off-line mode of operation (e.g. locked, unlocked), which will go in effect during loss of communication with the main control panel.
- N. Shall provide audible feedback to indicate access granted/denied decisions. Upon a card swipe, two audible tones or beeps shall indicate

access granted and three tones or beeps shall indicate access denied.
All keypad buttons shall provide tactile audible feedback.

- O. Shall have a minimum of two programmable inputs and two programmable outputs.
- P. All card readers that utilize keypad controls along with a reader and shall meet the following specifications:
 - 1. Entry control keypads shall use a unique combination of alphanumeric and other symbols as an identifier. Keypads shall contain an integral alphanumeric/special symbols keyboard with symbols arranged in ascending ASCII code ordinal sequence. Communications protocol shall be compatible with the local processor.
- Q. Shall include a Light Emitting Diode (LED) or other type of visual indicator display and provide visual or visual and audible status indications and user prompts. The display shall indicate power on/off, and whether user passage requests have been accepted or rejected. The design of the keypad display or keypad enclosure shall limit the maximum horizontal and vertical viewing angles of the keypad. The maximum horizontal viewing angle shall be plus and minus five (5) degrees or less off a vertical plane perpendicular to the plane of the face of the keypad display. The maximum vertical viewing angle shall be plus and minus 15 degrees or less off a horizontal plane perpendicular to the plane of the face of the keypad display.
 - 1. Shall respond to passage requests by generating a signal to the local processor. The response time shall be 800 milliseconds or less from the time the last alphanumeric symbol is entered until a response signal is generated.
 - 2. Shall be powered from the source as designed and shall not dissipate more than 150 Watts.
 - 3. Shall be suitable for surface, semi-flush, pedestal, or weatherproof mounting as required.
 - 4. Shall provide a means for users to indicate a duress situation by entering a special code.
- R. PIV Contact Card Reader
 - 1. Application Protocol Data Unit (APDU) Support: At a minimum, the contact interface shall support all card commands for contact based access specified in Section 7, End-point PIV Card Application Card Command Interface of SP 800-73-1, Interfaces for Personal Identity Verification.

2. Buffer Size: The reader must contain a buffer large enough to receive the maximum size frame permitted by International Organization for Standardization International Electrotechnical Commission (ISO/IEC) 7816-3:1997, Section 9.4.
 3. Programming Voltage: PIV Readers shall not generate a Programming Voltage.
 4. Support for Operating Class: PIV Readers shall support cards with Class A Vccs as defined in ISO/IEC 7816-3:1997 and ISO/IEC 7816-3:1997/Amd 1:2002.
 5. Retrieval Time: Retrieval time¹ for 12.5 kilobytes (KB) of data through the contact interface of the reader shall not exceed 2.0 seconds.
 6. Transmission Protocol: The PIV Reader shall support both the character-based T=0 protocol and block-based T=1 protocol as defined in ISO/IEC 7816-3:1997.
 7. Support for PPS Procedure: The reader shall support Protocol and Parameters Selection (PPS) procedure by having the ability to read character TA1 of the Answer to Reset (ATR) sent by the card as defined in ISO/IEC 7816-3:1997.
- S. Contactless Smart Cards and Readers
1. Smart card readers shall read credential cards whose characteristics of size and technology meet those defined by ISO/IEC 7816, 14443, 15693.
 2. The readers shall have "flash" download capability to accommodate card format changes.
 3. The card reader shall have the capability of reading the card data and transmitting the data to the main monitoring panel.
 4. The card reader shall be contactless and meet or exceed the following technical characteristics:
 - a. Data Output Formats: FIPS 201 low outputs the FASC-N in an assortment of Wiegand bit formats from 40 - 200 bits. FIPS 201 medium outputs a combination FASC-N and HMAC in an assortment of Wiegand bit formats from 32 - 232 bits. All Wiegand formats or the upgradeability from Low to Medium Levels can be field configured with the use of a command card.
-

- b. FIPS 201 readers shall be able to read, but not be limited to, DESfire and iCLASS cards.
- c. Reader range shall comply with ISO standards 7816, 14443, and 15693, and also take into consideration conditions, are at a minimum 1" to 2" (2.5 - 5 cm).
- d. APDU Support: At a minimum, the contactless interface shall support all card commands for contactless based access specified in Section 7, End-point PIV Card Application Card Command Interface of SP 800-73-1, Interfaces for Personal Identity Verification.
- e. Buffer Size: The reader shall contain a buffer large enough to receive the maximum size frame permitted by ISO/IEC 7816-3, Section 9.4.
- f. ISO 14443 Support: The PIV Reader shall support parts (1 through 4) of ISO/IEC 14443 as amended in the References of this publication.
- g. Type A and B Communication Signal Interfaces: The contactless interface of the reader shall support both the Type A and Type B communication signal interfaces as defined in ISO/IEC 14443-2:2001.
- h. Type A and B Initialization and Anti-Collision The contactless interface of the reader shall support both Type A and Type B initialization and anti-collision methods as defined in ISO/IEC 14443-3:2001.
- i. Type A and B Transmission Protocols: The contactless interface of the reader shall support both Type A and Type B transmission protocols as defined in ISO/IEC 14443-4:2001.
- j. Retrieval Time: Retrieval time for 4 KB of data through the contactless interface of the reader shall not exceed 2.0 seconds.
- k. Transmission Speeds: The contactless interface of the reader shall support bit rates of $f_c/128$ (~106 kbits/s), $f_c/64$ (~212 kbits/s), and configurable to allow activation/deactivation.
- l. Readability Range: The reader shall not be able to read PIV card more than 10cm(4inch) from the reader

2.8 CREDENTIAL CARDS

- A. Personal Identity Verification (PIV) credential cards are existing and comply to Federal Information Processing Standards Publication (FIPS) 201.

- B. Visual Card Topography shall be compliant with NIST 800-104.
- C. PIV logical credentials shall contain multiple data elements for the purpose of verifying the cardholder's identity at graduated assurance levels. These mandatory data elements shall collectively comprise the data model for PIV logical credentials, and include the following:
 - 1. CHUID
 - 2. PIN
- D. The credential card (PIV) shall be an ISO 14443 type smart card with contactless interface that operates at 13.56 MHZ.
- E. The credential card (PIV) shall be an ISO 7816 type smart card.

2.9 SYSTEM SENSORS AND RELATED EQUIPMENT

- A. The PACS (Physical Access Control System) and related Equipment provided by the Contractor shall meet or exceed the following performer specifications:
- B. Request to Exit Detectors:
 - 1. Passive Infrared Request to Exit Motion Detector (REX PIR) (1) The Contractor shall provide a surface mounted motion detector to signal the physical access control system request to exit input. The motion detector shall be a passive infrared sensor designed for wall or ceiling mounting 2134 to 4572 mm (7 to 15 ft) height. The detector shall provide two (2) form "C" (SPDT) relays rated one (1) Amp. @ 30 VDC for DC resistive loads. The detectors relays shall be user adjustable with a latch time from 1-60 seconds. The detector shall also include a selectable relay reset mode to follow the timer or absence of motion. The detection pattern shall be adjustable plus or minus fourteen (± 14) degrees. The detector shall operate on 12 VDC with approximately 26 mA continuous current draw. The detector shall have an externally visible activation LED. The motion detector shall measure approximately 38 mm H x 158 mm W x 38 mm D (1.5 x 6.25 x 1.5 in). The detector shall be immune to radio frequency interference. The detector shall not activate or set-up on critical frequencies in the range 26 to 950 Megahertz using a 50 watt transmitter located 30.5 cm (1 ft) from the unit or attached wiring. The detector shall be available on gray or black enclosures. The color of the housing shall be coordinated with the surrounding surface.
- C. Delayed Egress (DE)
 - 1. General:
 - a. The delay egress locking hardware shall provide a method to secure emergency exits and provide an approved delayed emergency exit method. The package shall be Underwriters Laboratories

listed as a delay egress-locking device. The delay egress device shall be available to support configurations with both rated and non-rated fire doors. The delay egress device shall comply with Life Safety Codes (NFPA-101, BOCA) as it applies to special locking arrangements for delay egress locks. Unless specifically identified as a non-fire rated opening, all doors shall be equipped with fire rated door hardware. The Contractor shall be responsible for providing all equipment and installation to provide a fully functioning system. Need to amend to use crashbars type mechanical release switches.

2. The delay-locking device shall include all of the following features:

- a. Delay Egress Mode

- 1) The delayed egress device shall be a SDC 101V Series Exit Check with wall mounted control module. Upon activation of an approved panic bar the delay locking device shall begin a delay sequence of 30 seconds; a flush mounted wall LED panel adjacent to the door will indicate initiation of the countdown time. During the 30 second delay period, a local sounding device shall annunciate a tone activation of the delay cycle and verbal exit instructions. At the end of the delay cycle the locking device shall unlock and allow free egress. The reset of the local sounding device shall be user definable and include options to select either local sound until silenced by reset or local sounder silenced upon opening of the door. Unless otherwise indicated the local delay sounder shall be silenced upon opening of the door. The SDC's device trigger output shall be connected to the SMS DGP alarm panel for pre-activation warning. The contractor shall specify the bond sensor option when ordering the delayed egress hardware; this output shall be wired to the SMS DGP to activate an alarm if the door does not lock. Use of reset panel not top mounted device.

- 2) Delayed egress doors will have bond sensors.

- 3) Delayed egress activation shall also trigger CCTV call -up.

- b. Fire Alarm Mode

- 1) Upon activation of the facility's fire evacuation and water flow alarm signal the delay locking devices shall immediately

unlock and provide free egress. The Contractor shall provide any required fire alarm relays or interface devices.

c. Reset Mode

- 1) The delay egress device shall be manually reset by the Delayed Egress controller located at the door via key switch.
- 2) The delay egress device shall automatically reset upon fire alarm system reset.
- 3) The delayed egress shall be resettable through the SMS.

d. The Contractor shall provide a Master Open Switch for all the facility's delayed egress hardware, with protective cover and permanent labeling in the Unit Control Room. The switch shall be wired into the fire alarm system to activate the evacuation alarms. When the switch is pressed all delayed egress or evacuation doors shall unlock and generate an alarm at the security console monitor showing and recording time and date of when the switch was pressed. The contractor is responsible for coordinating the wiring and connection with the fire alarm contactor. The Master Open Switch shall be linked to the fire alarm panel for the release of doors locks.

e. Each individual delayed egress door shall have the ability to unlock through a manual action on the SMS.

f. Unless otherwise indicated the Contractor shall provide all of the above reset methods for each door. All signs will meet the latest ADA requirements.

g. Signs

- 1) The delay egress package shall be provided with a warning sign complying with local code requirements. The warning sign shall be attached to the interior side of the controlled door. The sign shall be located on the interior side of the door above and within 304 mm (12 in) of the panic bar. The sign shall read:

EMERGENCY EXIT.

PUSH UNTIL

ALARM SOUNDS

DOOR CAN BE OPENED,

IN 30 SECONDS.

- 2) Signs shall be coordinated and comply with the building's existing sign specifications. Signs shall include grade 2 Braille.
- 3) Signs shall meet the current ADA requirements.
- 4) In instances of code and specification conflicts, the life safety code requirement shall prevail.
- 5) The Division 10 Contractor shall provide samples for approval with their submittal package.

3. Physical Access Control Interface

- a. The delay egress device shall be capable of interface with card access control systems.
- b. The system shall include a bypass feature that is activated via a dry contact relay output from the physical access control system. This bypass shall allow authorized personnel to pass through the controlled portal without creating an alarm condition or activating the delay egress cycle. The bypass shall include internal electronic shunts or door switches to prevent activation (re-arming) until the door returns to the closed position. An unused access event shall not cause a false alarm and shall automatically rearm the delay egress lock upon expiration of the programmed shunt time. The delay egress physical access control interface shall support extended periods of automated and/or manual lock and unlock cycles.

D. Crash Bar:

1. Emergency Exit with Alarm (Panic):

- a. Entry control portals shall include panic bar emergency exit hardware as designed.
- b. Panic bar emergency exit hardware shall provide an alarm shunt signal to the PACS and SMS.
- c. The panic bar shall include a conspicuous warning sign with one (1) inch (2.5 cm) high, red lettering notifying personnel that an alarm will be annunciated if the panic bar is operated.
- d. Operation of the panic bar hardware shall generate an intrusion alarm that reports to both the SMS and Intrusion Detection System. The use of a micro switch installed within the panic bar shall be utilized for this.
- e. The panic bar shall utilize a fully mechanical connection only and shall not depend upon electric power for operation.

f. The panic bar shall be compatible with mortise or rim mount door hardware and shall operate by retracting the bolt manually by either pressing the panic bar or with a key by-pass. Refer to Section 2.2.I.9 for key-bypass specifications.

g. Normal Exit:

- 1) Entry control portals shall include panic bar non-emergency exit hardware as designed.
- 2) Panic bar non-emergency exit hardware shall be monitored by and report to the SMS.
- 3) Operation of the panic bar hardware shall not generate a locally audible or an intrusion alarm within the IDS.
- 4) When exiting, the panic bar shall depend upon a mechanical connection only. The exterior, non-secure side of the door shall be provided with an electrified thumb latch or lever to provide access after the credential I.D. authentication by the SMS.
- 5) The panic bar shall be compatible with mortise or rim mount door hardware and shall operate by retracting the bolt manually by either pressing the panic bar or with a key by-pass. Refer to Section 2.2.I.9 for key-bypass specifications. The strikes/bolts shall include a micro switch to indicate to the system when the bolt is not engaged or the strike mechanism is unlocked. The signal switches shall report a forced entry to the system in the event the door is left open or accessed without the identification credentials.

E. Key Bypass:

1. Shall be utilized for all doors that have a mortise or rim mounted door hardware.
2. Each door shall be individually keyed with one master key per secured area.
3. Cylinders shall be six (6)-pin and made of brass or equivalent. Keys for the cylinders shall be constructed of solid material and produced and cut by the same distributor. Keys shall not be purchased, cut, and supplied by multiple dealers.
4. All keys shall have a serial number cut into the key. No two serial numbers shall be the same.
5. All keys and cylinders shall be stored in a secure area that is monitored by the Intrusion Detection System.

F. Automatic Door Opener and Closer:

1. Shall be low energy operators.
2. Door closing force shall be adjustable to ensure adequate closing control.
3. Shall have an adjustable back-check feature to cushion the door opening speed if opened violently.
4. Motor assist shall be adjustable from 0 to 30 seconds in five (5) second increments. Motor assist shall restart the time cycle with each new activation of the initiating device.
5. Unit shall have a three-position selector mode switch that shall permit unit to be switched "ON" to monitor for function activation, switched to "H/O" for indefinite hold open function or switched to "OFF," which shall deactivate all control functions but will allow standard door operation by means of the internal mechanical closer.
6. Door control shall be adjustable to provide compliance with the requirements of the Americans with Disabilities Act (ADA) and ANSI standards A117.1.
7. All automatic door openers and closers shall:
 - a. Meet UL standards.
 - b. Be fire rated.
 - c. Have push and go function to activate power operator or power assist function.
 - d. Have push button controls for setting door close and door open positions.
 - e. Have open obstruction detection and close obstruction detection built into the unit.
 - f. Have door closer assembly with adjustable spring size, back-check valve, sweep valve, latch valve, speed control valve and pressure adjustment valve to control door closing.
 - g. Have motor start-up delay, vestibule interface delay; electric lock delay and door hold open delay up to 30 seconds. All operators shall close door under full spring power when power is removed.
 - h. Are to be hard wired with power input of 120 VAC, 60Hz and connected to a dedicated circuit breaker located on a power panel reserved for security equipment.

G. Door Status Indicators:

1. Shall monitor and report door status to the SMS.
2. Door Position Sensor:
 - a. Shall provide an open or closed indication for all doors operated on the PACS and report directly to the SMS.
 - b. Shall also provide alarm input to the Intrusion Detection System for all doors operated by the PACS and all other doors that require monitoring by the intrusion detection system.
 - c. Switches for doors operated by the PACS shall be double pole double throw (DPDT). One side of the switch shall monitor door position and the other side if the switch shall report to the intrusion detection system. For doors with electromagnetic locks a magnetic bonding sensor (MBS) can be used in place of one side of a DPDT switch, in turn allowing for the use of a single pole double throw (SPDT) switch in it place of a DPDT switch.
 - d. Switches for doors not operated by the PACS shall be SPDT and report directly to the IDS.
 - e. Shall be surface or flush mounted and wide gap with the ability to operate at a maximum distance of up to 2" (5 cm).

2.10 PUSH BUTTON SWITCHES

- A. Push-Button Switches: Momentary-contact back-lighted push buttons, with stainless-steel switch enclosures.
1. Electrical Ratings:
 - a. Minimum continuous current rating of 10 A at 120 V ac or 5 A at 240-V ac.
 - b. Contacts that will make 720 VA at 60 A and that will break at 720 VA at 10 A.
 2. Enclosures: Flush or surface mounting. Push buttons shall be suitable for flush mounting in the switch enclosures.
 3. Enclosures shall additionally be suitable for installation in the following locations:
 - a. Indoors, controlled environment.
 - b. Indoors, uncontrolled environment.
 4. Power: Push-button switches shall be powered from their associated Controller, using dc control.

2.11 PORTAL CONTROL DEVICES

- A. Shall be used to assist the PACS.
- B. Such devices shall:
 - 1. Provide a means of monitoring the doors status.
 - 2. Allow for exiting a space via either a push button, request to exit, or panic/crash bar.
 - 3. Provide a means of override to the PACS via a keypad or key bypass.
 - 4. Assist door operations utilizing automatic openers and closures.
 - 5. Provide a secondary means of access to a space via a keypad.
- C. Shall be connected to and monitored by the main PACS panel.
- D. Shall be installed in a manner that they comply with:
 - 1. The Uniform Federal Accessibility Standards (UFAS)
 - 2. The Americans with Disabilities Act (ADA)
 - 3. The ADA Standards for Accessible Design
- E. Shall provide a secondary means of physical access control within a secure area.
- F. Push-Button Switches:
 - 1. Shall be momentary contact, back lighted push buttons, and stainless steel switch enclosures for each push button as shown. Buttons are to be utilized for secondary means of releasing a locking mechanism.
 - a. In an area where a push button is being utilized for remote access of the locking device then no more than two (2) buttons shall operate one door from within one secure space. Buttons will not be wired in series with one other.
 - b. In an area where locally stationed guards control entry to multiple secure points via remote switches. An interface board shall be designed and constructed for only the amount of buttons it shall house. These buttons shall be flush mounted and clearly labeled for ease of use. All buttons shall be connected to the PACS and SMS system for monitoring purposes.
 - c. Shall have double-break silver contacts that will make 720 VA at 60 amperes and break 720 VA at 10 amperes.
- G. Entry Control Devices:
 - 1. Shall be hardwired to the PACS main control panel and operated by either a card reader via a relay on the main control panel.
 - 2. Shall be fail-safe in the event of power failure to the PACS system.

3. Shall operate at 24 VCD, with the exception of turnstiles and be powered by a separate power supply dedicated to the door control system. Each power supply shall be rated to operate a minimum of two doors simultaneously without error to the system or overload the power supply unit.
4. Shall have a diode or metal-oxide varistor (MOV) to protect the controller and power supply from reverse current surges or back-check.
5. Electric Strikes/Bolts: Shall be:
 - a. Made of heavy-duty construction and tamper resistant design.
 - b. Tested to over one million cycles.
 - c. Rated for a minimum of 1000 lbs. holding strength.
 - d. Utilize an actuating solenoid for the strike/bolt. The solenoid shall move from fully open to fully closed position and back in not more than 500 milliseconds and be rated for continuous duty.
 - e. Utilize a signal switch that will indicate to the system if the strike/bolt is not engaged or is unlocked when it should be secured.
 - f. Flush mounted within the door frame.
6. Electric Mortise Locks: Shall be installed within the door and an electric transfer hinge shall be utilized to allow the wires to be transferred from the door frame to the lock. If utilized with a double door then the lock shall be installed inside the active leaf. Electric Mortise Locks shall:
 - a. These locks shall be provided and installed by the Division 8 "DOOR HARDWARE" Contractor.
 - b. Provide integration of the Electric Mortise Locks with the PACS for:
 - 1) Lock Power
 - 2) Request to Exit switch.
7. Electromagnetic Locks:
 - a. These locks shall be without mechanical linkage utilizing no moving parts, and securing the door to its frame solely on electromagnetic force.
 - b. Shall be comprised of two pieces, the mag-lock and the door plate. The electromagnetic locks shall be surface mounted to the door frame and the door plate shall be surface mounted to the door.

- c. Ensure a diode is installed in line with the DC voltage supplying power to the unit in order to prevent back-check on the system when the electromagnetic lock is powered.
- d. Shall utilize a magnetic bonding sensor (MBS) to monitor the door status and report that status to the SMS.
- e. Electromagnetic locks shall meet the following minimum technical characteristics:

Operating Voltage		24 VDC
Current Draw		.5A
Holding Force	Swing Doors	675 kg (1500 lbs)
	Sliding Doors	225 kg (500 lbs)

8. Turnstiles:

- a. Shall operate at 110 VAC, 60 Hz or 220 VAC, 50 Hz supplied from a dedicated circuit breaker on a security power panel. This device does not require a back-up power source.
- b. Shall be utilized as a means of monitoring and controlling access in a lobby.
- c. Shall meet the following minimum requirements:
 - 1) Be UFAS compliant.
 - 2) Provide either an audible or visual confirmation that access has been granted to a cleared individual.
 - 3) Provide an audible alarm in the event a non-cleared individual is attempting to gain access.
 - 4) Interface with the SMS and utilize a card reader for accessing and exiting a facility, and provide a recorded event of personnel accessing these points.
 - 5) Have a built-in step-down transformer to provide power to a card reader unit.
 - 6) Have built-in signal wiring chassis to allow for plug and play capabilities with the PACS.
 - 7) Have the ability to detect tailgating within one quarter on an inch to prevent unauthorized access to a facility.

2.12 INTERFACES

A. CCTV System Interface

- 1. An RS232 or Ethernet interface associated driver, and controller shall be provided for connection of the SMS Central Computer to the CCTV Alarm interface and switcher. The interface shall provide alarm data to the CCTV Alarm interface for automatic camera call-up. If required the Security Contractor shall be responsible for programming the command strings into the SMS Server.

B. Intercom System Interface

1. The CCTV call-up from intercom stations shall be through the intercom unit via RS232 or Ethernet communications interface to the SMS system, then through the matrix switcher.
 - a. Application Software
 - 1) Provides the interface between the Alarm Annunciation System and Operator; all sensors, local processors and data links, drive displays, report alarms, and report generation.
 - 2) Software is categorized as System Software and Application Software. System Software must consist of software to support set-up, operation, hard drive back-ups and maintenance processor. Application Software must consist of software to provide the completion of Physical Access Control System.

C. Power Supplies:

1. Shall be UL rated and able to adequately power (enter number) entry control devices on a continuous base without failure.
2. Shall meet the following minimum technical characteristics:

INPUT POWER	110 VAC 60 HZ (enter amperage)A
OUTPUT VOLTAGE	12 VDC Nominal (13.8 VDC) 24 VDC Nominal (27.6 VDC) Filtered and Regulated
BATTERY	Dependant on Output Voltage shall provide up to 8 Ah
OUTPUT CURRENT	[10] amp max. [@ 13.8] VDC [5] amp max. [@ 27.6] VDC
PRIMARY FUSE SIZE	6.3 amp (non-removable)
BATTERY FUSE SIZE	12 amp, 3AG
CHARGING CIRCUIT	Built-in standard

2.13 FLOOR SELECT ELEVATOR CONTROL

- A. Elevator access control shall be integral to security access.
 1. System shall be capable of providing full elevator security and control through dedicated Controllers without relying on the control-station host PC for elevator control decisions.
 2. Access-control system shall enable and disable car calls on each floor and floor select buttons in each elevator car, restricting passengers' access to the floors where they have been given access.

3. System setup shall, through programming, automatically secure and unsecure each floor select button of a car individually by time and day. Each floor select button within a car shall be separately controlled so that some floors may be secure while others remain unsecure.
 4. When a floor select button is secure, it shall require the passenger to use his/her access code and have access to that floor before the floor select button will operate. The passenger's credential shall determine which car call and floor select buttons are to be enabled, restricting access to floors unless authorized by system's access code database. Floor select button shall be enabled only in the car where the credential holder is the passenger.
- B. PACS shall record which call button is pressed, along with credential and time information.
1. System Controller shall record elevator access data.
 2. The Controller shall reset all additional call buttons that may have been enabled by the user's credential.
 3. The floor select elevator control shall allow for manual override either individually by floor or by cab as a group from a workstation PC.

2.14 VIDEO AND CAMERA CONTROL

- A. Control station or designated workstation displays live video from a CCTV source.
1. Control Buttons: On the display window, with separate control buttons to represent Left, Right, Up, Down, Zoom In, Zoom Out, Scan, and a minimum of two custom command auxiliary controls.
 2. Provide at least seven icons to represent different types of cameras, with ability to import custom icons. Provide option for display of icons on graphic maps to represent their physical location.
 3. Provide the alarm-handling window with a command button that will display the camera associated with the alarm point.
- B. Display mouse-selectable icons representing each camera source, to select source to be displayed. For CCTV sources that are connected to a video switcher, control station shall automatically send control commands through a COM port to display the requested camera when the camera icon is selected.

- C. Allow cameras with preset positioning to be defined by displaying a different icon for each of the presets. Provide control with Next and Previous buttons to allow operator to cycle quickly through the preset positions.

2.15 WIRES AND CABLES

- A. Refer to section 280513 "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY".

PART 3 - EXECUTION

3.1 GENERAL

- A. The Contractor shall install all system components and appurtenances in accordance with the manufacturers' instructions, ANSI C2, and shall furnish all necessary interconnections, services, and adjustments required for a complete and operable system as specified. Control signals, communications, and data transmission lines grounding shall be installed as necessary to preclude ground loops, noise, and surges from affecting system operation. Equipment, materials, installation, workmanship, inspection, and testing shall be in accordance with manufacturers' recommendations and as modified herein.
- B. Consult the manufacturers' installation manuals for all wiring diagrams, schematics, physical equipment sizes, etc., before beginning system installation. Refer to the Riser/Connection diagram for all schematic system installation/termination/wiring data.
- C. All equipment shall be attached to walls and ceiling/floor assemblies and shall be held firmly in place (e.g., sensors shall not be supported solely by suspended ceilings). Fasteners and supports shall be adequate to support the required load.

3.2 CURRENT SITE CONDITIONS

- A. The Contractor shall visit the site and verify that site conditions are in agreement with the design package. The Contractor shall report all changes to the site or conditions which will affect performance of the system to the Owner in a report as defined in paragraph Group II Technical Data Package. The Contractor shall not take any corrective action without written permission from the Owner.

3.3 EXAMINATION

- A. Examine pathway elements intended for cables. Check raceways, cable trays, and other elements for compliance with space allocations, installation tolerances, hazards to cable installation, and other conditions affecting installation.

- B. Examine roughing-in for LAN and control cable conduit systems to PCs, Controllers, card readers, and other cable-connected devices to verify actual locations of conduit and back boxes before device installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.4 PREPARATION

- A. Comply with recommendations in SIA CP-01.
- B. Comply with EIA/TIA-606, "Administration Standard for the Telecommunications Infrastructure of Commercial Buildings."
- C. Obtain detailed Project planning forms from manufacturer of access-control system; develop custom forms to suit Project. Fill in all data available from Project plans and specifications and publish as Project planning documents for review and approval.
 - 1. Record setup data for control station and workstations.
 - 2. For each Location, record setup of Controller features and access requirements.
 - 3. Propose start and stop times for time zones and holidays, and match up access levels for doors.
 - 4. Set up groups, linking, and list inputs and outputs for each Controller.
 - 5. Assign action message names and compose messages.
 - 6. Set up alarms. Establish interlocks between alarms, intruder detection, and video surveillance features.
 - 7. Prepare and install alarm graphic maps.
 - 8. Develop user-defined fields.
 - 9. Develop screen layout formats.
 - 10. Propose setups for guard tours and key control.
 - 11. Discuss badge layout options; design badges.
 - 12. Complete system diagnostics and operation verification.
 - 13. Prepare a specific plan for system testing, startup, and demonstration.
 - 14. Develop acceptance test concept and, on approval, develop specifics of the test.
 - 15. Develop cable and asset management system details; input data from construction documents. Include system schematics and Technical Drawings.

- D. In meetings with Architect and Owner, present Project planning documents and review, adjust, and prepare final setup documents. Use final documents to set up system software.

3.5 CABLING

- A. Comply with NECA 1, "Good Workmanship in Electrical Contracting."
- B. Install cables and wiring according to requirements in Division 28 Section "Conductors and Cables for Electronic Safety and Security."
- C. Wiring Method: Install wiring in raceway and cable tray except within consoles, cabinets, desks, and counters and except in accessible ceiling spaces and in gypsum board partitions where unenclosed wiring method may be used. Use NRTL-listed plenum cable in environmental air spaces, including plenum ceilings. Conceal raceway and cables except in unfinished spaces.
- D. Install LAN cables using techniques, practices, and methods that are consistent with Category 5E rating of components and that ensure Category 5E performance of completed and linked signal paths, end to end.
- E. Install cables without damaging conductors, shield, or jacket.
- F. Boxes and enclosures containing security system components or cabling, and which are easily accessible to employees or to the public, shall be provided with a lock. Boxes above ceiling level in occupied areas of the building shall not be considered to be accessible. Junction boxes and small device enclosures below ceiling level and easily accessible to employees or the public shall be covered with a suitable cover plate and secured with tamperproof screws.
- G. Install end-of-line resistors at the field device location and not at the Controller or panel location.

3.6 CABLE APPLICATION

- A. Comply with EIA/TIA-569, "Commercial Building Standard for Telecommunications Pathways and Spaces."
- B. Cable application requirements are minimum requirements and shall be exceeded if recommended or required by manufacturer of system hardware.
- C. RS-232 Cabling: Install at a maximum distance of 50 feet (15 m).
- D. RS-485 Cabling: Install at a maximum distance of 4000 feet (1220 m).
- E. Card Readers and Keypads:
 - 1. Install number of conductor pairs recommended by manufacturer for the functions specified.

2. Unless manufacturer recommends larger conductors, install No. 22 AWG wire if maximum distance from Controller to the reader is 250 feet (75 m), and install No. 20 AWG wire if maximum distance is 500 feet (150 m).
 3. For greater distances, install "extender" or "repeater" modules recommended by manufacturer of the Controller.
 4. Install minimum No. 18 AWG shielded cable to readers and keypads that draw 50 mA or more.
- F. Install minimum No. 16 AWG cable from Controller to electrically powered locks. Do not exceed 500 feet (150 m).
- G. Install minimum No. 18 AWG ac power wire from transformer to Controller, with a maximum distance of 25 feet (8 m).

3.7 GROUNDING

- A. Comply with Division 26 Section "Grounding and Bonding for Electronic Safety and Security Systems."
- B. Comply with IEEE 1100, "Power and Grounding Sensitive Electronic Equipment."
- C. Ground cable shields, drain conductors, and equipment to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments.
- D. Signal Ground:
 1. Terminal: Locate in each equipment room and wiring closet; isolate from power system and equipment grounding.
 2. Bus: Mount on wall of main equipment room with standoff insulators.
 3. Backbone Cable: Extend from signal ground bus to signal ground terminal in each equipment room and wiring closet.

3.8 INSTALLATION

- A. System installation shall be in accordance with UL 294, manufacturer and related documents and references, for each type of security subsystem designed, engineered and installed.
- B. Components shall be configured with appropriate "service points" to pinpoint system trouble in less than 30 minutes.
- C. The Contractor shall install all system components including Government furnished equipment, and appurtenances in accordance with the manufacturer's instructions, documentation listed in Sections 1.4 and 1.5 of this document, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a operable system.

- D. The PACS will be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the system is a stand alone or a network.
- E. For integration purposes, the PACS shall be integrated where appropriate with the following associated security subsystems:
 - 1. CCTV:
 - a. Provide 24 hour coverage of all entry points to the perimeter and agency buildings. As well as all emergency exits utilizing a fixed color camera.
 - b. Be able to monitor, control and record cameras on a 24 hours basis.
 - c. Be programmed automatically call up a camera when an access point is but into an alarm state.
 - d. For additional PACS system requirements as they relate to the CCTV, refer to Section 28 23 00, VIDEO SURVEILLANCE.
 - 2. IDS:
 - a. Be able monitor door control sensors.
 - b. Be able to monitor and control the IDS on a 24 hours basis.
 - c. Be programmed to go into an alarm state when an IDS device is put into an alarm state, and notify the operator via an audible alarm.
 - d. For additional PACS system requirements as they relate to the IDS, refer to Section 28 16 11, INTRUSION DETECTION SYSTEM.
 - 3. Security Access Detection:
 - a. Be able to monitor all objects that have been screened with an x-ray machine and be able to monitor all data acquired by the bomb detection unit.
 - b. For additional PACS system requirements as they relate to the Security Access Detection, refer to Section 28 13 53, SECURITY ACCESS DETECTION.
 - 4. EPPS:
 - a. Be programmed to go into an alarm state when an emergency call box or duress alarm/panic device is activated, and notify the Physical Access Control System and Database Management of an alarm event.
 - b. For additional PACS requirements as they relate to the EPPS, refer to Section 28 26 00, ELECTRONIC PERSONAL PROTECTION SYSTEM.

- F. Integration with these security subsystems shall be achieved by computer programming or the direct hardwiring of the systems.
- G. For programming purposes refer to the manufacturers requirements for correct system operations. Ensure computers being utilized for system integration meet or exceed the minimum system requirements outlined on the systems software packages.
- H. The Contractor shall visit the site and verify that site conditions are in agreement with the design package. The Contractor shall report all changes to the site or conditions that will affect performance of the system. The Contractor shall not take any corrective action without written permission from the Government.
- I. The Contractor shall visit the site and verify that site conditions are in agreement/compliance with the design package. The Contractor shall report all changes to the site or conditions that will affect performance of the system to the COTR in the form of a report. The Contractor shall not take any corrective action without written permission received from the COTR.
- J. Existing Equipment:
 - 1. The Contractor shall connect to and utilize existing door equipment, control signal transmission lines, and devices as outlined in the design package. Door equipment and signal lines that are usable in their original configuration without modification may be reused with COTR approval.
 - 2. The Contractor shall perform a field survey, including testing and inspection of all existing door equipment and signal lines intended to be incorporated into the PACS, and furnish a report to the COTR as part of the site survey report. For those items considered nonfunctioning, provide (with the report) specification sheets, or written functional requirements to support the findings and the estimated cost to correct the deficiency. As part of the report, the Contractor shall include a schedule for connection to all existing equipment.
 - 3. The Contractor shall make written requests and obtain approval prior to disconnecting any signal lines and equipment, and creating equipment downtime. Such work shall proceed only after receiving COTR approval of these requests. If any device fails after the Contractor has commenced work on that device, signal or control line, the Contractor shall diagnose the failure and perform any necessary corrections to the equipment.

4. The Contractor shall be held responsible for repair costs due to Contractor negligence, abuse, or improper installation of equipment.
 5. The COTR shall be provided a full list of all equipment that is to be removed or replaced by the Contractor, to include description and serial/manufacturer numbers where possible. The Contractor shall dispose of all equipment that has been removed or replaced based upon approval of the COTR after reviewing the equipment removal list. In all areas where equipment is removed or replaced the Contractor shall repair those areas to match the current existing conditions.
- K. Enclosure Penetrations: All enclosure penetrations shall be from the bottom of the enclosure unless the system design requires penetrations from other directions. Penetrations of interior enclosures involving transitions of conduit from interior to exterior, and all penetrations on exterior enclosures shall be sealed with rubber silicone sealant to preclude the entry of water and will comply with VA Master Specification 07 84 00, Firestopping. The conduit riser shall terminate in a hot-dipped galvanized metal cable terminator. The terminator shall be filled with an approved sealant as recommended by the cable manufacturer and in such a manner that the cable is not damaged.
- L. Cold Galvanizing: All field welds and brazing on factory galvanized boxes, enclosures, and conduits shall be coated with a cold galvanized paint containing at least 95 percent zinc by weight.
- M. Control Panels:
1. Connect power and signal lines to the controller.
 2. Program the panel as outlined by the design and per the manufacturer's programming guidelines.
- N. Card Readers:
1. Connect all signal inputs and outputs as shown and specified.
 2. Terminate input signals as required.
 3. Program and address the reader as per the design package.
 4. Readers shall be surface or flushed mounted and all appropriate hardware shall be provided to ensure the unit is installed in an enclosed conduit system.
- O. Portal Control Devices:
1. Install all signal input and output cables as well as all power cables.

2. Devices shall be surface or flush mounted as per the design package.
3. Program all devices and ensure they are working.

P. Door Status Indicators:

1. Install all signal input and output cables as well as all power cables.
2. RTE's shall be surface mounted and angled in a manner that they cannot be compromised from the non-secure side of a windowed door, or allow for easy release of the locking device from a distance no greater than 6 feet from the base of the door.
3. Door position sensors shall be surface or flush mounted and wide gap with the ability to operate at a maximum distance of up to 2" (5 cm).

Q. Entry Control Devices:

1. Install all signal input and power cables.
2. Strikes and bolts shall be mounted within the door frame.
3. Mortise locks shall be mounted within the door and an electric transfer hinge shall be utilized to transfer the wire from within the door frame to the mortise lock inside the door.
4. Electromagnetic locks shall be installed with the mag-lock mounted to the door frame and the metal plate mounted to the door.

R. System Start-Up:

1. The Contractor shall not apply power to the PACS until the following items have been completed:
 - a. PACS equipment items and have been set up in accordance with manufacturer's instructions.
 - b. A visual inspection of the PACS has been conducted to ensure that defective equipment items have not been installed and that there are no loose connections.
 - c. System wiring has been tested and verified as correctly connected as indicated.
 - d. All system grounding and transient protection systems have been verified as installed and connected as indicated.
 - e. Power supplies to be connected to the PACS have been verified as the correct voltage, phasing, and frequency as indicated.
2. Satisfaction of the above requirements shall not relieve the Contractor of responsibility for incorrect installation, defective equipment items, or collateral damage as a result of Contractor work efforts.

3. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the Resident Engineer and Commissioning Agent. Provide a minimum of 7 days prior notice.

S. Supplemental Contractor Quality Control:

1. The Contractor shall provide the services of technical representatives who are familiar with all components and installation procedures of the installed PACS; and are approved by the Contracting Officer.
2. The Contractor will be present on the job site during the preparatory and initial phases of quality control to provide technical assistance.
3. The Contractor shall also be available on an as needed basis to provide assistance with follow-up phases of quality control.
4. The Contractor shall participate in the testing and validation of the system and shall provide certification that the system installed is fully operational as all construction document requirements have been fulfilled.

3.9 FIELD QUALITY CONTROL

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect, test, and adjust field-assembled components and equipment installation, including connections, and to assist in field testing. Report results in writing.
- B. Testing Agency: Engage a qualified testing and inspecting agency to perform field tests and inspections and prepare test reports:
- C. Perform the following field tests and inspections and prepare test reports:
 1. LAN Cable Procedures: Inspect for physical damage and test each conductor signal path for continuity and shorts. Use Class 2, bidirectional, Category 6 tester. Test for faulty connectors, splices, and terminations. Test according to TIA/EIA-568-B1, "Commercial Building Telecommunications Cabling Standards - Part 1 General Requirements." Link performance for UTP cables must comply with minimum criteria in TIA/EIA-568-B.
 2. Test each circuit and component of each system. Tests shall include, but are not limited to, measurements of power supply output under maximum load, signal loop resistance, and leakage to ground where applicable. System components with battery backup shall be

operated on battery power for a period of not less than 10 percent of the calculated battery operating time. Provide special equipment and software if testing requires special or dedicated equipment.

3. Operational Test: After installation of cables and connectors, demonstrate product capability and compliance with requirements. Test each signal path for end-to-end performance from each end of all pairs installed. Remove temporary connections when tests have been satisfactorily completed.

3.10 PROTECTION

- A. Maintain strict security during the installation of equipment and software. Rooms housing the control station, and workstations that have been powered up shall be locked and secured, with an activated burglar alarm and access-control system reporting to a Central Station complying with UL 1610, "Central-Station Burglar-Alarm Units," during periods when a qualified operator in the employ of Contractor is not present.

3.11 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of units.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 28 08 00 - COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.
- C. Develop separate training modules for the following:
 1. Computer system administration personnel to manage and repair the LAN and databases and to update and maintain software.
 2. Operators who prepare and input credentials to man the control station and workstations and to enroll personnel.
 3. Security personnel.
 4. Hardware maintenance personnel.
 5. Corporate management.
- D. All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

-----END-----

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 28 23 00
VIDEO SURVEILLANCE

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Salvage and reinstall existing cameras to maintain the existing complete Video Surveillance System, which is identified as the Video Assessment and Surveillance System hereinafter referred to as the VASS System as specified in this section.
- B. This Section includes video surveillance system consisting of cameras, data transmission wiring. The control station, with its associated equipment, is not included.
- C. Video surveillance system Video assessment & surveillance system shall be integrated with monitoring and control system specified in Division 28 Section PHYSICAL ACCESS CONTROL, ELECTRONIC PERSONAL PROTECTION SYSTEM that specifies systems integration.

1.2 RELATED WORK

- A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.
- B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.
- C. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.
- D. Section 14 24 00 - HYDRAULIC ELEVATORS. Requirements for elevators.
- E. Section 26 05 21 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.
- F. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.
- G. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.
- H. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.
- I. Section 28 05 28.33 - CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.
- J. Section 28 13 00 - PHYSICAL ACCESS CONTROL SYSTEM. Requirements for physical access control system integration.
- K. Section 28 26 00 - ELECTRONIC PERSONAL PROTECTION SYSTEM (EPPS). Requirements for emergency and interior communications.

1.3 DEFINITIONS

- A. AGC: Automatic gain control.
- B. B/W: Black and white.
- C. CCD: Charge-coupled device.
- D. CIF: Common Intermediate Format CIF images are 352 pixels wide and 88/240 (PAL/NTSC) pixels tall (352 x 288/240).
- E. 4CIF: resolution is 704 pixels wide and 576/480 (PAL/NTSC) pixels tall (704 x 576/480).
- F. H.264 (also known as MPEG4 Part 10): a encoding format that compresses video much more effectively than older (MPEG4) standards.
- G. ips: Images per second.
- H. MPEG: Moving picture experts group.
- I. MPEG4: a video encoding and compression standard that uses inter-frame encoding to significantly reduce the size of the video stream being transmitted.
- J. NTSC: National Television System Committee.
- K. UPS: Uninterruptible power supply.
- L. PTZ: refers to a movable camera that has the ability to pan left and right, tilt up and down, and zoom or magnify a scene.

1.4 QUALITY ASSURANCE

- A. The Contractor shall be responsible for providing, installing, and the operation of the VASS System as shown. The Contractor shall also provide certification as required.
- B. The security system shall be installed and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the security system is stand-alone or a part of a complete Information Technology (IT) computer network.
- C. The Contractor or security sub-contractor shall be a licensed security Contractor as required within the state or jurisdiction of where the installation work is being conducted.
- D. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.

E. Product Qualification:

1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

F. Contractor Qualification:

1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of five (5) years experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Video Assessment and Surveillance System's (VASS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner's permission and representative, to verify the quality of installation and the references' level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to install, program, and service the VASS. The Contractor shall only utilize factory-trained technicians to install, terminate and service cameras, control, and recording equipment. The technicians shall have a minimum of five (5) continuous years of technical experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within 60 miles of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include appropriate diagnostic equipment to perform diagnostic procedures. The COTR reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.

2. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.
 3. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination and testing.
- G. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 SUBMITTALS

- A. Submit below items in conjunction with Master Specification Sections 01 33 23, Shop Drawings, Product Data, and Samples, and Section 02 41 00, Demolition Drawings.
- B. Provide certificates of compliance with Section 1.4, Quality Assurance.
- C. Provide a pre-installation and as-built design package in both electronic format and on paper, minimum size 1220 x 1220 millimeters (48 x 48 inches); drawing submittals shall be per the established project schedule.
- D. Pre-installation design and as-built packages shall include, but not be limited to:
 1. Index Sheet that shall:
 - a. Define each page of the design package to include facility name, building name, floor, and sheet number.
 - b. Provide a list of all security abbreviations and symbols.
 - c. Reference all general notes that are utilized within the design package.
 - d. Specification and scope of work pages for all security systems that are applicable to the design package that will:
 - 1) Outline all general and job specific work required within the design package.
 - 2) Provide a device identification table outlining device Identification (ID) and use for all security systems equipment utilized in the design package.

2. Floor plans, site plans, and enlarged plans shall:
 - a. Include a title block as defined above.
 - b. Define the drawings scale in both standard and metric measurements.
 - c. Provide device identification and location.
 - d. Address all signal and power conduit runs and sizes that are associated with the design of the electronic security system and other security elements (e.g., barriers, etc.).
 - e. Identify all pull box and conduit locations, sizes, and fill capacities.
 - f. Address all general and drawing specific notes for a particular drawing sheet.
3. A riser drawing for each applicable security subsystem shall:
 - a. Indicate the sequence of operation.
 - b. Relationship of integrated components on one diagram.
 - c. Include the number, size, identification, and maximum lengths of interconnecting wires.
 - d. Wire/cable types shall be defined by a wire and cable schedule. The schedule shall utilize a lettering system that will correspond to the wire/cable it represents (example: A = 18 AWG/1 Pair Twisted, Unshielded). This schedule shall also provide the manufacturer's name and part number for the wire/cable being installed.
4. A system drawing for each applicable security system shall:
 - a. Identify how all equipment within the system, from main panel to device, shall be laid out and connected.
 - b. Provide full detail of all system components wiring from point-to-point.
 - c. Identify wire types utilized for connection, interconnection with associate security subsystems.
 - d. Show device locations that correspond to the floor plans.
 - e. All general and drawing specific notes shall be included with the system drawings.
5. A schedule for all of the applicable security subsystems shall be included. All schedules shall provide the following information:
 - a. Device ID.
 - b. Device Location (e.g. site, building, floor, room number, location, and description).

- c. Mounting type (e.g. flush, wall, surface, etc.).
- d. Power supply or circuit breaker and power panel number.
- e. In addition, for the VASS Systems, provide the camera ID, camera type (e.g. fixed or pan/tilt/zoom (P/T/Z), lens type (e.g. for fixed cameras only) and housing model number.
- 6. Detail and elevation drawings for all devices that define how they were installed and mounted.
- E. Pre-installation design packages shall be reviewed by the Contractor along with a VA representative to ensure all work has been clearly defined and completed. All reviews shall be conducted in accordance with the project schedule. There shall be four (4) stages to the review process:
 - 1. 35 percent
 - 2. 65 percent
 - 3. 90 percent
 - 4. 100 percent
- F. Provide manufacturer security system product cut-sheets. Submit for approval at least 30 days prior to commencement of formal testing, a Security System Operational Test Plan. Include procedures for operational testing of each component and security subsystem, to include performance of an integrated system test.
- G. Submit manufacture's certification of Underwriters Laboratories, Inc. (UL) listing as specified. Provide all maintenance and operating manuals per the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute (ANSI)/Electronic Industries Alliance (EIA):
 - 330-09Electrical Performance Standards for CCTV
Cameras
 - 375A-76Electrical Performance Standards for CCTV
Monitors

- C. Institute of Electrical and Electronics Engineers (IEEE):
 - C62.41-02IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits
 - 802.3af-08Power over Ethernet Standard
- D. Federal Communications Commission (FCC):
 - (47 CFR 15) Part 15 Limitations on the Use of Wireless Equipment/Systems
- E. National Electrical Contractors Association (NECA):
 - 303-2005Installing Closed Circuit Television (CCTV) Systems
- F. National Fire Protection Association (NFPA):
 - 70-08Article 780-National Electrical Code
- G. Federal Information Processing Standard (FIPS):
 - 140-2-02Security Requirements for Cryptographic Modules
- H. Underwriters Laboratories, Inc. (UL):
 - 983-06Standard for Surveillance Camera Units
 - 3044-01Standard for Surveillance Closed Circuit Television Equipment

1.7 COORDINATION

- A. Coordinate arrangement, mounting, and support of video surveillance equipment:
 - 1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
 - 2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
 - 3. To allow right of way for piping and conduit installed at required slope.
 - 4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.
- B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.
- C. Coordinate location of access panels and doors for video surveillance items that are behind finished surfaces or otherwise concealed.

1.8 WARRANTY OF CONSTRUCTION

- A. Warrant VASS System work subject to the Article "Warranty of Construction" of FAR clause 52.246-21.

- B. Demonstration and training shall be performed prior to system acceptance.

PART 2 - PRODUCTS

2.1 GENERAL

- A. Video signal format shall comply with the NTSC standard composite video, interlaced. Composite video signal termination shall be 75 ohms.
- B. Surge Protection: Protect components from voltage surges originating external to equipment housing and entering through power, communication, signal, control, or sensing leads. Include surge protection for external wiring of each conductor entry connection to components.
- C. Power Connections: Comply with requirements in Section 28 05 00 COMMON WORK REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY, Part 2, as recommended by manufacturer for type of line being protected.
- D. Tamper Protection: Tamper switches on enclosures, control units, pull boxes, junction boxes, cabinets, and other system components shall initiate a tamper-alarm signal when unit is opened or partially disassembled. Control-station, control-unit alarm display shall identify tamper alarms and indicate locations.

2.2 CAMERAS

- A. All Cameras will be EIA 330 and UL 1. Minimum Protection for Power Connections 120 V and more: Auxiliary panel suppressors shall comply with requirements in Section 28 05 00 COMMON WORK REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY, Part 2.
- B. Minimum Protection for Communication, Signal, Control, and Low-Voltage 983 compliant as well as:
 - 1. Will be charge coupled device (CCD) cameras and shall conform to National Television System Committee (NTSC) formatting.
 - 2. Fixed cameras shall be color and the primary choice for monitoring following the activities described below. Pan/Tilt/Zoom (P/T/Z) cameras shall be color and are to be utilized to complement the fixed cameras.
 - 3. Existing cameras are powered by either 12 volts direct current (VDC) or 24 volts alternate current (VAC). Power supplies are Class 2 and UL compliant and have a back-up power source to ensure cameras are still operational in the event of loss of primary power to the VASS System.

4. New cameras shall match existing cameras. Existing cameras are Bosch EX49, Series Conical No-Grip Dome Cameras.
5. Shall be rated for continuous operation under the environmental conditions listed in Part 1, Project Conditions.
6. Will be home run to a monitoring and recording device via a controlling device such as a matrix switcher or network server and monitored on a 24 hour basis at a designated Security Management System location.
7. Each function and activity shall be addressed within the system by a unique user defined name, with minimum of twenty (20) characters. The use of codes or mnemonics identifying the VASS action shall not be accepted.
8. New cameras shall be Bosch EX49-VIPX1.
9. Shall be programmed to digitally flip from color to black and white at dusk and vice versa at low light conditions.
10. Will be fitted with AI/DC lenses to ensure the image quality under different light conditions.
11. Dummy or fake cameras will not be utilized at any time.
12. Appropriate signage shall be designed, provided, and posted that notifies people that an area is under camera surveillance.

2.3 DIGITAL BASED VIDEO MANAGEMENT SYSTEM

- A. Video management system is existing. Coordinate with COTR for access to add additional cameras and program recording and viewing at monitors.

2.4 VIDEO DISPLAY EQUIPMENT

- A. Video Display Equipment
 1. Will consist of color monitors and shall be EIA 375A compliant.
 2. Shall be able to display analog, digital, and other images in either NTSC or MPEG format associated with the operation of the Security Management System (SMS).
 3. Shall:
 - a. Have front panel controls that provide for power on/off, horizontal and vertical hold, brightness, and contrast.
 - b. Accept multiple inputs, either directly or indirectly.
 - c. Have the capabilities to observe and program the VASS System.
 - d. Be installed in a manner that they cannot be witnessed by the general public.

B. Color Video Monitors Technical Characteristics:

Sync Format	PAL/NTSC
Display Tube	90° deflection angle
Horizontal Resolution	250 TVL minimum, 300 TVL typical
Video Input	1.0 Vp-p, 75 Ohm
Front Panel Controls	Volume, Contrast, Brightness, Color
Connectors	BNC

C. Liquid Crystal Display (LCD) Flat Panel Display Monitor.

D. The 23-inch color LCD monitor shall have a flat screen and 23-inch diagonal viewing area and consists of an LCD panel, bezel, and stand.

E. The monitor shall meet or exceed the following specifications:

1. The monitor shall incorporate a 23-inch active matrix TFT LCD panel.
 - a. The pixel pitch of the monitor's LCD panel shall be 0.264 mm horizontal and 0.264 mm vertical.
 - b. The monitor shall have a maximum resolution of 500 television lines.
 - c. The contrast ratio shall be 500:1.
 - d. The typical brightness shall be 250 cd/m².
 - e. The monitor shall display at least 16.7 million colors.
 - f. The light source for the LCD panel shall have a lifetime of [50,000] <insert hours> hours.
 - g. The scan frequency horizontal shall be 30 K to 80 KHz and the scan frequency vertical shall be 56 to 75 Hz.
 - h. The viewing angle for the monitor shall be 170 degrees horizontal and 170 degrees vertical.
2. The monitor shall have automatic NTSC or PAL recognition.
3. The monitor shall use the following signal connectors:
 - a. Video 1.0 V peak-to-peak at 75 ohms
 - b. BNC in/out
 - c. Y/C (S-video) in/out
 - d. Audio in/out
 - e. VGA 15-pin D-Sub
4. The monitor shall have two audio speakers.
 - a. The speaker shall be 0.5 W minimum.

5. The monitor shall have the following front control panel buttons:
 - a. Power on/off
 - b. LED indicator
 - c. Mode
 - d. Increase (volume)
 - e. Decrease (volume)
 - f. Up (contrast adjustment)
 - g. Down (brightness adjustment)
 - h. Menu
 - i. Auto
6. The monitor shall have the following options for adjustment in an onscreen display menu:
 - a. Color
 - b. Tint
 - 1) NTSC mode only
 - a) Brightness
 - b) Contrast
 - c) Sharpness
 - d) Volume
 - e) Language
 - f) Scan
 - g) Color Temp
 - h) H-Position
 - i) Recall
- F. The electrical specifications for the monitor shall be as follows:
 1. Input voltage shall be 12 VDC/3 A.
 2. Power consumption shall be 50 W maximum.
- G. The environmental specifications for the monitor shall be as follows:
 1. Operating temperature shall be 32 to 104 degrees Fahrenheit or 0 to 40 degrees Celsius.
 2. Operating humidity shall be 10 to 85 percent.
- H. The physical specifications for the monitor shall be as follows:
- I. The monitor shall conform to these compliance standards:
 1. FCC
 2. CE (EMC/LVD)
 3. UL

2.5 CONTROLLING EQUIPMENT

- A. Shall be utilized to call up, operate, and program all cameras associated VASS System components.

- B. Will have the ability to operate the cameras locally and remotely. A matrix switcher or a network server shall be utilized as the VASS System controller.
- C. The controller shall be able to fit into a standard 47.5 cm (19 inch) equipment rack.
- D. Control and programming keyboards shall be provided with its own type of switcher. All keyboards shall:
 - 1. Be located at each monitoring station.
 - 2. Be addressable for programming purposes.
 - 3. Provide interface between the operator and the VASS System.
 - 4. Provide full control and programming of the switcher.
 - 5. Have the minimum following controls:
 - a. programming
 - b. switching
 - c. lens function
 - d. environmental housing
 - e. annotation

2.6 VIDEO CAMERAS

- A. The cameras shall be high-resolution color video cameras with wide dynamic range capturing capability.
- B. The camera shall meet or exceed the following specifications:
 - 1. The image capturing device shall be a 1/3-inch image sensor designed for capturing wide dynamic images.
 - a. The image capturing device shall have a separate analog-to-digital converter for every pixel.
 - b. The image capturing device shall sample each pixel multiple times per second.
 - c. The dynamic ranges shall be 95 dB typical and 120 dB maximum.
 - 2. The camera shall optimize each pixel independently.
 - 3. The camera shall have onscreen display menus for programming of the camera's settings.
 - 4. The signal system shall be NTSC.
- C. The camera shall have composite video output.
- D. The camera shall come with a manual varifocal lens.
- E. The video output shall be composite: 1.0 volts peak-to-peak at 75-ohm load.
 - 1. Pickup Device: 1/3 CCD interline transfer.

2. Fixed color camera shall be enclosed in dome and have board mounted varifocal lens.

F. Indoor/Outdoor Fixed Dome System (IP)

1. The indoor/outdoor fixed dome system shall include a built-in 100Base-TX network interface for live streaming to a standard Web browser.
2. The network dome shall be integrated into the back box design to accept multiple camera options without modification. The network mini dome shall operate in open architecture connectivity for third-party software recording solutions.
3. The indoor/outdoor fixed dome system shall meet or exceed the following design and performance specifications.

Imaging Device	1/3-inch imager
Picture Elements	NTSC/PAL 720 (H) x 540 (V) 720 (H) x 540 (V)
Dynamic Range	102 dB typical/120 dB maximum (DW/CW models only)
Scanning System	2:1 interlace (progressive option on CW/DW models only)
Synchronization	Internal
Electronic Shutter Range	Auto (1/15-1/22,000)
Lens Type	Varifocal with auto iris
Format Size	1/3-inch
Focal Length	3.0 mm-9.5 mm 9.0 mm-22.0 mm <list>
Operation	Iris Auto (DC-drive) Focus Manual Zoom Manual
Minimum Illumination	Color (day): 0.8 lux, SENS 8X: 0.2 lux, B-W (night): 0.08 lux, SENS 8X: 0.02 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance) Color (day): 0.15 lux, B-W (night): 0.015 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance) Color (day): 0.8 lux, SENS 8X: 0.2 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance) 0.2 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance)
Compression	MPEG-4, MJPEG in Web viewing mode

Video Streams	3, simultaneous		
Video Resolutions		NTSC	PAL
	4CIF	704 x 480	704 x 576
	2CIF	704 x 240	704 x 288
	CIF	352 x 240	352 x 288
	QCIF	176 x 120	176 x 144
Bit Rate	Configurable, 20 kbps to 2 Mbps per stream		
Web User Interface			
Environment	Low temperature, indoor/outdoor		
Connectors	RJ-45 for 100BASE-TX, Auto MDI/MDI-X		
Cabling	CAT5 cable or better for 100BASE-TX		
Input Voltage	24 VAC (18-36) or PoE input voltage		
Power Consumption	<7.5 Watts,<13 Watts with heaters 24VAC: <0.5 Amps, <0.9 Amps with heaters		
Alarm Input	10 VDC maximum, 5 mA maximum		
Alarm Output	0 to 15 VDC maximum, 75 mA maximum		
Service Connector	Internal to housing for 2.5 mm connector for NTSC/PAL video outputs		
Service Connector	3-conductor, 2.5 mm connector for video output to optional (IS-SC cable)		
Pan/Tilt Adjustment	Pan 360°, tilt 80° (20° to 100° range), and rotation 360°		
Light Attenuation	smoked bubble, f/1.5 light loss; clear bubble, zero light loss		
CERTIFICATIONS	CE, Class B UL Listed Meets NEMA Type 4X and IP66 standards		

4. Accessories

- a. Pendant mount
- b. Wall mount for pendant
- c. Corner adapter for wall mount
- d. Pole adapter for wall mount

G. NETWORK CAMERAS

1. Shall be IEEE 802.3af compliant.
 - a. Shall be utilized for interior and exterior purposes.
 - b. A Category CAT6 cable will be the primary source for carrying signals up to 100 m(300 ft.) from a switch hub or network server.

If any camera is installed greater than 100 m (300 ft.) from the controlling device then the following will be required:

- 1) A local or remote 12 VDC or 24 VAC power source will be required from a Class 2, UL compliant power supply.
 - 2) A signal converter will be required to convert from a CAT6 cable over to a fiber optic or standard signal cable. The signal will need to be converted back to a CAT6 cable at the controlling device using a signal converter card.
- c. Shall be routed to a controlling device via a network switch.
 - d. Shall be a programmable IP address that allows for installation of multiple units in the same Local Area Network (LAN) environment.
 - e. Incorporate a minimum of Transmission Control Protocol (TCP)/IP, User Datagram Protocol (UDP), Hypertext Transfer Protocol (HTTP), File Transfer Protocol (FTP), Internet Control Message Protocol (ICMP), Address Resolution Protocol (ARP), Real-Time Transport Protocol (RTP), Dynamic Host Configuration Protocol (DHCP), Network Time Protocol (NTP), Simple Mail Transfer Protocol (SMTP), Internet Group Management Protocol (IGMP), and Differentiated Service Code Point (DSCP) protocols for various network applications.

H. CAMERA HOUSINGS AND MOUNTS

1. This section pertains to only interior domes, and applicable ceiling mounts associated with the housing. Housings and mounts shall be specified in accordance to the type of cameras used.
2. All cameras and lenses shall be enclosed in a tamper resistant housing. Any additional mounting hardware required to install the camera housing at its specified location shall be provided along with the housing.
3. The camera and lens contained inside the housing shall be installed on a camera mount. All additional mounting hardware required to install the camera housing at its specified location shall be provided along with the housing.
4. Shall be manufactured in a manner that are capable of supporting a maximum of three (3) cameras with housings, and meet environmental requirements for the geographical area the camera support equipment is being installed on or within.

5. All electrical and signal cables required for correct operations shall be supplied in a hardened carrier system from the controller to the camera.
6. The mounting bracket shall be adjustable to allow for the housing weight of the camera and the housing unit it is placed in.
7. Accessibility to the camera and mounts shall be taken into consideration for maintenance and service purposes.

I. Indoor Mounts

1. Ceiling Mounts:

- a. This enclosure and mount shall be installed in a finished or suspended ceiling.
- b. The enclosure and mount shall be fastened to the finished ceiling, and shall not depend on the ceiling tile grid for complete support.
- c. Suspended ceiling mounts shall be low profile, and shall be suitable for replacement of 610mm x 610mm (2 foot by 2 foot) ceiling tiles.

J. Interior Domes

1. The interior dome shall be only ceiling mount.
2. The lower portion of the dome that provides camera viewing shall be made of black opaque acrylic and shall have a light attenuation factor of no more than 1 f-stop.
3. The housing shall be equipped with integral pan/tilt capabilities complete with wiring, wiring harness, connectors, receiver/driver, pan/tilt control system, pre-position cards, or any other hardware and equipment as needed to fully provide a fully functional pan/tilt dome.
4. The pan/tilt mechanism shall be:
 - a. Constructed of heavy duty bearings and hardened steel gears.
 - b. Permanently lubricated to ensure smooth and consistent movement of all parts throughout the life of the product.
 - c. Equipped with motors that are thermally or impedance protected against overload damage.
 - d. Pan movements shall be 360 degrees and tilt movement shall not be less than +/- 90 degrees.
 - e. Pan speed shall be a minimum of 10 degrees per second.

2.7 POWER SUPPLIES

- A. Power supplies shall be a low-voltage power supplies matched for voltage and current requirements of cameras and accessories, type as recommended by camera and lens manufacturer.
- B. Technical specifications:
 - 1. Input: 115VAC, 50/60Hz, 2.7 amps
 - 2. Outputs:
 - a. Number of outputs, 16
 - b. Fuse/PTC protected, power limited
 - c. Output voltage & power:
 - 1) 24VAC @ 12.5 amps (300VA) or 28VAC @ 10 amp (280VA) supply current
 - 3. Illuminated power disconnect circuit breaker with manual reset
 - 4. Surge suppression
 - 5. Camera synchronization
 - 6. Wall/Rack mount.
 - 7. Enclosure: NEMA 250, Type 1.

2.8 RECORDING DEVICES

- A. All cameras on the VASS System shall be recorded in real time using a new Network Video Recorder (NVR). The type of recording device utilized should be determined by the size and type of VASS System designed and installed, and to what extent the system is to be utilized.
- B. All recording devices shall be 47.5 cm (19 inch) rack-mountable.
- C. All DVR's and NVR's that are viewable over an Intranet or Internet will be routed through an encryptor.
- D. Encryptors shall:
 - 1. Comply with FIPS PUB 140-2.
 - 2. Support TCP/IP.
 - 3. Directly interfaces to low-cost commercial routers.
 - 4. Provide packet-based crypto synchronization.
 - 5. Encrypt source and destination IP addresses.
 - 6. Support web browser based management requiring no additional software.
 - 7. Have a high data sustained throughput – 1.544 Mbps (T1) full duplex data rate.
 - 8. Provide for both bridging and routing network architecture support.
 - 9. Support Electronic Key Management System (EKMS) compatible.
 - 10. Have remote management ability.

11. Automatically reconfigure when secure network or wide area network changes.

E. Network Video Recorder (NVR)

1. Shall record video to a hard drive-based digital storage medium in MPEG, MPEG4 or H.264 format.
2. Shall meet the following minimum requirements:
 - a. Record at minimum rate of 30 IPS.
 - b. Have a minimum of eight (8) to 16 looping inputs.
 - c. Have a minimum of eight (8) to 16 alarm inputs and two (2) relay outputs.
 - d. Shall provide instantaneous playback of all recorded images.
 - e. Be IP addressable, if part of a VASS network.
 - f. Have built-in digital motion detection with masking and sensitivity adjustments.
 - g. Easy playback and forward/reverse search capabilities.
 - h. Complete audit trail database, with minimum of a six-month history that tracks all events related to the alarm; specifically who, what, where and when.
 - i. NVR management capability providing automatic video routing to a back-up spare recorder in case of failure.
 - j. Accessible locally and remotely via the internet, intranet, or a personal digital assistant (PDA).
 - k. Records all alarm events in real time, ensuring 60 seconds before and after the event are included in the recording.
 - l. Utilize RS-232 or fiber optic connections for integration with the SMS computer station via a remote port on a network hub.
 - m. Allow for independently adjustable frame rate settings.
 - n. Be compatible with the matrix switcher utilized to operate the cameras.

3. Technical Characteristics:

Hardware/CPU	Pentium III Xeon or IV, 1.8 GHz
HDD Interface	IDE or better; optional: SCSI II, SCSI Ultra, or Fiber Channel
RAM	1024 MB
Operating System	Windows 2000/XP Professional/Server 2003 Standard
Graphic	Card VGA
Ethernet Card	100/1000 MB
Memory	20 MB
Software Setup	Centralized setup from each authorized PC; access via integrated web server
Storage Media	All storage media possible (e.g., HD, RAID), depending on operating system
Storage Mode	Linear mode, ring mode (capacity-based)
Recording Configuration	Camera name assignment, bandwidth limit, frame rate, video quality
Recording Content	Video and/or audio data
Search Parameters	Time, date, event
Playback	Playback via any IP network (LAN/WAN) simultaneous recording, playback, and backup
Network Interface	Ethernet (RJ-45, 10/100M)
Network Protocol	TCP/IP, DHCP, HTTP, UDP
Network Capabilities	Live/Playback/P/T/Z control
Recording Rate	30 ips for 720 x 240 (NTSC)
Password Protection	Menu Setup, Remote Access
Recording Capacity	160 (1 or 2 fixed HDD) 1 CD-RW
Power Interrupt	Auto recovered to recording mode

2.9 WIRES AND CABLES

- A. Shall meet or exceed the manufactures recommendation for power and signal.
- B. Will be carried in an enclosed conduit system, utilizing electromagnetic tubing (EMT) to include the equivalent in flexible metal, rigid galvanized steel (RGS) to include the equivalent of liquid tight, polyvinylchloride (PVC) schedule 40 or 80.
- C. All conduits will be sized and installed per the NEC. All security system signal and power cables that traverse or originate in a high security office space will contained in either EMT or RGS conduit.

- D. All conduit, pull boxes, and junction boxes shall be clearly marked with colored permanent tape or paint that will allow it to be distinguished from all other conduit and infrastructure.
- E. Conduit fills shall not exceed 50 percent unless otherwise documented.
- F. A pull string shall be pulled along and provided with signal and power cables to assist in future installations.
- G. At all locations where there is a wall penetration or core drilling is conducted to allow for conduit to be installed, fire stopping materials shall be applied to that area
- H. High voltage and signal cables shall not share the same conduit and shall be kept separate up to the point of connection. High voltage for the security system shall be defined as any cable or sets of cables carrying 30 VDC/VAC or higher.
- I. For all equipment that is carrying digital data between the Physical Access Control System and Database Management or at a remote monitoring station, shall not be less than 20 AWG and stranded copper wire for each conductor. The cable or each individual conductor within the cable shall have a shield that provides 100% coverage. Cables with a single overall shield shall have a tinned copper shield drain wire.
- J. All cables and conductors, except fiber optic cables, that act as a control, communication, or signal lines shall include surge protection. Surge protection shall be furnished at the equipment end and additional triple electrode gas surge protectors rated for the application on each wire line circuit shall be installed within 1 m. (3 ft.) of the building cable entrance. The inputs and outputs shall be tested in both normal and common mode using the following wave forms:
 - 1. A 10 microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 volts and peak current of 60 amperes.
 - 2. An 8 microsecond rise time by 20 microsecond pulse width wave form with a peak voltage of 1000 volts and peak current of 500 amperes.
- K. The surge suppression device shall not attenuate or reduce the video or sync signal under normal conditions. Fuses and relays shall not be used as a means of surge protection.

L. Coaxial Cables

1. All video signal cables for the VASS System, with exception to the PoE cameras, shall be a coaxial cable and have a characteristic impedance of 75 ohms plus or minus 3 ohms.
2. For runs up to 750 feet use of an RG-59/U is required. The RG-59/U shall be shielded which provides a minimum of 95 percent coverage, with a stranded copper center conductor of a minimum 23 AWG, polyethylene insulation, and black non-conductive polyvinylchloride (PVC) jacket.
3. For runs between 750 feet and 1250 feet, RG-6/U is required. RG-6/U shall be shielded which provides a minimum of 95 percent coverage, with a stranded copper center conductor of a minimum 18 AWG, polyethylene insulation, and black non-conductive polyvinylchloride (PVC) jacket.
4. For runs of 1250 to 2750 feet, RG-11/U is required. RG-11/U shall be shielded which provides a minimum of 95 percent coverage, with a stranded copper center conductor of a minimum 14 AWG, polyethylene insulation, and black non-conductive polyvinylchloride (PVC) jacket.
5. All runs greater than 2750 feet will be substituted with a fiber optic cable. If using fiber optics as a signal carrier then the following equipment will be utilized:
 - a. Multimode fiber optic cable a minimum size of 62 microns
 - b. Video transmitter, installed at the camera that utilizes 12 VDC or 24 VAC for power.
 - c. Video receiver, installed at the switcher.

6. RG-59/U Technical Characteristics

AWG	22
Stranding	7x29
Conductor Diameter	.031 in.
Conductor Material	BCC
Insulation Material	Gas-injected FHDPE
Insulation Diameter	.145 in.
Outer Shield Type	Braid/Braid
Outer Jacket Material	PVC
Overall Nominal Diameter	.242 in.
UL Temperature Rating	75°C
Nom. Characteristic Impedance	75 Ohms
Nom. Inductance	0.094 •H/ft
Nom. Capacitance	Conductor to Shield 17.0 pF/ft
Nom. Velocity of Propagation	80 %
Nom. Delay	1.3 ns/ft
Nom. Conductor DC Resistance @ 20°C	12.2 Ohms/1000 ft
Nom. Outer Shield DC Resistance @ 20°C	2.4 Ohms/1000 ft
Max. Operating Voltage	UL 300 V RMS

7. Signal Cables:

- a. Signal wiring for PoE cameras depends on the distance the camera is being installed from either a hub or the server.
- b. If the camera is up to 300 ft from a hub or the server, then use a shielded UTP Category 6 cable with a standard RJ-45 connector at each end. The cable with comply with the Power over Ethernet, IEEE802.3af, Standard.
- c. If the camera is over 300 ft from a hub or server then utilize a multimode fiber optic cable with a minimum size of 62 microns.
- d. Provide a separate cable for power.

8. Power Cables

- a. Will be sized accordingly and shall comply with the NEC. High voltage power cables will be a minimum of three conductors, 14 AWG, stranded, and coated with a non-conductive polyvinylchloride

- (PVC) jacket. Low voltage cables will be a minimum of 18 AWG, stranded and non-conductive polyvinylchloride (PVC) jacket.
- b. Will be utilized for all components of the VASS System that require either a 110 VAC 60 Hz or 220 VAC 50 Hz input. Each feed will be connected to a dedicated circuit breaker at a power panel that is primarily for the security system.
 - c. All equipment connected to AC power shall be protected from surges. Equipment protection shall withstand surge test waveforms described in IEEE C62.41. Fuses shall not be used as a means of surge protection.
 - d. Shall be rated for either 110 or 220 VAC, 50 or 60 Hz, and shall comply with VA Master Spec 26 05 21 Low Voltage Electrical Power Conductors and Cables (600 Volts and Below).
 - e. Low Voltage Power Cables;
 - 1) Shall be a minimum of 18 AWG, Stranded and have a polyvinylchloride outer jacket.
 - 2) Cable size shall determined using a basic voltage over distance calculation and shall comply with the NEC's requirements for low voltage cables.

PART 3 - EXECUTION

3.1. GENERAL

- A. Installation: The Contractor shall install all system components including Owner furnished equipment, and appurtenances in accordance with the manufacturer's instructions, ANSI C2 and as shown, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable data transmission system.
- B. Identification and Labeling: The Contractor shall supply permanent identification labels for each cable at each end that will appear on the as-built drawings. The labeling format shall be identified and a complete record shall be provided to the Owner with the final documentation. Each cable shall be identified by type or signal being carried and termination points. The labels shall be printed on letter size label sheets that are self laminated vinyl that can be printed from a computer data base or spread sheet. The labels shall be E-Z code WES12112 or equivalent.
 - 1. The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform all testing.

- C. Transient Voltage Surge Suppressors (TVSS): The Contractor shall mount TVSS within 3 m (118 in) of equipment to be protected inside terminal cabinets or suitable NEMA 1 enclosures. Terminate off-premise conductors on input side of device. Connect the output side of the device to the equipment to be protected. Connect ground lug to a low impedance earth ground (less than 10 ohms) via Number 12 AWG insulated, stranded copper conductor.
- D. Contractor's Field Test: The Contractor shall verify the complete operation of the data transmission system during the Contractor's Field Testing. Field test shall include a bit error rate test. The Contractor shall perform the test by sending a minimum of 1,000,000 bits of data on each DTM circuit and measuring the bit error rate. The bit error rate shall not be greater than one (1) bit out of each 100,000 bits sent for each dial-up DTM circuit, and one (1) bit out of 1,000,000 bits sent for each leased or private DTM circuit. The Contractor shall submit a report containing results of the field test.
- E. Acceptance Test and Endurance Test: The wire line data transmission system shall be tested as a part of the completed IDS and EECS during the Acceptance test and Endurance Test as specified.
- F. Identification and Labeling: The Contractor shall supply identification tags or labels for each cable. Cable shall be labeled at both end points and at intermediate hand holes, manholes, and junction boxes. The labeling format shall be identified and a complete record shall be provided to the Owner with the final documentation. Each cable shall be identified with type of signal being carried and termination points.

3.2 INSTALLATION

- A. System installation shall be in accordance with NECA 303, manufacturer and related documents and references, for each type of security subsystem designed, engineered and installed.
- B. Components shall be configured with appropriate "service points" to pinpoint system trouble in less than 30 minutes.
- C. The Contractor shall install all system components including Government furnished equipment, and appurtenances in accordance with the manufacturer's instructions, documentation listed in Sections 1.5 of this document, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable system.

- D. The VASS System will be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the system is a stand alone or a complete network.
- E. For integration purposes, the VASS System shall be integrated where appropriate with the following associated security subsystems:
 - 1. PACS:
 - a. Provide 24 hour coverage of all entry points to the perimeter and agency buildings, as well as all emergency exits utilizing a fixed color camera.
 - b. Record cameras on a 24 hours basis.
 - c. Be programmed go into an alarm state when an emergency exit is opened, and notify the Physical Access Control System and Database Management of an alarm event.
 - 2. IDS:
 - a. Provide a recorded alarm event via a color camera that is connected to the IDS system by either direct hardwire or a security system computer network.
 - b. Record cameras on a 24 hours basis.
 - c. Be programmed to go into an alarm state when an IDS device is put into an alarm state, and notify the PACS.
 - d. For additional VASS System requirements as they relate to the IDS, refer to Section 28 16 00 "INTRUSION DETECTION".
 - 3. Security Access Detection:
 - a. Provide full coverage of all vehicle and lobby entrance screening areas utilizing a fixed color camera.
 - b. Record cameras on a 24 hours basis.
 - 4. EPPS:
 - a. Provide a recorded alarm event via a color camera that is connected to the EPPS system by either direct hardwire or a security system computer network.
 - b. Record cameras on a 24 hours basis.
 - c. Be programmed to go into an alarm state when an emergency call box or duress alarm/panic device is activated, and notify the Physical Access Control System and Database Management of an alarm event.
- F. Integration with these security subsystems shall be achieved by computer programming or the direct hardwiring of the systems.

- G. For programming purposes refer to the manufacturers requirements for correct system operations. Ensure computers being utilized for system integration meet or exceed the minimum system requirements outlined on the systems software packages.
- H. A complete VASS System shall be comprised of, but not limited to, the following components:
1. Cameras
 2. Video Display Equipment
 3. Camera Housings and Mounts
 4. Controlling Equipment
 5. Recording Devices
 6. Wiring and Cables
- I. The Contractor shall visit the site and verify that site conditions are in agreement/compliance with the design package. The Contractor shall report all changes to the site or conditions that will affect performance of the system to the Contracting Officer in the form of a report. The Contractor shall not take any corrective action without written permission received from the COTR.
- J. Existing Equipment:
1. The Contractor shall connect to and utilize existing video equipment, video and control signal transmission lines, and devices as outlined in the design package. Video equipment and signal lines that are usable in their original configuration without modification may be reused with COTR approval.
 2. The Contractor shall perform a field survey, including testing and inspection of all existing video equipment and signal lines intended to be incorporated into the VASS System, and furnish a report to the Contracting Officer as part of the site survey report. For those items considered nonfunctioning, provide (with the report) specification sheets, or written functional requirements to support the findings and the estimated cost to correct the deficiency. As part of the report, the Contractor shall include a schedule for connection to all existing equipment.
 3. The Contractor shall make written requests and obtain approval prior to disconnecting any signal lines and equipment, and creating equipment downtime. Such work shall proceed only after receiving COTR approval of these requests. If any device fails after the Contractor has commenced work on that device, signal or control line, the Contractor shall diagnose the failure and perform any necessary corrections to the equipment.

4. The Contractor shall be held responsible for repair costs due to Contractor negligence, abuse, or incorrect installation of equipment.
 5. The COTR shall be provided a full list of all equipment that is to be removed or replaced by the Contractor, to include description and serial/manufacturer numbers where possible. The Contractor shall dispose of all equipment that has been removed or replaced based upon approval of the Contracting Officer after reviewing the equipment removal list. In all areas where equipment is removed or replaced the Contractor shall repair those areas to match the current existing conditions.
- K. Enclosure Penetrations: All enclosure penetrations shall be from the bottom of the enclosure unless the system design requires penetrations from other directions. Penetrations of interior enclosures involving transitions of conduit from interior to exterior, and all penetrations on exterior enclosures shall be sealed with rubber silicone sealant to preclude the entry of water and will comply with VA Master Specification 07 84 00, Firestopping. The conduit riser shall terminate in a hot-dipped galvanized metal cable terminator. The terminator shall be filled with an approved sealant as recommended by the cable manufacturer and in such a manner that the cable is not damaged.
- L. Interconnection of Console Video Equipment: The Contractor shall connect signal paths between video equipment as specified by the OEM. Cables shall be as short as practicable for each signal path without causing strain at the connectors. Rack mounted equipment on slide mounts shall have cables of sufficient length to allow full extension of the slide rails from the rack.
- M. Cameras:
1. Install the cameras.
 2. Connect power and signal lines to the camera.
 3. Aim camera to give field of view as needed to cover the alarm zone.
 4. Focus the lens to give a sharp picture (to include checking for day and night focus and image quality) over the entire field of view.
 5. Synchronize all cameras so the picture does not roll on the monitor when cameras are selected.
- N. Monitors:
1. Install the monitors as shown and specified in design and construction documents.

2. Connect all signal inputs and outputs as shown and specified.
3. Terminate video input signals as required.
4. Connect the monitor to AC power.

O. Switcher:

1. Install the existing switcher as shown in the design and construction documents, and according to the OEM.
2. Connect all subassemblies as specified by the manufacturer and as shown.
3. Connect video signal inputs and outputs as shown and specified; terminate video inputs as required.
4. Connect alarm signal inputs and outputs as shown and specified; connect control signal inputs and outputs for ancillary equipment or secondary control/monitoring sites as specified by the manufacturer and as shown.
5. Connect the switcher CPU and switcher subassemblies to AC power.
6. Load all software as specified and required for an operational VASS System configured for the site and building requirements, including data bases, operational parameters, and system, command, and application programs.
7. Provide the original and 2 backup copies for all accepted software upon successful completion of the endurance test.
8. Program the video annotation for each camera.

P. Video Encoder:

1. Install the existing Video Encoder per design and construction documents, and as specified by the OEM.
2. Connect analog camera inputs to video encoder.
3. Connect video encoder to VASS network.
4. Connect unit to AC power (UPS).
5. Configure the existing video encoder per manufacturer's recommendation and project requirements.

Q. Network Recording Equipment:

1. Install the NVR or video storage unit as shown in the design and construction documents, and as specified by the OEM.
2. Connect recording device to AC power (UPS).
3. Connect recording device to network switch as shown and specified.
4. Configure network connections
5. Provide recording unit programming per VA guidance and the requirements provided by the Owner. Programming shall include:

- a. Camera names
 - b. Screen views
 - c. Camera recording schedules (continuous and event) driven recording. Events include alarms from other systems (sensors), manual input, and video motion detection.
 - d. Video detection zones for each camera requiring video motion detection
 - e. Alarm interface
 - f. Alarm outputs
 - g. GUI maps, views, icons and actions
 - h. Reports
- R. Video Signal Equipment:
- 1. Install the video signal equipment as shown in the design and construction documents, and as specified by the OEM.
 - 2. Connect video or signal inputs and outputs as shown and specified.
 - 3. Terminate video inputs as required.
 - 4. Connect alarm signal inputs and outputs as required.
 - 5. Connect control signal inputs and outputs as required.
 - 6. Connect electrically powered equipment to AC power.
- S. Camera Housings, Mounts, and Poles:
- 1. Install the camera housings and mounts as specified by the manufacturer and as shown, provide mounting hardware sized appropriately to secure each camera, housing and mount with maximum wind and ice loading encountered at the site.
 - 2. Provide electrical and signal transmission cabling to the mount location via a hardened carrier system from the Physical Access Control System and Database Management to the device.
 - 3. Connect signal lines and AC power to the housing interfaces.

3.3 SYSTEM START-UP

- A. The Contractor shall not apply power to the VASS System until the following items have been completed:
- 1. VASS System equipment items and have been set up in accordance with manufacturer's instructions.
 - 2. A visual inspection of the VASS System has been conducted to ensure that defective equipment items have not been installed and that there are no loose connections.
 - 3. System wiring has been tested and verified as correctly connected as indicated.

4. All system grounding and transient protection systems have been verified as installed and connected as indicated.
5. Power supplies to be connected to the VASS System have been verified as the correct voltage, phasing, and frequency as indicated.
- B. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COTR. Provide a minimum of 7 days prior notice.
- C. Satisfaction of the above requirements shall not relieve the Contractor of responsibility for incorrect installation, defective equipment items, or collateral damage as a result of Contractor work efforts.

3.4 SUPPLEMENTAL CONTRACTOR QUALITY CONTROL

- A. The Contractor shall provide the services of technical representatives who are familiar with all components and installation procedures of the installed VASS System; and are approved by the COTR.
- B. The Contractor will be present on the job site during the preparatory and initial phases of quality control to provide technical assistance.
- C. The Contractor shall also be available on an as needed basis to provide assistance with follow-up phases of quality control.
- D. The Contractor shall participate in the testing and validation of the system and shall provide certification that the system installed is fully operational as all construction document requirements have been fulfilled.

3.5 DEMONSTRATION AND TRAINING

- A. All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, "GENERAL REQUIREMENTS".
- B. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of units.

-----END-----

SECTION 28 26 00
ELECTRONIC PERSONAL PROTECTION SYSTEM

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Salvage and reinstall existing complete Duress-Panic Alarms, Emergency Phones/ Call-Boxes, and Intercom Systems, data transmission wiring and a control station with its associated equipment, hereafter referred to as EPPS System.
- B. EPPS shall be integrated with monitoring and control system specified in Division 28 Section VIDEO SURVEILLANCE SYSTEMS PHYSICAL ACCESS CONTROL SYSTEM that specifies systems integration.

1.2 RELATED WORK

- A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.
- B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.
- C. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.
- D. Section 14 24 00 - HYDRAULIC ELEVATORS. Requirements for elevators.
- E. Section 26 05 21 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.
- F. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.
- G. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.
- H. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.
- I. Section 28 05 28.33 - CONDUITS AND BACK BOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.
- J. Section 28 13 00 - PHYSICAL ACCESS CONTROL SYSTEMS (PACS). Requirements for physical access control integration.
- K. Section 28 23 00 - VIDEO SURVEILLANCE. Requirements for security camera systems.

1.3 QUALITY ASSURANCE

- A. The Contractor shall be responsible for providing, installing, and the operation of the EPPS System as shown. The Contractor shall also provide certification as required.

- B. The security system shall be installed and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the security system is stand-alone or a part of a complete Information Technology (IT) computer network.
- C. The Contractor or security sub-contractor shall be a licensed security Contractor as required within the state or jurisdiction of where the installation work is being conducted.
- D. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.
- E. Product Qualification:
 - 1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
 - 2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.
- F. Contractor Qualification:
 - 1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of five (5) years experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Security Management System's (PACS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner's permission and representative, to verify the quality of installation and the references' level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to

install, program, and service the PACS. The Contractor shall only utilize factory-trained technicians to install, terminate and service controller/field panels and reader modules. The technicians shall have a minimum of five (5) continuous years of technical experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within 60 miles of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include appropriate diagnostic equipment to perform diagnostic procedures. The COTR reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.

2. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.
3. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination and testing.

G. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.4 SUBMITALS

- A. Submit below items in accordance with Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY and Master Specification Sections 01 33 23, SHOP DRAWING, PRODUCT DATA, AND SAMPLES, and Section 02 41 00, DEMOLITION.
- B. Provide certificates of compliance with Section 1.3, Quality Assurance.
- C. Provide a pre-installation and as-built design package in both electronic format and on paper, minimum size 48 x 48 inches (1220 x 1220 millimeters); drawing submittals shall be per the established project schedule.

D. Shop drawings and as-built packages shall include, but not be limited to:

1. Index Sheet that shall:
 - a. Define each page of the design package to include facility name, building name, floor, and sheet number.
 - b. Provide a list of all security abbreviations and symbols.
 - c. Reference all general notes that are utilized within the design package.
 - d. Specification and scope of work pages for all security systems that are applicable to the design package that will:
 - 1) Outline all general and job specific work required within the design package.
 - 2) Provide a device identification table outlining device Identification (ID) and use for all security systems equipment utilized in the design package.
2. Drawing sheets that will be plotted on the individual floor plans or site plans shall:
 - a. Include a title block as defined above.
 - b. Define the drawings scale in both standard and metric measurements.
 - c. Provide device identification and location.
 - d. Address all signal and power conduit runs and sizes that are associated with the design of the electronic security system and other security elements (e.g., barriers, etc.).
 - e. Identify all pull box and conduit locations, sizes, and fill capacities.
 - f. Address all general and drawing specific notes for a particular drawing sheet.
3. A riser drawing for each applicable security subsystem shall:
 - a. Indicate the sequence of operation.
 - b. Relationship of integrated components on one diagram.
 - c. Include the number, size, identification, and maximum lengths of interconnecting wires.
 - d. Wire/cable types shall be defined by a wire and cable schedule. The schedule shall utilize a lettering system that will correspond to the wire/cable it represents (example: A = 18 AWG/1 Pair Twisted, Unshielded). This schedule shall also provide the manufacturer's name and part number for the wire/cable being installed.

4. A system drawing for each applicable security system shall:
 - a. Identify how all equipment within the system, from main panel to device, shall be laid out and connected.
 - b. Provide full detail of all system components wiring from point-to-point.
 - c. Identify wire types utilized for connection, interconnection with associate security subsystems.
 - d. Show device locations that correspond to the floor plans.
 - e. All general and drawing specific notes shall be included with the system drawings.
5. A schedule for all of the applicable security subsystems shall be included. All schedules shall provide the following information:
 - a. Device ID.
 - b. Device Location (e.g. site, building, floor, room number, location, and description).
 - c. Mounting type (e.g. flush, wall, surface, etc.).
 - d. Power supply or circuit breaker and power panel number.
6. Detail and elevation drawings for all devices that define how they were installed and mounted.
- E. Pre-installation design packages shall be reviewed by the Contractor along with a VA representative to ensure all work has been clearly defined and completed. All reviews shall be conducted in accordance with the project schedule. There shall be four (4) stages to the review process:
 1. 35 percent
 2. 65 percent
 3. 90 percent
 4. 100 percent
- F. Provide manufacturer security system product cut-sheets. Submit for approval at least 30 days prior to commencement of formal testing, a Security System Operational Test Plan. Include procedures for operational testing of each component and security subsystem, to include performance of an integrated system test.
- G. Submit manufacture's certification of Underwriters Laboratories, Inc. (UL) listing as specified. Provide all maintenance and operating manuals per the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute (ANSI):
ANSI S3.2-09Method for measuring the Intelligibility of
Speech over Communications Systems
- C. Department of Justice American Disability Act (ADA)
28 CFR Part 362010 ADA Standards for Accessible Design
- D. Federal Communications Commission (FCC):
(47 CFR 15) Part 15Limitations on the Use of Wireless
Equipment/Systems
- E. National Fire Protection Association (NFPA):
70-11National Electrical Code
- F. National Electrical Manufacturers Association (NEMA)
250-08Enclosures for Electrical Equipment (1000 Volts
Maximum)
- G. Underwriters Laboratories, Inc. (UL):
305-08Standard for Panic Hardware
444-08Safety Communications Cables
636-01Standard for Holdup Alarm Units and Systems
- H. Uniform Federal Accessibility Standards (UFAS), 1984

1.6 COORDINATION

- A. Coordinate arrangement, mounting, and support of electronic safety and security equipment:
 - 1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
 - 2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
 - 3. To allow right of way for piping and conduit installed at required slope.
 - 4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.
- B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

- C. Coordinate location of access panels and doors for electronic safety and security items that are behind finished surfaces or otherwise concealed.

1.7 MAINTENANCE & SERVICE

A. General Requirements

- 1. The Contractor shall provide all services required and equipment necessary to maintain the entire integrated electronic security system in an operational state as specified for a period of one (1) year after formal written acceptance of the system. The Contractor shall provide all necessary material required for performing scheduled adjustments or other non-scheduled work. Impacts on facility operations shall be minimized when performing scheduled adjustments or other non-scheduled work. See also General Project Requirements.

B. Description of Work

- 1. The adjustment and repair of the security system includes all software updates, panel firmware, and the following new items computers equipment, communications transmission equipment and data transmission media (DTM), local processors, security system sensors, facility interface, and signal transmission equipment.

C. Personnel

- 1. Service personnel shall be certified in the maintenance and repair of the selected type of equipment and qualified to accomplish all work promptly and satisfactorily. The COTR shall be advised in writing of the name of the designated service representative, and of any change in personnel. The COTR shall be provided copies of system manufacturer certification for the designated service representative.

D. Schedule of Work

- 1. The work shall be performed during regular working ours, Monday through Friday, excluding federal holidays. These inspections shall include:
 - a. The Contractor shall perform two (2) minor inspections at six (6) month intervals or more if required by the manufacturer, and two (2) major inspections offset equally between the minor inspections to effect quarterly inspection of alternating magnitude.

- 1) Minor Inspections shall include visual checks and operational tests of all console equipment, peripheral equipment, local processors, sensors, electrical and mechanical controls, and adjustments on printers.
- 2) Major Inspections shall include all work described for Minor Inspections and the following: clean all system equipment and local processors including interior and exterior surfaces; perform diagnostics on all equipment; operational tests of the CPU, switcher, peripheral equipment, check and calibrate each sensor; run all system software diagnostics and correct all problems; and resolve any previous outstanding problems.

E. Emergency Service

1. The owner shall initiate service calls whenever the system is not functioning properly. The Contractor shall provide the Owner with an emergency service center telephone number. The emergency service center shall be staffed 24 hours a day 365 days a year. The Owner shall have sole authority for determining catastrophic and non-catastrophic system failures within parameters stated in General Project Requirements.
 - a. For catastrophic system failures, the Contractor shall provide same day four (4) hour service response with a defect correction time not to exceed eight (8) hours from notification.
Catastrophic system failures are defined as any system failure that the Owner determines will place the facility(s) at increased risk.
 - b. For non-catastrophic failures, the Contractor within eight (8) hours with a defect correction time not to exceed 24 hours from notification.

F. Operation

1. Performance of scheduled adjustments and repair shall verify operation of the system as demonstrated by the applicable portions of the performance verification test.

G. Records & Logs

1. The Contractor shall maintain records and logs of each task and organize cumulative records for each component and for the complete system chronologically. A continuous log shall be submitted for all devices. The log shall contain all initial settings, calibration, repair, and programming data. Complete logs shall be maintained and

available for inspection on site, demonstrating planned and systematic adjustments and repairs have been accomplished for the system.

H. Work Request

1. The Contractor shall separately record each service call request, as received. The record shall include the serial number identifying the component involved, its location, date and time the call was received, specific nature of trouble, names of service personnel assigned to the task, instructions describing the action taken, the amount and nature of the materials used, and the date and time of commencement and completion. The Contractor shall deliver a record of the work performed within five (5) working days after the work was completed.

I. System Modifications

1. The Contractor shall make any recommendations for system modification in writing to the COTR. No system modifications, including operating parameters and control settings, shall be made without prior written approval from the COTR. Any modifications made to the system shall be incorporated into the operation and maintenance manuals and other documentation affected.

J. Software

1. The Contractor shall provide all software updates when approved by the Owner from the manufacturer during the installation and 12-month warranty period and verify operation of the system. These updates shall be accomplished in a timely manner, fully coordinated with the system operators, and incorporated into the operations and maintenance manuals and software documentation. There shall be at least one (1) scheduled update near the end of the first year's warranty period, at which time the Contractor shall install and validate the latest released version of the Manufacturer's software. All software changes shall be recorded in a log maintained in the unit control room. An electronic copy of the software update shall be maintained within the log. At a minimum, the contractor shall provide a description of the modification, when the modification occurred, and name and contact information of the individual performing the modification. The log shall be maintained in a white 3 ring binder and the cover marked "SOFTWARE CHANGE LOG".

1.8 WARRANTY OF CONSTRUCTION.

- A. Warrant EPPS System work subject to the Article "Warranty of Construction" of FAR clause 52.246-21.
- B. Demonstration and training shall be performed prior to system acceptance.

1.9 GENERAL REQUIREMENTS

- A. For general requirements that are common to more than one section in Division 28 refer to Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.
- B. General requirements applicable to this section include:
 - 1. Performance Requirements,
 - 2. Delivery, Handling and Storage,
 - 3. Project Conditions,
 - 4. Equipment and Materials,
 - 5. Electrical Power,
 - 6. Lightning, Power Surge Suppression, and Grounding,
 - 7. Electronic Components,
 - 8. Substitute Materials and Equipment, and
 - 9. Like Items.

PART 2 - PRODUCTS**2.1 EQUIPMENT AND MATERIALS**

- A. General:
 - 1. All equipment shall be rated for continuous operation.
Environmental conditions (i.e. temperature, humidity, wind, and seismic activity) shall be taken under consideration at each facility and site location prior to installation of the equipment.
 - 2. All equipment shall operate on a 120 or 240 volts alternating current (VAC); 50 hertz (Hz) or 60 Hz Alternating Current (AC) power system unless documented otherwise in subsequent sections listed within this spec. All equipment shall have a battery back-up source of power that will provide 12 hours (hrs.) of run time in the event of a loss of primary power to the security systems until a backup generator comes on-line.
 - 3. The EPPS systems shall be designed, installed, and programmed in a manner that will allow for easy of operation, programming, servicing, maintenance, testing, and upgrading of the system.

4. All EPPS components located in designated "HAZARDOUS ENVIRONMENT" areas where fire or explosion could occur due to the presence of natural gases or vapors, flammable liquids, combustible residue, or ignitable fibers or debris, shall be rated Class II, Division I, Group F, and installed in accordance with National Fire Protection Association (NFPA) 70, National Electrical Code Chapter 5.
5. The Contractor shall provide the Contracting Officer with written verification, that the type of wire/cable being provided is recommended and approved by the OEM. Cabling shall meet the interconnecting wiring requirements of NFPA 70, National Electrical Code. The Contractor is responsible for providing the correct protection cable duct and/or conduit and wiring.
6. When interfacing with other communications or security subsystems the Contractor shall utilize interfacing methods that are approved by the Contracting Officer. At a minimum, an acceptable interfacing method requires not only a physical and mechanical connection; but also a matching of signal, voltage, and processing levels with regard to signal quality and impedance. The interface point must adhere to all standards described herein.
7. Systems shall be scaleable, not vendor specific, and allow expansion as required.
8. Wireless systems shall use ultrasonic, infrared and radio frequency waves to link distributed transmitters and receivers. Specific characteristics of particular facility will determine best application. Contractor is responsible for determining best system using prediction program to determine where readable signals can be obtained and identify "dead spots".
9. All hardwired alarms, switches, and junction boxes shall be protected from tampering and include line supervision.
10. The installation and placement of intercom units and emergency-call boxes in strategic locations shall also require that signage be posted near these devices. The signage, in accordance with Section 10 14 00, SIGNAGE shall communicate the location of the device and its unique identification number, and brief instruction on how to access/use the device. The signage may appear on the device, on a pole or wall near the device location and shall be printed in a manner that is easily read during daylight and hours of darkness.

2.2 EQUIPMENT ITEMS

- A. All systems shall be designed to provide continuous electrical supervision of the complete and entire system.
- B. Noise filters and surge protectors shall be provided for all intercommunications equipment to ensure protection from primary AC power surges and to ensure noise interference is not induced into low voltage data circuits.
- C. All alarm and initiating and signaling circuits shall be supervised for open circuits, short circuits, and system grounds. Main and Uninterrupted Power Supply (UPS) power circuits shall be supervised for any change in operating conditions (e.g. low battery, primary to back up battery, and UPS online). When an open, short or ground occurs in any system circuit, an audible and visual fault alarm signal shall be initiated at the master control station and all remote locations.
- D. Control Unit: Shall consist of the components to constantly monitor and verify alarm activation; identify zone of activation and location of activation.
- E. Audible Signal Device for Duress-Panic: Provides alarm activation and audible sound for alarms, as well as supervisory and trouble signals that shall be distinctive.
- F. Assessment: This capability shall consist of electronic devices required to visually and audibly verify the validity of alarms. Assessment also includes providing indication of tampering, fail-safe, low battery, and power losses.
- G. Alarm Monitoring and Reporting: Shall annunciate information to at least two (2) separate locations. The alarms shall maintain the capability to respond with local and remote visible and audible signals upon activation of an alarm. The alarms shall have the capability of operating in a silent mode, alerting personnel monitoring the system that the device has been activated.
- H. The intercom and emergency call-box systems shall be provided with normally acceptable speech intelligibility, defined as a score of at least 70% in accordance with ANSI S3.2
- I. Master Stations for Emergency Call Box and Security Intercoms:
 - 1. All master stations shall have a "call-in" switch to provide an audible and visual indication of incoming calls from remote stations. Individual visual indication shall identify the calling

station and status, and remain actuated until a call is answered by a master station.

2. Master stations shall be equipped with a handset with a switch for private conversations.
3. Intercom master stations shall also have an all-call feature, and have the ability to receive video from a video intercom unit.
4. Master stations shall have the capability to selectively communicate with any remote station by actuating assigned station number on a keypad or select button for that station.
5. Master stations may be standalone or can be integrated with the Physical Access Control System and Database Management. The Contractor will be responsible for the integration of the Master station with the Physical Access Control System and Database Management in accordance with OEM instructions and Section 28 13 16, PHYSICAL ACCESS CONTROL SYSTEM AND DATABASE MANAGEMENT.

J. Duress-Panic Alarms:

1. Housing shall be a rugged corrosion-resistant housing of stainless steel or Acrylonitrile Butadiene Styrene (ABS) molded plastic or similar material that is weather and dust proof.
2. Actuating device shall include a minimum of a plunger button whose head is recessed from the face/front edge of the housing and be designed to avoid accidental activation using switch guard or multiple buttons (i.e., requires pressing two (2) buttons simultaneously)
3. Wireless stationary devices will meet the same specifications as Personal Duress/Panic Alarms.
4. Alarm switch/button shall lock-in upon activation until manually reset with key or manufacture provided device.
5. The switch shall be a positive-acting, double-pole, and double-throw switch.
6. Duress/Panic alarms shall meet UL 305 Standard for Panic Alarms. To reduce the possibility of false alarms and ensure installation functionality UL 636 Standard for Holdup Alarms standards shall be met.
7. Alarms used for concealed application requires silent alarm notification to a monitoring station. They shall annunciate at the Physical Access Control System and Database Management, monitored by

a central station or direct connect to local police, depending on local ordinance requirements.

8. Shall be capable of being mounted for hand or foot use in a manner that is unable to be viewed by the public. Larger systems use a computer that intercepts and processes alarms and displays them on a monitor. The central computer can make an announcement over facility hand held radios, pagers or telephones, or at the Physical Access Control System and Database Management so that the other security personnel can be immediately notified. These systems shall be hardwired.
9. Components:
 - a. Transmitter
 - b. Locator subsystem
 - c. Receiver
 - d. Software
10. Wiring will be four (4) conductor #18 American Wire Gauge (AWG).
11. Duress-Panic Alarm Technical Characteristics:

Temperature Range	0° to 110°F (-17.8°C to 43.3°C)
Nominal Voltage	12 V DC @ 6 mA
Current	Max 8 mA
Operational Voltage	7 V DC to 15 V DC
Operational life	Rated for 0,000 activations
Battery Activations	500
Actuator	Dual button plunger with activation lock
LED	Bi-color - on and activated

K. Personal Duress-Panic Alarm:

1. These systems are wireless only and can be worn as a belt clip, with a neck lanyard or with a wrist band. These alarms can be either active (manually operated) or passive mode (if detached from body, or body position changes to a prone position) alarm activates. They also provide identification of individual and location.
2. Components:
 - a. Transmitter
 - b. Repeaters (for wireless and increase distance)
 - c. Locator subsystem

- d. Receiver
 - e. Software
3. Wireless transmitters shall send a periodic check in signal to the main computer or processor. If the signal is not received according to a definable time window, a supervisory alert will be generated. Wireless devices shall report a low battery condition well in advance to the failure of the battery.
 4. Shall consist of a compact lightweight transmitter enclosed in a durable fire-retardant ABS plastic case that can be easily worn.
 5. Transmitters may use ultrasonic, radio frequency (RF), or infrared (IR) to transmit signals. Each has advantages and disadvantages. Selection of system shall be dependent on defined usage and range of communications required.
 6. Sensors shall be adjustable to activate automatically when mounted on a belt and the user is in a horizontal position for longer than one (1) to fifteen (15) minutes. Adjustment capability shall not be accessible to personnel wearing the panic alarm device.
 7. Radio frequencies for transmitter will comply with Federal Communication Commission (FCC) regulations.
 8. Radio frequency transmitters will use frequency modulation signal hopping.
 9. Personal Duress-Panic Alarm Technical Characteristics:

Temperature Range	0° to 110°F (-17.8°C to 43.3°C)
Nominal Voltage	12 V DC @ 6 mA
Current	Max 8 mA
Operational Voltage	7 V DC to 15 V DC
Battery Life	Regular battery 60 hour duration or Nickel-Metal Hydride (NiMH) rechargeable 12 hrs. 20 hr. per charge
Battery Lifespan	500 activations
Actuator	Plunger with activation lock
LED	Bi-color - on and activated
Passive Activation	Adjustable Prone position 1-15 minutes

L. Strobes and Beacon:

1. Used for visual recognition of device activation once an emergency phone or intercom is activated. They provide unit identification and quick location of the caller.
2. Strobes and Beacons Technical Characteristics:

STROBE	
Input Voltage	10.5 - 28 VDC or VAC
Input Current	Average 1 amp
Input Current	Peak 3 amp
Intensity	1,000,000 candlepower
Control Circuit Output	2 mA max
Flash Rate	60 - 75 times per minute
BEACON	
Input Voltage	10.5 - 28 VAC or VDC
Input Current	@24.0 : 427 MA

M. Security Intercoms:

1. Shall be utilized to assist in controlling entry to a site, parking lot, facility, main and alternate entries, loading dock areas. They are also used for emergencies. These systems shall have both two-way voice communications and video (CCTV) capabilities built in. Intercoms may also have key-pads that allow for specific call connections or may provide a directory. These systems consist of both remote and master stations. Intercom shall be externally powered for distances over 1,500 feet (457.2 meters) (m) from the master control unit.
2. The Intercom shall be programmable from a remote location and have a three number dialing capability per activation button, or include a keypad for dialing authorized and published extensions.
3. The Intercom shall have an internally mounted electronics enclosure and auxiliary power.
4. The Contractor shall be responsible for integration of intercom with auxiliary output to electronic or magnetic door releases, as well as CCTV, as required.

5. Security Intercom Technical Characteristics:

Construction	12 gauge (2.8mm) #4 brushed stainless steel face plate
Operating Temperature	-4°F to +149°F (-20°C to +65°C)
Communication	2-way hands-free communication
Digital Capacity	Up to 18 digits, including pauses, for each of two (2) phone numbers
Dialing Speed	Minimum 10 tones per second
Power Source	Phone line powered or PBX
Connection	Parallel tip and ring connected to RJ11 connector for quick installation
Memory	EPROM
Circuit Protection	Lightening suppressed and full wave polarity guarded
Programming	Non-volatile EEPROM programming can be done from any telephone. No battery back-up needed
Wiring Requirements	1 twisted-shielded pair (gauge depends on distance)
Camera	Option for pin-hole color camera or Integration with existing CCTV
LED	Call confirmation
Activation	1.5 in. (38.1mm) minimum piezoelectric button
Labeling	"Information" or "Help"

2.3 INSTALLATION KIT

- A. General: A kit shall be provided that, at a minimum, includes all connectors and terminals, labeling systems, barrier strips, wiring blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, etc., required to accomplish a neat and secure installation. Unfinished or unlabeled wire connections will not be allowed. Contractor shall turn over to the Contracting Officer all unused and partially opened installation kit boxes, coaxial cable reels, conduit, cable tray, and/or cable duct bundles, wire rolls, and physical installation hardware. This is an acceptable alternate to the individual spare equipment requirement as long as the minimum spare items are provided in this count. The following installation sub-kits are required as a minimum:

B. System Grounding:

1. The grounding kit shall include all cable in accordance with UL 444 Communications Cables, and installation hardware required. All grounding will be according to the NEC.
2. This includes, but is not limited to:
 - a. Coaxial Cable Shields
 - b. Control Cable Shields
 - c. Data Cable Shields
 - d. Conduits
 - e. Cable Duct
 - f. Cable Trays
 - g. Power Panels
 - h. Connector Panels

C. Coaxial Cable: The coaxial cable kit shall include all coaxial connectors, cable tying straps, heat shrink tabbing, hangers, clamps, etc., required to accomplish a neat and secure installation.

D. Wire And Cable: The wire and cable kit shall include all connectors and terminals, barrier straps, wiring blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.

E. Equipment Interface: The equipment interface kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface Systems and Subsystems according to the OEM requirements and this specification.

F. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to label each subsystem according to the OEM requirements, as-installed drawings, and this specification.

G. Documentation: The documentation kit shall include any item or quantity of items, computer discs, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to correctly provide the system documentation as required by this document and explained herein.

PART 3 - EXECUTION

3.1 INSTALLATION

A. System installation shall be installed in accordance with NFPA 731 Standards for the Installation of Electric Premises Security Systems and appropriate installation manual for each type of subsystem designed, engineered, and installed.

- B. The location and type of duress, intercom, or call-box to be installed will be in accordance with physical security requirements unique to each VA facility.
- C. For EPPS systems (i.e. use current panic/duress and emergency call boxes) that can operate through existing VA facility telephone system lines, software programming and hardware, refer to Section 27 51 23, INTERCOMMUNICATIONS AND PROGRAM SYSTEMS to integrate additional EPPS equipment.
- D. Concealed duress/panic devices shall be mounted in such a way that their location is only known by the person having knowledge of the activating device location. No wiring shall be exposed to identify the location of the activation device.
- E. Floor mounted duress alarms shall be attached to millwork on floor. When mounted under millwork, wiring shall be routed in millwork to conduit system via flexible conduit.
- F. Hard-wired switches shall be wired to individual alarm points within the Advanced Processing Controller (apC).
- G. Wall and post mounted stations shall be mounted to meet UFAS/ADA requirements and use tamper proof bolts and screws. Testing will be finished before installation of fasteners.
- H. Cleaning: Subsequent to installation, clean each system component of dust, dirt, grease, or oil incurred during installation in accordance to manufacture instructions.
- I. Provisions shall be made for systems in high-noise areas or areas with electrical interference environments.
- J. Adjustment/Alignment/Synchronization: Contractor shall prepare for system activation by following manufacturer's recommended procedures for adjustment, alignment, or programming. Prepare each component in accordance with appropriate provisions of the component's installation, operations, and maintenance instructions.

3.2 WIRELINE DATA TRANSMISSION

- A. Installation: The Contractor shall install all system components including Owner furnished equipment, and appurtenances in accordance with the manufacturer's instructions, ANSI C2 and as shown, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable data transmission system.

- B. Identification and Labeling: The Contractor shall supply permanent identification labels for each cable at each end that will appear on the as-built drawings. The labeling format shall be identified and a complete record shall be provided to the Owner with the final documentation. Each cable shall be identified by type or signal being carried and termination points. The labels shall be printed on letter size label sheets that are self laminated vinyl that can be printed from a computer data base or spread sheet. The labels shall be E-Z code WES12112 or equivalent.
- C. The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform all testing.
- D. Transient Voltage Surge Suppressors (TVSS): The Contractor shall mount TVSS within 3 m (118 in) of equipment to be protected inside terminal cabinets or suitable NEMA 1 enclosures. Terminate off-premise conductors on input side of device. Connect the output side of the device to the equipment to be protected. Connect ground lug to a low impedance earth ground (less than 10 ohms) via Number 12 AWG insulated, stranded copper conductor.
- E. Contractor's Field Test: The Contractor shall verify the complete operation of the data transmission system during the Contractor's Field Testing. Field test shall include a bit error rate test. The Contractor shall perform the test by sending a minimum of 1,000,000 bits of data on each DTM circuit and measuring the bit error rate. The bit error rate shall not be greater than one (1) bit out of each 100,000 bits sent for each dial-up DTM circuit, and one (1) bit out of 1,000,000 bits sent for each leased or private DTM circuit. The Contractor shall submit a report containing results of the field test.
- F. Acceptance Test and Endurance Test: The wire line data transmission system shall be tested as a part of the completed IDS and EECS during the Acceptance test and Endurance Test as specified.
- G. Identification and Labeling: The Contractor shall supply identification tags or labels for each cable. Cable shall be labeled at both end points and at intermediate hand holes, manholes, and junction boxes. The labeling format shall be identified and a complete record shall be provided to the Owner with the final documentation. Each cable shall be identified with type of signal being carried and termination points.

3.3 WIRING

- A. Wiring Method: Install cables in raceways and as otherwise indicated. Conceal raceways and wiring except in unfinished spaces.
- B. Wiring within Enclosures: Bundle, lace, and train conductors to terminal points with no excess and without exceeding manufacturer's limitations on bending radii. Provide and use lacing bars and distribution spools.
- C. Splices, Taps, and Terminations: For power and control wiring, use numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A and UL 486B.
- D. Grounding: Provide independent-signal circuit grounding recommended in writing by manufacturer.

3.4 FIELD QUALITY CONTROL

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect field-assembled components and equipment installation and supervise pretesting, testing, and adjusting of video surveillance equipment.
- B. Inspection: Verify that units and controls are properly installed, connected, and labeled, and that interconnecting wires and terminals are identified.
- C. Test Schedule: Schedule tests after pretesting has been successfully completed and system has been in normal functional operation for at least 14 days. Provide a minimum of 10 days' notice of test schedule.
- D. Operational Tests: Perform operational system tests to verify that system complies with Specifications. Include all modes of system operation. Test equipment for proper operation in all functional modes.
- E. Remove and replace malfunctioning items and retest as specified above.
- F. Record test results for each piece of equipment.
- G. Retest: Correct deficiencies identified by tests and observations and retest until specified requirements are met.

3.5 ADJUSTING

- A. Occupancy Adjustments: When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions and to optimize performance of the

installed equipment. Tasks shall include, but are not limited to, the following:

1. Check cable connections.
2. Check proper operation of detectors.
3. Recommend changes to walk through detectors, X-ray machines, and associated equipment to improve Owner' utilization of security access detection system.
4. Provide a written report of adjustments and recommendations.

3.6 CLEANING

- A. Clean installed items using methods and materials recommended in writing by manufacturer.

3.7 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain electronic personal protection system (EPSS) equipment.
 1. Train Owner's maintenance personnel on procedures and schedules for troubleshooting, servicing, and maintaining equipment.
 2. Demonstrate methods of determining optimum alignment and adjustment of components and settings for system controls.
 3. Review equipment list and data in maintenance manuals.
 4. Conduct a minimum of two hours' training.

3.8 TESTS AND TRAINING

- A. All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS and Section 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

-----END-----

SECTION 28 31 10
FIRE ALARM SYSTEM (NETWORK)

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section of the specifications includes modifications to the existing fire alarm system and the furnishing, installation, and connection of relocated and new devices to the existing fire alarm equipment. It shall include, but not be limited to, alarm initiating devices, alarm indicating devices, control panels, auxiliary control devices, power supplies, and wiring as shown on the Drawings.
- B. The existing systems in building 67 (Main Hospital) will remain as a standalone system.
- C. All fire alarm work (final connections and programming) shall be done by the current VA fire alarm maintenance contractor, Fire Sentry.
- D. Fire Alarm Signals: Building No. 67 has automatic digitized voice fire alarm signals with emergency manual voice override to notify hospital staff of an emergency.

1.2 SCOPE

- A. Modify the existing control panel as required to add the new devices and functions indicated on the drawings.
- B. All existing fire alarm equipment, wiring, devices and sub-systems shall remain unless indicated for removal on the Drawings. All removed equipment not specified to remain property of the Medical Center shall become the property of the Contractor and shall be disposed of properly.
- C. The design, materials, equipment, installation, inspection and testing of the fire alarm system shall be in accordance with the required and advisory provisions of NFPA 72 and Underwriters Laboratories, Inc.
- D. Existing fire alarm horns, bells, chimes, door holders, valve tamper switches water and flow switches shall remain unless indicated for removal on the Drawings.
- E. Basic Performance:
 - 1. Signaling line circuits connecting building fire alarm control panels shall be wired in accordance with NFPA 72, Table 3-6.1, Style 5.
 - 2. Signaling line circuits within buildings shall be wired in accordance with NFPA 72, Table 3-6.1, Style 1.0.
 - 3. Initiating device circuits shall be wired in accordance with NFPA 72, Table 3-5.1, Style C.
 - 4. Notification circuits shall be wired in accordance with NFPA 72, Table 3-7.1, Style Y.
 - 5. Alarm, supervisory and trouble signals from each building fire alarm control panel shall be encoded by UL listed electronic devices onto the fiber optics communication network.

1.3 RELATED WORK

- A. Section 013323, SAMPLES AND SHOP DRAWINGS.
- B. Section 078400, FIRE STOPPING
- C. Section 090000, CUTTING AND PATCHING.
- D. Section 099100, PAINTING.
- F. Section 260511, BASIC METHODS AND REQUIREMENTS (ELECTRICAL).
- G. Section 260533, CONDUIT SYSTEMS.
- H. Section 260521, CABLES, LOW VOLTAGE (600 VOLTS AND BELOW).

1.4 SUBMITTALS

- A. Submit in accordance with section 013323, SAMPLES AND SHOP DRAWINGS and Section 260511, BASIC METHODS AND REQUIREMENTS (ELECTRICAL).

- B. Shop Drawings;

- 1. Detailed drawings in accordance with NFPA 72. Drawings shall be prepared using AutoCad Release 2008 software and include all contractors information. Layering and device symbolism shall be by VA criteria as provided by the COTR. Bid drawing files on AutoCad will be provided to the Contractor at the pre-construction meeting.
 - 2. Include dimensions, mounting requirements, equipment layout, device arrangement, complete wiring diagrams (including floor plans), and terminal cabinet connection diagrams with terminal identifications for new devices.
 - 3. On a riser diagram or the floor plan drawings, show door holder interface and auxiliary functions and wire color code schedule.
 - 4. Prior to final inspection, the Contractor shall deliver to the COTR one (1) set of reproducible, as-built drawings, two blueline copies and one (1) set of the as-built drawing computer files on AutoCad Release 2008. As-built drawings shall indicate all new or existing conduit used for the fire alarm system.

- C. Manuals:

- 1. Submit simultaneously with the shop drawings, companion copies of complete technical data sheets, power requirements, device wiring diagrams, dimensions, and information for ordering replacement parts.
 - a. Wiring diagrams shall have their terminals identified to facilitate installation, operation, expansion and maintenance.
 - b. Wiring diagrams shall indicate internal wiring for each item of equipment and the interconnections between the items of equipment.

- c. Provide a clear and concise description of operation which gives, in detail, the information required to properly operate, inspect, test and maintain the equipment and system.
 - d. Provide standby battery calculations under normal operating and alarm modes. Verify existing battery capacity is adequate after addition of devices. Replace or provide additional batteries as required to support additional devices.
 - e. Include information indicating who will provide emergency service and perform post contract maintenance.
 - f. Provide a replacement parts list with current prices. Include a list of recommended spare parts, tools, and instruments for testing and maintenance purposes.
 - g. A computerized preventative maintenance schedule for all equipment.
 - h. Furnish manuals in loose-leaf binder or manufacturer's standard binder.
2. Prior to final inspection, deliver four copies of the final updated operating and maintenance manual to the COTR.
- a. The manual shall be updated to include any information necessitated by the project.
 - b. Complete "As installed" wiring and schematic diagrams shall be included which show all items of equipment and their interconnecting wiring. Show all final terminal identifications.
 - c. Complete listing of all programming information including all control events per device.
 - d. Certificate of Installation as required by NFPA 72 for each building system.
- D. Certifications:
- 1. Together with the shop drawing submittal, submit a certification from the control panel manufacturer indicating that the proposed supervisor of installation and the proposed performer of contract maintenance is an authorized representative of the major equipment manufacturer. Include name and address in the certification.
 - 2. Together with the shop drawing submittal, submit a certification from the major equipment manufacturer that the wiring and connection diagrams meet this specification, UL and NFPA 72 requirements.

1.5 GUARANTY

- A. All work performed and all material and equipment furnished under this contract shall be free from defects and shall remain so for a period of three (3) years from the date of acceptance of the entire installation by the Contracting Officer.

1.6 GUARANTY PERIOD SERVICES

- A. Complete inspection, testing, maintenance and repair service for the fire alarm system shall be provided, by a factory trained authorized representative of the manufacturer of the major equipment for a period of three years from the date of acceptance of the entire installation by the Contracting Officer.
- B. Contractor shall provide all necessary test equipment, parts and labor to perform required inspection, testing, maintenance and repair.
- C. All inspection, testing, maintenance and permanent records required by NFPA 72, and recommended by the equipment manufacturer shall be provided. Work shall include operation of sprinkler system alarm and supervisory devices for any modifications to the existing system.
- D. Maintenance and testing shall be performed in accordance with NFPA 72. Coordinate with existing preventive maintenance schedule and describe the protocol for preventive maintenance of additional equipment. The schedule shall include a systematic examination, adjustment and cleaning of all additional equipment.
- E. Non-included Work: Repair service shall not include the performance of any work due to improper use, accidents, or negligence for which the contractor is not responsible.
- F. Service and emergency personnel shall report to the Engineering Office or their authorized representative upon arrival at the hospital and again upon the completion of the required work. A copy of the work ticket containing a complete description of the work performed and parts replaced shall be provided to the VA Safety Office or authorized representative.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in text by the basic designation only.
- B. National Fire Protection Association (NFPA):
 - 70-1999National Electrical Code (NEC).
 - 72-1999National Fire Alarm Code.

90A-1999Installation of Air Conditioning and Ventilating Systems.

101-1997 Life Safety Code

C. Underwriters Laboratories, Inc. (UL):

Fire Protection Equipment Directory, 2000 ~~1996~~ edition.

D. Factory Mutual Engineering Corporation (FM)

Fire Protection Approval Guide, 2000 edition

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIAL, GENERAL

- A. All equipment and components shall be new, and the manufacturer's current model. The equipment shall be tested and listed by Underwriters Laboratories, Inc., or Factory Mutual Research Corporation for use as an extension of the existing Edwards fire alarm system. The authorized representative of the existing equipment manufacturer shall install and be responsible for satisfactory total system operation and its certification.
- B. Existing equipment shall be reused and revised as required to incorporate new and relocated devices.

2.2 CONDUIT AND WIRE

A. Conduit:

- 1. All new and reused conduit shall be installed in accordance with NFPA 70.
- 2. Conduit fill shall not exceed 40 percent of interior cross sectional area.
- 3. All new conduit shall be 3/4 inch minimum.

B. Wire:

- 1. All existing wiring shall be replaced and installed in a conduit or raceway.
- 2. Wiring shall be in accordance with NEC article 760 and as recommended by the manufacturer of the fire alarm system. All wires shall be sized and color coded in accordance with the following table. Number of conductors shall be as recommended by the fire alarm system manufacturer.

EXISTING FIRE ALARM WIRING SCHEDULE			
SYMBOL	APPLICATION	WIRE SIZE / TYPE	DESCRIPTION
(SG)	SIGNATURE DATA LINE (1) RED+ (1) BLACK- IN RED OUTER JACKET	#16AWG / FPLR PAIR	ADDRESSABLE DEVICES, e.i. Pull Stations, Smoke & Heat Detectors, Key Test Stations, etc.
(UG SG)	UNDER GROUND SIGNATURE DATA LINE (1) RED+ (1) BLACK- BOTH YELLOW BANDED	#14 SOLID / THHN/THWN	ADDRESSABLE CIRCUITRY leaving one building to enter another building thru underground raceway.
(NAC)	AUDIBLE / VISUAL CIRCUIT (1) ORANGE+ (1) BROWN-	#12 STRANDED / THHN/THWN	NOTIFICATION DEVICES, e.i. Horns, Strobes, Horn/Strobes.
(UG NAC)	UNDER GROUND AUDIBLE / VISUAL CIRCUIT (1) ORANGE+ (1) BROWN-	#12 STRANDED / THHN/THWN	ADDRESSABLE CIRCUITRY leaving one bldg. to enter another bldg. thru underground raceway.
(NETA)	NETWORK AUDIO LOOP (1) RED+ (1) BLACK- IN BLUE OUTER JACKET	#16AWG / SH-FPLR PAIR	CIRCUITRY between FACP's with speakers.
(AR)	AUDIO RISER (1) RED+ (1) BLACK- IN BLACK OUTER JACKET	#14AWG / FPLR PAIR	CIRCUITRY from Amplifier to CC2 and from CC2 to CC2.
(SP)	SPEAKER CIRCUIT (1) WHITE+ (1) BLUE-	#14 SOLID / THHN/THWN	NOTIFICATION DEVICES, Speakers only
(24VDC)	24VDC POWER (1) RED+ (1) BLACK-	#14 SOLID / THHN/THWN	24VDC CIRCUITRY from FACP to auxiliary modules.
(DM)	DOOR HOLDER POWER (1) YELLOW+ (1) PURPLE-	#14 SOLID / THHN/THWN	SPECIAL 24VDC CIRCUITRY from FACP to door magnetic holders.
(CONV)	CONVENTIONAL ZONE (1) PINK+ (1) TAN-	#14 SOLID / THHN/THWN	DRY CONTACTS, e.i. PIV's, Tampers, and Flows.
(LED)	SIGA-LED (LED) (1) GRAY+ (1) GREEN WITH YELLOW STRIPE-	#14 SOLID / THHN/THWN	CIRCUITRY from Detectors to Remote LED.
(RMIC)	REMOTE MICROPHONE (1) RED+ (1) BLACK- IN BLUE OUTER JACKET WITH RED BANDING	#16AWG / SH-FPLR PAIR	CIRCUITRY from ASU in FACP-85 to FACP-67 then cascade to FACP- 88/13 and FACP-27.
(RMICK)	REMOTE MICROPHONE KEY (1) RED+ (1) BLACK- IN BLUE OUTER JACKET WITH BLACK BANDING	#16AWG / SH-FPLR PAIR	CIRCUITRY from ASU in FACP-85 to FACP-67 then cascade to FACP- 88/13 and FACP-27.
(NETD)	FIBER OPTIC NETWORK DATA ORANGE	2 PLENUM ZIP CORD	FIBER from building breakout to building FACP.

3. Signaling line circuits shall be twisted and shielded unless specifically excepted by the fire alarm equipment manufacturer in writing.
4. Any fire alarm system wiring which extends outside of a building shall have additional power surge protection to protect equipment from physical damage and false signals due to lighting, voltage and current induced transients.

C. Terminal Boxes, Junction Boxes, and Cabinets:

1. Shall be galvanized steel in accordance with UL requirements.
2. All new and reused boxes shall be 4-11/16" square, extra deep, installed in accordance with NFPA 70.
3. New and existing covers shall be repainted red and shall be identified with white markings as "FA" for junction boxes and as "Fire Alarm System" for cabinets and terminal boxes. Lettering shall be a minimum of 3/4" high.
4. Terminal boxes and cabinets shall have a volume 50 percent greater than required by the NFPA 70. Minimum sized wire shall be considered as 14 AWG for calculations purposes.
5. Terminal boxes and cabinets shall have identified pressure type terminal strips, and shall be located at the base of each riser.

2.3 BATTERY AND CHARGER

A. Batteries

1. Battery shall be of the sealed lead acid maintenance free type, 24-volt nominal.
2. Battery shall have sufficient capacity to power the fire alarm system for not less than four hours plus five minutes of alarm to an end voltage of 1.14 volts per cell, upon a normal AC power failure. System load shall include the power required by the electromagnetic door holders.
3. Battery racks shall be steel with an alkali-resistant finish.

B. Battery Charger:

1. Shall be completely automatic, with constant potential charger maintaining the battery fully charged under all service conditions. Charger shall operate from a 120-volt, 60 hertz emergency power source.
2. Shall be rated for fully charging a completely discharged battery within 48 hours while simultaneously supplying any loads connected to the battery.
3. Shall have protection to prevent discharge through the charger.
4. Shall have protection for overloads and short circuits on both AC and DC sides.
5. A trouble condition shall actuate the fire alarm trouble signal.
6. Charger shall have automatic AC line voltage regulation, automatic current-limiting features, and adjustable voltage controls.

2.4 VOICE COMMUNICATION SYSTEM (VCS) (EXISTING)

A. General:

1. An existing emergency voice communication system is installed throughout Building No. 67.
2. Upon receipt of a signal from the building fire alarm system the VCS shall automatically transmit prerecorded fire alarm messages throughout the building or building group.

B. Speaker Circuit Control Panel (Existing):

1. The speaker circuit control panel shall include switches to manual activate or deactivate speaker circuits grouped by floor in the system.

C. Speaker Circuit Arrangement:

1. Speaker circuits shall be arranged such that there is one speaker circuit per floor of each building.
2. Speaker circuits and control equipment shall be arranged such that loss of any one speaker circuit will not cause the loss of any other speaker circuit in the system.

2.5 ALARM NOTIFICATION DEVICES

A. Speakers:

1. Shall match existing speakers.
2. Dual coil type and operate on either 25 VRMS or 70.7 VRMS with field selectable output taps from 0.5 to 2.0W and originally installed at the one-half watt tap. Speakers shall provide a minimum sound output of 80 dBA at ten feet with the one-half watt tap.
3. Frequency response shall be a minimum of 400 HZ to 4000 HZ.
4. 4" or 8" speakers ceiling mounted with white colored baffles in areas with suspended ceilings and wall mounted in areas without ceilings.
5. Speaker in fire alarm control room shall be equipped with a volume control dial.

B. Strobes:

1. Shall match existing strobes.
2. Xenon flash tube type 15 or 75 candela rated, with a minimum 1 HZ and maximum 2 HZ flash rate.
3. Backplate shall be red with ½-inch permanent red letters. Lettering to read "Fire" and be visible from all viewing directions.
4. Each strobe circuit shall have a minimum of twenty (20) percent spare capacity.

2.6 ALARM INITIATING DEVICES

A. Manual Fire Alarm Stations

1. Shall match existing manual fire alarm stations.
2. Shall be non-breakglass address reporting type.
3. Station front shall be constructed of a durable material such as cast or extruded metal or high impact plastic. Stations shall be semi-flush type.
4. Stations shall be of single action pull down type with suitable operating instructions provided on front in raised or depressed letters, and clearly labeled "FIRE".
5. Operating handles shall be constructed of a durable material. On operation, the lever shall lock in alarm position and remain so until reset. A key shall be required to gain front access for resetting, or conducting tests and drills.
6. Unless otherwise specified, all exposed parts shall be of color red and have a smooth, hard, durable finish.
7. Provide six clear plastic guards with internal alarm horns for manual fire alarm stations. Guards to be installed where directed by the COTR.

B. Smoke Detectors

1. Shall match existing smoke detectors.
2. Smoke detectors shall be UL listed for use with the fire alarm control panel being furnished.
3. Smoke detectors shall be the 2-wire analog type complying with applicable UL Standards for system type detectors. Smoke detectors shall be installed in accordance with the manufacturer's recommendations and NFPA 72.
4. Detectors shall have an indication lamp to denote an alarm condition. Provide remote indicator lamps and identification plates where detectors are concealed from view. Locate the remote indicator lamps and identification plates flush mounted on walls so they can be observed from a normal standing position.
5. All spot type and duct type detectors installed shall be of the photoelectric type.
6. Photoelectric detectors shall be factory calibrated and readily field adjustable. The sensitivity of any photoelectric detector shall be factory set at 3.0 plus or minus 0.25 percent obscuration per foot.
7. Single station 120VAC (with integral battery backup) powered smoke detectors shall be provided in residence sleeping rooms in accordance with NFPA 72. A single 120VAC circuit may be used to power groups of detectors.

C. Water Flow Switches

1. Shall match existing flow switches.
2. Wet pipe water flow switches or dry pipe alarm pressure switches for sprinkler systems shall be connected to the fire alarm system by way of an address reporting interface device.
3. All new water flow switches shall be of a single manufacturer and series and non-accumulative retard type.
4. Shall have an alarm transmission delay time which is conveniently adjustable from 0 to 60 seconds. Initial settings shall be 30-45 seconds.
5. Water flow switches denoted "F" for future shall not be installed under this contract. Fire alarm contractor shall provide conduit system, wiring and addressable interface device only at these locations for devices to be installed under future projects.

2.7 SUPERVISORY DEVICES

A. Induct Smoke Detectors

1. Shall match existing induct smoke detectors.
2. Duct detectors shall be provided and connected under this section. Detectors shall be listed and labeled for in-duct installation. Detectors shall be provided with an approved duct housing mounted exterior to the duct, and shall have perforated sampling tubes extending across the full width of the duct (wall to wall).
3. Interlocking with fans shall be provided as specified hereinafter under Part 3.2, "TYPICAL OPERATION".
4. Provide remote indicator lamps, key test stations and identification nameplates ("induct smoke detector AHU-X") for all duct detectors. Locate key test stations in plain view on walls or ceilings so that they can be observed and operated from a normal standing position.

B. Sprinkler and Standpipe System Supervisory Switches:

1. Shall match existing supervisory switches.
2. Each sprinkler system water supply control valve, riser valve or zone control valve, and each standpipe system riser control valve shall be equipped with a supervisory switch. Standpipe hose valves, and test and drain valves shall not be equipped with supervisory switches.
3. PIV (post indicator valve) or main gate valve shall be equipped with a supervisory switch.
4. Existing valve supervisory switches shall be connected to the fire alarm system by way of address reporting interface device.
5. The mechanism shall be contained in a weatherproof die-cast aluminum housing, which shall provide a 3/4-inch tapped conduit entrance and incorporate the necessary facilities for attachment to the valves.

6. The entire installed assembly shall be tamper-proof and arranged to cause a switch operation if the housing cover is removed, or if the unit is removed from its mounting.
7. Valve tamper switches denoted "F" for future shall not be installed under this contract. Fire alarm contractor shall provide conduit system, wiring and addressable interface devices only at these locations for devices to be installed under future projects.
8. Where dry-pipe sprinkler systems are installed, high and low air pressure supervisory switches shall be provided and monitored by way of an address reporting interface devices.

2.8 ADDRESS REPORTING INTERFACE DEVICE

- A. Shall have unique addresses which report directly to the building fire alarm panel.
- B. Shall be configurable to monitor normally open or normally closed devices for both alarm and trouble conditions.
- C. Shall have terminal designations clearly differentiating between the circuit to which they are reporting from and the device which they are monitoring.
- D. Shall be UL listed for fire alarm use and compatibility with the panel to which they are connected.
- E. Shall be mounted in weatherproof housings if mounted exterior to a building.

2.9 ELEVATOR CONTROL

- A. Remove existing control relay modules at elevator control equipment being removed.
- B. The contractor shall revise connections from the fire alarm control relay module to elevator control equipment being removed.

2.10 SMOKE BARRIER DOOR CONTROL

- A. Electromagnetic Door Holders:
 1. New door holders shall be a standard wall mounted electromagnetic type. In locations where doors do not come in contact with the wall when in the full open position, an extension post shall be added to the door bracket.
 2. Operation shall be by 24 volt DC supplied from a battery located at the main fire alarm control panel. Door holders shall be coordinated as to voltage, ampere drain, and voltage drop with the battery, battery charger, wiring and fire alarm system for operation as specified.

- B A maximum of twelve door holders shall be provided for each circuit.
- C. Door holder control circuits shall be electrically supervised.
- D. Smoke detectors shall not be incorporated as an integral part of door holders.

2.11 UTILITY LOCKS AND KEYS:

All control panels, annunciator panels, manual pull stations and lockable cabinets shall be provided with a single standardized utility lock and key (match existing).

PART 3 - EXECUTION

3.1 INSTALLATION:

- A. Installation shall be in accordance with NFPA 70 and 72, as shown on the drawings, and as recommended by the major equipment manufacturer.
- B. All new conduit junction boxes, conduit supports and hangers shall be concealed in finished areas and may be exposed in unfinished areas. All existing accessible conduit not reused shall be removed.
- C. All new or reused exposed conduit shall be painted to match surrounding finished areas.
- D. Existing devices which are reused shall be properly mounted and installed. Mounting surfaces shall be repatched and re-painted as necessary to match existing.
- E. All fire detection and alarm system devices, control panels and remote annunciators shall be flush mounted when located in finished areas and may be surface mounted when located in unfinished areas. Exact locations to be approved by the COTR.
- F. Speakers shall be ceiling mounted and fully recessed in areas with suspended ceilings. Speakers shall be wall mounted and recessed in finished areas without suspended ceilings. Speakers may be surface mounted in unfinished areas. Fire alarm connection to the secondary coil of each speaker.
- G. Strobes shall be flush wall mounted 80" above the floor or 6" below ceiling, whichever is lower. Locate and mount to maintain a minimum 3 foot clearance from side obstructions. Install 15 candela rated strobes in toilet rooms and 75 candela rated strobes in all other areas.
- H. Manual fire alarm stations shall be installed not less than 42 inches or more than 48 inches from finished floor to bottom of device and within five (5) feet of a stairway or an exit door.

- I. Smoke detectors shall be installed within five feet of smoke barrier doors and a minimum of three feet from HVAC system grilles.
- J. Where possible locate flow switches a minimum of one (1) foot from a fitting which changes the direction of the flow and a minimum of three (3) feet for a valve.
- K. Mount valve tamper switches so as not to interfere with the normal operation of the valve and adjust to operate within two revolutions toward the closed position of the valve control, or when the stem has moved no more than one-fifth of the distance from its normal position.
- L. All building alarm, supervisory and trouble conditions shall be transmitted to remote annunciators via the site central annunciation. Information shall include building number, floor, zone, device description and status.
- M. Building fire alarm conditions shall automatically notify the local municipal fire department via a central station connection.

3.2 TYPICAL OPERATION

- A. Normal System Operation: Actuation of any manual station, smoke detector, heat detector or water flow switch shall cause the following operations to occur, unless otherwise specified:
 - 1. Operate the fire alarm notification appliances as follows:
 - a. Flash all strobes on the floor in alarm and operate the emergency voice communication system throughout the building in alarm, for Buildings Nos. 27, 67, 77, 85, 85A, 88 and 13.
 - b. Flash all strobes and ring a coded alarm of 9-9-9 throughout the building in alarm, in the remainder of the buildings.
 - 2. Flash all strobes as indicated above until reset at the fire alarm control panel..
 - 3. Light the associated floor and zone lamp on the annunciator.
 - 4. Release all magnetic door holders on the floor from which alarm was initiated after the five second alert signal. Single impulses with time delay shall not release the door holders.
 - 5. Transmit a separate alarm signal, via the site central annunciation system to remote locations.
 - 6. Smoke detectors in the primary elevator lobby shall, in addition to the above functions, return all elevators in the bank to the secondary floor (if existing elevator controller has capability).

7. Smoke detectors in the remaining elevator lobbies, elevator machine room, or top of hoistway, shall in addition to the above functions, return all elevators in the bank to the primary floor (if existing elevator controller has capability).
 8. Heat detectors in elevator machine rooms shall in addition to the above functions, send a signal to the elevator shunt trip telling it to trip as soon as it receives a signal that the elevator doors are open.
- B. Operation of induct smoke detectors shall, cause a system supervisory condition and shut down the ventilation system or close associated control dampers as appropriate.
 - C. Operation of any sprinkler or standpipe system valve supervisory switch, or high/low air pressure switch shall cause a system supervisory condition.
 - D. Activation of a kitchen range, hood and duct system alarm switch or Halon system alarm switch shall cause a system supervisory condition.
 - E. Activation of a security button shall cause a security condition and transmit a separate alarm signal, via the site central annunciation system to remote locations.

3.3 TESTS

- A. Provide the service of a competent, factory-trained engineer or technician authorized by the manufacturer of the fire alarm equipment to technically supervise and participate during all of the adjustments and tests for the system. Make all adjustments and tests in the presence of the COTR.
- B. When the systems have been completed and prior to the scheduling of the final inspection, furnish testing equipment and perform the following tests in the presence of the COTR. When any defects are detected, make repairs or install replacement components, and repeat the tests until such time that the complete fire alarm systems meets all contract requirements. After the system has passed the test and been approved by the COTR, the contractor may request a final inspection.
 1. Before energizing the cables and wires, check for correct connections and test for short circuits, ground faults, continuity, and insulation.
 2. Test the insulation on all installed cable and wiring by standard methods as recommended by the equipment manufacturer.

3. Run water through all flow switches. Check time delay on water flow switches. Submit a report listing all water flow switch operations and their retard time in seconds.
4. Open each alarm initiating and notification circuit to see if trouble signal actuates.
5. Ground each alarm initiation and notification circuit and verify response of trouble signals.
6. Check alarm transmission to all fire alarm notification.

3.4 FINAL INSPECTION AND ACCEPTANCE

- A. Prior to final acceptance a minimum 60 day "burn-in" period shall be provided. The purpose shall be to allow equipment to stabilize and potential installation and software problems and equipment malfunctions to be identified and corrected. During this diagnostics period, all system operations and malfunctions shall be recorded. Final acceptance will be made upon successful completion of the "burn-in" period where the last 30 days is without a system or equipment malfunction.
- B. At the final inspection a factory trained representative of the manufacturer of the major equipment shall perform the tests in Article 3.3 TESTS and those required by NFPA 72. In addition the representative shall demonstrate that the systems function properly in every respect. The demonstration shall be made in the presence of a VA representative.

3.5 INSTRUCTION

- A. Provide on-site instruction and training to the VA as follows:
 1. Six - one hour sessions to engineering staff, security police and central attendant personnel for simple operation of the system. Two sessions at the start of installation, two sessions at the completion of installation and two sessions 3 months after the completion of installation.
 2. Four - two-hour sessions to engineering staff for detailed operation of the system. Two sessions at the completion of installation and two sessions 3 months after the completion of installation.
 3. One twenty-four hour session to electrical technicians for maintaining, programming, modifying, and repairing the system at the completion of installation and one eight hour refresher session 3 months after the completion of installation.

- B. The Contractor and/or the Systems Manufacturer's representative shall provide a typewritten "Sequence of Operation" including a trouble shooting guide of the entire system for submittal to the Owner.
- C. Furnish the services of a competent instructor for instructing personnel in the programming requirements necessary for system expansion. Such programming shall include addition or deletion of devices, zones, indicating circuits and printer/display text.

PART 4 - SCHEDULES

4.1 Digitized Voice Messages

- A. Digitized voice messages arranged with a 5 second alert tone, a "Code Red" message and a description of the fire alarm area (building number, floor, level and smoke zone). Samples of the messages are as follows:

. . . Alert tone . . .
Code Red
Building One, Second Floor, East Wing
Code Red
Building One, Second Floor, East Wing
Code Red
Building One, Second Floor, East Wing
. . . Alert Tone . . .

- - - E N D - - -

SECTION 31 20 11
EARTH MOVING (SHORT FORM)

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies the requirements for furnishing all equipment, materials, labor and techniques for earthwork including excavation, fill, backfill and site restoration utilizing fertilizer, seed and/or sod.

1.2 DEFINITIONS:

A. Unsuitable Materials:

1. Fills: Topsoil, frozen materials; construction materials and materials subject to decomposition; clods of clay and stones larger than 75 mm (3 inches); organic materials, including silts, which are unstable; and inorganic materials, including silts, too wet to be stable.
2. Existing Subgrade (except footings): Same materials as above paragraph, that are not capable of direct support of slabs, pavement, and similar items, with the possible exception of improvement by compaction, proofrolling, or similar methods of improvement.
3. Existing Subgrade (footings only): Same as Paragraph 1, but no fill or backfill. If materials differ from design requirements, excavate to acceptable strata subject to testing agency's approval.

B. Earthwork: Earthwork operations required within the new construction area. It also includes earthwork required for auxiliary structures and buildings and sewer and other trenchwork throughout the job site.

C. Degree of Compaction: Degree of compaction is expressed as a percentage of maximum density obtained by the test procedure presented in ASTM D698.

D. The term fill means fill or backfill as appropriate.

1.3 RELATED WORK:

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Safety Requirements: Section 00 72 00, GENERAL CONDITIONS, Article, ACCIDENT PREVENTION.

C. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01 00 00, GENERAL REQUIREMENTS.

D. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article, PHYSICAL DATA.

E. Foundation System Requirements: Section 31 64 00, HELICAL ANCHORS/PILES.

F. Geotechnical Engineering Reports: Section 00 02 00, GEOTECHNICAL ENGINEERING REPORT; 00 02 10, GEOTECHNICAL ENGINEERING REPORT - ADDENDUM #1 REVISED.

1.4 CLASSIFICATION OF EXCAVATION:

A. Unclassified Excavation: Removal and disposal of pavements and other man-made obstructions visible on the surface; utilities, and other items including underground structures indicated to be demolished and removed; together with any type of materials regardless of character of material and obstructions encountered.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.6 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. American Nursery and Landscape Association (ANLA):

2004American Standard for Nursery Stock

C. American Association of State Highway and Transportation Officials (AASHTO):

T99-01 (R2004)Moisture-Density Relations of Soils Using a 2.5 kg (5.5 lb) Rammer and a 305 mm (12 inch) Drop

T180-01 (2004)Moisture-Density Relations of Soils Using a 4.54-kg [10 lb] Rammer and a 457 mm (18 inch) Drop

D. American Society for Testing and Materials (ASTM):

D698-07Laboratory Compaction Characteristics of Soil Using Standard Effort

D1557-02Laboratory Compaction Characteristics of Soil Using Modified Effort

E. Idaho Standards for Public Works Construction (ISPWC), latest revision.

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Fills: Materials approved from on site and off site sources having a minimum dry density of 1760 kg/m³ (110 pcf), a maximum Plasticity Index of 6, and a maximum Liquid Limit of 30.

B. Granular Fill:

1. Under concrete slab, crushed stone or gravel graded from 19 mm (3/4 inch) to 4.75 mm (No. 4).

- 2. Bedding for sanitary and storm sewer pipe, crushed stone or gravel graded from 13 mm (1/2 inch) to 4.75 mm (No. 4).
- C. Fertilizer: (5-10-5) delivered to site in unopened containers that clearly display the manufacturer's label, indicating the analysis of the contents.
- D. Seed: Grass mixture comparable to existing turf delivered to site in unopened containers that clearly display the manufacturer's label, indicating the analysis of the contents.
- E. Sod: Comparable species with existing turf. Use State Certified or State Approved sod when available. Deliver sod to site immediately after cutting and in a moist condition. Thickness of cut must be 19 mm to 32 mm (3/4 inch to 1 1/4 inches) excluding top growth. There shall be no broken pads and torn or uneven ends.

PART 3 - EXECUTION

3.1 SITE PREPARATION:

- A. Clearing: Clearing within the limits of earthwork operations as described or designated by the COTR. Work includes removal of trees, shrubs, fences, foundations, incidental structures, paving, debris, trash and any other obstructions. Remove materials from the Medical Center.
- B. Grubbing: Remove stumps and roots 75 mm (3 inches) and larger diameter. Undisturbed sound stumps, roots up to 75 mm (3 inches) diameter, and nonperishable solid objects which will be a minimum of 900 mm (3 feet) below subgrade or finished embankment may be left.
- C. Trees and Shrubs: Trees and shrubs, not shown for removal, may be removed from the areas within 4500 mm (15 feet) of new construction and 2250 mm (7'-6") of utility lines if such removal is approved in advance by the COTR. Remove materials from the Medical Center. Box, and otherwise protect from damage, existing trees and shrubs which are not shown to be removed in the construction area. Repair immediately damage to existing trees and shrubs by trimming, cleaning and painting damaged areas, including the roots, in accordance with standard industry horticultural practice for the geographic area and plant species. Building materials shall not be stored closer to trees and shrubs, that are to remain, than the farthest extension of their limbs.
- D. Stripping Topsoil: Unless otherwise indicated on the drawings, the limits of earthwork operations shall extend anywhere the existing grade is filled or cut or where construction operations have compacted or otherwise disturbed the existing grade or turf. Strip topsoil as defined herein, or as indicated in the geotechnical report, from within the limits of earthwork operations as specified above unless specifically

indicated or specified elsewhere in the specifications or shown on the drawings. Topsoil shall be fertile, friable, natural topsoil of loamy character and characteristic of the locality. Topsoil shall be capable of growing healthy horticultural crops of grasses. Any stockpiling of topsoil shall occur off site, at the discretion of the contractor. Eliminate foreign material, such as weeds, roots, stones, subsoil, frozen clods, and similar foreign materials, larger than 0.014 m³ (1/2 cubic foot) in volume, from soil as it is stockpiled. Remove foreign materials larger than 50 mm (2 inches) in any dimension from topsoil used in final grading. Topsoil work, such as stripping, stockpiling, and similar topsoil work, shall not, under any circumstances, be carried out when the soil is wet so that the tilth of the soil will be destroyed.

1. Concrete Slabs and Paving: Score deeply or saw cut to insure a neat, straight cut, sections of existing concrete slabs and paving to be removed where excavation or trenching occurs. Extend pavement section to be removed a minimum of 300 mm (12 inches) on each side of widest part of trench excavation and insure final score lines are approximately parallel unless otherwise indicated. Remove material from the Medical Center.

E. Disposal: All materials removed from the property shall be disposed of at a legally approved site, for the specific materials, and all removals shall be in accordance with all applicable Federal, State and local regulations. No burning of materials is permitted onsite.

3.2 EXCAVATION:

- A. Shoring, Sheet piling and Bracing: Shore, brace, or slope to its angle of repose banks of excavations to protect workmen, banks, adjacent paving, structures, and utilities, in compliance with OSHA requirements.
 1. Extend shoring and bracing to the bottom of the excavation. Shore excavations that are carried below the elevations of adjacent existing foundations.
 2. If the bearing of any foundation is disturbed by excavating, improper shoring or removal of shoring, placing of backfill, and similar operations, provide a concrete fill support in compliance with Specification Section 31 23 23.33, FLOWABLE FILL, under disturbed foundations, as directed by COTR, at no additional cost to the Government. Do not remove shoring until permanent work in excavation has been inspected and approved by COTR.
- B. Excavation Drainage: Operate pumping equipment and/or provide other materials, means and equipment as required, to keep excavations free of water and subgrades dry, firm, and undisturbed until approval of permanent work has been received from COTR. Approval by the COTR is also

required before placement of the permanent work on all subgrades. When subgrade for foundations has been disturbed by water, remove the disturbed material to firm undisturbed material after the water is brought under control. Replace disturbed subgrade in trenches by mechanically tamped sand or gravel. When removed disturbed material is located where it is not possible to install and properly compact disturbed subgrade material with mechanically compacted sand or gravel, the COTR should be contacted to consider the use of flowable fill.

C. Blasting: Blasting shall not be permitted.

D. Building Earthwork:

1. Excavation shall be accomplished as required by drawings and specifications.
2. Excavate foundation excavations to solid undisturbed subgrade.
3. Remove loose or soft material to solid bottom.
4. Fill excess cut under footings or foundations with 25 MPa (3000 psi) concrete, poured separately from the footings.
5. Do not tamp earth for backfilling in footing bottoms, except as specified.

E. Trench Earthwork:

1. Utility trenches (except sanitary and storm sewer):
 - a. Excavate to a width as necessary for sheeting and bracing and proper performance of the work.
 - b. Grade bottom of trenches with bell-holes, scooped-out to provide a uniform bearing.
 - c. Support piping on undisturbed earth unless a mechanical support is shown.
 - d. The length of open trench in advance of pipe laying shall not be greater than is authorized by the COTR.
2. Sanitary and storm sewer trenches:
 - a. Trench width below a point 150 mm (6 inches) above top of the pipe shall be 900 mm (36 inches) for up to and including 300 mm (12 inches) diameter and four-thirds diameter of pipe plus 200 mm (8 inches) for pipe larger than 300 mm (12 inches). Width of trench above that level shall be as necessary for sheeting and bracing and proper performance of the work.
 - b. The bottom quadrant of the pipe shall be bedded on undisturbed soil or granular fill.
 - 1) Undisturbed: Bell holes shall be no larger than necessary for jointing. Backfill up to a point 300 mm (12 inches) above top of pipe shall be clean earth placed and tamped by hand.

- 2) Granular Fill: Depth of fill shall be a minimum of 75 mm (3 inches) plus one-sixth of pipe diameter below the pipe of 300 mm (12 inches) above top of pipe. Place and tamp fill material by hand.
 - c. Place and compact as specified the remainder of backfill using acceptable excavated materials. Do not use unsuitable materials.
 - d. Use granular fill for bedding where rock or rocky materials are excavated.
- F. Site Earthwork: Excavation shall be accomplished as required by drawings and specifications. Remove subgrade materials, that are determined by the Geotechnical Engineer as unsuitable, and replace with acceptable material. G. Finished elevation of subgrade shall be as follows:
1. Pavement Areas - bottom of the pavement or base course as applicable.
 2. Planting and Lawn Areas - 100 mm (4 inches) below the finished grade, unless otherwise specified or indicated on the drawings.

3.3 FILLING AND BACKFILLING:

- A. General: Do not fill or backfill until all debris, unsatisfactory soil materials, obstructions, and deleterious materials have been removed from the excavation. Proof-roll exposed subgrades with a fully loaded dump truck. Use excavated materials or borrow for fill and backfill, as applicable. Do not use unsuitable excavated materials. Do not backfill until foundation walls have been completed above grade and adequately braced, waterproofing or dampproofing applied, and pipes coming in contact with backfill have been installed, and inspected and approved by COTR.
- B. Proof-rolling Existing Subgrade: Proof-roll with a fully loaded dump truck. Make a minimum of one pass in each direction. Remove unstable uncompactable material and replace with granular fill material completed to mix requirements specified.
- C. Placing: Place material in horizontal layers not exceeding 200 mm (8 inches) in loose depth and then compacted. Do not place material on surfaces that are muddy, frozen, or contain frost.
- D. Compaction: Use approved equipment (hand or mechanical) well suited to the type of material being compacted. Do not operate mechanized vibratory compaction equipment within 3000 mm (10 feet) of new or existing building walls without the prior approval of the COTR. Moisten or aerate material as necessary to provide the moisture content that will readily facilitate obtaining the specified compaction with the equipment used. Compact each layer to not less than 95 percent of the maximum density determined in accordance with the following test method ASTM D698.

3.4 GRADING:

- A. General: Uniformly grade the areas within the limits of this section, including adjacent transition areas. Smooth the finished surface within specified tolerance. Provide uniform levels or slopes between points where elevations are indicated, or between such points and existing finished grades. Provide a smooth transition between abrupt changes in slope.
- B. Cut rough or sloping rock to level beds for foundations. In unfinished areas fill low spots and level off with coarse sand or fine gravel.
- C. Slope backfill outside the building away from the building walls for a minimum distance of 3048 mm (10 feet) at a minimum five percent (5%) slope.
- D. The finished grade shall be 150 mm (6 inches) below bottom line of windows or other building wall openings unless greater depth is shown.
- E. Place crushed stone or gravel fill under concrete slabs on grade tamped and leveled. The thickness of the fill shall be 150 mm (6 inches), unless otherwise indicated.
- F. Finish subgrade in a condition acceptable to the COTR at least one day in advance of the paving operations. Maintain finished subgrade in a smooth and compacted condition until the succeeding operation has been accomplished. Scarify, compact, and grade the subgrade prior to further construction when approved compacted subgrade is disturbed by contractor's subsequent operations or adverse weather.
- G. Grading for Paved Areas: Provide final grades for both subgrade and base course to +/- 6 mm (0.25 inches) of indicated grades.

3.5 LAWN AREAS:

- A. General: Harrow and till to a depth of 100 mm (4 inches), new or existing lawn areas to remain, which are disturbed during construction. Establish existing or design grades by dragging or similar operations. Do not carry out lawn areas earthwork out when the soil is wet so that the tilth of the soil will be destroyed. Plant bed must be approved by COTR before seeding or sodding operation begins.
- B. Finished Grading: Begin finish grading after rough grading has had sufficient time for settlement. Scarify subgrade surface in lawn areas to a depth of 100 mm (4 inches). Apply topsoil so that after normal compaction, dragging and raking operations (to bring surface to indicated finish grades) there will be a minimum of 100 mm (4 inches) of topsoil over all lawn areas; make smooth, even surface and true grades, which will not allow water to stand at any point. Shape top and bottom of banks to form reverse curves in section; make junctions with undisturbed areas to conform to existing topography. Solid lines within

grading limits indicate finished contours. Existing contours, indicated by broken lines are believed approximately correct but are not guaranteed.

- C. Fertilizing: Incorporate fertilizer into the soil to a depth of 100 mm (4 inches) at a rate of 12 kg/100 m² (25 pounds per 1000 square feet).
- D. Seeding: Seed at a rate of 2 kg/100 m² (4 pounds per 1000 square feet) and accomplished only during periods when uniform distribution may be assured. Lightly rake seed into bed immediately after seeding. Roll seeded area immediately with a roller not to exceed 225 kg/m (150 pounds per foot) of roller width.
- E. Sodding: Topsoil shall be firmed by rolling and during periods of high temperature the topsoil shall be watered lightly immediately prior to laying sod. Sod strips shall be tightly butted at the ends and staggered in a running bond fashion. Placement on slopes shall be from the bottom to top of slope with sod strips running across slope. Secure sodded slopes by pegging or other approved methods. Roll sodded area with a roller not to exceed 225 kg/m (150 pounds per foot) of the roller width to improve contact of sod with the soil.
- F. Watering: The COTR is responsible for having adequate water available at the site. As sodding is completed in any one section, the entire sodded area shall be thoroughly irrigated by the contractor, to a sufficient depth, that the underside of the new sod pad and soil, immediately below sod, is thoroughly wet. COTR will be responsible for sod after installation and acceptance.

3.6 DISPOSAL OF UNSUITABLE AND EXCESS EXCAVATED MATERIAL:

- A. Disposal: Remove surplus satisfactory soil and waste material, including unsatisfactory soil, trash, and debris, and legally dispose of it off Medical Center property.
- C. Remove from site and dispose of any excess excavated materials after all fill and backfill operations have been completed.

3.7 CLEAN-UP:

Upon completion of earthwork operations, clean areas within contract limits, remove tools, and equipment. Provide site clear, clean, free of debris, and suitable for subsequent construction operations. Remove debris, rubbish, and excess material from the Medical Center Property.

- - - E N D - - -

**SECTION 31 23 19
DEWATERING**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies performance of dewatering required to lower and control ground water table levels and hydrostatic pressures to permit excavation, backfill, and construction to be performed in the dry. Control of surface water shall be considered as part of the work under this specification.
- B. The Geotechnical Report for this site indicates ground water to be greater than 20 ft (6.1 m) below ground surface. The portions of this section applying to ground water dewatering are not a part of this Contract; surface water is a part of this Contract.
- C. If groundwater becomes an issue at the time of construction it will be addressed under changed conditions. The following specifications regarding ground water dewatering will then become part of the Contract.

1.2 SUMMARY:

- A. The work to be completed by the Contractor includes, but is not necessarily limited to the following:
 - 1. Implementation of the Erosion and Sedimentation Control Plan.
 - 2. Dewater excavations, including seepage and precipitation.
- B. The Contractor shall be responsible for providing all materials, equipment, labor, and services necessary for care of water and erosion control. Excavation work shall not begin before the Erosion and Sedimentation Control Plan is in place.

1.3 REQUIREMENT:

- A. Dewatering system shall be of sufficient size and capacity necessary to lower and maintain ground water table to an elevation at least 300 mm (1 foot) below lowest foundation subgrade or bottom of pipe trench and to allow material to be excavated in a reasonably dry condition. Materials to be removed shall be sufficiently dry to permit excavation to grades shown and to stabilize excavation slopes where sheeting is not required. Operate dewatering system continuously until backfill work has been completed.
- B. Reduce hydrostatic head below any excavation to the extent that water level in the construction area is a minimum of 300 mm (1 foot) below prevailing excavation surface.
- C. Prevent loss of fines, seepage, boils, quick conditions or softening of foundation strata.

- D. Maintain stability of sides and bottom of excavation.
- E. Construction operations are performed in the dry.
- F. Control of surface and subsurface water is part of dewatering requirements. Maintain adequate control so that:
 - 1. The stability of excavated and constructed slopes are not adversely affected by saturated soil, including water entering prepared subbase and subgrades where underlying materials are not free draining or are subject to swelling or freeze-thaw action.
 - 2. Erosion is controlled.
 - 3. Flooding of excavations or damage to structures does not occur.
 - 4. Surface water drains away from excavations.
 - 5. Excavations are protected from becoming wet from surface water, or insure excavations are dry before additional work is undertaken.
- G. Permitting Requirements: The contractor shall comply with and obtain the required State and County permits where the work is performed.

1.4 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Safety Requirements: Section 00 72 00, GENERAL CONDITIONS, Article, ACCIDENT PREVENTION.
- C. Submittal requirements as specified in Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- D. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01 00 00, GENERAL REQUIREMENTS.
- E. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.11, PHYSICAL DATA.
- F. Excavation, backfilling, site grade and utilities: Section 31 20 00, EARTH MOVING.

1.5 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Drawings and Design Data:
 - 1. Submit drawings and data showing the method to be employed in dewatering excavated areas 30 days before commencement of excavation.
 - 2. Material shall include: location, depth and size of wellpoints, headers, sumps, ditches, size and location of discharge lines, capacities of pumps and standby units, and detailed description of dewatering methods to be employed to convey the water from site to adequate disposal.
 - 3. Include a written report outlining control procedures to be adopted if dewatering problem arises.

4. Materials submitted shall be in a format acceptable for inclusion in required permit applications to any and all regulatory agencies for which permits for discharge water from the dewatering system are required due to the discharge reaching regulated bodies of water.

C. Inspection Reports.

D. All required permits.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 INSTALLATION:

- A. Install a dewatering system (as required) to lower and control ground surface water in order to permit excavation, construction of structure, and placement of backfill materials to be performed under dry conditions. Make the dewatering system adequate to pre-drain the water-bearing strata above and below the bottom of structure foundations, utilities and other excavations.
- B. In addition, reduce hydrostatic pressure head in water-bearing strata below structure foundations, utility lines, and other excavations, to extent that water levels in construction area are a minimum of 300 mm (1 foot) below prevailing excavation surface at all times.

3.2 OPERATION:

- A. Prior to any excavation below the ground water table, place system into operation to lower water table as required and operate it continuously 24 hours a day, 7 days a week until utilities and structures have been satisfactorily constructed, which includes the placement of backfill materials and dewatering is no longer required.
- B. Place an adequate weight of backfill material to prevent buoyancy prior to discontinuing operation of the system.

3.3 WATER DISPOSAL:

- A. Dispose of water removed from the excavations in such a manner as:
 1. Will not endanger portions of work under construction or completed.
 2. Will cause no inconvenience to Government or to others working near site.
 3. Will comply with the stipulations of required permits for disposal of water.
 4. Will Control Runoff: The Contractor shall be responsible for control of runoff in all work areas including but not limited to: excavations, access roads, parking areas, laydown, and staging areas. The Contractor shall provide, operate, and maintain all ditches, basins, sumps, culverts, site grading, and pumping facilities to divert, collect, and remove all water from the work areas. All water

shall be removed from the immediate work areas and shall be disposed of in accordance with applicable permits.

B. Excavation Dewatering:

1. The Contractor shall be responsible for providing all facilities required to divert, collect, control, and remove water from all construction work areas and excavations.
2. Drainage features shall have sufficient capacity to avoid flooding of work areas.
3. Drainage features shall be so arranged and altered as required to avoid degradation of the final excavated surface(s).
4. The Contractor shall utilize all necessary erosion and sediment control measures as described herein to avoid construction related degradation of the natural water quality.

C. Dewatering equipment shall be provided to remove and dispose of all surface and ground water entering excavations, trenches, or other parts of the work during construction. Each excavation shall be kept dry during subgrade preparation and continually thereafter until the structure to be built, or the pipe to be installed therein, is completed to the extent that no damage from hydrostatic pressure, flotation, or other cause will result.

3.4 STANDBY EQUIPMENT:

Provide complete standby equipment, installed and available for immediate operation, as may be required to adequately maintain dewatering on a continuous basis and in the event that all or any part of the system may become inadequate or fail.

3.5 CORRECTIVE ACTION:

If dewatering requirements are not satisfied due to inadequacy or failure of the dewatering system (loosening of the foundation strata, or instability of slopes, or damage to foundations or structures), perform work necessary for reinstatement of foundation soil and damaged structure resulting from such inadequacy or failure by Contractor, at no additional cost to Government.

3.6 DAMAGES:

Immediately repair damages to adjacent facilities caused by dewatering operations.

3.7 REMOVAL:

Insure compliance with all conditions of regulating permits and provide such information to the COTR. Obtain written approval from Resident Engineer before discontinuing operation of dewatering system.

----- E N D -----

SECTION 31 64 00
HELICAL ANCHORS/PILES

PART 1 - General

1.1 SCOPE

- A. The work consists of designing, furnishing, installing, loading and testing helical piles used to support compressive loads, and any ancillary materials (e.g. sacrificial anodes, load transfer devices, etc.) according to the project plans provided and these specifications. Unless otherwise noted, the Installing Contractor shall provide all labor, tools, equipment and materials necessary to accomplish the work.
- B. The owner will provide suitable access to the construction site for the Installing Contractor's personnel and equipment. Unless specifically noted otherwise in the contract documents, the Owner will remove and replace any structures, utilities, pavements, landscaping or other surficial improvements in the work area as necessary to facilitate the work. The owner will be responsible for overall construction oversight to preclude the development of unsafe conditions. The work does not include any post-construction monitoring of pile performance unless specifically noted otherwise in the contract documents.

1.2 DEFINITIONS

- A. The following terms apply to helical piles used to support compressive loads. In determining the meaning of any term used herein, the definition contained in the following list shall take precedence, followed by the definition contained in the latest edition of "Glossary of Foundation Terms" published by the Deep Foundations Institute, then by customary usage.
 - 1. Allowable Load: See "Nominal Load" below
 - 2. Bearing Stratum: Any soil layer which provides a significant portion of the axial load capacity of an installed helical pile by providing resistance to one or more of the pile's helical plates.
 - 3. Crowd: Axial compressive force or pressure applied to the helical pile as needed during installation to ensure the pile progresses into the ground a distance approximately equal to the helix pitch per revolution.
 - 4. Design Load: See "Nominal Load" below.

5. **Extension Section:** Helical pile component installed between the lead section and the load transfer device allowing installation of the helix plates to such depth as may be necessary to attain the required load capacity. They may be plain (without helix plates) or (including one or more helix plates). Helical extensions typically follow immediately behind the lead section. Extension shaft ends are adapted to interconnect with helical lead sections, other extension sections and the load transfer device.
6. **Effective Torsional Resistance:** The average installation torque typically taken over a distance equal to the last three diameters of penetration of the largest helix plate.
7. **Factored Load:** Nominal load times the required load factor (Load Resistance Factor Design) or safety factor (Allowable Stress Design).
8. **Geotechnical Capacity (a.k.a. Ultimate Soil Capacity):** The maximum load that can be resisted through the bearing of helix plates on the soil in which they are embedded.
9. **Helical Pile:** Consists of 1) One or more helical deformed plates ("helix plates") attached to a central shaft and 2) Load transfer device for attachment to a structure. It may also include surface coating or other corrosion protection means. It is installed by screwing into the soil with down pressure ("crowd"), and thereafter resists compressive loads through bearing of the helical plates on the soil in which they are embedded.
10. **Helical Plate:** Generally round steel plate formed into a helical spiral and welded to the central steel shaft. When rotated in the ground, the helical shape provides thrust along its longitudinal axis thus aiding in pile installation, plus the plate transfers axial load to the soil through bearing.
11. **Lead Section:** The first helical pile component installed into the soil. It consists of one or more helical plates welded to the central steel shaft.
12. **Limit State:** A condition beyond which a helical pile component or interface becomes unfit for service and is judged to be no longer useful for its intended function (serviceability limit state) or to be unsafe (strength limit state).

13. Loads: Forces or other actions that result from the weight of all building materials, occupants and their possessions, environmental effects, differential movement, and restrained dimensional changes. Permanent loads are those loads in which variations over time are rare or of small magnitude. All other loads are variable loads (see also Nominal Load below).
14. Load Factor: A factor that accounts for deviations of the actual load from the nominal load (Load Resistance Factor Design).
15. Mechanical Strength: The maximum compressive load that can be resisted by the structural elements of a helical pile.
16. Nominal Load: The magnitude of the loads determined by the Owner's engineer, which includes dead, live, soil wind, snow, rain, flood and earthquake.
17. Reveal: The distance from ground surface to the end of the last installed extension of a pile, measured along the pile's longitudinal axis.
18. Safety Factor: The ratio of the ultimate pullout resistance to the nominal load used for the design of any helical pile component or interface (Allowable Stress Design).
19. Load Test: A procedure to test the capacity and relation of load to movement by applying a compressive load on the helical pile.
20. Working Load: See "Nominal Load" above.
21. Ultimate Bearing Resistance: Limit state based on the lesser of mechanical strength or geotechnical capacity of the helical pile defined as the point at which no additional load can be justified.

1.3 DESIGN AND PERFORMANCE REQUIREMENTS

- A. Helical piles shall be designed to support the nominal compressive load(s) as shown on the project plans. The overall length, helix configuration and minimum effective torsional resistance of a helical pile shall be such that the required geotechnical capacity is developed by the helix plate(s) in an appropriate bearing stratum(s).

- B. All steel structure pile components shall be designed within the limits provided by the American Institute of Steel Construction (AISC). Either Allowable Stress Design (ASD) or Load and Resistance Factor Design (LRFD) are acceptable methods of analysis. Product testing in accordance with ICC-ES Acceptance Criteria 358 may also be considered as an acceptable means of establishing allowable system capacities.
- C. Except where noted otherwise on the project plans, all structure pile components shall be selected to provide a minimum factor of safety against ultimate mechanical resistance of 2.5.
- D. Except where noted otherwise on the project plans, all piles shall be installed to provide a minimum factor of safety against ultimate bearing resistance of 2, residential and commercial structure piles shall be installed to provide a maximum axial deflection at nominal compressive load of 0.5 inches, and must satisfy the deflection criteria as stated on the plans or drawings.
- E. Except where noted otherwise on the project plans, each pile shall be designed to meet a corrosion service life of 50 years.
- F. The pile design shall take into account such pile spacing, soil stratification, corrosion and strain compatibility issues as are present for the project.
- G. The piles shall be designed such that the maximum test load for structure piles does not exceed 80% of the manufacturer's rated ultimate mechanical strength of any pile component or load transfer device.

1.4 PLACEMENT REQUIREMENTS

- A. When helical pile placement is shown on the project plans, production piles shall be placed such that the pile head is within 3 inches, and the pile shaft alignment is within 2 degrees of the inclination angle, shown on the project plans. Cutoff elevation shall be within 2" of design. When pile placement is not shown on the project plans, the placements, alignments and their respective tolerances shall be included as part of the design submittal.

1.5 PRECONSTRUCTION SUBMITTALS

- A. The Installing Contractor and/or pile designer shall submit to the Owner or Owner's representative a proposal including the

following documentation. Work shall not begin until all the submittals have been received and approved by the owner. All costs associated with incomplete or unacceptable submittals shall be the responsibility of the Installing Contractor.

B. Documents to be submitted:

1. Evidence of Installing Contractor's competence and safety record:
 - a. Evidence of Installing Contractor's competence in the installation of helical piles shall be provided to the owner's satisfaction and include all of the following:
 - 1) Pile manufacturer's certificate of competency in installation of helical piles, or
 - 2) A list of at least three projects completed within the previous three years wherein the Installing Contractor installed helical piles similar to those shown in the project plans, such list to include names and phone numbers of those project owner's representatives who can verify the installing Contractor's participation in those projects, or
 - 3) A letter from the pile manufacturer, pile distributor or manufacturer's representative expressing ability and intent to provide on-site supervision of the pile installation.
2. A listing of all safety violations lodged against the Installing Contractor within the previous three years and the current status or final resolutions thereof. Descriptions of safety improvements instituted within the previous three years may also be submitted, at the Installing Contractor's discretion.

C. Evidence of pile designer's competence:

1. Evidence of competence in the design of helical pile shall be provided to the Owner's satisfaction and include all of the following:
 - a. Recommendation from the pile manufacturer, pile distributor or manufacturer's representative.
 - b. Registration as a Professional Engineer in the State of Idaho.

- c. A list of at least three projects completed within the previous three years wherein the pile designer designed helical piles similar to those shown in the project plans, such list to include names and phone numbers of those project owner's representatives who can verify the engineer's participation in those projects.
- D. Evidence of pile manufacturer's competence and capability:
 - 1. Evidence of competence in the manufacture of helical piles shall be provided to the owner's satisfaction and include all of the following:
 - a. At least three years of production experience making helical piles.
 - b. The manufacturer's helical piles have been used successfully in at least three engineered construction projects within the last three years, or
 - c. Product listing by an applicable building code authority (ICC, IAPMO, NES, IBC, etc)

1.6 DESIGN DOCUMENTATION SUBMITTALS

- A. Within 2 weeks of receiving the contract award, the Installing Contractor and/or pile designer shall submit the following helical pile design documentation:
- B. A pile hardware schedule showing, for each category of pile:
 - 1. Product designations for helix and extension sections and all ancillary products to be supplied at each helical pile location.
 - 2. Individual pile nominal loads.
 - 3. Individual pile loading requirements (if any).
 - 4. Manufacturer's published mechanical strengths for the pile assemblies, including load transfer devices.
 - 5. Calculated theoretical geotechnical capacity of piles.
 - 6. Minimum effective torsional resistance criteria.
 - 7. Maximum allowable installation torque of pile.
 - 8. Minimum embedment lengths and such other site specific embedment depth requirements as may be appropriate for the site soil profiles.
 - 9. Inclination angle and location tolerance requirements.

- C. If pile placements are not shown on the project plans, drawings showing the proposed pile placements and placement tolerances. Known Rights of Way and obstructions (provided by the Owner) shall be shown to demonstrate how the piles will be installed to miss these items.
- D. Proposed production quality control plan, including method and equipment to be used to measure torsional resistance during installation.
- E. Procedures and acceptance criteria for any proposed performance and/or proof testing.
- F. Certification by the pile designer that the selected piles can be installed with ordinary skill to achieve the requirements of the project plans and this specification.
- G. Certification by a registered professional engineer that the proposed loading and test equipment (if any) can be safely used to apply and hold the proposed loads.
- H. Copies of certified calibration reports for torque measuring equipment and load measuring equipment to be used on the project. The calibrations shall have been performed within one year of the proposed starting date for helical pile installation or as recommended by the equipment manufacturer based on the proposed starting date.

1.7 PILE INSTALLATION

- A. Before entering the construction site to begin work, the Installing Contractor shall provide proof of insurance coverage as stated in the general specifications and/or contract.
- B. Installing Contractor shall furnish and install all helical piles per the project plans and approved pile design documentation. In the event of conflict between the project plans and the approved pile design documentation, the Installing Contractor shall not begin construction on any affected items until such conflict has been resolved.
- C. The Installing Contractor shall conduct his construction operations in a manner to insure the safety of persons and property in the vicinity of the work. The Installing Contractor's personnel shall comply with safety procedures in accordance with OSHA standards and any established project safety plan.

- D. The Installing Contractor shall request marking of underground utilities by an underground utility location service as required by law, and shall avoid contact with all marked underground facilities.
- E. The portion of the construction site occupied by the Installing Contractor, his equipment and his material stockpiles shall be kept reasonably clean and orderly.
- F. Installation of helical piles may be observed by representatives of the Owner for quality assurance purposes. The Installing Contractor shall give the Owner's representative at least 24 hours prior notice of pile installation operations. All helical pile sections and ancillary products shall be marked as necessary to allow correlation with the pile design documentation before shipment from the manufacturer.
- G. The helical pile installation technique shall be such that it is consistent with the geotechnical, logistical, environmental, and load carrying conditions of the project. The lead section shall be positioned at the location as shown on the pile design drawings. Inclined helical piles can be positioned perpendicular to the ground to assist in initial advancement into the soil before the required batter angle shall be established. After initial penetration, the required inclination angle shall be established. The helical pile sections shall be engaged and advanced into the soil in a smooth, continuous manner at a rate of rotation of 5 to 25 RPM's. Sufficient down pressure (crowd) shall be applied to uniformly advance the helical pile sections a distance approximately equal to the pitch of the helix plate (typically 3 inches) per revolution. The rate of rotation and magnitude of down pressure shall be adjusted for different soil conditions and depths. Extension sections shall be provided to obtain the required minimum overall length and minimum effective torsional resistance as shown on the project plans.

1.7 TERMINATION CRITERIA

- A. The minimum overall length criteria and the minimum effective torsional resistance criteria as specified in the Design Documentation Submittals must be satisfied prior to terminating the pile installation. In the event any helical pile fails to

meet these production quality control criteria, the following pre-qualified remedies are authorized:

B. If the installation fails to meet the minimum effective torsional resistance criterion at the minimum embedment length:

1. Continue the installation to greater depths until the torsional resistance criterion is met, provided that, if a maximum length constraint is applicable, continued installation does not exceed said maximum length constraint,
Or
2. Demonstrate acceptable pile performance through proof testing.
Or
3. Replace the pile with one having a different helix configuration. The replacement pile must not exceed any applicable maximum embedment length and either (A) be embedded to a length that places its last helix at least three times its own diameter beyond the position of the first helix of the replaced pile and meet the minimum effective torsional resistance criterion, or (B) pass proof testing.

C. If the torsional resistance during installation reaches the helical pile's allowable torque rating prior to satisfaction of the minimum embedment length criterion:

1. Terminate the installation at the depth obtained if allowed by the owner's representative. Or,
2. Replace the pile with one having a shaft with a higher torsional strength rating. This replacement pile must be installed to satisfy the minimum embedment length criterion. It must also be embedded to a length that places its last helix at least three times its own diameter beyond the position of the first helix of the replaced pile without exceeding any applicable maximum embedment length requirements and it must meet the minimum effective torsional resistance criterion. Or,
3. Replace the pile with one having a different helix configuration. This replacement pile must be installed to satisfy the minimum embedment length criterion. It must also be embedded to a length that places its last helix at least three times its own diameter beyond the position of the first helix of the replaced pile without

exceeding any applicable maximum embedment length requirements, and it must meet the minimum effective torsional resistance criterion.

4. If allowed by the pile location tolerance or approved by the Owner's representative, remove and reinstall the pile at a position at least three times the diameter of the largest helix away from the initial location. Original embedment length and torsional resistance criteria must be met. This pile repositioning may require the installation of additional helical piles with nominal loads adjusted for these spacing changes.
- D. If the installation reaches a specified maximum embedment length without achieving the minimum effective torsional resistance criterion:
1. If allowed by the pile location tolerance or approved by the Owner's representative, remove and reinstall the pile at a position at least three times the diameter of the largest helix away from the initial location. Original embedment length and torsional resistance criteria must be met. This pile repositioning may require the installation of additional helical piles with nominal loads adjusted for these spacing changes. Or,
 2. Demonstrate acceptable pile performance through proof testing, Or
 3. De-rate the load capacity of the helical pile and install additional piles as necessary. The de-rated capacity and additional pile location shall be subject to the approval of the Owner's representative. Or,
 4. Replace the pile with one having a different helix configuration. This replacement pile must be installed to satisfy the minimum embedment length criterion and it must meet the minimum effective torsional resistance criterion.
- E. If a helical pile fails to meet acceptance criteria in a performance or proof test:
1. Install the pile to a greater depth & installation torque and re-test provided that, if a maximum embedment length constraint is applicable, continued installation will not exceed said maximum length constraint, Or

2. Replace the pile with one having more and/or larger helix plates. It must be embedded to a length that places its last helix at least three times its own diameter beyond the position of the first helix of the replaced pile without exceeding any applicable maximum embedment length requirements. This replacement pile must be re-tested. Or,
3. If approved by the Owner's representative, de-rate the load capacity of the helical pile and install additional piles. Additional piles must be installed at positions that are at least three times the diameter of the largest helix away from any other pile locations and are approved by the Owner's representative. Piles installed in cohesive soils shall not be spaced closer than four helix diameters.
4. Proof testing to qualify a pile under any of the foregoing remedial actions shall not be used to satisfy proof testing frequency requirements shown in the project plans or the design documentation.
5. If a helical pile fails a production quality control criterion for any other reason, any proposed remedy must be approved by the Owner's representative prior to initiating its implementation at the project site.

1.9 INSTALLATION RECORD SUBMITTALS

- A. The Installing Contractor shall provide the Owner, or his authorized representative, copies of individual helical pile installation records within 24 hours after each installation is completed. Formal copies shall be submitted (insert time frequency). These installation records shall include, but are not limited to, the following information:
 1. Date and time of installation
 2. Location of helical pile
 3. Pile Reveal
 4. Actual helical pile type and configuration
 5. Total length of installed pile
 6. Actual inclination of pile
 7. Actual effective torsional resistance
 8. Calculated geotechnical capacity based on actual torsional resistance and soil parameters appropriate for subsurface

conditions within 3 helix diameters above below the helix depth.

9. Comments pertaining to interruptions, obstructions, or other relevant information
10. Pile installation shall be observed by a Professional Engineer (P.E.) competent in the specific task area or graduate of accredited engineering technology program under the direct supervision of a P.E. or a NICET Certified Engineering Technologist (CT) observe the pile installation. Note the P.E. shall be registered in the State of Idaho.

1.10 PILE TESTING

- A. If pile testing is required, the Installing Contractor shall furnish all labor, equipment and pre-production helical piles necessary to accomplish the testing as shown in the approved pile design documentation. Installing Contractor shall apply the specified loads for the specified durations and record the specified data, for the specified number of piles. No deviations from the test plan(s) will be allowed without explicit approval in writing from the Owner's representative. Pile testing shall be in accordance with ASTM D1143.
- B. Installing Contractor shall provide the owner, or owner's representative, copies of raw field test data or reports within 24 hours after completion of each load test. Formal test reports shall be submitted within 30 days following test completion. Formal test reports shall include, but are not limited to, the following information:
 1. Name of project and Installing Contractor
 2. Name of Installing Contractor's supervisor during installation
 3. Name of third party test agency, if any
 4. Pre-production or production test
 5. Date, time, and duration of test
 6. Unique identifier and location of helical pile tested
 7. Type of test (performance or proof)
 8. Description of calibrated testing equipment and test set-up
 9. Actual helical pile type and configuration
 10. Steps and duration of each load increment
 11. Cumulative pile-head movement at each load step
 12. Signatures as required by local jurisdiction

1.11 CLEANUP

- A. Within one week of completion of the work, the Installing Contractor shall remove any and all material, equipment, tools, building materials, concrete forms, debris, or other items belonging to the Installing Contractor or used under the Installing Contractor's direction.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 32 05 23
CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section shall cover site work concrete constructed upon the prepared subgrade and in conformance with the lines, grades, thickness, and cross sections shown. Construction shall include the following:
- B. Curb and gutter.
- C. Pedestrian Pavement: Walks.

1.2 RELATED WORK

- A. Laboratory and Field Testing Requirements: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Subgrade Preparation: Section 31 20 00, EARTH MOVING.
- C. Concrete Materials, Quality, Mixing, Design and Other Requirements: Section 03 30 00, CAST-IN-PLACE-CONCRETE.
- D. Metal Components of Steps (Nosing and Railing): Section 05 50 00, METAL FABRICATIONS.

1.3 DESIGN REQUIREMENTS

Design all elements with the latest published version of applicable codes.

1.4 WEATHER LIMITATIONS

Placement of concrete shall be as specified under Article 3.8, COLD WEATHER and Article 3.7, HOT WEATHER of Section 03 30 00, CAST-IN-PLACE CONCRETE.

1.5 SELECT SUBBASE MATERIAL JOB-MIX

The Contractor shall retain and reimburse a testing laboratory to design a select subbase material mixture and submit a job-mix formula to the COTR, in writing, for approval. The formula shall include the source of materials, gradation, plasticity index, liquid limit, and laboratory compaction curves indicating maximum density at optimum moisture.

1.6 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
- B. Manufacturers' Certificates and Data certifying that the following materials conform to the requirements specified.
 - 1. Expansion joint filler
 - 2. Hot poured sealing compound
 - 3. Reinforcement
 - 4. Curing materials
- C. Data and Test Reports: Select subbase material.

1. Job-mix formula.
2. Source, gradation, liquid limit, plasticity index, percentage of wear, and other tests as specified and in referenced publications.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Refer to the latest edition of all referenced Standards and codes.
- B. American Association of State Highway and Transportation Officials (AASHTO):
 - M031MM031-07-ULDeformed and Plain Carbon-Steel Bars for
Concrete Reinforcement (ASTM A615/A615M-09)
 - M055MM055-09-ULSteel Welded Wire Reinforcement, Plain, for
Concrete (ASTM A185)
 - M147-65-ULMaterials for Aggregate and Soil-Aggregate
Subbase, Base and Surface Courses (R 2004)
 - M148-05-ULLiquid Membrane-Forming Compounds for Curing
Concrete (ASTM C309)
 - M171-05-ULSheet Materials for Curing Concrete (ASTM C171)
 - M182-05-ULBurlap Cloth Made from Jute or Kenaf and Cotton
Mats
 - M213-01-ULPreformed Expansion Joint Fillers for Concrete
Paving and Structural Construction
(Non-extruding and Resilient Bituminous Type)
(ASTM D1751)
 - T099-09-ULMoisture-Density Relations of Soils Using a 2.5
kg. (5.5 lb) Rammer and a 305 mm (12 in.) Drop
 - T180-09-ULMoisture-Density Relations of Soils Using a 4.54
kg (10 lb.) Rammer and a 457 mm (18 in.) Drop
- C. American Society for Testing and Materials (ASTM):
 - C94/C94M-09Ready-Mixed Concrete
 - C143/C143M-09Slump of Hydraulic Cement Concrete

PART 2 - PRODUCTS

2.1 GENERAL

Concrete shall be Type C, air-entrained as specified in Section 03 30 00, CAST-IN-PLACE CONCRETE, with the following exceptions:

TYPE	MAXIMUM SLUMP*
Curb & Gutter	75 mm (3")
Pedestrian Pavement	75 mm (3")
Vehicular Pavement	50 mm (2") (Machine Finished) 100 mm (4") (Hand Finished)
Equipment Pad	75 to 100 mm (3" to 4")
* For concrete to be vibrated: Slump as determined by ASTM C143. Tolerances as established by ASTM C94.	

2.2 REINFORCEMENT

- A. The type, amount, and locations of steel reinforcement shall be as shown on the drawings and in the specifications.
- B. Welded wire-fabric shall conform to AASHTO M55.
- C. Dowels shall be plain steel bars conforming to AASHTO M31. Tie bars shall be deformed steel bars conforming to AASHTO M31.

2.3 SELECT SUBBASE

- A. Subbase material shall consist of select granular material composed of sand, sand-gravel, crushed stone, crushed or granulated slag, with or without soil binder, or combinations of these materials conforming to AASHTO M147, Grading E or F.
- B. Materials meeting other gradations than that noted will be acceptable whenever the gradations are within a tolerance of three to five percent, plus or minus, of the single gradation established by the job-mix formula.
- C. Subbase material shall produce a compacted, dense-graded course, meeting the density requirement specified herein.

2.4 FORMS

- A. Use metal or wood forms that are straight and suitable in cross-section, depth, and strength to resist springing during depositing and consolidating the concrete, for the work involved.
- B. Do not use forms if they vary from a straight line more than 3 mm (1/8 inch) in any 3000 mm (ten foot) long section, in either a horizontal or vertical direction.
- C. Wood forms should be at least 50 mm (2 inches) thick (nominal). Wood forms shall also be free from warp, twist, loose knots, splits, or other defects. Use approved flexible or curved forms for forming radii.

2.5 CONCRETE CURING MATERIALS

- A. Concrete curing materials shall conform to one of the following:
 - 1. Burlap conforming to AASHTO M182 having a weight of 233 grams (seven ounces) or more per square meter (yard) when dry.
 - 2. Impervious Sheeting conforming to AASHTO M171.

3. Liquid Membrane Curing Compound conforming to AASHTO M148 (ASTM C309), Type 1 shall be free of paraffin or petroleum.

2.6 EXPANSION JOINT FILLERS

Material shall conform to AASHTO M213.

PART 3 - EXECUTION

3.1 SUBGRADE PENETRATION

- A. Prepare, construct, and finish the subgrade as specified in Section 31 20 00, EARTH MOVING.
- B. Maintain the subgrade in a smooth, compacted condition, in conformance with the required section and established grade until the succeeding operation has been accomplished.

3.2 SELECT SUBBASE

- A. Mixing: Proportion the select subbase by weight or by volume in quantities so that the final approved job-mixed formula gradation, liquid limit, and plasticity index requirements will be met after subbase course has been placed and compacted. Add water in approved quantities, measured by weight or volume, in such a manner to produce a uniform blend.
- B. Placing:
 1. Place the mixed material on the prepared subgrade in a uniform layer to the required contour and grades, and to a loose depth not to exceed 200 mm (8 inches), and that when compacted, will produce a layer of the designated thickness.
 2. When the designated compacted thickness exceeds 150 mm (6 inches), place the material in layers of equal thickness. Remove unsatisfactory areas and replace with satisfactory mixture, or mix the material in the area.
 3. In no case will the addition of thin layers of material be added to the top layer in order to meet grade.
 4. If the elevation of the top layer is 13 mm (1/2 inch) or more below the grade, excavate the top layer and replace with new material to a depth of at least 75 mm (3 inches) in compacted thickness.
- C. Compaction:
 1. Perform compaction with approved equipment (hand or mechanical) well suited to the material being compacted.
 2. Moisten or aerate the material as necessary to provide the moisture content that will readily facilitate obtaining the specified compaction with the equipment used.
 3. Compact each layer to at least 95 percent or 100 percent of maximum density as determined by AASHTO T180 or AASHTO T99 respectively.

D. Smoothness Test and Thickness Control:

Test the completed subbase for grade and cross section with a straight edge.

1. The surface of each layer shall not show any deviations in excess of 10 mm (3/8 inch).
2. The completed thickness shall be within 13 mm (1/2 inch) of the thickness as shown.

E. Protection:

1. Maintain the finished subbase in a smooth and compacted condition until the concrete has been placed.
2. When Contractor's subsequent operations or adverse weather disturbs the approved compacted subbase, excavate, and reconstruct it with new material meeting the requirements herein specified, at no additional cost to the VA.

3.3 SETTING FORMS

A. Base Support:

1. Compact the base material under the forms true to grade so that, when set, they will be uniformly supported for their entire length at the grade as shown.
2. Correct imperfections or variations in the base material grade by cutting or filling and compacting.

B. Form Setting:

1. Set forms sufficiently in advance of the placing of the concrete to permit the performance and approval of all operations required with and adjacent to the form lines.
2. Set forms to true line and grade and use stakes, clamps, spreaders, and braces to hold them rigidly in place so that the forms and joints are free from play or movement in any direction.
3. Forms shall conform to line and grade with an allowable tolerance of 3 mm (1/8 inch) when checked with a straightedge and shall not deviate from true line by more than 6 mm (1/4 inch) at any point.
4. Do not remove forms until removal will not result in damaged concrete or at such time to facilitate finishing.
5. Clean and oil forms each time they are used.

C. The Contractor's Registered Professional Land Surveyor, specified in Section 00 72 00, GENERAL CONDITIONS, shall establish and control the alignment and the grade elevations of the forms or concrete slipforming machine operations.

1. Make necessary corrections to forms immediately before placing concrete.

2. When any form has been disturbed or any subgrade or subbase has become unstable, reset and recheck the form before placing concrete.

3.4 EQUIPMENT

- A. The COTR shall approve equipment and tools necessary for handling materials and performing all parts of the work prior to commencement of work.
- B. Maintain equipment and tools in satisfactory working condition at all times.

3.5 PLACING REINFORCEMENT

- A. Reinforcement shall be free from dirt, oil, rust, scale or other substances that prevent the bonding of the concrete to the reinforcement.
- B. Before the concrete is placed, the COTR shall approve the reinforcement, which shall be accurately and securely fastened in place with suitable supports and ties. The type, amount, and position of the reinforcement shall be as shown.

3.6 PLACING CONCRETE - GENERAL

- A. Obtain approval of the COTR before placing concrete.
- B. Remove debris and other foreign material from between the forms before placing concrete. Obtain approval of the COTR before placing concrete.
- C. Before the concrete is placed, uniformly moisten the subgrade, base, or subbase appropriately, avoiding puddles of water.
- D. Convey concrete from mixer to final place of deposit by a method which will prevent segregation or loss of ingredients. Deposit concrete so that it requires as little handling as possible.
- E. While being placed, spade or vibrate and compact the concrete with suitable tools to prevent the formation of voids or honeycomb pockets. Vibrate concrete well against forms and along joints. Over-vibration or manipulation causing segregation will not be permitted. Place concrete continuously between joints without bulkheads.
- F. Install a construction joint whenever the placing of concrete is suspended for more than 30 minutes and at the end of each day's work.
- G. Workmen or construction equipment coated with foreign material shall not be permitted to walk or operate in the concrete during placement and finishing operations.

3.7 PLACING CONCRETE FOR CURB AND GUTTER, PEDESTRIAN PAVEMENT, AND EQUIPMENT PADS

- A. Place concrete in the forms in one layer of such thickness that, when compacted and finished, it will conform to the cross section as shown.
- B. Deposit concrete as near to joints as possible without disturbing them but do not dump onto a joint assembly.

- C. After the concrete has been placed in the forms, use a strike-off guided by the side forms to bring the surface to the proper section to be compacted.
- D. Consolidate the concrete thoroughly by tamping and spading, or with approved mechanical finishing equipment.
- E. Finish the surface to grade with a wood or metal float.
- F. All Concrete pads and pavements shall be constructed with sufficient slope to drain properly.

3.8 CONCRETE FINISHING - GENERAL

- A. The sequence of operations, unless otherwise indicated, shall be as follows:
 - 1. Consolidating, floating, straight-edging, troweling, texturing, and edging of joints.
 - 2. Maintain finishing equipment and tools in a clean and approved condition.

3.9 CONCRETE FINISHING CURB AND GUTTER

- A. Round the edges of the gutter and top of the curb with an edging tool to a radius of 6mm (1/4 inch) or as otherwise detailed.
- B. Float the surfaces and finish with a smooth wood or metal float until true to grade and section and uniform in textures.
- C. Finish the surfaces, while still wet, with a bristle type brush with longitudinal strokes.
- D. Immediately after removing the front curb form, rub the face of the curb with a wood or concrete rubbing block and water until blemishes, form marks, and tool marks have been removed. Brush the surface, while still wet, in the same manner as the gutter and curb top.
- E. Except at grade changes or curves, finished surfaces shall not vary more than 3 mm (1/8 inch) for gutter and 6 mm (1/4 inch) for top and face of curb, when tested with a 3000 mm (10 foot) straightedge.
- F. Remove and reconstruct irregularities exceeding the above for the full length between regularly scheduled joints.
- G. Correct any depressions which will not drain.
- H. Visible surfaces and edges of finished curb and gutter, shall be free of blemishes, form marks, and tool marks, and shall be uniform in color, shape, and appearance.

3.10 CONCRETE FINISHING PEDESTRIAN PAVEMENT

- A. Walks:
 - 1. Finish the surfaces to grade and cross section with a metal float, trowled smooth and finished with a broom moistened with clear water.
 - 2. Brooming shall be transverse to the line of traffic.

3. Finish all slab edges, including those at formed joints, carefully with an edger having a radius as shown on the Drawings.
4. Unless otherwise indicated, edge the transverse joints before brooming. The brooming shall eliminate the flat surface left by the surface face of the edger. Execute the brooming so that the corrugation, thus produced, will be uniform in appearance and not more than 2 mm (1/16 inch) in depth.
5. The completed surface shall be uniform in color and free of surface blemishes, form marks, and tool marks. The finished surface of the pavement shall not vary more than 5 mm (3/16 inch) when tested with a 3000 mm (10 foot) straightedge.
6. The thickness of the pavement shall not vary more than 6 mm (1/4 inch).
7. Remove and reconstruct irregularities exceeding the above for the full length between regularly scheduled joints.

3.11 JOINTS - GENERAL

- A. Place joints, where shown, conforming to the details as shown, and perpendicular to the finished grade of the concrete surface.
- B. Joints shall be straight and continuous from edge to edge of the pavement.

3.12 CONTRACTION JOINTS

- A. Cut joints to depth as shown with a grooving tool or jointer of a radius as shown. Sawing of joints is unacceptable.
- B. Construct joints by inserting 3 mm (1/8 inch) steel plates conforming to the cross sections of the curb and gutter.
- C. Plates shall remain in place until concrete has set sufficiently to hold its shape and shall then be removed.
- D. Finish edges of all joints with an edging tool having a radius of 1/4 in (.6 mm).
- E. Score pedestrian pavement with a standard grooving tool or jointer.

3.13 EXPANSION JOINTS

- A. Use a preformed expansion joint filler material of the thickness as shown to form expansion joints.
- B. Material shall extend the full depth of concrete, cut and shaped to the cross section as shown, except that top edges of joint filler shall be below the finished concrete surface where shown to allow for sealing.
- C. Anchor with approved devices to prevent displacing during placing and finishing operations.
- D. Round the edges of joints with an edging tool.
- E. Form expansion joints as follows:

1. Without dowels, about structures and features that project through, into, or against any site work concrete construction.
2. Using joint filler of the type, thickness, and width as shown.
3. Installed in such a manner as to form a complete, uniform separation between the structure and the site work concrete item.

3.14 CONSTRUCTION JOINTS

- A. Place transverse construction joints of the type shown, where indicated and whenever the placing of concrete is suspended for more than 30 minutes.
- B. Use a butt-type joint with dowels in curb and gutter.

3.15 FORM REMOVAL

- A. Forms shall remain in place at least 12 hours after the concrete has been placed. Remove forms without injuring the concrete.
- B. Do not use bars or heavy tools against the concrete in removing the forms. Promptly repair any concrete found defective after form removal.

3.16 CURING OF CONCRETE

- A. Cure concrete by one of the following methods appropriate to the weather conditions and local construction practices, against loss of moisture, and rapid temperature changes for at least seven days from the beginning of the curing operation. Protect unhardened concrete from rain and flowing water. All equipment needed for adequate curing and protection of the concrete shall be on hand and ready to install before actual concrete placement begins. Provide protection as necessary to prevent cracking of the pavement due to temperature changes during the curing period. If any selected method of curing does not afford the proper curing and protection against concrete cracking, remove and replace the damaged pavement and employ another method of curing as directed by the COTR.
- B. Burlap Mat: Provide a minimum of two layers kept saturated with water for the curing period. Mats shall overlap each other at least 150 mm (6 inches).
- C. Impervious Sheeting: Use waterproof paper, polyethylene-coated burlap, or polyethylene sheeting. Polyethylene shall be at least 0.1 mm (4 mils) in thickness. Wet the entire exposed concrete surface with a fine spray of water and then cover with the sheeting material. Sheets shall overlap each other at least 300 mm (12 inches). Securely anchor sheeting.
- D. Liquid Membrane Curing:
 1. Apply pigmented membrane-forming curing compound in two coats at right angles to each other at a rate of 5 m²/L (200 square feet per gallon) for both coats.

2. Do not allow the concrete to dry before the application of the membrane.
3. Cure joints designated to be sealed by inserting moistened paper or fiber rope or covering with waterproof paper prior to application of the curing compound, in a manner to prevent the curing compound entering the joint.
4. Immediately re-spray any area covered with curing compound and damaged during the curing period.

3.17 CLEANING

A. After completion of the curing period:

1. Remove the curing material (other than liquid membrane).
2. Sweep the concrete clean.
3. After removal of all foreign matter from the joints, seal joints as herein specified.
4. Clean the entire concrete of all debris and construction equipment as soon as curing and sealing of joints has been completed.

3.18 PROTECTION

The contractor shall protect the concrete against all damage prior to final acceptance by the Government. Remove concrete containing excessive cracking, fractures, spalling, or other defects and reconstruct the entire section between regularly scheduled joints, when directed by the COTR, and at no additional cost to the Government.

3.19 FINAL CLEAN-UP

Remove all debris, rubbish and excess material from the Station.

- - - E N D - - -

SECTION 32 84 00**PLANTING IRRIGATION****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This section specifies materials and procedures for furnishing and installing a complete automatically-controlled irrigation system, controllers and all other appurtenances necessary to serve specified landscape and plant bed areas.

1.2 RELATED WORK

- A. Excavation, Trench Widths, Pipe Bedding, Backfill, Shoring, Sheeting, Bracing: Section 31 20 00, EARTH MOVING.
- B. Concrete Work, Reinforcing, Placement and Finishing: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- C. General plumbing, protection of Materials and Equipment, and quality assurance: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- D. Submittals: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- E. Plant materials: Section 32 90 00, PLANTING.

1.3 DEFINITIONS

- A. Circuit Piping: Downstream from control valves to sprinklers, specialties, and drain valves.
- B. Drain Piping: Downstream from circuit-piping drain valves.
- C. Main Piping: Downstream from point of connection to water distribution piping to, and including, control valves.
- D. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 volts or for remote-control, signaling power-limited circuits.

1.4 ABBREVIATIONS

- A. FPT: Female pipe thread
- B. HDPE: high-density polyethylene plastic
- C. NPT: National pipe thread
- D. PTFE: Polytetrafluoroethylene
- E. PVC: Polyvinyl chloride plastic
- F. WOG: Water, oil and gas

1.5 PERFORMANCE REQUIREMENTS

- A. Irrigation zone control shall be automatic operation with controller and automatic control valves.

- B. Location of sprinklers and specialties on Drawings is approximate. Contractor to make minor adjustments necessary to avoid plantings and obstructions such as signs, utilities and light standards. Provide 100 percent irrigation coverage of areas indicated.
- C. Minimum Working Pressures: The following are maximum pressure requirements for piping, valves and specialties unless otherwise indicated.
 - 1. Irrigation Main Piping: 100 psi (640 kPa)
 - 2. Circuit Piping: 80 psi (520 kPa)

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver piping with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe-end damage and to prevent entrance of dirt, debris, and moisture.
- B. Store plastic piping protected from direct sunlight. Support pipe to prevent sagging and bending.

1.7 QUALITY ASSURANCE:

- A. Products Criteria:
 - 1. When two or more units of the same type or class of materials or equipment are required, these units shall be products of one manufacturer.
 - 2. A nameplate bearing manufacturer's name or trademark, including model number, shall be securely affixed in a conspicuous place on equipment. In addition, the model number shall be either cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.
- B. Installer Certification:
 - 1. Installer should be an employer of workers that perform specified work, and have provided irrigation installations for 5 years.
 - 2. Service provider qualifications shall be maintained and/or trained by the manufacturer to render satisfactory service within 8 hours of service request notification.
- C. System Requirements:
 - 1. 100 percent irrigation coverage of specified areas is required. The Contractor shall, at no additional cost to the Government, make minor adjustments necessary to avoid plantings and obstructions such as signs, utilities and light standards and achieve full and complete coverage of irrigated areas without overspray on roadways,

sidewalks, window wells, or buildings and to protect trees from close high spray velocity.

1.8 SUBMITTALS

- A. Submit product data as one package for each type of product indicated. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.
- B. Submit complete detailed irrigation layout covering design of system showing pipe sizes and lengths; fittings; locations; types and sizes of sprinklers; controls; backflow preventers; valves; location and mounting details of electrical control equipment complete wiring diagram showing routes and wire sizes for; power, signal and control wiring details and connections to water supply main. Do not start work before final shop drawing approval.
- C. Provide qualification data for:
 - 1. A qualified irrigation Installer.
- D. Include a zone chart and controller timing schedule showing each irrigation zone and its control valve; and show the time settings for each automatic controller zone.
- E. Provide operation and maintenance data for sprinklers, controllers, and automatic control valves to include in operation and maintenance manuals.

1.9 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society Of Mechanical Engineers (ASME):
 - B16.18-2001Cast Copper Alloy Solder Joint Pressure Fittings
 - B16.22-2001Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
 - B16.24-2006Cast Copper Alloy Pipe Flanges and Flanged Fittings: Classes 150, 300, 600, 900, 1500 and 2500
 - B18.2.1-2010Square, Hex, Heavy Hex, and Askew Head Bolts and Hex, Heavy Hex, Hex Flange, Lobed Head, and Lag Screws (Inch Series)

B40.100-2005Pressure Gauges and Gauge Attachments

C. American Society Of Sanitary Engineering (ASSE):

1013-2009Reduced Pressure Principle Backflow Preventers
and Reduced Pressure Principle Fire Protection
Backflow Preventers

D. American Society For Testing And Materials (ASTM):

B32-08Solder Metal

B61-08Steam or Valve Bronze Castings

B62-09Composition Bronze or Ounce Metal Castings

B88/B88M-09Seamless Copper Water Tube

B813-10Liquid and Paste Fluxes for Soldering of Copper
and Copper Alloy Tube

D1785-06Poly(Vinyl Chloride) (PVC) Plastic Pipe,
Schedule 40, 80, and 120

D2241-09Poly(Vinyl Chloride) (PVC) Pressure Rated Pipe
(SDR Series)

D2464-06Threaded Poly (Vinyl Chloride) (PVC) Plastic
Pipe Fittings, Schedule 80

D2466-06Poly(Vinyl Chloride) (PVC) Plastic Pipe
Fittings, Schedule 40

D2467-06Poly(Vinyl Chloride) (PVC) Plastic Pipe
Fittings, Schedule 80

D2564-04(2009)e1Solvent Cements for Poly (Vinyl Chloride) (PVC)
Plastic Piping Systems

D2609-02(2008)Plastic Insert Fittings for Polyethylene (PE)
Plastic Pipe

D2683-10Socket-Type Polyethylene Fittings for Outside
Diameter-Controlled Polyethylene Pipe and
Tubing

D2855-96(2010)Making Solvent Cemented Joints with Poly (Vinyl
Chloride) (PVC) Pipe and Fittings

D3261-10aButt Heat Fusion Polyethylene (PE) Plastic
Fittings for Polyethylene (PE) Plastic Pipe and
Tubing

F477-10Elastomeric Seals (Gaskets) for Joining Plastic
Pipe

F656-10Primers for Use in Solvent Cement Joints of
Poly(Vinyl Chloride) (PVC) Plastic Pipe and
Fittings

F771-99(2005)Polyethylene (PE) Thermoplastic High-Pressure
Irrigation Pipeline Systems

E. American Water Works Association (AWWA):

C504-06Rubber-Seated Butterfly Valves

C906-07Polyethylene (PE) Pressure Pipe and Fittings, 4
in. (100 mm) Through 63 in. (1600 mm), for
Water Distribution and Transmission

F. American Welding Society (AWS):

A5.8/A5.8M:2004Filler Metals for Brazing and Braze Welding

G. General Services Administration:

A-A-60005Frames, Covers, Gratings, Steps, Sump and Catch
Basin, Manhole

H. Manufacturers Standardization Society (MSS):

SP-70-2006Gray Iron Gate Valves, Flanged and Thread Ends

I. National Fire Protection Association (NFPA):

70 2011 EditionNational Electrical Code

1.10 WARRANTY

A. The Contractor shall remedy any defect due to faulty material or workmanship and pay for any damage to other work resulting therefrom within a period of one year from final acceptance. Further, the Contractor will provide all manufacturers' and supplier's written guarantees and warranties covering materials and equipment furnished under this Contract.

PART 2 - PRODUCTS

2.1 PIPES, TUBES AND FITTINGS

- A. PVC pipe: ASTM D1785, PVC 1120 compound, Schedules 40 and 80.
 - 1. PVC socket fittings shall be ASTM D2466, Schedule 40 and ASTM D2464, Schedule 80.
 - 2. PVC threaded fittings: ASTM D2464, Schedule 80.
 - 3. Swing joints: Threaded fittings with elastomeric seals that allow 360 degree rotation, and designed for minimum 200 psi (1375 kPa) working pressure, may be used in lieu of standard threaded fittings.
 - 4. PVC socket unions: Both headpiece and tailpiece shall be PVC with socket ends.
- B. PVC Pipe: ASTM D2241, PVC 1120 compound, SDR 21.
 - 1. PVC socket fittings: ASTM D2467, Schedule 80.
 - 2. PVC socket unions: Both headpiece and tailpiece shall be PVC with socket or threaded ends.

2.2 PIPE JOINING MATERIALS

- A. Metal, pipe-flange bolts and nuts: ASME B18.2.1, carbon steel unless otherwise indicated.
- B. Brazing filler metals: AWS A5.8, BCuP Series, copper-phosphorus alloys for general-duty brazing unless otherwise indicated.
- C. Solder filler metals: ASTM B32, lead-free alloys. Include water-flushable flux according to ASTM B813.
- D. Solvent cements for joining PVC piping: ASTM D2564. Include primer according to ASTM F656.
- E. Plastic, Pipe-Flange Gaskets, Bolts, and Nuts: Type and material recommended by piping system manufacturer unless otherwise indicated.

2.3 VALVES

- A. Underground Shut-Off Valves:
 - 1. Ball valves, isolation valves, 1-1/2 inch (38 mm) and smaller: Full-port ball valves with bronze body, PTFE seats, and 90 degree on/off handle. Ball valves to have NPT female end connections.
- B. Operations:
 - 1. Underground applications shall use valves with 2 inch (50 mm) nut for T-Handle socket wrench operation.
 - 2. Valve ends shall accommodate the type of main pipe adjacent to valve.
- C. Remote Control Valves:

1. Valves shall be globe type of heavy duty construction and shall have manual shut-off and flow control adjustment and provide for manual operation.
2. Molded-plastic body, furnished as straight or angle pattern type, normally closed diaphragm type with manual shut off and flow control adjustment.
 - a. Install valves with unions on each side to allow for easy removal.
 - b. Each sprinkler section shall be automatically operated by a remote control valve installed underground and operated by a 24 volt AC electric solenoid.
 - c. Each valve shall be in a valve vault.
- D. Valves shall be completely serviceable from the top without removing valve body from the system. Furnish 1 30 inch (750 mm) long adjustment keys. Valves to operate at no more than 7 psi (50 kPa) pressure loss at manufacturers maximum recommended flow rate.
- E. Valves shall be diaphragm type designed to operate in water containing sand and debris and shall have a self cleaning type contamination filter to filter all water leading to the solenoid actuator and the diaphragm chamber. Valve shall incorporate a non-adjustable type opening and closing speed control for protection against surge pressures, or valves shall operate by means of a slow acting direct drive thermal hydraulic motor without ports, screens or diaphragms.

2.4 VALVE BOX

- A. In plant bed areas, valve boxes shall be HDPE structural foam Type A, Class III, green in color. Box shall be minimum 19 inches (475 mm) long by 14 inches (350 mm) deep with key-lockable hinged cast iron cover.
- B. After installation of boxes:
 1. Label boxes with two 3 inch (80 mm) size stencils designated controller and circuit numbers with permanent white epoxy paint. Numbers shall be placed at center of valve cover and shall face nearest main road or service road.
- C. Drip zone Lateral Flush Cap Assembly: Round reinforced plastic valve box and lid constructed from HDPE. Opening at top of access box to be 5-3/4 inch (14.5 cm) diameter, minimum. Height of access box to be 9-1/16 inch (23 cm), minimum. Lid to have lift-hole for opening.

2.5 BACKFLOW PREVENTER

- A. Reduced pressure principle backflow preventer: ASSE 1013, at each new connection to water distribution system.

2.6 SPRINKLER HEADS

- A. Sprinkler heads: Heads to be as indicated on Drawings. The entire internal assembly including filter screen, to be capable of removal from the top without removing the sprinkler case from the riser.
- B. Rotary pop-up sprinklers: Gear-driven.
 - 1. Full circle sprinklers shall be dual or tri-nozzle combination type with positive drive by means of a water-driven gear assembly. Sprinkler head to rotate uniformly and to be driven by means of a train of gears. Sprinklers to be equipped with an integral anti-drain valve to be self-closing at pressures of 10 feet (3.0 m) of head or less. Gears and pinions shall be assembled on stainless steel spindles in a water-lubricated sandproof gear case. An inlet screen shall prevent debris from entering the sprinkler and shall be removable with the internal assembly. Sprinklers outer case shall be constructed of corrosion resistant, impact resistant, heavy-duty ABS.
 - 2. Part circle sprinklers shall be variable arc type as required with same type drive used for full circle heads.
- C. Shrub spray head nozzle shall be pop-up or fixed spray type of standard, undersize or oversize configuration as noted on plans. The sprinkler body, stem, nozzle and screen shall be constructed of heavy-duty, ultraviolet resistant plastic. It shall have a heavy duty stainless steel retract spring and a ratcheting system for alignment of the pattern. The sprinkler shall have a soft elastomer pressure-activated co-molded wiper seal for cleaning debris from the pop-up stem. The sprinkler shall have a plastic or brass nozzle with an adjusting screw capable of regulating the radius and flow. The sprinkler shall be capable of housing protective, non-clogging filter screens or pressure compensating screens (PCS) under the nozzle.
- D. Drip Emitters shall be of the pressure compensating, permanently assembled type with 1/2 inch (1.25 cm) FPT inlet. Emitters shall be capable of providing 1 GPM (3.8 LPM) at inlet pressures between 15 and 50 psi (105 and 342 kPa).
- E. Emitter distribution tubing shall be constructed of UV resistant vinyl material with a 0.22 inch (5.5 mm) O.D. and a 0.16 inch (4 mm) I.D. Tubing shall be manufactured by the same manufacturer as the drip emitters.

2.7 QUICK COUPLERS

- A. Quick couplers shall have all parts contained in a two-piece unit and shall consist of a coupler water seal valve assembly and a removable upper body to allow the spring and key track to be serviced without shut down of the main.
- B. Metal parts shall be brass.
- C. Lids shall be lockable vinyl covered and have springs for positive closure on key removal.
- D. Furnish one hose swivel and operating key for each size coupler to the Contracting Officer's Representative.

2.8 LOW VOLTAGE CONTROL VALVE WIRE

- A. Wire shall be solid copper wire, Underwriters Laboratories Inc. approved for direct burial in ground. Size of wire shall be in accordance with manufacturer's recommendations, never less than No. 14.

2.9 SPLICING MATERIALS: EPOXY WATERPROOF SEALING PACKET. LOW VOLTAGE CONTROLLER CABLE

- A. Multi-strand cable, UL-approved for direct burial in ground. Size and type of wire shall be in accordance with manufacturer's recommendations.

2.10 SLEEVE MATERIAL

- A. ASTM D2241, Schedule 40.

2.11 TRACER WIRES

- A. Tracer Wires shall be No. 14, Green, Type TW plastic-coated copper tracer wire shall be installed with non-metallic irrigation main lines.

PART 3 - EXECUTION**3.1 PREPARATION**

- A. Examine proposed irrigation areas for compliance with requirements and conditions affecting installation and performance.
- B. Set stakes to identify locations of proposed irrigation system. Obtain Contracting Officer's Representative's approval before excavation.

3.2 PIPE INSTALLATION - GENERAL

- A. Layout work as closely as possible to drawings. Swing joints, offsets and all fittings are not shown. Lines are to be in a common trench wherever possible.
- B. Install sprinkler lines to avoid heating, ventilating, and air conditioning trenches; electric ducts; storm and sanitary sewer lines; and existing water and gas mains; all of which have the right of way.

- C. Existing sidewalks and curbs shall not be cut during trenching and installation of pipe. Install pipe under sidewalks and curbs by jacking, auger boring, or by tunneling. Repair or replace any cracked concrete, due to settling, during the warranty period.
- D. Do not lay pipe on unstable material, in wet trenches or, in the opinion of Contracting Officer's Representative, when trench or weather conditions are unsuitable for work.
- E. Allow a minimum of 3 inches (80 mm) between parallel pipes in the same trench.
- F. Clean the interior portion of pipe and fittings of foreign matter before installation. Securely close open ends of pipe and fittings with caps or plugs to protect fixtures and equipment against dirt, water and chemical or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.
- G. The full length of each section of pipe shall rest upon the pipe bed with recesses excavated to accommodate bells or joints. Do not lay pipe on wood blocking.
- H. Hold pipe securely in place while joint is being made.
- I. Do not work over, or walk on, pipe in trenches until covered by layers of earth, well tamped, in place to a depth of 12 inches (300 mm) over pipe.
- J. Irrigation lines and control wire in cemetery applications shall run at boundaries of graves, through designated utility lanes or beside roadways so that any gravesite may be opened in the future without disruption of the irrigation system.
- K. Irrigation lines and control wire shall run through designated utility lanes or beside roadways where possible.
- L. Connect new system to existing mains.
- M. Concrete thrust blocks shall be installed where the irrigation main changes direction at "L" and "T" locations and where the irrigation main terminates. Pressure tests shall not be made for a period of 36 hours following the completion of pouring of the thrust blocks. Concrete thrust blocks for supply mains shall be sized and placed in strict accordance with the pipe manufacturer's specifications and shall be of an adequate size and so placed as to take all thrust created by the maximum internal water pressure.
- N. Minimum cover over water mains shall be 30 inches (750 mm). Cover laterals to minimum depth of 24 inches (600 mm).

- O. Warning tape shall be continuously placed 12 inches (300 mm) above sprinkler system water mains and laterals.

3.3 PLASTIC PIPE INSTALLATION

- A. Plastic pipe shall be snaked in trench at least 1 foot per 100 feet (1 meter to 100 meters) to allow for thermal construction and expansion and to reduce strain on connections.
- B. Joints
 - 1. Solvent Welded Socket Type: ASTM D2855.
 - 2. Threaded Type: Apply liquid teflon thread lubricant of teflon thread type. After joint is made hand tight (hard), a strap wrench should be used to make up to two additional full turns.
 - 3. Elastomeric Gasket: ASTM F477.

3.4 EMITTER HOSE INSTALLATION

- A. Joint: Solvent weld connection.
- B. Bushing: Adaptation from PVC Schedule 40 fittings to flex vinyl hose shall be line size by 3/8 inch (10 mm) insert bushings.

3.5 SLEEVE INSTALLATION

- A. Furnish and install where pipe and control wires pass under walks, paving, walls, and other similar areas.
- B. Sleeves to be twice line size or greater to accommodate retrieval for repair of wiring or piping and shall extend 12 inches (300 mm) beyond edges of paving or construction.
- C. Bed sleeves with a minimum of 4 inches (100 mm) of sand backfill above top of pipe in areas where pipe is placed prior to hardscape is installed.

3.6 VALVE INSTALLATION

- A. Locations of remote control valves are schematic. Remote control valves shall be grouped wherever possible and aligned at a set dimension back of curb along roads.
- B. No valves shall be set under roads, pavement or walks.
- C. Clean interior of valves of foreign matter before installation.
- D. Pressure control valves installed adjacent to remote control valve shall be housed in the same valve box.
- E. Set valve box cover flush with finished grade.
- F. Control valves shall never be less than 3 inches (80 mm) below finished grade.

3.7 SPRINKLER AND QUICK COUPLER INSTALLATION

- A. Sprinkler heads and quick couplers shall be placed on temporary nipples extending at least 3 inches (80 mm) above finished grade. After turf is established, remove temporary nipples, ensuring that no dirt or foreign matter enters outlet, and install sprinkler heads and quick couplers at ground surface as detailed.
- B. Place part circle rotary sprinkler heads no more than 6 inches (150 mm) from edge, of and flush with top of adjacent walks, header boards, curbs, and mowing aprons, or paved areas at time of installation.
- C. Install all sprinklers, shrub sprays and quick couplers on swing joints, as detailed on plans.
- D. Set shrub heads 8 inches (200 mm) above grade and 1 foot (300 mm) from edge of curb or pavement. Place adjacent to walls. Stake heads prior to backfilling trenches. Support stakes to be parallel to riser.
- E. Each sprinkler section shall drain to waste valves placed at lowest elevation points in the system. Waste valves shall discharge to drainage pits composed of three 1 foot (300 mm) long vertical sections of 24 inch (600 mm) diameter sewer pipe placed under the lawn areas. Fill pipe with gravel and cover with 2 inch (50 mm) precast concrete cover before backfilling. Waste valves may also discharge to storm sewers, where available.

3.8 AUTOMATIC IRRIGATION - CONTROL SYSTEM INSTALLATION

- A. Install interior controllers on wall.
 - 1. Place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
 - 2. Install anchor bolts to elevations required for proper attachment to supported equipment.
- B. Install exterior freestanding controllers on precast concrete bases.
 - 1. Place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
 - 2. Install anchor bolts to elevations required for proper attachment to supported equipment.

3.9 CONTROL WIRE INSTALLATION

- A. Wiring from master controllers to satellites and stub cuts for future extension shall be located in trench with new mains or in separate

trench at back of curb, unless cross-country route is shown. Locate in trench with mains when possible on cross-country routes.

- B. Wiring bundles located with piping shall be set with top of the bundle 2 inches (50 mm) below bottom of the pipe. No two wires in any bundle shall be of the same color. Wires shall be bundled, and tied or taped at 15 foot (4.5 m) intervals. A numbered tag shall be provided at each end of a wire, i.e., at valve, at field located controllers and at master controller. The wires at each end of wire to be the same in number and color.
- C. Splicing shall be held to a minimum. A pullbox shall be provided at each splice. No splices will be allowed between field located controllers and remote control valves.
- D. Provide 12 inch (300 mm) expansion loops in wiring at each wire connection or change in wire direction. Provide 24 inch (600 mm) loop at remote control valves.
- E. The power wire(s) for the operation of irrigation system shall not be run in same conduit as the irrigation control wire(s).

3.10 TRACER WIRE INSTALLATION

- A. Tracer wire shall be installed on bottom of trench, adjacent to vertical pipe projections, carefully installed to avoid stress from backfilling, and shall be continuous throughout length of pipe with spliced joints soldered and covered with insulation type tape.
- B. Tracer wire shall follow main line pipe and branch lines and terminate in yard box with gate valve controlling these main irrigation lines. Provide sufficient length of wire to reach finish grade, bend back end of wire to make a loop and attach a plastic label with designation "Tracer Wire."
- C. Record locations of tracer wires and their terminations on project record documents.

3.11 FIELD TEST AND QUALITY CONTROL

- A. Engage a factory-authorized service representative to inspect, test, and adjust components, assemblies, and equipment installations, including connections.
- B. Tests and Inspections:
 - 1. Pressure test lines before joint areas are backfilled. Backfill a minimum of 12 inches (300 mm) over the pipe to maintain pipe stability during test period. Test piping at hydraulic pressure of 150 psi (1025 kPa) for two hours. Maximum loss shall be 0.8

gallons/inch pipe diameter/1,000-feet (3 L/25 mm pipe diameter/300 m). Locate pump at low point in line and apply pressure gradually. Install pressure gage shut-off valve and safety blow-off valve between pressure source and piping. Inspect each joint and repair leaks. Line shall be retested until satisfactory.

2. After testing, flush system with a minimum of 150 percent of operating flow passing through each pipe beginning with larger mains and continuing through smaller mains in sequence. Flush lines before installing sprinkler heads and quick couplers.
 3. After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
 4. After electrical circuitry has been energized and final adjustment of the sprinkler heads to permanent level at ground surface is complete, test each sprinkler section by the pan test and visual test to indicate a uniform distribution within any one sprinkler head area and over the entire area. Operate controllers and automatic control valves to demonstrate the complete and successful installation and operation of all equipment.
- C. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment. Any irrigation product will be considered defective if it does not pass tests and inspections.
- D. Prepare test and inspection reports.

3.12 ADJUSTMENTS

- A. Adjust settings of controllers.
- B. Adjust automatic control valves to provide flow rate at rated operating pressure required for each sprinkler circuit.
- C. Adjust sprinklers and devices, except those intended to be mounted aboveground, so they will be flush with, or not more than 1/2 inch (13 mm) above, finish grade.

3.13 DEMONSTRATION AND DOCUMENTATION

- A. Prior to final acceptance, verbal instructions, for a period of not less than 1 hours, shall be provided to the operating personnel. Provide 2 additional years of software support for one hour each month.
- B. Program controller and satellites according to approved irrigation schedule.
- C. Follow manufacturer's instructions for installation.

- D. Manufacturer of Control Systems shall certify control system is complete, including all related components, and totally operational. Submit certificate to Contracting Officer's Representative.
- E. Maintain and provide a complete set of as built drawings which shall be corrected daily to show changes in locations of all pipe, valves, pumps and related irrigation equipment. Valves shall be shown with dimensions to reference points.
- F. Controller Drawings and Zone Chart(s):
1. Prepare in digital format a drawing mapping the location of all valves, lateral lines, and route of the control wires. Identify all valves as to size, station, number and type of irrigation. Digital formatted "as built" drawings must be approved before controller zone charts are prepared.
 2. Provide one controller zone chart for each automatic controller showing the area covered by the controller. The chart shall be a reduced drawing of the actual "as built" system and fit the maximum size controller door will allow. If controller sequence is not legible when the drawing is reduced to door size, the drawing shall be enlarged to a size that is readable and placed folded, in a sealed plastic container, inside the controller door.
 3. The final irrigation "as built" drawings shall be submitted in digital format with a different color code used to show area of coverage for each station. All drawings and zone charts must be completed and approved prior to final inspection of the irrigation system.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 32 90 00**PLANTING****PART 1 - GENERAL****1.1 DESCRIPTION**

A. The work in this section consists of furnishing and installing plant, soils, edging turf, grasses and landscape materials required as specified in locations shown.

1.2 RELATED WORK

A. Section 32 84 00, PLANTING IRRIGATION.

1.3 DEFINITIONS

- A. Backfill: The earth used to replace earth in an excavation.
- B. Balled and Burlapped Stock: ANSI Z60.1. Plants dug with firm, natural balls of earth in which they were grown, with ball size not less than diameter and depth recommended by ANSI Z60.1 for type and size of plant required; wrapped with burlap, tied, rigidly supported, and drum laced with twine with the root flare visible at the surface of the ball.
- C. Balled and Potted Stock: ANSI Z60.1. Plants dug with firm, natural balls of earth in which they are grown and placed, unbroken, in a container. Ball size is not less than diameter and depth recommended by ANSI Z60.1 for type and size of plant required.
- D. Container-Grown Stock: Healthy, vigorous, well-rooted plants grown in a container, with a well-established root system reaching sides of container and maintaining a firm ball when removed from container. Container shall be rigid enough to hold ball shape and protect root mass during shipping and be sized according to ANSI Z60.1 for type and size of plant required.
- E. Fabric Bag-Grown Stock: Healthy, vigorous, well-rooted plants established and grown in-ground in a porous fabric bag with well-established root system reaching sides of fabric bag. Fabric bag size is not less than diameter, depth, and volume required by ANSI Z60.1 for type and size of plant.
- F. Finish Grade: Elevation of finished surface of planting soil.
- G. Manufactured Topsoil: Soil produced off-site by homogeneously blending mineral soils or sand with stabilized organic soil amendments to produce topsoil or planting soil.
- H. Pesticide: A substance or mixture intended for preventing, destroying, repelling, or mitigating a pest. This includes insecticides, miticides,

herbicides, fungicides, rodenticides, and molluscicides. It also includes substances or mixtures intended for use as a plant regulator, defoliant, or desiccant.

- I. Planting Soil: Standardized topsoil; existing, native surface topsoil; existing, in-place surface soil; imported topsoil; or manufactured topsoil that is modified with soil amendments and perhaps fertilizers to produce a soil mixture best for plant growth.
- J. Plant Material: These terms refer to vegetation in general, including trees, shrubs, vines, ground covers, turf and grasses, ornamental grasses, bulbs, corms, tubers, or herbaceous vegetation.
- K. Root Flare: Also called "trunk flare." The area at the base of the plant's stem or trunk where the stem or trunk broadens to form roots; the area of transition between the root system and the stem or trunk.
- L. Subgrade: Surface or elevation of subsoil remaining after excavation is complete, or the top surface of a fill or backfill before planting soil is placed.
- M. Subsoil: All soil beneath the topsoil layer of the soil profile, and typified by the lack of organic matter and soil organisms.

1.4 DELIVERY, STORAGE AND HANDLING

- A. Notify the Contracting Officer's Representative of the delivery schedule in advance so the plant material may be inspected upon arrival at the job site. Remove unacceptable plant and landscape materials from the job site immediately.
- B. Deliver packaged materials in original, unopened containers showing weight, certified analysis, name and address of manufacturer, and indication of conformance with state and federal laws, as applicable. Keep seed and other packaged materials in dry storage away from contaminants.
- C. Bulk Materials:
 - 1. Do not dump or store bulk materials near structures, utilities, walkways and pavements, or on existing turf areas or plants. Keep bulk materials in dry storage away from contaminants.
 - 2. Provide erosion control measures to prevent erosion or displacement of bulk materials, discharge of soil-bearing water runoff, and airborne dust reaching adjacent properties, water conveyance systems, or walkways.
 - 3. Accompany each delivery of bulk fertilizers with appropriate certificates.

- D. Deliver bare-root stock plants freshly dug. Immediately after digging up bare-root stock, pack root system in wet straw, hay, or other suitable material to keep root system moist until planting.
- E. Do not prune trees and shrubs before delivery. Protect bark, branches, and root systems from sun scald, drying, wind burn, sweating, whipping, and other handling and tying damage. Do not bend or bind-tie trees or shrubs in such a manner as to destroy their natural shape. Provide protective covering of plants during shipping and delivery. Do not drop plants during delivery and handling.
- F. Handle planting stock by root ball.
- G. The use of equipment such as "tree spades" is permitted provided the plant balls are sized in accordance with ANSI Z60.1 and tops are protected from damage.
- H. Store bulbs, corms, and tubers in a dry place at 60 to 65 deg F (16 to 18 deg C) until planting.
- I. Deliver plants after preparations for planting have been completed, and install immediately. If planting is delayed more than 6 hours after delivery, set plants and trees in their appropriate aspect (sun, filtered sun, or shade), protect from weather and mechanical damage, and keep roots moist.
 - 1. Heel-in bare-root stock: Soak roots that are in dry condition in water for two hours. Reject dried-out plants.
 - 2. Set balled stock on ground and cover ball with soil, peat moss, sawdust, or other acceptable material.
 - 3. Do not remove container-grown stock from containers before time of planting.
 - 4. Water root systems of plants stored on-site deeply and thoroughly with a fine-mist spray. Water as often as necessary to maintain root systems in a moist, but not overly-wet, condition.
- J. Harvest, deliver, store, and handle sod according to requirements in TPI's "Guideline Specifications to Turfgrass Sodding". Deliver sod in time for planting within 24 hours of harvesting. Protect sod from breakage, seed contamination and drying.
- K. Deliver sprigs in air tight bags to keep from drying out. Sprigs delivered unwrapped, shall be kept moist in burlap or other accepted material until planting.
- L. Deliver plugs within 24 hours of harvesting, keep moist until planting.

M. All pesticides and herbicides shall be properly labeled and registered with the U.S. Department of Agriculture. Deliver materials in original, unopened containers showing, certified analysis, name and address of manufacturer, product label, manufacturer's application instructions specific to the project and indication of conformance with state and federal laws, as applicable.

1.5 PROJECT CONDITIONS

- A. Verify actual grade elevations, service and utility locations, irrigation system components, and dimensions of plantings and construction contiguous with new plantings by field measurements before proceeding with planting work.
- B. Proceed with planting only when existing and forecasted weather conditions permit planting to be performed when beneficial and optimum results may be obtained. Apply products during favorable weather conditions according to manufacturer's written instructions and warranty requirements.
- C. Plant trees, shrubs, and other plants after finish grades are established and before planting turf areas unless otherwise indicated.
 - 1. When planting trees, shrubs, and other plants after planting turf areas, protect turf areas, and promptly repair damage caused by planting operations.
- D. Plant trees, shrubs, and other plants after finish grades and irrigation system components are established but not before irrigation system components are installed, tested and approved unless otherwise indicated.
 - 1. When planting trees, shrubs, and other plants, protect irrigation system components and promptly repair damage caused by planting operations.

1.6 QUALITY ASSURANCE:

- A. Products Criteria:
 - 1. When two or more units of the same type or class of materials or equipment are required, these units shall be products of one manufacturer.
 - 2. A nameplate bearing manufacturer's name or trademark, including model number, shall be securely affixed in a conspicuous place on equipment. In addition, the model number shall be either cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.

- B. Installer Qualifications: A qualified landscape installer whose work has resulted in successful establishment of plants.
 - 1. Installer shall be a member in good standing of either the Professional Landcare Network or the American Nursery and Landscape Association with 3 years experience in landscape installation.
 - 2. Require Installer to maintain an experienced full-time supervisor on Project site when work is in progress.
- C. Provide quality, size, genus, species, variety and sources of plants indicated, complying with applicable requirements in ANSI Z60.1.
- D. Measure according to ANSI Z60.1. Do not prune to obtain required sizes.
 - 1. Measure trees and shrubs with branches and trunks or canes in their normal position. Take height measurements from or near the top of the root flare for field-grown stock and container grown stock. Measure main body of tree or shrub for height and spread; do not measure branches or roots tip to tip. Take caliper measurements 6 inches (150 mm) above the root flare for trees up to 4 inch (100 mm) caliper size, and 12 inches (300 mm) above the root flare for larger sizes.
 - 2. Measure other plants with stems, petioles, and foliage in their normal position.
- E. Contracting Officer's Representative may observe plant material either at place of growth or at site before planting for compliance with requirements for genus, species, variety, cultivar, size, and quality. Contracting Officer's Representative retains right to observe trees and shrubs further for size and condition of balls and root systems, pests, disease symptoms, injuries, and latent defects and to reject unsatisfactory or defective material at any time during progress of work. Remove rejected trees or shrubs immediately from Project site.
 - 1. Notify Contracting Officer's Representative of plant material sources seven days in advance of delivery to site.
- F. Include product label and manufacturer's literature and data for pesticides and herbicides.
- G. Conduct a pre-installation conference at Project site.

1.7 SUBMITTALS

- A. Submit product data for each type of product indicated, including soils:
 - 1. Include quantities, sizes, quality, and sources for plant materials.
- B. Submit samples and manufacturer's literature for each of the following for approval before work is started.

1. Trees and Shrubs: 3 samples of each variety and size delivered to the site for review. Maintain approved samples on-site as a standard for comparison.
 2. Submit edging materials and accessories in manufacturer's standard size, to verify color selected.
- C. Qualification data for qualified landscape Installer. Include list of similar projects completed by Installer demonstrating Installer's capabilities and experience. Include project names, addresses, and year completed, and include names and addresses of owners' contact persons.
- D. Prior to delivery, provide notarized certificates attesting that each type of manufactured product, from the manufacturer, meet the requirements specified and shall be submitted to the Contracting Officer's Representative for approval:
1. Plant Materials (Department of Agriculture certification by State Nursery Inspector declaring material to be free from insects and disease).
 2. Seed and Turf Materials notarized certificate of product analysis.
 3. Manufacturer's certified analysis of standard products.
 4. Analysis of other materials by a recognized laboratory made according to methods established by the Association of Official Analytical Chemists, where applicable.
- E. Maintenance Instructions: Recommended procedures to be established by Owner for maintenance of plants during a calendar year. Submit before start of required maintenance periods.

1.8 PLANT AND TURF ESTABLISHMENT PERIOD

- A. The establishment period for plants and turf shall begin immediately after installation, with the approval of the Contracting Officer's Representative, and continue until the date that the Government accepts the project or phase for beneficial use and occupancy. During the Establishment Period the Contractor shall maintain the plants and turf as required in Part 3.

1.9 PLANT AND TURF MAINTENANCE SERVICE

- A. Provide initial maintenance service for trees, shrubs, ground cover and other plants by skilled employees of landscape Installer. Begin maintenance immediately after plants are installed and continue until plantings are acceptably healthy and well established but for not less than maintenance period below.
1. Maintenance Period: 12 months from date of Substantial Completion.

- B. Obtain continuing maintenance proposal from Installer to Owner, in the form of a standard yearly (or other period) maintenance agreement, starting on date initial maintenance service is concluded. State services, obligations, conditions, and terms for agreement period and for future renewal options.

1.10 APPLICABLE PUBLICATIONS

- A. The publications listed below, form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American National Standards Institute (ANSI):
- Z60.1-04Nursery Stock
- C. Association of Official Seed Analysts (AOSA): Rules for Testing Seed.
- D. American Society For Testing And Materials (ASTM):
- B221-08Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Profiles, and Tubes
- C33/C33M-11Concrete Aggregates
- C136-06Sieve Analysis of Fine and Coarse Aggregates
- C516-08Vermiculite Loose Fill Thermal Insulation
- C549-06Perlite Loose Fill Insulation
- C602-07Agricultural Liming Materials
- D977-05Emulsified Asphalt (AASHTO M140)
- D5268-07Topsoil Used for Landscaping Purposes
- E. Hortus Third: A Concise Dictionary of Plants Cultivated in the United States and Canada.
- F. Turfgrass Producers International (TPI): Guideline Specifications to Turfgrass Sodding.
- G. United States Department of Agriculture (USDA): Handbook No. 60
Diagnosis and Improvement of Saline and Alkali Soils; Federal Seed Act Regulations.
- H. National Cemetery Administration (NCA):
- Handbook 3420-08Turfgrass Maintenance

Appendix TL-08Cemetery Construction Requirements for
Turfgrass and Landscape Plant Material
Installation

1.11 WARRANTY

- A. The Contractor shall remedy any defect due to faulty material or workmanship and pay for any damage to other work resulting therefrom within a period of one year from final acceptance, unless noted otherwise below. Further, the Contractor will provide all manufacturer's and supplier's written guarantees and warranties covering materials and equipment furnished under this Contract.
1. Plant and Turf Warranty Periods will begin from the date of Substantial Completion.
 - a. Trees, Shrubs, Vines, and Ornamental Grasses: 12 months.
 - b. Ground Covers, Biennials, Perennials, Turf, and Other Plants: 12 months.
 2. The Contractor shall have completed, located, and installed all plants and turf according to the plans and specifications. All plants and turf are expected to be living and in a healthy condition at the time of final inspection.
 3. The Contractor will replace any dead plant material and any areas void of turf immediately, unless required to plant in the succeeding planting season. Provide extended warranty for period equal to original warranty period for replacement plant materials. Replacement plant and turf warranty will begin on the day the work is completed.
 4. Replacement of relocated plants, that the Contractor did not supply, is not required unless plant failure is due to improper handling and care during transplanting. Loss through Contractor negligence requires replacement in plant type and size.
 5. The Government will reinspect all plants and turf at the end of the Warranty Period. The Contractor will replace any dead, missing, or defective plant material and turf immediately. The Warranty Period will end on the date of this inspection provided the Contractor has complied with the warranty work required by this specification. The Contractor shall also comply with the following requirements:
 - a. Replace plants that are more than 25 percent dead, missing or defective plant material prior to final inspection.

- b. A limit of one replacement of each plant will be required except for losses or replacements due to failure to comply with requirements.
 - c. Mulch and weed plant beds and saucers. Just prior to final inspection, treat these areas to a second application of approved pre-emergent herbicide.
 - d. Complete remedial measures directed by the Contracting Officer's Representative to ensure plant and turf survival.
 - e. Repair damage caused while making plant or turf replacements.
- B. Installer agrees to repair or replace plantings and accessories that fail in materials, workmanship, or growth within specified warranty period.
1. Failures include, but are not limited to, the following:
- a. Death and unsatisfactory growth, except for defects resulting from abuse, lack of adequate maintenance, or neglect by Owner, or incidents that are beyond Contractor's control.
 - b. Structural failures including plantings falling or blowing over.
 - c. Deterioration of metals, metal finishes, and other materials beyond normal weathering.

PART 2 - PRODUCTS

2.1 PLANT MATERIAL

- A. Plant and turf materials: ANSI Z60.1; will conform to the varieties specified and be true to botanical name as listed in Hortus Third; nursery-grown plants and turf material true to genus, species, variety, cultivar, stem form, shearing, and other features indicated on Drawings; healthy, normal and unbroken root systems developed by transplanting or root pruning; well-shaped, fully branched, healthy, vigorous stock, densely foliated when in leaf; free of disease, pests, eggs, larvae, and defects such as knots, sun scald, windburn, injuries, abrasions, and disfigurement.
1. Trees-deciduous and evergreen: Single trunked with a single leader, unless otherwise indicated; symmetrically developed deciduous trees and shrubs of uniform habit of growth; straight boles or stems; free from objectionable disfigurements; evergreen trees and shrubs with well developed symmetrical tops, with typical spread of branches for each particular species or variety. Trees with damaged, crooked, or multiple leaders; tight vertical branches where bark is squeezed

between two branches or between branch and trunk ("included bark"); crossing trunks; cut-off limbs more than 3/4 inch (19 mm) in diameter; or with stem girdling roots will be rejected.

2. Ground cover and vine plants: Provide the number and length of runners for the size specified on the Drawings, together with the proper age for the grade of plants specified. Provide vines and ground cover plants well established in removable containers, integral containers, or formed homogeneous soil sections. Plants shall have been grown under climatic conditions similar to those in the locality of the project. Spray all plants budding into leaf or having soft growth with an anti desiccant at the nursery before digging.
 3. The minimum acceptable sizes of all plants, measured before pruning with branches in normal position, shall conform to the measurements designated. Plants larger in size than specified may be used with the approval of the Contracting Officer's Representative, with no change in the contract price. When larger plants are used, increase the ball of earth or spread of roots in accordance with ANSI Z60.1.
 4. Provide nursery grown plant material conforming to the requirements and recommendations of ANSI Z60.1. Dig and prepare plants for shipment in a manner that will not cause damage to branches, shape, and future development after planting.
 5. Balled and burlapped (B&B) plant ball sizes and ratios will conform to ANSI Z60.1, consisting of firm, natural balls of soil wrapped firmly with burlap or strong cloth and tied.
 6. Container grown plants shall have sufficient root growth to hold the earth intact when removed from containers, but shall not be root bound.
 7. Make substitutions only when a plant (or alternates as specified) is not obtainable and the Contracting Officer's Representative authorizes a change order providing for use of the nearest equivalent obtainable size or variety of plant with the same essential characteristics and an equitable adjustment of the contract price.
 8. Do not use plants harvested from the wild, from native stands, from an established landscape planting, or not grown in a nursery unless otherwise indicated.
- B. Label at least one plant of each variety, size, and caliper with a securely attached, waterproof and weather-resistant label bearing

legible the correct designation of common name and full scientific name, including genus and species. Include nomenclature for hybrid, variety, or cultivar, if applicable for the plant as indicated in the Plant Schedule or Plant Legend shown on the Drawings. Labels shall be securely attached and not be removed.

2.2 INORGANIC SOIL AMENDMENTS

- A. Lime: ASTM C602, agricultural liming material containing a minimum of 80 percent calcium carbonate equivalent and as follows:
 - 1. Class: T, with a minimum of 99 percent passing through No. 8 (2.36 mm) sieve and a minimum of 75 percent passing through No. 60 (0.25 mm) sieve.
 - 2. Class: O, with a minimum of 95 percent passing through No. 8 (2.36 mm) sieve and a minimum of 55 percent passing through No. 60 (0.25 mm) sieve.
 - 3. Provide lime in form of ground dolomitic limestone.
- B. Sulfur: Granular, biodegradable, and containing a minimum of 90 percent sulfur, with a minimum of 99 percent passing through No. 6 (3.35 mm) sieve and a maximum of 10 percent passing through No. 40 (0.425 mm) sieve.
- C. Iron Sulfate: Granulated ferrous sulfate containing a minimum of 20 percent iron and 10 percent sulfur.
- D. Aluminum Sulfate: Commercial grade, unadulterated.
- E. Perlite: ASTM C549, horticultural perlite, soil amendment grade.
- F. Agricultural Gypsum: Minimum 90 percent calcium sulfate, finely ground with 90 percent passing through No. 50 (0.30 mm) sieve.
- G. Coarse Sand shall be concrete sand, ASTM C33 Fine Aggregate, clean, sharp free of limestone, shale and slate particles, and toxic materials.
- H. Vermiculite: ASTM C516, horticultural grade and free of any toxic materials.
- I. Diatomaceous Earth: Calcined, 90 percent silica, with approximately 140 percent water absorption capacity by weight.
- J. Zeolites: Mineral clinoptilolite with at least 60 percent water absorption by weight.

2.3 ORGANIC SOIL AMENDMENTS

- A. Organic matter: Commercially prepared compost. Well-composted, stable, and weed-free organic matter, pH range of 5.5 to 8; moisture content 35 to 55 percent by weight; 100 percent passing through 1 inch (25 mm)